


Product Brief



Key Features

- Targeted to the Enterprise Edge with low implementation cost and power.
- Higher stack/uplink bandwidth enables nonblocking 48 port switch with 4x 10GbE of uplinks plus 40GbE for stacking.
- IEEE 802.11ac Wave2 support.
- Expanded L2 capabilities.
- Integration of Gigabit copper PHYs.
- StrataConnect® architecture and SDK support.
- Serves as a port extender, enables centrally managed networks.
- HiGig™ stacking for seamlessly stacking with other StrataXGS® switch families.

BCM53440

116 Gb/s L2 Multilayer Switch

Overview

The Broadcom® BCM53440 switch family offers industry-leading integration and low power in a small footprint. The device offers up to 24 GbE ports and four 10GE uplink ports. Offering the industry's highest level of integration, the BCM53440 has embedded copper GPHYs as well as a powerful Arm A9 processor. The BCM53440 is ideal for cost sensitive edge applications, such as full L2-managed wiring closet switches for enterprise or MTU/ MDU switches for service providers.

The BCM53440 family offers I/O configurations that address key segments of edge connectivity. A single device supports the popular 24x GbE switch with 4x 10GbE or 40GbE uplinks. Two devices can be cascaded to build nonblocking 48x GbE switch systems with 4x 10GbE uplinks and two HG[20] stacking ports, or two 40GbE uplinks.

IEEE 802.11ac Wave2 increases the data rate required by Access Points from GbE to 2.5GbE. The BCM53440 dedicates ports to be multirate, enabling the development of cost effective platforms for the enterprise that support both Gigabit connections for the desktop as well as 2.5GbE for access points.

The BCM53440 device family builds on the successful BCM56150 and features EEE for low power, IEEE 802.1Q VLAN, VLAN translation, enhanced Denial of Service (DoS) protection, IPv4 and IPv6 support, advanced ContentAware™ Engine, IEEE 802.1p Quality of Service (QoS),

and HiGig™ stacking. New features in this generation include priority flow control, IEEE 802.1br port extender support, expanded tables, and new VLAN-based counters.


Benefits

- Single-chip switch optimized for L2-managed connectivity applications.
- Supports Wave2 data rates of 2.5 Gb/s on eight of the 24 ports.
- Optimized for entry-level edge access applications for enterprise and service provider.
- EEE lowers PHY power in periods of low traffic.
- Eight flexible Class of Service (CoS) queues per port assure the lowest latency to high-priority traffic. This capability supports a wide variety of delay sensitive video and audio multicast applications.
- Based on industry-leading and market-proven StrataXGS architecture and supports the HiGig2™ protocol for connection to other StrataXGS devices.
- IPv6 support provides future-proofing.
- Flow-based classification, policing, marking, and queuing.
- IEEE 802.1br Port Extender works with Controlling Bridge.
- IEEE-1588 for Industrial Ethernet applications
- Synchronous Ethernet provides timing accuracy for delay-sensitive applications, such as voice and video.

Features

- Highly integrated 24-port 10/100/1000 Mb/s Ethernet switch with integrated copper 10/100/1000 PHYs.
- Specific ports support either SGMII or 2500BASE-X, or two QSGMIIs for interfacing to an Octal GbE PHY.
- 10GbE stacking or uplink ports can be configured as XFI, HiGig[10], HGd[20], HGd[25], or 40GbE.
- HiGig-Duo™[25] ports for nonblocking 48-port stackable design.
- Fully integrated packet buffer.
- Intelligent Memory Management Unit (MMU) optimized for handling bursty data traffic.
- Flow-based classification, metering, and marking of frames.
- Enhanced DoS attack statistics gathering.
- Industrial temperature support.
- Network-time synchronization.
- 1588 (1-Step TC) support.
- Integrated Arm A9 CPU.
- Advanced three-stage ContentAware Engine.
- Enhance security and visibility into tunnels
- Full IPv4 and IPv6 support.
- Low-power Energy Efficient Ethernet support.

Figure. BCM53440 Block Diagram

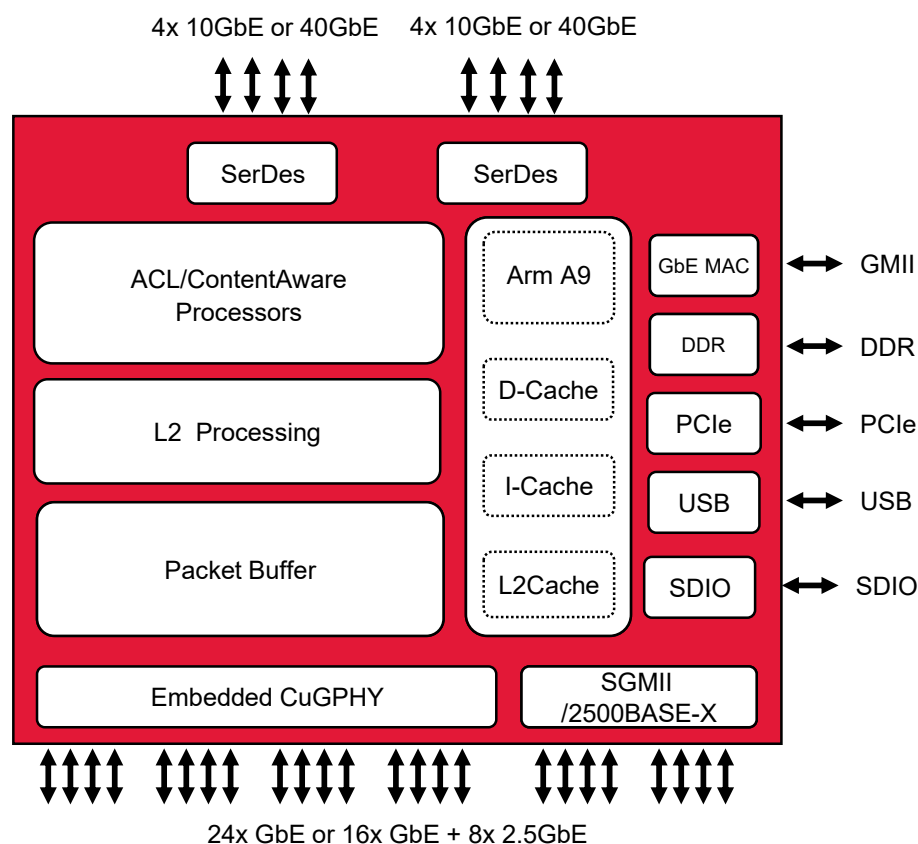

The Broadcom BCM53440 is a System-on-a-Chip (SoC) suitable for a variety of enterprise switching applications. The BCM53440 integrates copper GbE PHYs, a high-performance Arm Cortex-A9 processor, and an Ethernet switch controller.

Ordering Information

Part Number	Description
BCM53440	24 GbE + 4x 10GbE with 40GbE Stacking and integrated 16x 1000BASE-T PHYs
BCM53442	24 GbE + 4x 1GbE with integrated 16x 1000BASE-T PHYs
BCM53443	8 GbE + 2x 10GbE with integrated 8x 1000BASE-T PHYs