


Salient Features

- No external pull-ups required on VRDAs.
- No external droop resistor required for Voltage Positioning.
- Startup voltage set with a single resistor.
- DSX voltage set with a single resistor.



Copyright (C) 1995-2001 Transmeta Corporation. All rights reserved.
 This document contains confidential and proprietary information of Transmeta Corporation. It is not to be disclosed or used except in accordance with applicable agreements. This copyright notice does not evidence any actual or intended publication of such document.

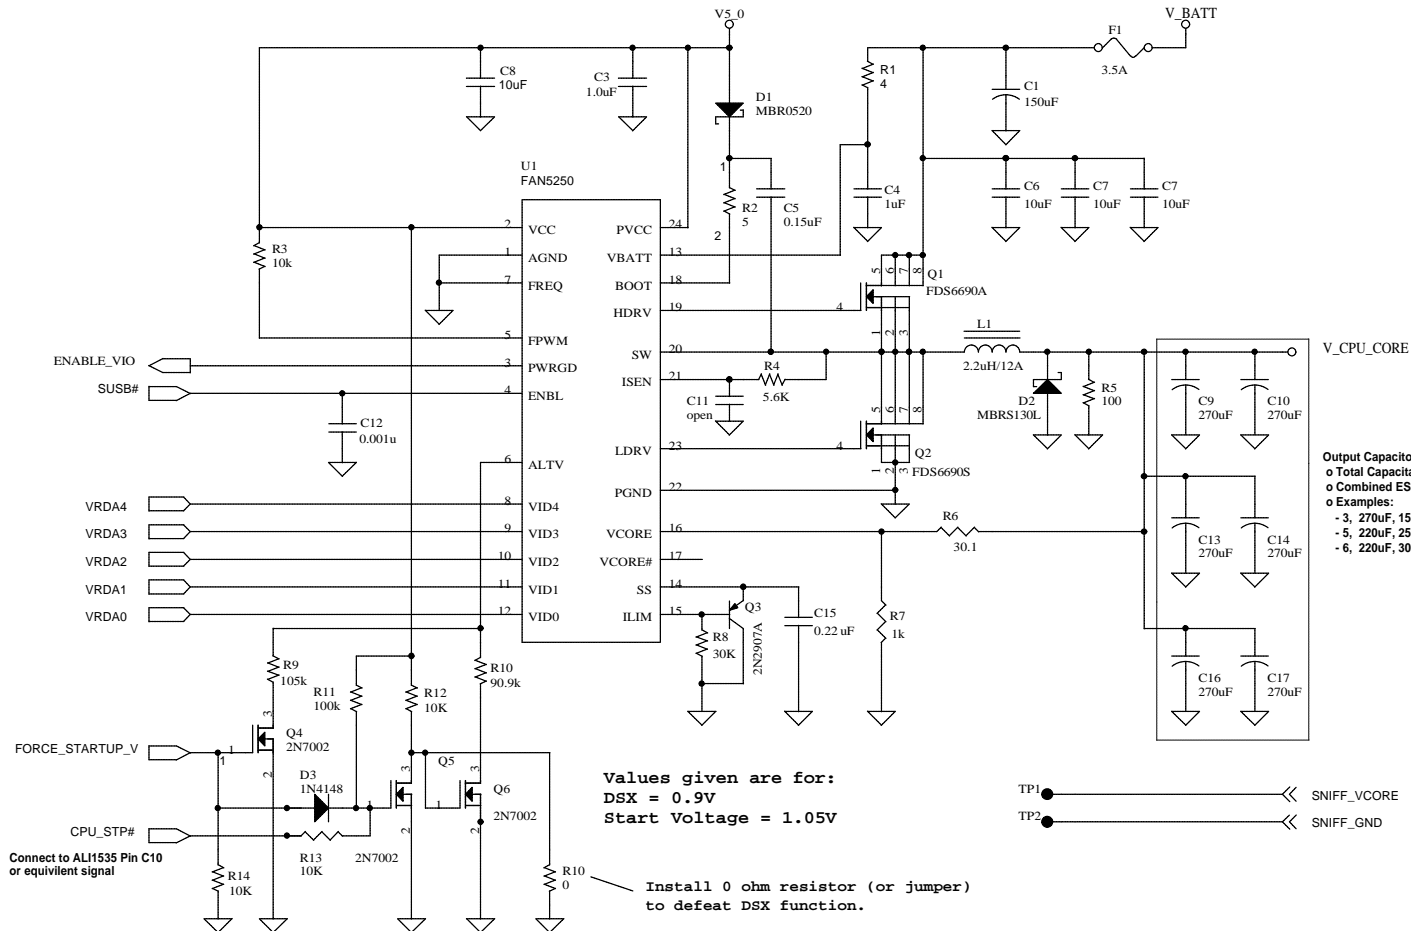

Project:	TM5800 Design Guide		
Title:	Fairchild 5250 VRM		
Document Number:			Revision: A
Size: Custom	Date: Friday, October 26, 2001	Author: Ron	Page 1 of 1