



Method 1- Delayed

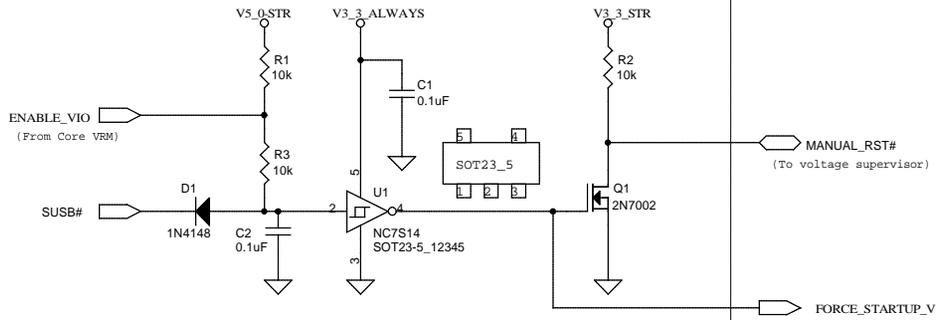

See note below


Method 2- Monitored

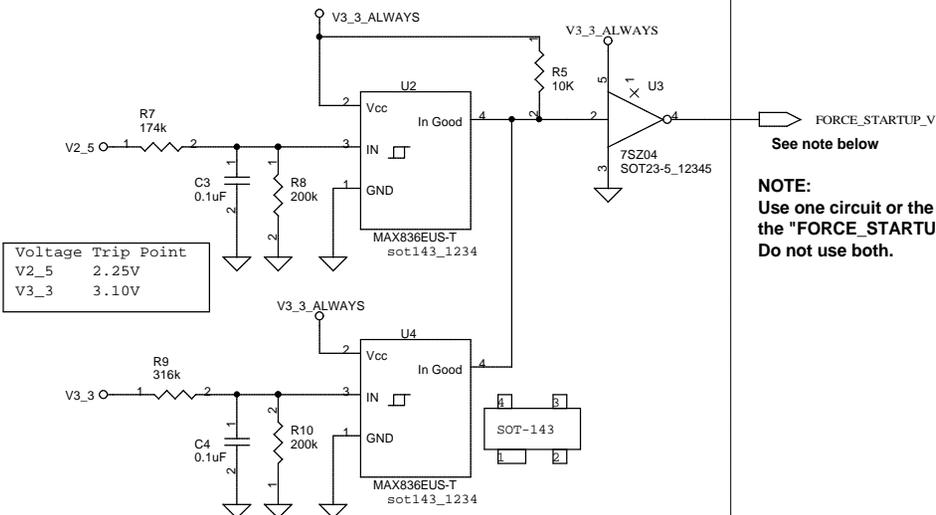

See note below

NOTE:
Use one circuit or the other for the "FORCE_STARTUP_V" signal.
Do not use both.

Voltage Trip Point	
V2_5	2.25V
V3_3	3.10V

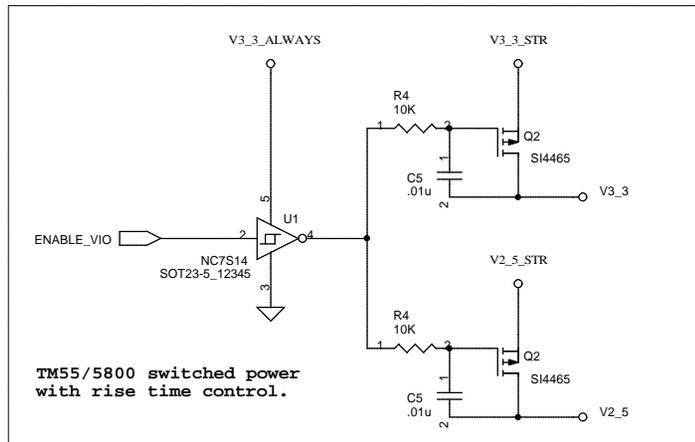

TM55/5800 switched power with rise time control.

Copyright (C) 1995-2001 Transmeta Corporation. All rights reserved. This document contains confidential and proprietary information of Transmeta Corporation. It is not to be disclosed or used except in accordance with applicable agreements. This copyright notice does not evidence any actual or intended publication of such document.



3940 Freedom Circle
Santa Clara, CA 95054
(408) 919-3000

Project: TM5500/5800		Revision: A	
Title: VRM Vsequence Circuits		Page 1 of 1	
Document Number: DOCUMENT#	Date: Thursday, November 29, 2001	Author: RJB	