


Salient Features

- No external pull-ups required on VRDAs.
- No external droop resistor required for Voltage Positioning.
- Startup voltage set with a single resistor.
- DSX voltage set with a single resistor.

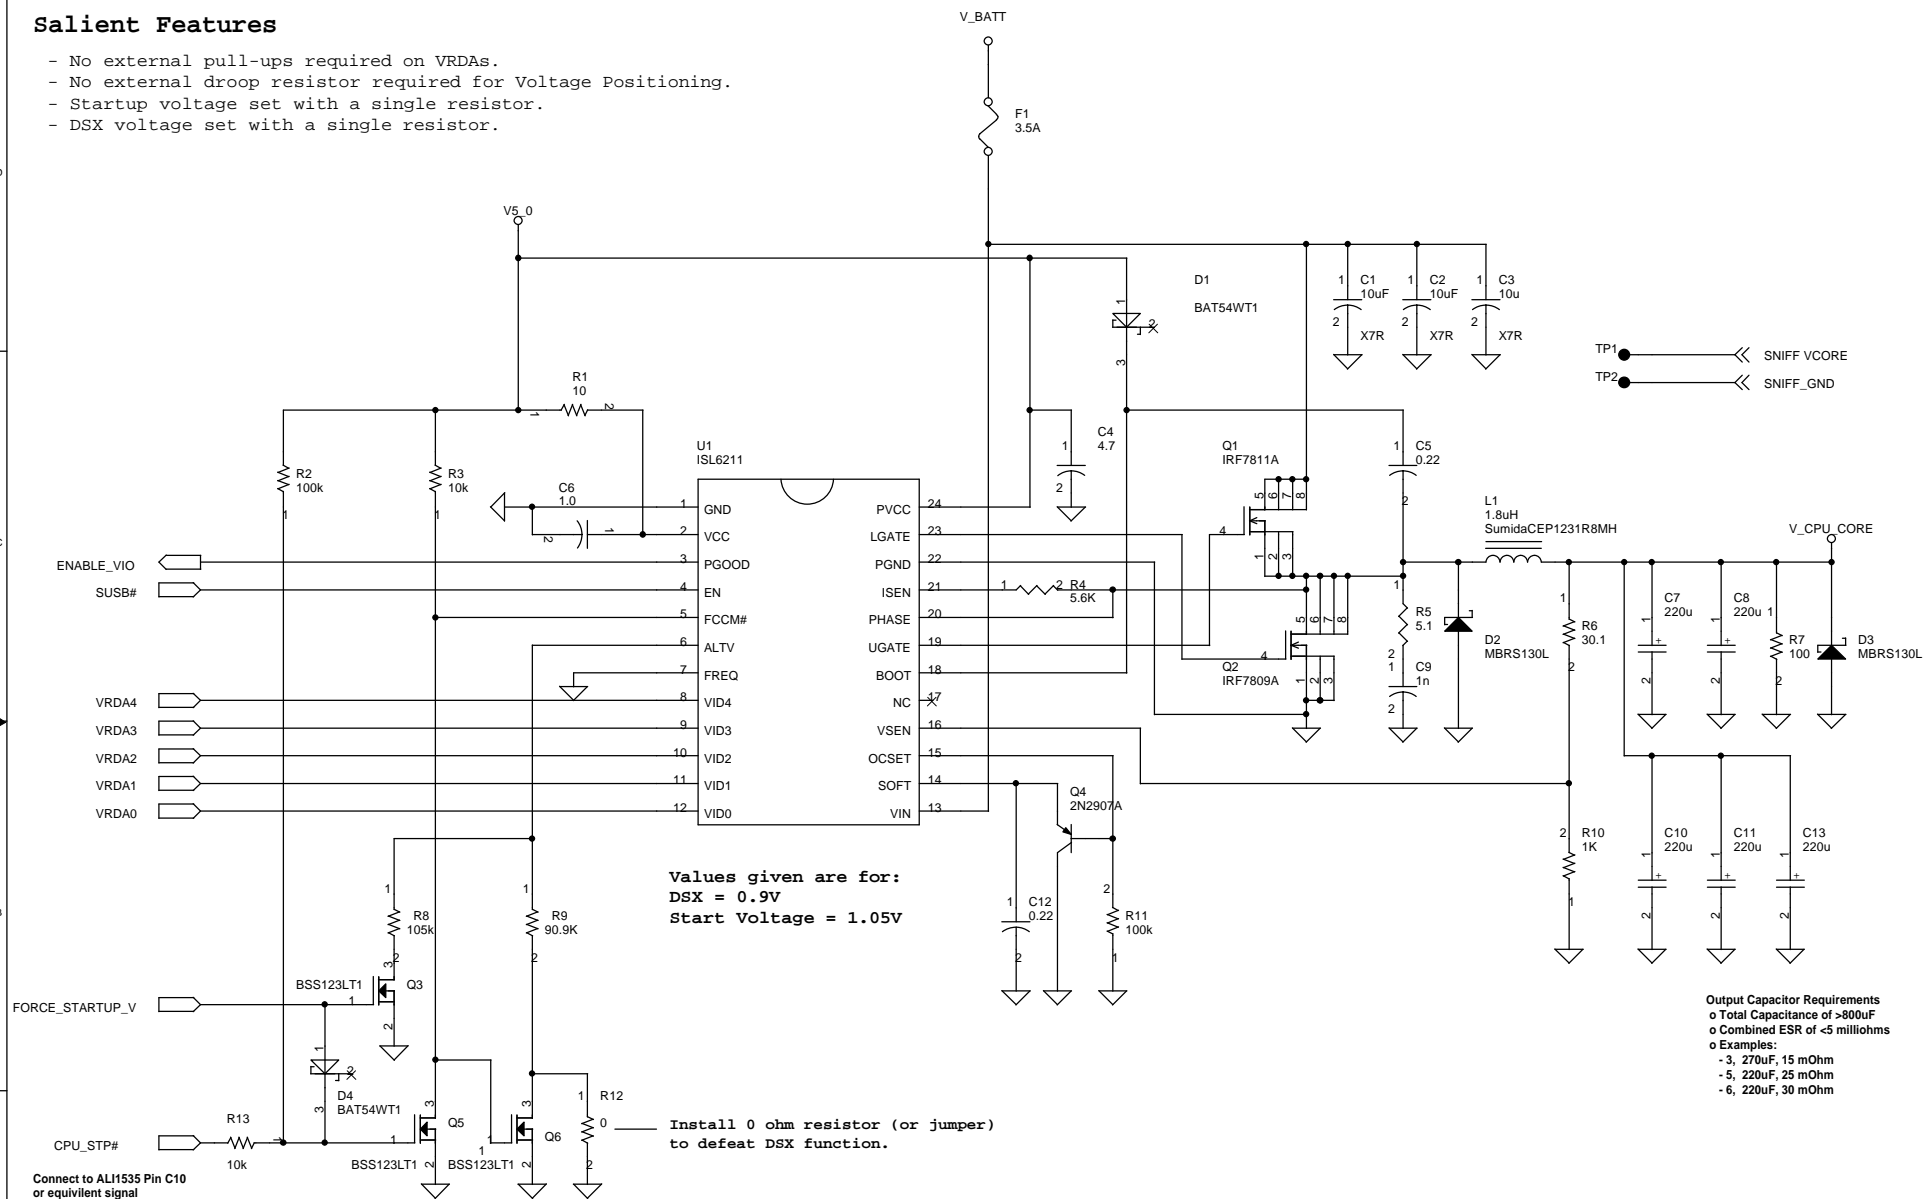

Copyright (C) 1995-2001 Transmeta Corporation. All rights reserved.
This document contains confidential and proprietary information of Transmeta Corporation. It is not to be disclosed or used except in accordance with applicable agreements. This copyright notice does not evidence any actual or intended publication of such document.

TRANSMETA
Corporation

3940 Freedom Circle
Santa Clara, CA. 95054
(408) 919-3000

Project:	TM5800 Design Guide		
Title:	Intersil 6211 VRM		
Document Number:	DOCUMENT#	Revision:	A
Size: Custom	Date: Wednesday, October 24, 2001	Author: Ron	Page 1 of 1