

ARM[®]v8-M Architecture Reference Manual

Beta

ARM[®]

ARMv8-M Architecture Reference Manual

Copyright © 2015, 2016 ARM Limited or its affiliates. All rights reserved.

Release Information

The following releases of this document have been made.

Change History

Date	Issue	Confidentiality	Change
29 March 2016	A.a	Confidential - Beta	Beta release, limited circulation
28 July 2016	A.b	Non-confidential - Beta	Beta release

The copyright statement reflects the fact that some draft issues of this document have been released, to a limited circulation.

Proprietary Notice

This document is protected by copyright and other related rights and the practice or implementation of the information contained in this document may be protected by one or more patents or pending patent applications. No part of this document may be reproduced in any form by any means without the express prior written permission of ARM Limited (“ARM”). **No license, express or implied, by estoppel or otherwise to any intellectual property rights is granted by this document unless specifically stated.**

Your access to the information in this document is conditional upon your acceptance that you will not use or permit others to use the information for the purposes of determining whether implementations infringe any patents.

THIS DOCUMENT IS PROVIDED “AS IS”. ARM PROVIDES NO REPRESENTATIONS AND NO WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, SATISFACTORY QUALITY, NON-INFRINGEMENT OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE DOCUMENT. For the avoidance of doubt, ARM makes no representation with respect to, and has undertaken no analysis to identify or understand the scope and content of, third party patents, copyrights, trade secrets, or other rights.

This document may include technical inaccuracies or typographical errors.

This document may be translated into other languages for convenience, and you agree that if there is any conflict between the English version of this document and any translation, the terms of the English version shall prevail.

TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT WILL ARM BE LIABLE FOR ANY DAMAGES, INCLUDING WITHOUT LIMITATION ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES, HOWEVER CAUSED AND REGARDLESS OF THE THEORY OF LIABILITY, ARISING OUT OF ANY USE OF THIS DOCUMENT, EVEN IF ARM HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

This document consists solely of commercial items. You shall be responsible for ensuring that any use, duplication or disclosure of this document complies fully with any relevant export laws and regulations to assure that this document or any portion thereof is not exported, directly or indirectly, in violation of such export laws. Use of the word “partner” in reference to ARM’s customers is not intended to create or refer to any partnership relationship with any other company. ARM may make changes to this document at any time and without notice.

If any of the provisions contained in these terms conflict with any of the provisions of any signed written agreement specifically covering this document with ARM, then the signed written agreement prevails over and supersedes the conflicting provisions of these terms.

Words and logos marked with ® or ™ are registered trademarks or trademarks of ARM Limited or its affiliates in the EU and/or elsewhere. All rights reserved. Other brands and names mentioned in this document may be the trademarks of their respective owners. You must follow the ARM trademark usage guidelines <http://www.arm.com/about/trademarks/guidelines/index.php>.

Copyright © 2015, 2016 ARM Limited or its affiliates. All rights reserved.
ARM Limited. Company 02557590 registered in England.
110 Fulbourn Road, Cambridge, England CB1 9NJ.

LES-PRE-20327

In this document, where the term ARM is used to refer to the company it means “ARM or any of its subsidiaries as appropriate”.

Confidentiality Status

This document is Non-Confidential. The right to use, copy and disclose this document may be subject to license restrictions in accordance with the terms of the agreement entered into by ARM and the party that ARM delivered this document to.

Product Status

The information in this document is for a Beta product, that is a product under development.

Web Address

<http://www.arm.com>

Limitations of issue A.b

As indicated by its beta status, this document is a work-in-progress. Some areas might contain errors. In particular, the following chapters are of beta quality and have had limited review:

- [Chapter B6 *Memory Model*](#).
- [Chapter B7 *Synchronization and Semaphores*](#).
- [Chapter B9 *The ARMv8-M Protected Memory System Architecture*](#).
- [Chapter B12 *Debug*](#).
- [Chapter B13 *Debug and trace components*](#).

Contents

ARMv8-M Architecture Reference Manual

Preface

About this book	xii
Using this book	xiii
Conventions	xv
Additional reading	xvii
Feedback	xviii

Part A ARMv8-M Architecture Introduction and Overview

Chapter A1

Introduction

A1.1 About the ARMv8 architecture, and architecture profiles	A1-22
A1.2 The ARMv8-M architecture profile	A1-23
A1.3 ARMv8-M variants	A1-24

Part B ARMv8-M Architecture Rules

Chapter B1

Rules Overview

Chapter B2

Resets

B2.1 Resets, Cold reset and Warm reset	B2-30
--	-------

Chapter B3

Power Management

B3.1 Power management	B3-32
-----------------------------	-------

Chapter B4

Programmers' Model

B4.1 PE modes, Thread mode and Handler mode	B4-37
---	-------

B4.2	Privileged and unprivileged execution	B4-38
B4.3	Registers	B4-39
B4.4	XPSR, APSR, IPSR, and EPSR	B4-40
B4.5	Special-purpose register updates and the memory order model	B4-42
B4.6	Security states, Secure state and Non-secure state	B4-43
B4.7	Security states, register banking between them	B4-44
B4.8	Stack pointer	B4-45
B4.9	Exception numbers and exception priority numbers	B4-46
B4.10	Exception enable, pending, and active bits	B4-49
B4.11	Security states, exception banking	B4-50
B4.12	Faults	B4-52
B4.13	Exception states	B4-55
B4.14	Priority model	B4-56
B4.15	Secure address protection	B4-59
B4.16	Security state transitions	B4-60
B4.17	Function calls from Secure state to Non-secure state	B4-61
B4.18	Function returns from Non-secure state	B4-62
B4.19	Exception handling	B4-63
B4.20	Exception entry, context stacking	B4-64
B4.21	Exception entry, register clearing after context stacking	B4-69
B4.22	Stack limit checks	B4-70
B4.23	Exception return	B4-73
B4.24	Integrity signature	B4-76
B4.25	Exceptions during exception entry	B4-77
B4.26	Exceptions during exception return	B4-78
B4.27	Tail-chaining	B4-79
B4.28	Exceptions, instruction resume or instruction restart	B4-81
B4.29	Vector tables	B4-83
B4.30	Hardware-controlled priority escalation to HardFault	B4-84
B4.31	Special-purpose mask registers, PRIMASK, BASEPRI, FAULTMASK, for software-controlled priority boosting	B4-85
B4.32	Lockup	B4-87
B4.33	Exception during a singleword load operation	B4-92
B4.34	Special-purpose CONTROL register	B4-93
B4.35	Saving context on process switch	B4-94
B4.36	Context Synchronization Operation	B4-95
B4.37	Coprocessor support	B4-96

Chapter B5

Floating-point Support

B5.1	The optional Floating-point Extension, FPUv5	B5-98
B5.2	About the Floating-point Status and Control Register (FPSCR)	B5-99
B5.3	Registers for floating-point data processing, S0-S31 or D0-D15	B5-100
B5.4	Floating-point standards and terminology	B5-101
B5.5	Floating-point data representable	B5-102
B5.6	Floating-point encoding formats, half-precision, single-precision, and double-precision	B5-103
B5.7	The IEEE 754 floating-point exceptions	B5-105
B5.8	The Flush-to-zero mode	B5-106
B5.9	The Default NaN mode, and NaN handling	B5-107
B5.10	The Default NaN	B5-108
B5.11	Combinations of floating-point exceptions	B5-109
B5.12	Priority of floating-point exceptions relative to other floating-point exceptions ..	B5-110

Chapter B6

Memory Model

B6.1	Memory accesses	B6-113
B6.2	Address space	B6-114
B6.3	Endianness	B6-115
B6.4	Alignment behavior	B6-117
B6.5	Atomicity	B6-118

B6.6	Concurrent modification and execution of instructions	B6-119
B6.7	Observability and completion of memory accesses	B6-120
B6.8	Ordering requirements for memory accesses	B6-122
B6.9	Ordering of implicit memory accesses	B6-123
B6.10	Ordering of explicit memory accesses	B6-124
B6.11	Memory barriers	B6-125
B6.12	Shareability domains	B6-128
B6.13	Shareability attributes	B6-129
B6.14	Normal memory	B6-130
B6.15	Device memory	B6-131
B6.16	Device memory attributes	B6-132
B6.17	Memory access restrictions	B6-135
B6.18	Mismatched memory attributes	B6-136
B6.19	Load-Exclusive and Store-Exclusive accesses to Normal memory	B6-138
B6.20	Load-Acquire and Store-Release accesses to memory	B6-139
B6.21	Caches	B6-141
B6.22	Behavior of Preload Data (PLD) and Preload Instruction (PLI) instructions with caches B6-144	
B6.23	Branch predictors	B6-145
B6.24	Cache maintenance operations	B6-146
B6.25	Branch predictor maintenance operations	B6-149
Chapter B7	Synchronization and Semaphores	
B7.1	Exclusive access instructions	B7-152
B7.2	Exclusive access instructions and Non-shareable memory locations	B7-153
B7.3	Local monitors	B7-154
B7.4	Exclusive access instructions and shareable memory locations	B7-156
B7.5	The global monitor	B7-157
B7.6	Load-Exclusive and Store-Exclusive instruction usage restrictions	B7-160
B7.7	Use of WFE and SEV instructions by spinlocks	B7-162
Chapter B8	The System Address Map	
B8.1	System address map	B8-164
B8.2	The System region of the system address map	B8-165
B8.3	The System Control Space (SCS)	B8-166
Chapter B9	The ARMv8-M Protected Memory System Architecture	
B9.1	MPU definition	B9-168
B9.2	MPU operation	B9-170
Chapter B10	The System Timer, SysTick	
B10.1	The system timer, SysTick	B10-172
Chapter B11	Nested Vectored Interrupt Controller	
B11.1	NVIC definition	B11-174
B11.2	NVIC operation	B11-175
Chapter B12	Debug	
B12.1	About debug	B12-178
B12.2	Accessing debug features	B12-182
B12.3	Debug authentication interface	B12-184
B12.4	Multiprocessor support	B12-190
B12.5	CoreSight and identification registers	B12-191
B12.6	Debug event behavior	B12-192
B12.7	Exiting Debug state	B12-200
B12.8	Debug System registers	B12-201

Chapter B13	Debug and trace components	
B13.1	Instrumentation Trace Macrocell	B13-204
B13.2	Data Watchpoint and Trace unit	B13-210
B13.3	Embedded Trace Macrocell	B13-224
B13.4	Trace Port Interface Unit	B13-225
B13.5	Flash Patch and Breakpoint unit	B13-226
Part C	ARMv8-M Instruction Set	
Chapter C1	Instruction Set Overview	
C1.1	Instruction set	C1-234
C1.2	Instruction set, interworking support	C1-235
C1.3	Instruction set, interstating support	C1-236
C1.4	Format of instruction descriptions	C1-237
C1.5	Standard assembler syntax fields	C1-240
C1.6	Conditional execution	C1-241
C1.7	Instruction set, encoding	C1-246
C1.8	Modified immediate constants	C1-249
C1.9	Pseudocode descriptions of operations on general-purpose registers and PC	C1-250
C1.10	NOP-compatible hint instructions	C1-251
Chapter C2	Instruction Specification	
C2.1	Top level T32 instruction set encoding	C2-254
C2.2	16-bit T32 instruction encoding	C2-255
C2.3	32-bit T32 instruction encoding	C2-266
C2.4	Alphabetical list of instructions	C2-302
Part D	ARMv8-M Registers	
Chapter D1	Register Overview	
D1.1	Understanding the register descriptions in the register specification	D1-788
Chapter D2	Register Specification	
D2.1	Register index	D2-790
D2.2	Alphabetical list of registers	D2-806
Part E	ARMv8-M Pseudocode	
Chapter E1	Pseudocode Overview	
E1.1	About the pseudocode	E1-1118
E1.2	Pseudocode operators and keywords	E1-1119
Chapter E2	ARM Pseudocode Definition	
E2.1	About the ARM pseudocode	E2-1124
E2.2	Data types	E2-1125
E2.3	Operators	E2-1130
E2.4	Statements and control structures	E2-1136
E2.5	Built-in functions	E2-1142
E2.6	ARM pseudocode definition index	E2-1145
Chapter E3	Pseudocode Specification	
E3.1	Alphabetical pseudocode List	E3-1150

Part F

Debug Packet Protocols

Chapter F1

ITM and DWT Packet Protocol Specification

F1.1	About the ITM and DWT packets	F1-1288
F1.2	Alphabetical list of DWT and ITM packets	F1-1291

Preface

This preface introduces the *ARMv8-M Architecture Reference Manual*. It contains the following sections:

- *About this book* on page xii.
- *Using this book* on page xiii.
- *Conventions* on page xv.
- *Additional reading* on page xvii.
- *Feedback* on page xviii.

About this book

This manual documents the microcontroller profile of version 8 of the ARM® Architecture, the ARMv8-M architecture profile. For short definitions of all the ARMv8 profiles see [About the ARMv8 architecture, and architecture profiles on page A1-22](#).

This manual has the following parts:

- Part A** Provides an introduction to the ARMv8-M architecture.
- Part B** Describes the architectural rules.
- Part C** Describes the T32 instruction set. This instruction set is backwards-compatible with earlier versions of the ARM architecture. This information is of primary importance to authors and users of compilers, assemblers, and other programs that generate ARM machine code.
- Part D** Describes the System registers.
- Part E** Describes the ARMv8-M pseudocode.
- Part F** Describes the packet protocols.

Using this book

The information in this manual is organized into parts, as described in this section.

Part A, ARMv8-M Architecture Introduction and Overview

Part A gives an overview of the ARMv8-M architecture profile, including its relationship to the other ARM PE architectures. It introduces the terminology used to describe the architecture, and gives an overview of the optional architectural extensions. It contains the following chapter:

Chapter A1 *Introduction*

Read this for an introduction to the ARMv8-M architecture.

Part B, ARMv8-M Architecture Rules

Part B describes the architecture rules. It contains the following chapters:

Chapter B1 *Rules Overview*

Read this for an introduction to the architecture rules.

Chapter B2 *Resets*

Read this for a description of the reset rules.

Chapter B3 *Power Management*

Read this for a description of the power management rules.

Chapter B4 *Programmers' Model*

Read this for a description of the programmers model rules.

Chapter B5 *Floating-point Support*

Read this for a description of the floating-point support rules.

Chapter B6 *Memory Model*

Read this for a description of the memory model rules.

Chapter B7 *Synchronization and Semaphores*

Read this for a description of the rules on non-blocking synchronization of shared memory.

Chapter B8 *The System Address Map*

Read this for a description of the system address map rules.

Chapter B9 *The ARMv8-M Protected Memory System Architecture*

Read this for a description of the protected memory system architecture rules.

Chapter B10 *The System Timer, SysTick*

Read this for a description of the system timer rules.

Chapter B11 *Nested Vectored Interrupt Controller*

Read this for a description of the *Nested Vectored Interrupt Controller* (NVIC) rules.

Chapter B12 *Debug*

Read this for a description of the debug rules.

Chapter B13 *Debug and trace components*

Read this for a description of the debug and trace component rules.

Part C, ARMv8-M Instructions

Part C describes the instructions. It contains the following chapters:

Chapter C1 *Instruction Set Overview*

Read this for an overview of the instruction set and the instruction set encoding.

Chapter C2 *Instruction Specification*

Read this for a description of each instruction, arranged by instruction mnemonic.

Part D, ARMv8-M Registers

Part D describes the registers. It contains the following chapters:

Chapter D1 *Register Overview*

Read this for an overview of the registers.

Chapter D2 *Register Specification*

Read this for a description of the registers.

Part E, ARMv8-M Pseudocode

Part E describes the pseudocode. It contains the following chapters:

Chapter E1 *Pseudocode Overview*

Read this for an overview of the pseudocode.

Chapter E2 *ARM Pseudocode Definition*

Read this for a definition of the pseudocode that ARM documentation uses.

Chapter E3 *Pseudocode Specification*

Read this for a description of the pseudocode.

Part F, Packet Protocols

Part F describes the packet protocols. It contains the following chapter:

Chapter F1 *ITM and DWT Packet Protocol Specification*

Read this for a description of the protocol for packets that are used to send the data generated by the ITM and DWT to an external debugger.

Conventions

The following sections describe conventions that this book can use:

- [Typographic conventions](#).
- [Signals](#).
- [Numbers](#).
- [Pseudocode descriptions](#).
- [Assembler syntax descriptions on page xvi](#).

Typographic conventions

The typographical conventions are:

italic Introduces special terminology, and denotes citations.

bold Denotes signal names, and is used for terms in descriptive lists, where appropriate.

monospace Used for assembler syntax descriptions, pseudocode, and source code examples.
Also used in the main text for instruction mnemonics and for references to other items appearing in assembler syntax descriptions, pseudocode, and source code examples.

SMALL CAPITALS

Used for a few terms that have specific technical meanings, and are included in the Glossary.

Colored text Indicates a link. This can be:

- A URL, for example <http://infocenter.arm.com>.
- A cross-reference, that includes the page number of the referenced information if it is not on the current page, for example, [Standard assembler syntax fields on page C1-240](#).
- A link, to a chapter or appendix, or to a glossary entry, or to the section of the document that defines the colored term, for example [ADC \(immediate\)](#).

Signals

In general this specification does not define processor signals, but it does include some signal examples and recommendations.

The signal conventions are:

Signal level The level of an asserted signal depends on whether the signal is active-HIGH or active-LOW. Asserted means:

- HIGH for active-HIGH signals.
- LOW for active-LOW signals.

Lowercase n At the start or end of a signal name denotes an active-LOW signal.

Numbers

Numbers are normally written in decimal. Binary numbers are preceded by `0b`, and hexadecimal numbers by `0x`. In both cases, the prefix and the associated value are written in a monospace font, for example `0xFFFF0000`. To improve readability, long numbers can be written with an underscore separator between every four characters, for example `0xFFFF_0000_0000_0000`. Ignore any underscores when interpreting the value of a number.

Pseudocode descriptions

This book uses a form of pseudocode to provide precise descriptions of the specified functionality. This pseudocode is written in a monospace font, and is described in [Chapter E3 Pseudocode Specification](#).

Assembler syntax descriptions

This book contains numerous syntax descriptions for assembler instructions and for components of assembler instructions. These are shown in a monospace font, and use the conventions described in *A list of the assembler symbols for the instruction* on page C1-238.

Additional reading

This section lists relevant publications from ARM and third parties.

See the Infocenter <http://infocenter.arm.com>, for access to ARM documentation.

ARM publications

- *Procedure Call Standard for the ARM Architecture* (ARM GENC 003534).
- *Run-time ABI for the ARM Architecture* (ARM IHI 0043).
- *ARM® Debug Interface v5 Architecture Specification* (ARM IHI 0031).
- *ARM® CoreSight™ Architecture Specification* (ARM IHI 0029).
- *ARM® CoreSight™ SoC-400 Technical Reference Manual* (ARM DDI 0480).
- *ARM® Embedded Trace Macrocell Architecture Specification* (ARM IHI 0014).
- *ARM® Embedded Trace Macrocell Architecture Specification, ETMv4* (ARM IHI 0064).

For information about the ARMv6-M architecture profile, see the *ARMv6-M Architecture Reference Manual* (ARM DDI 0419).

For information about the ARMv7-M architecture profile, see the *ARMv7-M Architecture Reference Manual* (ARM DDI 0403).

For information about the ARMv8-A architecture profile, see the *ARM® Architecture Reference Manual, ARMv8, for ARMv8-A architecture profile* (ARM DDI 0487).

Other publications

The following publications are referred to in this manual, or provide more information:

- ANSI/IEEE Std 754-1985 and ANSI/IEEE Std 754-2008, *IEEE Standard for Binary Floating-Point Arithmetic*. Unless otherwise indicated, references to IEEE 754 refer to either issue of the standard.

———— **Note** —————

This document does not adopt the terminology defined in the 2008 issue of the standard.

- JEP106, *Standard Manufacturers Identification Code*, JEDEC Solid State Technology Association.

Feedback

ARM welcomes feedback on its documentation.

Feedback on this book

If you have comments on the content of this book, send an e-mail to errata@arm.com. Give:

- The title.
- The number, ARM DDI 0553A.b.
- The page numbers to which your comments apply.
- The rule identifiers to which your comments apply, if applicable.
- A concise explanation of your comments.

ARM also welcomes general suggestions for additions and improvements.

———— **Note** —————

ARM tests PDFs only in Adobe Acrobat and Acrobat Reader, and cannot guarantee the appearance or behavior of any document when viewed with any other PDF reader.

—————

Part A

ARMv8-M Architecture Introduction and Overview

Chapter A1

Introduction

This chapter introduces the ARMv8 architecture, the architecture profiles it defines, and the ARMv8-M profile defined by this manual. It contains the following sections:

- *About the ARMv8 architecture, and architecture profiles on page A1-22.*
- *The ARMv8-M architecture profile on page A1-23.*
- *ARMv8-M variants on page A1-24.*

A1.1 About the ARMv8 architecture, and architecture profiles

The ARM architecture described in this Architecture Reference Manual defines the behavior of an abstract machine, referred to as a *Processing Element* (PE). Implementations compliant with the ARM architecture must conform to the described behavior of the PE. This manual is not intended to describe how to build an implementation of the PE, nor to limit the scope of such implementations beyond the defined behaviors.

Except where the architecture specifies differently, the programmer-visible behavior of an implementation that is compliant with the ARM architecture must be the same as a simple sequential execution of the program on the processing element. This programmer-visible behavior does not include the execution time of the program.

The ARM Architecture Reference Manual also describes rules for software to use the PE.

The ARM architecture includes definitions of:

- An associated debug architecture.
- Associated trace architectures, which define trace macrocells that implementers can implement with the associated processor hardware. For more information, see the *ARM® Embedded Trace Macrocell Architecture Specification*.

The ARM architecture is a *Reduced Instruction Set Computer* (RISC) architecture with the following RISC architectural features:

- A large uniform register file.
- A load/store architecture, where data-processing operations only operate on register contents, not directly on memory contents.
- Simple addressing modes, with all load/store addresses determined from register contents and instruction fields only.

ARM defines three architecture profiles:

A Application profile:

- Supports a *Virtual Memory System Architecture* (VMSA) based on a *Memory Management Unit* (MMU).

———— **Note** ————

An ARMv8-A implementation can be called an AArchv8-A implementation.

- Supports the A64, A32, and T32 instruction sets.

R Real-time profile:

- Supports a *Protected Memory System Architecture* (PMSA) based on a *Memory Protection Unit* (MPU).
- Supports the A32 and T32 instruction sets.

M Microcontroller profile, described in this manual:

- Implements a programmers' model designed for low-latency interrupt processing, with hardware stacking of registers and support for writing interrupt handlers in high-level languages.
- Optionally implements a variant of the R-profile PMSA.
- Supports a variant of the T32 instruction set.

———— **Note** ————

This Architecture Reference Manual:

- Describes only the ARMv8-M profile.
- Does not describe details of other ARM architecture profiles or of earlier versions of the M profile architecture.

A1.2 The ARMv8-M architecture profile

The ARM architecture has evolved through several major versions to a point where it supports implementations across a wide spectrum of performance points, with over a billion parts per annum being produced. The latest versions, ARMv7 and ARMv8, formally recognize this diversity by defining a set of architecture profiles that tailor the architecture to different market requirements. A key factor is that the application level is consistent across all profiles, and the bulk of the variation is at the system level.

The introduction of Thumb[®]-2 technology in ARMv6T2 provided a balance to the A32 and T32 instruction sets, and the opportunity for the ARM architecture to be extended into new markets, in particular the microcontroller marketplace. To take maximum advantage of this opportunity, ARM introduced the M architecture profile for microcontroller implementations, complementing its strengths in the high-performance and real-time embedded markets. ARMv8-M is a T32-only profile with a different system level programmers' model from the A and R architecture profiles.

ARMv8-M satisfies the following key implementation criteria:

- Enables implementations with industry leading power, performance, and area constraints:
 - Provides opportunities for simple pipeline designs offering leading edge system performance levels in a broad range of markets and applications.
- Highly deterministic operation:
 - Single or low cycle count execution.
 - Minimal interrupt latency, with short pipelines.
 - Capable of cacheless operation.
- Excellent C/C++ target. This aligns with the ARM programming standards in this area:
 - Exception handlers are standard C/C++ functions, entered using standard calling conventions.
- Designed for deeply embedded systems:
 - Low pincount devices.
 - Enables new entry level opportunities for the ARM architecture.
- Provides debug and software profiling support for event-driven systems.

ARMv8-M offers key improvements in a number of areas, including:

- The Security Extension.
- An improved *Memory Protection Unit* (MPU) model.
- Alignment with ARMv8-A and ARMv8-R memory types.
- Stack pointer limit checking.
- A refined debug system.
- Improved support for multi-processing.
- Better alignment with C11 and C11++ standards.

A1.2.1 The ARMv8-M instruction set

ARMv8-M only supports execution of T32 instructions. The *Floating-point* (FP) Extension adds floating-point instructions to the T32 instruction set. For more information, see [Chapter B5 Floating-point Support](#), [Chapter C1 Instruction Set Overview](#), and [Chapter C2 Instruction Specification](#).

The ARMv8-M core instruction set supports:

- The Security Extension.
- Execute-only code generation.
- Code optimization.
- Semaphores.
- C11 and C++11.

A1.3 ARMv8-M variants

R _{FHPH}	The ARMv8-M architecture has the following optional extensions: <ul style="list-style-type: none">• The Main Extension.• The Security Extension.• The Floating-point Extension.• The <i>Digital Signal Processing</i> (DSP) Extension.• The Debug Extension.
R _{FGRP}	A PE can only implement the Floating-point Extension if it also implements the Main Extension.
R _{MGVL}	A PE can only implement the DSP Extension if it also implements the Main Extension.
I _{WCCN}	The ARMv8-M Security Extension can also be referred to as ARM® TrustZone® for ARMv8-M.
I _{TLHM}	A PE with the Main Extension is also referred to as a Mainline implementation.
I _{GFDP}	A PE without the Main Extension is also referred to as a Baseline implementation. A Baseline implementation has a subset of the instructions, registers, and features, of a Mainline implementation.
I _{LCIN}	ARMv6-M compatibility is provided by all ARMv8-M implementations.
I _{SQKT}	ARMv7-M compatibility requires the Main Extension.

Part B


ARMv8-M Architecture Rules

Chapter B1

Rules Overview

Chapter B4 to Chapter B13 specify the v8-M Architecture rules. This manual uses a different style to previous ARM Architecture Reference Manuals. The focus is on specifying the rules. There is little explanatory information or educational text giving, for example, background knowledge.

The following figure shows an example of an architecture rule:

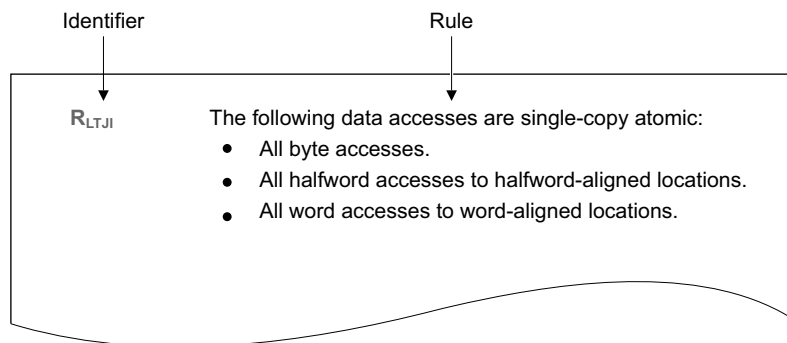

The identifier scheme is as follows:

R_{XXXX} Architecture rule.

I_{XXXX} Information only.

A rule identifier is random and has no significance apart from uniquely identifying a rule.

Chapter B2

Resets

This chapter contains the following section:

- [Resets, Cold reset and Warm reset on page B2-30.](#)

B2.1 Resets, Cold reset and Warm reset

R _{BDPL}	There are two resets: <ul style="list-style-type: none">• Cold reset.• Warm reset.
R _{FNNX}	On a Cold reset, registers that have a defined reset value contain that value.
R _{GTXW}	On a Warm reset, some debug register control fields that have a defined reset value remain unchanged, but otherwise all registers that have a defined reset value contain that value.
R _{YMHN}	On a Warm reset, the PE performs the actions described by the TakeReset() pseudocode.
R _{WSZN}	AIRCR.SYSRESETREQ is required to cause a Warm reset.
R _{HFRS}	For AIRCR.SYSRESETREQ , the architecture does not guarantee that the reset takes place immediately.
R _{DJPD}	A Warm reset takes the PE out of Debug state.

Chapter B3

Power Management

This chapter contains the following section:

- [Power management on page B3-32.](#)

B3.1 Power management

- I_{HCYL} There are the following instructions that hint to the PE hardware that it can suspend execution and enter a low-power state:
- Wait for Event (WFE).
 - Wait For Interrupt (WFI).

B3.1.1 The Wait for Event (WFE) instruction

- R_{DCMH} When a WFE instruction is executed, if the state of the [Event register](#) is:
- Clear, the PE can suspend execution and enter a low-power state.
 - Set, the instruction clears the register and completes immediately.
- R_{BGZM} If the PE enters a low-power state on a WFE instruction, it remains in that low-power state until it receives a *WFE wakeup event*. When the PE recognizes a WFE wakeup event, the WFE instruction completes. The following are WFE wakeup events:
- The execution of a [SEV](#) instruction by any PE.
 - When [SCR.SEVONPEND](#) is 1, any exception entering the pending state.
 - Any exception at a priority that would preempt the current execution priority, taking into account any active exceptions and including the effects of any software-controlled priority booting by [AIRCR.PRIS](#) == 1 and [PRIMASK](#), [FAULTMASK](#), or [BASEPRI](#).
 - If debug is enabled, a debug event.
- R_{YRDC} The ARMv8-M architecture does not define the exact nature of the low-power state entered on a WFE instruction, except that it must not cause a loss of memory coherency.
- I_{TZJZ} ARM recommends that software always uses the WFE instruction in a loop.
- See also:
- [WaitForEvent](#) on page E3-1278.
 - [SendEvent](#) on page E3-1258.

B3.1.2 The Event register

- I_{RPZM} The Event register is a single-bit register for each PE in the system.
- R_{BPBR} The Event register for a PE is set by any of the following:
- Any WFE wakeup event.
 - Exception entry.
 - Exception return.
- R_{YJPL} If the state of the Event register is set when a WFE instruction is executed, the PE hardware must not suspend execution.
- I_{MMZW} When the Event register is set, it is an indication that an event has occurred since the register was last cleared, that might require some action by the PE.
- R_{CXMT} A reset clears the Event register.
- I_{LNEV} Software cannot read, and cannot write to, the Event register directly.
- See also:
- [SetEventRegister](#) on page E3-1259.
 - [ClearEventRegister](#) on page E3-1158.
 - [EventRegistered](#) on page E3-1176.

B3.1.3 The Wait for Interrupt (WFI) instruction

R_{HRMJ}

When a [WFI](#) instruction is executed, the PE can suspend execution and enter a low-power state. If it does, it remains in that state until it receives a *WFI wakeup event*. When the PE recognizes a WFI wakeup event, the WFI instruction completes. The following are WFI wakeup events:

- A reset.
- Any asynchronous exception at a priority that, ignoring the effect of PRIMASK (so that behavior is as if PRIMASK is 0), would preempt any currently active exceptions.
- An IMPLEMENTATION DEFINED WFI wakeup event.
- If debug is enabled, a debug event.

I_{CGNL}

ARM recommends that software always uses the [WFI](#) instruction in a loop.

See also:

- [WaitForInterrupt](#) on page E3-1278.

Chapter B4

Programmers' Model

This chapter specifies the ARMv8-M programmers' model architecture rules. It contains the following sections:

- *PE modes, Thread mode and Handler mode* on page B4-37.
- *Privileged and unprivileged execution* on page B4-38.
- *Registers* on page B4-39.
- *XPSR, APSR, IPSR, and EPSR* on page B4-40.
- *Special-purpose register updates and the memory order model* on page B4-42.
- *Security states, Secure state and Non-secure state* on page B4-43.
- *Security states, register banking between them* on page B4-44.
- *Stack pointer* on page B4-45.
- *Exception numbers and exception priority numbers* on page B4-46.
- *Exception enable, pending, and active bits* on page B4-49.
- *Security states, exception banking* on page B4-50.
- *Faults* on page B4-52.
- *Exception states* on page B4-55.
- *Priority model* on page B4-56.
- *Secure address protection* on page B4-59.
- *Security state transitions* on page B4-60.
- *Function calls from Secure state to Non-secure state* on page B4-61.
- *Function returns from Non-secure state* on page B4-62.
- *Exception handling* on page B4-63.
- *Exception entry, context stacking* on page B4-64.
- *Exception entry, register clearing after context stacking* on page B4-69.
- *Stack limit checks* on page B4-70.
- *Exception return* on page B4-73.
- *Integrity signature* on page B4-76.

- *Exceptions during exception entry* on page B4-77.
- *Exceptions during exception return* on page B4-78.
- *Tail-chaining* on page B4-79.
- *Exceptions, instruction resume or instruction restart* on page B4-81.
- *Vector tables* on page B4-83.
- *Hardware-controlled priority escalation to HardFault* on page B4-84.
- *Special-purpose mask registers, PRIMASK, BASEPRI, FAULTMASK, for software-controlled priority boosting* on page B4-85.
- *Lockup* on page B4-87.
- *Exception during a singleword load operation* on page B4-92.
- *Special-purpose CONTROL register* on page B4-93.
- *Saving context on process switch* on page B4-94.
- *Context Synchronization Operation* on page B4-95.
- *Coprocessor support* on page B4-96

B4.1 PE modes, Thread mode and Handler mode

R_{CNMS} There are two PE modes:

- Thread mode.
- Handler mode.

I_{FDVT} A common usage model for the PE modes is:

Thread mode

Applications

Handler mode

OS kernel and associated functions. Software that manages system resources.

R_{RPKP} The PE handles all exceptions in Handler mode.

R_{CMQP} Thread mode is selected on reset. The [IPSR](#) is set to zero on reset.

See also:

- [Privileged and unprivileged execution](#) on page B4-38.
- [Interrupt Program Status Register \(IPSR\)](#) on page B4-41.
- [Security states, Secure state and Non-secure state](#) on page B4-43.

B4.2 Privileged and unprivileged execution

R_{WVRK}

Thread mode

Execution can be privileged or unprivileged.

Handler mode

Execution is always privileged.

I_{WCFH}

[CONTROL.nPRIV](#) determines whether execution in Thread mode is unprivileged.

R_{SBQF}

In a PE without the Main Extension, it is IMPLEMENTATION DEFINED whether [CONTROL.nPRIV](#) can be set to 1.

R_{VCFR}

Privileged execution has access to all resources.

See also:

- [PE modes, Thread mode and Handler mode on page B4-37.](#)

B4.3 Registers

R_{KGST}

There are the following registers in the base register set:

General-purpose registers, all 32-bit:

- R0-R12
- R13. This is the Stack Pointer (SP).
- R14. This is the Link Register (LR).

Program Counter, 32-bit:

- R15 is the Program Counter (PC).

Special-purpose registers

- Mask Registers:
 - 1-bit exception mask register, [PRIMASK](#).
 - 8-bit base priority mask register, [BASEPRI](#).
 - 1-bit fault mask register, [FAULTMASK](#).
- A 2-bit, 3-bit, or 4-bit [CONTROL](#) register.
- Two 32-bit Stack Pointer Limit registers, [MSPLIM](#) and [PSPLIM](#).
- A combined 32-bit Program Status Register ([XPSR](#)), comprising:
 - Application Program Status Register ([APSR](#)).
 - Interrupt Program Status Register ([IPSR](#)).
 - Execution Program Status Register ([EPSR](#)).
- A 32-bit Combined Exception Return Program Status Register, [RETSPSR](#).

Memory-mapped registers

All other registers.

I_{DHVL}

Extensions might add additional registers to the base register set.

R_{PLRT}

In a PE with the Main Extension, the LR is set to 0xFFFFFFFF on both of the ARMv8-M resets, Cold reset and Warm reset. Otherwise, it becomes UNKNOWN on both of the ARMv8-M resets.

R_{TBGP}

The LR is updated automatically on exception entry.

R_{PLNS}

The PC is loaded with the reset handler start address on both of the ARMv8-M resets, Cold reset and Warm reset.


See also:

- [Chapter B8 The System Address Map](#).
- [Special-purpose mask registers, PRIMASK, BASEPRI, FAULTMASK, for software-controlled priority boosting on page B4-85](#).
- [Special-purpose CONTROL register on page B4-93](#).
- [Stack limit checks on page B4-70](#).
- [XPSR, APSR, IPSR, and EPSR on page B4-40](#).
- [Special-purpose register updates and the memory order model on page B4-42](#).
- In [Chapter B2 Resets](#):
 - [Resets, Cold reset and Warm reset on page B2-30](#).

B4.4 XPSR, APSR, IPSR, and EPSR

R_{VWTF}

The [APSR](#), [IPSR](#), and [EPSR](#) combine to form one register, the [XPSR](#):

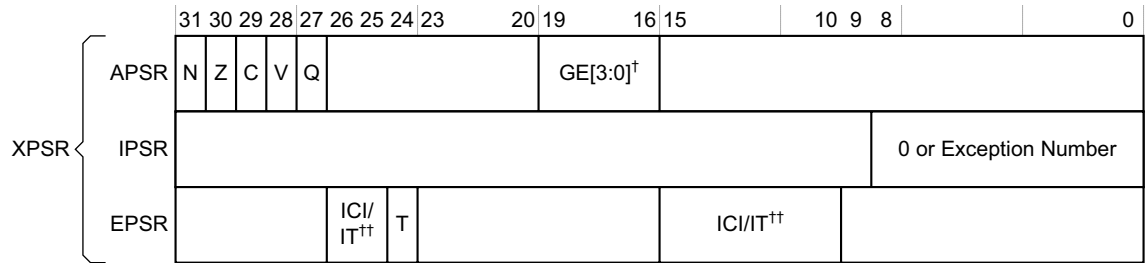

† Reserved if the DSP Extension is not implemented

†† Reserved if the Main Extension is not implemented

All unused bits in any of the [APSR](#), [IPSR](#), or [EPSR](#), or any unused bits in the combined [XPSR](#), are reserved.

R_{XGTP}

The [MRS](#) and [MSR](#) instructions recognize the following mnemonics for accessing the [APSR](#), [IPSR](#), or [EPSR](#), or a combination of them:

Mnemonic	Registers accessed
APSR	APSR
IPSR	IPSR
EPSR	EPSR
IAPSR	IPSR and APSR
EAPSR	EPSR and APSR
IEPSR	IPSR and EPSR
XPSR	APSR , IPSR , and EPSR

See also:

- [Registers](#) on page B4-39.
- [Application Program Status Register \(APSR\)](#).
- [Interrupt Program Status Register \(IPSR\)](#) on page B4-41.
- [Execution Program Status Register \(EPSR\)](#) on page B4-41.

B4.4.1 Application Program Status Register (APSR)

R_{KCLM}

Software can use [MRS](#) and [MSR](#) instructions to access the [APSR](#).

R_{RPNB}

Application-level software can access the [APSR](#), regardless of whether the application-level software is privileged or unprivileged.

See also:

- [XPSR, APSR, IPSR, and EPSR](#).
- In [Chapter D2 Register Specification](#):
 - [APSR, Application Program Status Register](#) on page D2-812.

B4.4.2 Interrupt Program Status Register (IPSR)

- R_{DTBJ}** When the PE is in Thread mode, the **IPSR** value is zero. When the PE is in Handler mode:
- In the case of a taken exception, the **IPSR** holds the exception number of the exception being handled.
 - When there has been a function call from Secure state to Non-secure state, the **IPSR** has the value of 1.
- The PE updates the **IPSR** on exception entry and return.
- R_{XTCC}** Software can use **MRS** instructions to read the **IPSR**. The PE ignores writes to the **IPSR** by MSR instructions.

See also:

- [XPSR, APSR, IPSR, and EPSR on page B4-40.](#)
- [Function calls from Secure state to Non-secure state on page B4-61.](#)
- In [Chapter D2 Register Specification](#):
 - [IPSR, Interrupt Program Status Register on page D2-987.](#)

B4.4.3 Execution Program Status Register (EPSR)

- R_{KSCH}** A reset sets **EPSR.T** to the value of bit[0] of the reset vector.
- I_{GPIH}** Bit[0] of the reset vector must be 1 if the PE is to execute the code indicated by the reset vector.
- R_{SQLX}** When **EPSR.T** is:
- 0** Any attempt to execute any instruction generates:
 - An INVSTATE UsageFault, in a PE with the Main Extension.
 - A HardFault, in a PE without the Main Extension.
 - 1** The Instruction set state is T32 state and all instructions are decoded as T32 instructions.
- I_{XBWX}** The intent is that the Instruction set state is always T32 state.
- R_{LBJQ}** All **EPSR** fields read as zero using an **MRS** instruction. The PE ignores writes to the **EPSR** by an MSR instruction.

See also:

- [XPSR, APSR, IPSR, and EPSR on page B4-40.](#)
- In [Chapter D2 Register Specification](#):
 - [EPSR, Execution Program Status Register on page D2-919.](#)

B4.5 Special-purpose register updates and the memory order model

R_XHHC

Except for writes to the [CONTROL](#) register, any change to a special-purpose register by a [CPS](#) or [MSR](#) instruction is guaranteed:


- Not to affect that [CPS](#) or [MSR](#) instruction, or any instruction preceding it in program order.
- To be visible to all instructions that appear in program order after the [CPS](#) or [MSR](#).

See also:

- [Registers on page B4-39](#).

B4.6 Security states, Secure state and Non-secure state

- R_{HKKL} A PE with the Security Extension has two Security states:
- Secure state.
 - Non-secure state.

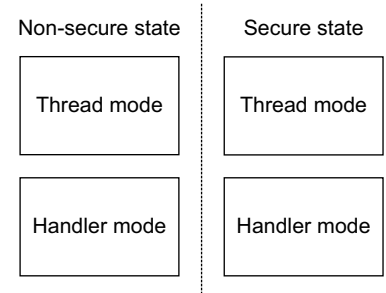

- R_{HWFV} A PE with the Security Extension resets into Secure state on both of the ARMv8-M resets, Cold reset and Warm reset.

- R_{PLGH} A PE without the Security Extension behaves as though reset into Non-secure state.

See also:

- [Security states, register banking between them](#) on page B4-44.
- [Security states, exception banking](#) on page B4-50.
- [Security state transitions](#) on page B4-60.
- In Chapter B2 *Resets*:
 - [Resets, Cold reset and Warm reset](#) on page B2-30.

B4.7 Security states, register banking between them

I_{MGRQ} In a PE with the Security Extension, some registers are banked between the Security states. When a register is banked in this way, there is a physical instance of the register in Secure state and another physical instance of the register in Non-secure state.

R_{BHDK} In a PE with the Security Extension:

- The general-purpose registers that are banked are:
 - R13. This is the Stack Pointer (SP).
- The special-purpose registers that are banked are:
 - The Mask registers, [PRIMASK](#), [BASEPRI](#), and [FAULTMASK](#).
 - The [CONTROL](#) register.
 - The main and process Stack Pointer Limit registers, [MSPLIM](#) and [PSPLIM](#).
- The System Control Space (SCS) is banked.

I_{GBWT} For [MRS](#) and [MSR](#) instructions, [SYSm\[7\]](#) in the instruction encoding specifies whether the Secure or the Non-secure instance of a banked register is accessed:

Accesses from	SYSm[7]	
	0	1
Secure state	Secure instance	Non-secure instance
Non-secure state	Non-secure instance	RAZ/WI

I_{MKKR} This specification uses the following naming convention to identify banked registers:

<register name>_S

The Secure instance of the register.

<register name>_NS

The Non-secure instance of the register.

<register name>

The instance associated with the current Security state.

See also:

- [Registers on page B4-39](#).
- [Security states, Secure state and Non-secure state on page B4-43](#).
- [Stack pointer on page B4-45](#).
- In [Chapter B8 The System Address Map](#):
 - [The System Control Space \(SCS\) on page B8-166](#).

B4.8 Stack pointer

R_{MPWV}

In a PE with the Security Extension, four stacks and four stack pointer registers are implemented:

Stack		Stack pointer register
Secure	Main	MSP_S
	Process	PSP_S
Non-secure	Main	MSP_NS
	Process	PSP_NS

Otherwise, two stacks and two stack pointer registers are implemented:

Stack	Stack pointer register
Main	MSP
Process	PSP

R_{TXRW}

In Handler mode, the PE uses the main stack.

I_{DMLS}

In Thread mode, [CONTROL.SPSEL](#) determines whether the PE uses the main or process stack.

R_{BLPL}

In a PE with the Security Extension, the Secure main stack, MSP_S, is selected and initialized on reset. Otherwise, MSP is selected and initialized on reset.

R_{XPWM}

<stack_pointer_register_name>[1:0] is always treated as RES0, so that all stack pointers are always guaranteed to be word-aligned.

R_{KQFB}

After the exception entry stacking operation, the stack pointer is doubleword-aligned.

I_{PWRQ}

ARM recommends that the Secure stacks be located in Secure memory.

See also:

- [Security states, Secure state and Non-secure state on page B4-43.](#)
- [PE modes, Thread mode and Handler mode on page B4-37.](#)
- [Exception entry, context stacking on page B4-64.](#)
- [Vector tables on page B4-83.](#)
- [Registers on page B4-39.](#)
- [Stack limit checks on page B4-70.](#)

B4.9 Exception numbers and exception priority numbers

I_{DCJS} Each exception has an associated *exception number* and an associated *priority number*.

RCMTC In a PE with the Main Extension, the exceptions, their associated numbers, and their associated priority numbers are as follows:

Exception	Exception number	Priority number
Reset	1	-4 ^a
Secure HardFault when AIRCR.BFHFNMINS is 1 ^b	3	-3
NMI	2	-2
Secure HardFault when AIRCR.BFHFNMINS is 0	3	-1
Non-secure HardFault	3	-1
MemManage fault	4	Software configurable
BusFault	5	Software configurable
UsageFault	6	Software configurable
SecureFault	7 ^c	Software configurable
Reserved	8-10	-
SVCcall	11	Software configurable
DebugMonitor	12	Software configurable
Reserved	13	-
PendSV	14	Software configurable
SysTick	15	Software configurable
External interrupt 0	16	Software configurable
.	.	.
.	.	.
.	.	.
External interrupt N	16+N	Software configurable

- a. Highest priority.
- b. When AIRCR.BFHFNMINS is 1, faults that target Secure state that are escalated to HardFault are still Secure HardFaults. That is, the value of AIRCR.BFHFNMINS does not affect faults that target Secure state that are escalated to HardFaults. This table row applies to such faults.
- c. In a PE without the Security Extension, exception number 7 is reserved.

R_{MGNV}

In a PE without the Main Extension, the exceptions, their associated numbers, and their associated priority numbers are as follows:

Exception	Exception number	Priority number
Reset	1	-4 ^a
Secure HardFault when AIRCR.BFHFNMINS is 1 ^b	3	-3
NMI	2	-2
Secure HardFault when AIRCR.BFHFNMINS is 0	3	-1
Non-secure HardFault	3	-1
Reserved	4-10	-
SVCall	11	Software configurable
Reserved	12-13	-
PendSV	14	Software configurable
SysTick	15	Software configurable
External interrupt 0	16	Software configurable
.	.	.
.	.	.
.	.	.
External interrupt N	16+N	Software configurable

- a. Highest priority.
- b. When AIRCR.BFHFNMINS is 1, faults that target Secure state that are escalated to HardFault are still Secure HardFaults. That is, the value of AIRCR.BFHFNMINS does not affect faults that target Secure state that are escalated to HardFaults. This table row applies to such faults.

I_{FPJD}

The maximum supported number of external interrupts is 496, regardless of whether the Main Extension is implemented.

I_{QWTM}

For exceptions with software configurable priority numbers, software configures the priority numbers by using registers SHPR1 - SHPR3 in the System Control Block (SCB).

R_{NFSM}

Software configurable priority numbers start at 0.

R_{GGCP}

In a PE with the Main Extension, the number of software configurable priority numbers is an IMPLEMENTATION DEFINED power of two in the range 8 - 256:

Number of priority bits of SHPRn.PRI_n implemented ^a	Number of software configurable priority numbers	Minimum priority number (highest priority)	Maximum priority number (lowest priority)
3	8	0	0b11100000 = 224
4	16	0	0b11110000 = 240
5	32	0	0b11111000 = 248

Number of priority bits of SHPRn.PRI_n implemented ^a	Number of software configurable priority numbers	Minimum priority number (highest priority)	Maximum priority number (lowest priority)
6	64	0	0b11111100 = 252
7	128	0	0b11111110 = 254
8	256	0	0b11111111 = 255

a. All low-order bits of these fields that are not implemented as priority bits are RES0, as shown in the maximum priority number column.

RCMGH

In a PE without the Main Extension, the number of software configurable priority numbers is 4:

Number of priority bits of SHPRn.PRI_n implemented ^a	Number of software configurable priority numbers	Minimum priority number (highest priority)	Maximum priority number (lowest priority)
2	4	0	0b11000000 = 192

a. SHPRn.PRI_n[5:0] are RES0, as shown in the maximum priority number column.

See also:

- [Security states, exception banking on page B4-50.](#)
- [Faults on page B4-52.](#)
- [Priority model on page B4-56.](#)

B4.10 Exception enable, pending, and active bits

I_{QQDG} The **SHCSR**, **ICSR**, **DEMCR**, **NVIC_IABR<n>**, **NVIC_ISPR<n>**, **NVIC_ISER<n>**, and **STIR** contain exception enable, pending, and active fields.

I_{GHGW} The following exceptions are always enabled and therefore do not have an exception enable bit:

- Hardfault.
- NMI.
- SVCcall.
- PendSV.

I_{LHSX} In a PE without the Security Extension:

- Privileged execution can pend interrupts by writing to the **NVIC_ISPR<n>**.
- When **CCR.USERSETMPEND** is 1, unprivileged execution can pend interrupts by writing to the **STIR**.

I_{QDKX} In a PE with the Security Extension:

- Software can use the **STIR** to pend any Secure or Non-secure interrupt, as follows:

	Secure state	Non-secure state
Privileged execution	Can use STIR to pend any Secure or Non-secure interrupt.	Can use STIR to pend a Non-secure interrupt.
Unprivileged execution	When CCR.USERSETMPEND_S is 1, can use STIR to pend any Secure or Non-secure interrupt.	When CCR.USERSETMPEND_NS is 1, can use STIR to pend a Non-secure interrupt.

- Software can use **STIR_NS** to pend a Non-secure interrupt, as follows:

	Secure state	Non-secure state
Privileged execution	Can use STIR_NS to pend a Non-secure interrupt.	RES0
Unprivileged execution	When CCR.USERSETMPEND_NS is 1, can use STIR_NS to pend a Non-secure interrupt.	

- Software can use **NVIC_ISPR<n>** to pend any Secure or Non-secure interrupt, as follows:

	Secure state	Non-secure state
Privileged execution	Can use NVIC_ISPR<n> to pend any Secure or Non-secure interrupt.	Can use NVIC_ISPR<n> to pend a Non-secure interrupt.
Unprivileged execution	Fault	Fault

- Software can use **NVIC_ISPRN_NS** to pend a Non-secure interrupt, as follows:

	Secure state	Non-secure state
Privileged execution	Can use NVIC_ISPRN_NS to pend a Non-secure interrupt.	RES0
Unprivileged execution	Fault	Fault

B4.11 Security states, exception banking

- R_{PJHV}** In a PE with the Security Extension, some exceptions are banked. A banked exception has all of the following:
- Banked enabled, pending, and active bits.
 - A banked SHPR_n.PRI field.
 - A banked exception vector.
 - A banked handler.

Exception	Banked
Reset	No
HardFault	Yes
NMI	No
MemManage fault ^a	Yes
BusFault ^a	No
UsageFault ^a	Yes
SecureFault ^a	No
SVCall	Yes
DebugMonitor ^a	No
PendSV	Yes
SysTick	Yes
External interrupt 0	No
.	.
.	.
.	.
External interrupt N	No

a. Exception type is present only if the Main Extension is implemented.

- R_{CWNH}** A banked exception targets the Security state it is taken from.
- R_{NBMV}** Reset always targets Secure state.
- I_{DDKC}** NMI can be configured to target either Security state, by using [AIRCR.BFHFNMINS](#).
- I_{HGFM}** BusFault can be configured to target either Security state, by using [AIRCR.BFHFNMINS](#).
- R_{MQWN}** SecureFault always targets Secure state.
- I_{WSSL}** DebugMonitor targets Secure state if the status bit [DEMCR.SDME](#) is 1. Otherwise, it targets Non-secure state.
- I_{DQLX}** Each external interrupt, 0-N, targets the Security state that its NVIC_ITNS_n.<bit number> dictates.
- R_{PBXI}** In this rule, <exception> is one of:
- NMI.

- BusFault.
- DebugMonitor.
- External interrupt N.

When <exception> targets Secure state, the Non-secure view of its SHPRn.PRI field, and enabled, pending, and active bits, are RAZ/WI.

I_{LFHQ}

Secure software must ensure that when changing the target Security state of an exception, the exception is not pending or active.

See also:

- [Exception numbers and exception priority numbers on page B4-46.](#)
- [Vector tables on page B4-83.](#)

B4.12 Faults

I_{NHTB}

There are the following Fault Status Registers:

- **HardFault Status Register (HFSR)**. Present only if the Main Extension is implemented.
- **MemManage Fault Status Register (MMFSR)**. Present only if the Main Extension is implemented.
- **BusFault Status Register (BFSR)**. Present only if the Main Extension is implemented.
- **UsageFault Status Register (UFSR)**. Present only if the Main Extension is implemented.
- **SecureFault Status Register (SFSR)**. Present only if the Main Extension and Security Extension are implemented.
- **Debug Fault Status Register (DFSR)**. Present only if halting debug or the Main Extension is implemented.
- **Auxiliary Fault Status Register (AFSR)**. The contents of this register are IMPLEMENTATION DEFINED.

In a PE with the Main Extension, the **MMFSR**, **BFSR**, and **UFSR** combine to form one register, called the Configurable Fault Status Register (CFSR).

There are the following Fault Address Registers:

- **MemManage Fault Address Register (MMFAR)**. Present only if the Main Extension is implemented.
- **BusFault Address Register (BFAR)**. Present only if the Main Extension is implemented.
- **SecureFault Address Register (SFAR)**. Present only if the Main Extension is implemented.

R_{XMRH}

MMFAR is updated only for a MemManage fault on a direct data access.

R_{DDJ}

BFAR is updated only for a BusFault on a data access, precise.

I_{TSDC}

An *imprecise* exception is an exception that is generated as the result of a system error and that is reported at a time that is asynchronous to the instruction that caused it.

R_{PDCH}

In a PE with the Main Extension, the faults are:

Exception number	Exception	Fault	Fault status bit
3	HardFault	HardFault on a vector table entry read error	HFSR.VECTTBL
		HardFault on fault escalation	HFSR.FORCED
		HardFault on BKPT escalation	HFSR.DEBUGEVT
4	MemManage fault	MemManage fault on an instruction fetch	MMFSR.IACCVIOL
		MemManage fault on a direct data access	MMFSR.DACCVIOL
		MemManage fault on context unstacking by hardware, because of an MPU access violation	MMFSR.MUNSTKERR
		MemManage fault on context stacking by hardware, because of an MPU access violation	MMFSR.MSTKERR
		When lazy FP context preservation is active, a MemManage fault on saving FP context to the stack	MMFSR.MLSPERR

Exception number	Exception	Fault	Fault status bit
5	BusFault	BusFault on an instruction fetch, precise	BFSR.IBUSERR
		BusFault on a data access, precise	BFSR.PRECISERR
		BusFault on a data access, imprecise	BFSR.IMPRESERR
		BusFault on context unstacking by hardware	BFSR.UNSTKERR
		BusFault on context stacking by hardware	BFSR.STKERR
		When lazy FP context preservation is active, a BusFault on saving FP context to the stack	SFSR.LSPERR
6	UsageFault	UsageFault, undefined instruction	UFSR.UNDEFINSTR
		UsageFault, invalid Instruction set state because EPSR.T is 0	UFSR.INVSTATE
		UsageFault, failed integrity check on exception return	UFSR.INVPC
		UsageFault, no coprocessor	UFSR.NOCP
		UsageFault, stack overflow	UFSR.STKOF
		UsageFault, unaligned access when CCR.UNALIGN_TRP is 1	UFSR.UNALIGNED
		UsageFault, divide by zero when CCR.DIV_0_TRP is 1	UFSR.DIVBYZERO
7	SecureFault	SecureFault, invalid Secure state entry point	SFSR.INVEP
		SecureFault, invalid integrity signature when unstacking	SFSR.INVIS
		SecureFault, invalid exception return	SFSR.INVER
		SecureFault, attribution unit violation	SFSR.AUVIOL
		SecureFault, invalid transition from Secure state	SFSR.INVTRAN
		SecureFault, lazy FP context preservation error	SFSR.LSPERR
		SecureFault, lazy FP context error	SFSR.LSERR

R_{NXRX}

In a PE without the Main Extension, the faults remain the same as for a PE with the Main Extension, but the enable, pending, and active bits for the following faults are RAZ/WI in the SHCSR:

- MemManage fault.
- BusFault.
- UsageFault.
- SecureFault.

In a PE without the Main Extension, the faults are:

Exception number	Exception
3	HardFault

RFQJV	Fault conditions that would generate a SecureFault in a PE with the Main Extension instead generate a Secure Hardfault in a PE without the Main Extension.
ICCXG	For the exact circumstances under which each of the ARM v8-M faults is generated, see the appropriate Fault Status Register description.

See also:

- [Exception numbers and exception priority numbers on page B4-46.](#)
- [Hardware-controlled priority escalation to HardFault on page B4-84.](#)

B4.13 Exception states

I_{CTFJ}

An exception, other than reset, has the following possible states:

Active

An exception that either:

- Is being handled.
- Was being handled. The handler was preempted by a handler for a higher priority exception.

Pending

An exception that has been generated, but that is not active.

Inactive

The exception has not been generated.

Active and pending

One instance of the exception is active, and a second instance of the exception is pending.

Only asynchronous exceptions can be active and pending. Synchronous exceptions are either inactive, pending, or active.

B4.14 Priority model

R_{CJDM} Lower priority numbers take precedence.

R_{VMKV} The current execution priority is:

1. If any exceptions are active, the current execution priority is the priority number of the active exception with the lowest SHPR_n.PRI group priority field value.
2. The current execution priority then includes any effects of any software-controlled priority boosting by AIRCR.PRIS == 1 and PRIMASK, FAULTMASK, and BASEPRI.

When no exception is active and no priority boosting is active, the instruction stream that is executing has a priority number of (maximum supported priority number+1).

I_{WXSK} (maximum supported priority number+1) corresponds to the lowest priority.

R_{RKCQ} Execution at a particular priority can only be preempted by an exception with a lower SHPR_n.PRI_n group priority field value.

I_{DPSP} In a PE with the Main Extension, BASEPRI and each SHPR_n.PRI_n and NVIC_n.PRI_{Nn} are 8-bit fields that AIRCR.PRIGROUP splits into two fields, a group priority field and a subpriority field:

BASEPRI, SHPR _n .PRI _n [7:0], and NVIC _n .PRI _{Nn} [7:0] ^a		
AIRCR.PRIGROUP value	Group priority field	Subpriority field
0	[7:1]	[0]
1	[7:2]	[1:0]
2	[7:3]	[2:0]
3	[7:4]	[3:0]
4	[7:5]	[4:0]
5	[7:6]	[5:0]
6	[7]	[6:0]
7	-	[7:0]

a. All low-order bits of these fields that are not implemented as priority bits are RES0.

In a PE without the Main Extension, AIRCR.PRIGROUP is RES0, therefore each SHPR_n.PRI_n and NVIC_n.PRI_{Nn} is split into two as follows:

SHPR _n .PRI _n [7:0] and NVIC _n .PRI _{Nn} [7:0] ^a		
AIRCR.PRIGROUP value	Group priority field	Subpriority field
RES0	[7:1]	[0]

a. SHPR_n.PRI_n[5:0] are RES0.

R_{CQRV} If there are multiple pending exceptions, the pending exception with the lowest group priority field value takes precedence.

If multiple pending exceptions have the same group priority field value, the pending exception with the lowest subpriority field value takes precedence.

If multiple pending exceptions have the same group priority field value and the same subpriority field value, the pending exception with the lowest exception number takes precedence.

If a pending Secure exception and a pending Non-secure exception both have the same group priority field value, the same subpriority field value, and the same exception number, the Secure exception takes precedence.

INCDS

The following is an example of exceptions with different priorities:

Example B4-1

This example considers the following exceptions, that all have software configurable priority numbers:

- A has the highest priority.
- B has medium priority.
- C has lowest priority.

Example sequence of events:

1. No exception is active and no priority boosting is active.
2. B is generated. The PE takes exception B and starts executing the handler for it. Exception B is now active and the current execution priority is that of B.
3. A is generated. A is higher priority, therefore A preempts B and the PE starts executing the handler for A. Exception A is now active and the current execution priority is that of A. Exception B remains active.
4. C is generated. C has the lowest priority, therefore it is pending.
5. The PE reduces the priority of A to a priority that is lower than C. B is now the highest priority active exception, therefore the execution priority moves to that of B. The PE continues executing the handler for A at the priority of B. After completing A, the PE restarts the handler for B. After completing B, the PE takes exception C and starts executing the handler for it. C is now active and the current execution priority is that of C.

IXQPK


In a PE with the Main Extension and the Security Extension, when `AIRCR.PRIS` is 1, each Non-secure `SHPRn_NS.PRI_n` group priority field value has the following sequence applied to it:

It

1. is divided by two.
2. The constant `0x80` is then added to it.

This maps the Non-secure `SHPRn_NS.PRI_n` group priority field values to the bottom half of the priority range. When this sequence is applied, any effects of `AIRCR.PRIGROUP` have already been taken into account, so the subpriority field is dropped and the sequence is only applied to the group priority field.

The following diagram shows an example. In this example, all eight bits of `SHPRn_NS.PRI_n` are implemented as priority bits and `AIRCR.PRIGROUP_NS` is set to 0.

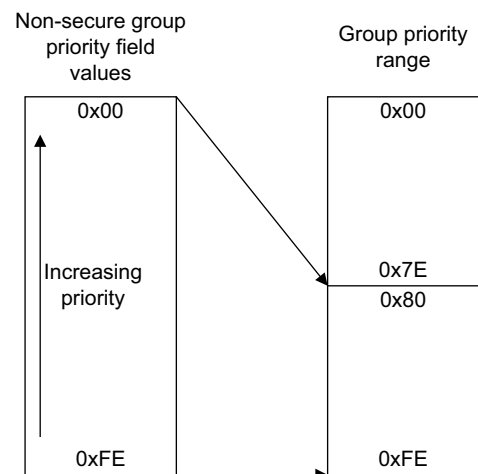

In this example, the mapping is:

Non-secure group priority field value	Mapped to
0x00	0x80
0x02	0x81
0x04	0x82
0x06	0x83
.	.
.	.
.	.

In this example, Secure exceptions in the range 0x00 - 0x7E have priority over all Non-secure exceptions.

See also:

- [Exception numbers and exception priority numbers on page B4-46.](#)
- [Exception states on page B4-55.](#)
- [Special-purpose mask registers, PRIMASK, BASEPRI, FAULTMASK, for software-controlled priority boosting on page B4-85.](#)

B4.15 Secure address protection

R _{CHIX}	<i>NS-Req</i> defines the Security state that the PE requests a memory access be performed in.
R _{MSENJ}	<i>NS-Attr</i> marks a memory access as Secure or Non-secure.
R _{VHRL}	For data accesses, <i>NS-Req</i> is equal to the current Security state.
R _{XSPQ}	For data accesses, <i>NS-Attr</i> is determined as follows:

NS-Req	Security attribute of the location being accessed	NS-Attr
Non-secure	X	Non-secure
Secure	Non-secure	Non-secure
	Secure	Secure

R _{TDNR}	For instruction fetches, <i>NS-Req</i> and <i>NS-Attr</i> are equal to the Security attribute of the location being accessed. <i>NS-Attr</i> also determines the Security state of the PE.
I _{NGXH}	It is not possible to execute Secure code in Non-secure state, or Non-secure code in Secure state.

See also:

- [Security state transitions on page B4-60.](#)

B4.16 Security state transitions

R_{PQHT} For a branch to an address in the other Security state, the following table shows when the PE changes Security state:

Current Security state	Security attribute of the branch target address	Security state change
Secure	Non-secure	Change to Non-secure state if the branch was an <i>interstating branch</i> instruction, BXNS or BLXNS, with the lsb of its target address set to 0. Otherwise: <ul style="list-style-type: none"> In a PE with the Main Extension, an INVTRAN SecureFault is generated. In a PE without the Main Extension, a Secure HardFault is generated.
Non-secure	Secure and Non-secure callable	Change to Secure state if both: <ul style="list-style-type: none"> The branch target address contains an SG instruction. The whole of the instruction at the branch target address is flagged as Secure and Non-secure callable. Otherwise: <ul style="list-style-type: none"> In a PE with the Main Extension, an INVEP SecureFault is generated. In a PE without the Main Extension, a Secure HardFault is generated.
Non-secure	Secure and not Non-secure callable	In a PE with the Main Extension, an INVEP SecureFault is generated. In a PE without the Main Extension, a Secure Hardfault is generated.

I_{KWMP} SG instructions in Secure memory are valid entry points to Secure code. They prevent Non-secure code from being able to jump to arbitrary addresses in Secure code.

I_{WJRL} When an interstating branch is executed in Secure state, the lsb of the target address indicates the target Security state:

- 1** The target Security state is Secure.
- 0** The target Security state is Non-secure.

Interstating branches are UNDEFINED in Non-secure state.

R_{XNVW} If sequential instruction execution crosses from Non-secure memory to Secure memory, then if the Secure memory entry point contains an SG instruction and the whole of the instruction at the Secure memory entry point is flagged as Secure and Non-secure callable, it is CONSTRAINED UNPREDICTABLE whether:

- The PE changes to Secure state.
- A fault is generated:
 - An INVEP SecureFault in a PE with the Main Extension.
 - A Secure HardFault in a PE without the Main Extension.


R_{DWXH} When an exception is taken to the other Security state, the PE automatically transitions to that other Security state.

B4.17 Function calls from Secure state to Non-secure state

R_{GVBB}

If an interstating branch generates a change from Secure state to Non-secure state, then before the Security state change:

- The return address, which is the address of the instruction after the instruction that caused the function call, the **IPSR** value, and **CONTROL.SFPA** are stored onto the current stack, as shown in the following figure. ReturnAddress[0] is set to 1 to indicate a return to the T32 Instruction set state. The **IPSR** is stacked in the partial **RETPSR**, and **CONTROL.SFPA** is stacked in bit [20] of the partial **RETPSR**.

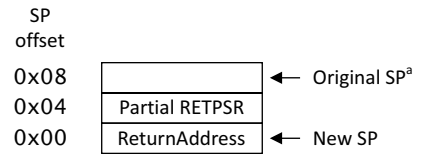

a Or at offset 0x0C if at a word-aligned but not doubleword-aligned address.

- If the PE is in Handler mode, **IPSR** has the value of 1.
- The **FNC_RETURN** value is saved in the LR.

I_{DKGV}

Behavior is UNPREDICTABLE when a function call stack frame is not doubleword-aligned.

I_{TSVP}

The PE hardware does not ensure doubleword-alignment of function call stack frames.

I_{KWZD}

ARM recommends that when Secure code calls a Non-secure function, any registers not being used to pass function arguments are set to zero.

B4.18 Function returns from Non-secure state

R_{HFPFG} A function return from Non-secure state begins when one of the following instructions loads a **FNC_RETURN** value into the PC:

- A **POP** or **LDM** that includes loading the PC.
- An **LDR** with the PC as a destination.
- A **BX** with any register.

On detecting a **FNC_RETURN** value in the PC:

- The stack is unstacked.
- **EPSR.IT** is set to **0b00**.
- The following *integrity checks on function return* are performed:
 - A check that **IPSR** is zero or 1 before the value of it is restored.
 - A check that if the return is to Thread mode, the stacked **IPSR** value is zero.
 - A check that if the return is to Handler mode, the stacked **IPSR** value is nonzero.

R_{DWTF} The **FNC_RETURN** value is:

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	S

Bits[31:1] This is what identifies the value as a **FNC_RETURN** value.

Bit[0], S The function call was from:

- 0** Secure state.
- 1** Non-secure state.

R_{UKFL} Any failed integrity check on function return generates:

In a PE with the Main Extension:

An **INVPC UsageFault** that is synchronous to the instruction that loaded the **FNC_RETURN** value into the PC.

Otherwise:

A **Secure HardFault** that is synchronous to the instruction that loaded the **FNC_RETURN** value into the PC.

R_{LDVW} When the stack is unstacked on detecting a **FNC_RETURN** value in the PC, if **ReturnAddress[0]** is 0, the PE generates an **INVSTATE UsageFault**.

B4.19 Exception handling

R _{YFHR}	An exception that does not cause <i>lockup</i> sets both: <ul style="list-style-type: none"> • The pending bit of its handler, or the pending bit of the HardFault handler, to 1. • The associated fault status information.
R _{ULDB}	When a pending exception has a lower group priority field value than current execution, including taking into account any priority adjustment by AIRCR.PRIS , the pending exception preempts current execution.
R _{WBND}	Preemption of current execution causes the following basic sequence: <ol style="list-style-type: none"> 1. R0-R3, R12, R14, RETPSR, and CONTROL.SFPA are stacked. 2. The return address is determined and stacked. 3. Optional stacking of FP context. 4. Optional stacking of additional state context and additional FP context. 5. LR is set to EXC_RETURN. 6. Optional clearing of registers. 7. The exception to be taken is chosen, and IPSR.Exception is set accordingly. The setting of IPSR.Exception to a nonzero value causes the PE to change to Handler mode. 8. CONTROL.SPSEL is set to 0, to select the main stack. 9. The pending bit of the exception to be taken is set to 0. The active bit of the exception to be taken is set to 1. 10. EPSR.T is set to bit[0] of the exception vector for the exception to be taken. 11. The PC is set to the exception vector for the exception to be taken.
I _{PSGQ}	The HandleException , ExceptionEntry , PushStack , ExceptionTaken , and ActivateException pseudocode describes the full exception handling sequence.
R _{NJVF}	During exception entry, if it is found that the exception and the exception vector are associated with different Security states an INVEP or INVTRAN SecureFault is generated, unless the exception is associated with Non-secure state and is targeting an SG instruction that is located in memory that is Secure and Non-secure callable.
R _{QLHB}	The return address is one of: <ul style="list-style-type: none"> • On return from a synchronous exception, other than an SVCcall exception, the address of the instruction that caused the exception. • On return from an asynchronous exception, the address of the next instruction in the program order. • On return from an SVCcall exception, the address of the next instruction in the program order.
R _{XKDD}	The least significant bit of the return address from an exception is (ReturnAddress[0]) is RES0.

See also:

- [Priority model](#) on page B4-56.
- [Exception entry, context stacking](#) on page B4-64.
- [Exception entry, register clearing after context stacking](#) on page B4-69.
- [Vector tables](#) on page B4-83.
- [Stack limit checks](#) on page B4-70.
- [Exceptions during exception entry](#) on page B4-77.


B4.20 Exception entry, context stacking

R_{PWWG} In a PE without the Security Extension and without the Floating-point Extension (regardless of whether the Main Extension is implemented), on taking an exception, the PE hardware saves *state context* onto the stack that the SP register points to. The state context that is saved is eight 32-bit words:

- [RETPSR](#).
- ReturnAddress.
- R14. This is the Link Register (LR).
- R12.
- R3-R0.

R_{PTRL} In a PE without the Security Extension but with the Floating-point and Main Extensions, on taking an exception, the PE hardware saves state context onto the stack that the SP register points to. If [CONTROL.FPCA](#) is 1 when the exception is taken, then in addition to the state context being saved, there are the following possible modes for the *FP context*:

- Stack the FP context.
- Reserve space on the stack for the FP context. This is called *lazy FP context preservation*.

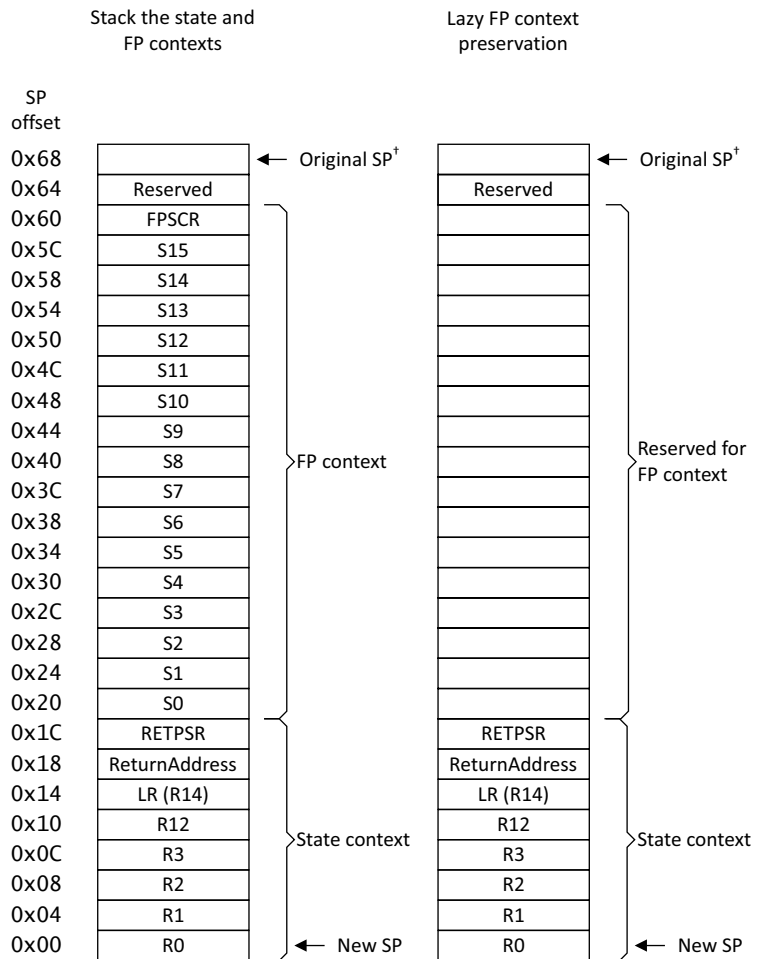


[†] Or at offset 0x6C if at a word-aligned but not doubleword-aligned address.

R_{PLHM} In a PE with the Security Extension but without the Floating-point Extension (regardless of whether the Main Extension is implemented), on taking an exception, the PE hardware:

1. Saves state context onto the stack that the SP register points to.

- If exception entry is to Non-secure state, regardless of whether a higher priority derived or late-arriving exception targeting Secure state occurs, the PE hardware extends the stack frame and also saves *additional state context*, as shown below:

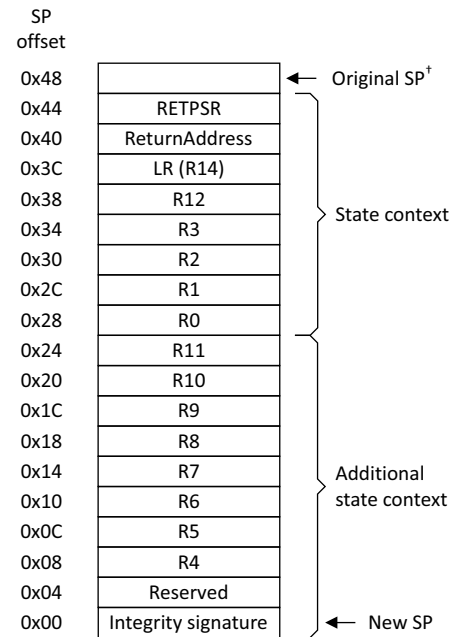

† Or at offset 0x4C if at a word-aligned but not doubleword-aligned address.

R_{DHDP}

In a PE with the Security Extension, Floating-point Extension, and Main Extension, on taking an exception from:
Non-secure state

Behavior is the same as a PE without the Security Extension but with the Floating-point Extension.

Secure state when CONTROL.FPCA is 0


Behavior is the same as for a PE with the Security Extension but without the Floating-point Extension.

Secure state when CONTROL.FPCA is 1

The PE hardware:

- Saves state context onto the stack that the SP register points to.
- If FPCCR_S.TS is 0 when the exception is taken, the PE hardware either stacks the FP context or reserves space on the stack for the FP context.
 If FPCCR_S.TS is 1 when the exception is taken, the PE hardware either stacks both the FP context and additional FP context, or reserves space on the stack for both the FP context and additional FP context.
- If exception entry is to Non-secure state, including when a higher priority derived or late-arriving exception targeting Secure state occurs, the PE hardware extends the stack frame and also saves the additional state context.

The following figure shows PE stacking behavior when `CONTROL.FPCA` is 1, `FPPCR_S.TS` is 1 (and both the FP context and additional FP context is stacked), and exception entry is to Non-secure state:

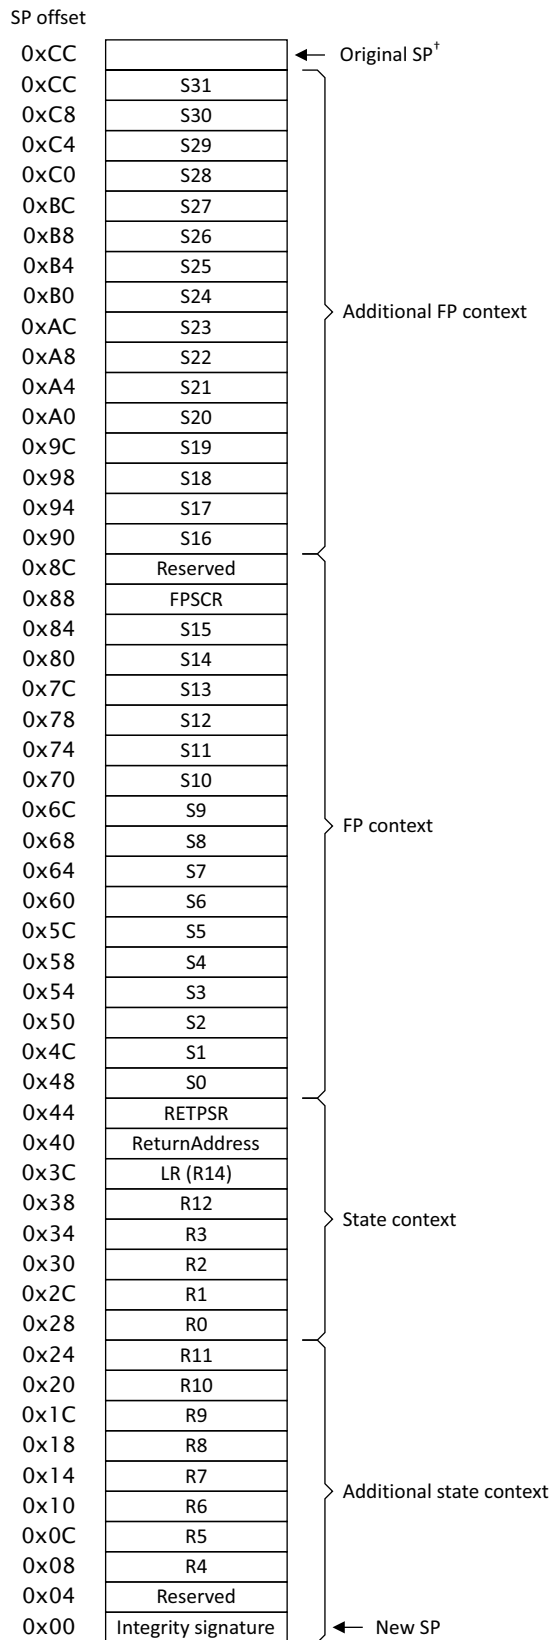

[†] Or at offset 0xD4 if at a word-aligned but not doubleword-aligned address.

R _{BKVD}	<p>On an exception, the RETPSR value that is stacked is all of the following:</p> <ul style="list-style-type: none"> • The APSR, IPSR, and EPSR. • CONTROL.SFPA, in RETPSR[20]. <p>In addition, on an exception, the PE uses RETPSR.SPREALIGN to indicate whether the PE realigned the stack to make it doubleword-aligned:</p> <p>1 The PE realigned the stack.</p> <p>0 The PE did not realign the stack.</p>
R _{QDKQ}	Full descending stacks are used.
R _{PWBW}	<p>In a PE with the Floating-point Extension:</p> <ul style="list-style-type: none"> • Because setting FPCCR.ASPEN to 1 causes the PE to automatically set CONTROL.FPCA to 1 on the execution of a floating-point instruction, setting FPCCR.ASPEN to 1 means that the PE hardware automatically either: <ul style="list-style-type: none"> — Stacks FP context on taking an exception. — Uses <i>lazy FP context preservation</i> on taking an exception. <p>If CONTROL.FPCA is 1, it is FPCCR.LSPEN that determines which of the above the PE hardware performs:</p> <p>0 The PE hardware automatically stacks FP context on taking an exception. In a PE that also includes the Security Extension, if FPCCR_S.TS is 1, the hardware stacks the <i>additional FP context</i> as well as the FP context.</p> <p>1 The PE hardware uses lazy FP context preservation on taking an exception, and sets all of : <ul style="list-style-type: none"> • The FPCAR, to point to the reserved S0 stack address. • FPCCR.LSPACT to 1. • FPCCR.{USER, THREAD, HFREADY, MMRDY, BFRDY, SFRDY, MONRDY, UFRDY}, to record the permissions and fault possibilities to be applied to any subsequent FP context save. <p>In a PE that also includes the Security Extension, if FPCCR_S.TS is 1, the hardware reserves space on the stack for both the FP context and the additional FP context. Otherwise, the hardware only reserves space on the stack for the FP context.</p> </p>
R _{GHDJ}	Execution of a floating-point instruction while FPCCR.LSPACT == 1 indicates that lazy FP context preservation is active.
R _{MBXL}	<p>If software attempts to execute a floating-point instruction while lazy FP context preservation is active, the access permissions that CPACR and NSACR define are checked against the context that activated lazy FP context preservation, as stored in the FPCCR.</p> <ul style="list-style-type: none"> • If no permission violation is detected, the PE: <ol style="list-style-type: none"> 1. Saves FP context to the reserved area on the stack, as identified by the FPCAR. 2. Sets FPCCR.LSPACT to 0 to indicate that lazy FP context preservation is no longer active. 3. Processes the floating-point instruction. • If a permission violation is detected, the PE generates a NOCP UsageFault and does not save FP context to the reserved area on the stack. <p>This check is performed regardless of whether the Security Extension is implemented.</p>
R _{LGNS}	<p>In a PE with the Floating-point Extension, when the following conditions are met are on exception entry, the PE generates a Secure NOCP UsageFault and does not allocate space on the stack for FP context:</p> <ul style="list-style-type: none"> • CONTROL.FPCA is 1. • NSACR.CP10 is 0. • The Background Security state is Non-secure state.
R _{KMBN}	<p>In a PE with the Security Extension and Floating-point Extension, if lazy FP context preservation is activated when FPCCR.LSPACT is already set to 1, the PE generates an LSERR SecureFault.</p>

See also:

- [Stack pointer](#) on page B4-45.
- [Exception entry, register clearing after context stacking](#) on page B4-69.
- [Integrity signature](#) on page B4-76.
- [PushStack](#) on page E3-1246.

B4.21 Exception entry, register clearing after context stacking

R _{DRRB}	In a PE without the Security Extension and without the Floating-point Extension, the PE hardware sets R0-R3, R12, APSR , and EPSR to an UNKNOWN value after it has pushed <i>state context</i> to the stack.
R _{DJRX}	In a PE without the Security Extension but with the Floating-point Extension: <ul style="list-style-type: none">• The PE hardware sets R0-R3, R12, APSR, and EPSR to an UNKNOWN value after it has pushed state context to the stack.• The PE hardware sets S0-S15 and the FPSCR to an UNKNOWN value after it has pushed <i>FP context</i> to the stack.
R _{SNDB}	<p>In a PE with the Security Extension but without the Floating-point Extension, after the PE hardware has pushed state context to the stack, it sets R0-R3, R12, APSR, and EPSR to:</p> <ul style="list-style-type: none">• An UNKNOWN value if the exception is taken to Secure state.• Zero if the exception is taken to Non-secure state. <p>If the PE did not also push <i>additional state context</i> to the stack, as indicated by EXC_RETURN.DCRS, the values of R4-R11 remain unchanged.</p> <p>If the PE also pushed additional state context to the stack, as indicated by EXC_RETURN.DCRS, then afterwards:</p> <ul style="list-style-type: none">• If the Background Security state is Non-secure, R4-R11 remain unchanged.• If the Background Security state is Secure, the PE sets R4-R11 to:<ul style="list-style-type: none">— An UNKNOWN value if the exception is taken to Secure state.— Zero if the exception is taken to Non-secure state.
R _{JWBK}	<p>In a PE with the Security Extension and Floating-point Extension, register clearing behavior after context stacking is as follows:</p> <p>State context and additional state context</p> <p>Register clearing behavior is the same as for a PE with the Security Extension but without the Floating-point Extension.</p> <p>FP context and additional FP context</p> <ul style="list-style-type: none">• If FPCCR_S.TS is 0 when the FP context is pushed to the stack, S0-S15 and the FPSCR are set to an UNKNOWN value after stacking.• If FPCCR_S.TS is 1 when the FP context and additional FP context are both pushed to the stack, S0-S31 and the FPSCR are set to zero after stacking. <p>In both cases, CONTROL.FPCA is set to 0 to indicate that the Floating-point Extension is not active.</p>

See also:

- [Exception entry, context stacking on page B4-64.](#)
- [Tail-chaining on page B4-79.](#)

B4.22 Stack limit checks

I_{KDPG}

In a PE with the Main and Security Extensions, there are four stack limit registers:

Security state	Stack	Stack limit register
Secure	Main	MSPLIM_S
	Process	PSPLIM_S
Non-secure	Main	MSPLIM_NS
	Process	PSPLIM_NS

In a PE with the Main Extension but without the Security Extension, there are two stack limit registers:

Stack	Stack limit register
Main	MSPLIM
Process	PSPLIM

In a PE without the Main Extension but with the Security Extension, there are:

- No stack limit registers in Non-secure state.
- Two stack limit registers in Secure state.

Security state	Stack	Stack limit register
Secure	Main	MSPLIM_S
	Process	PSPLIM_S

In a PE without the Main Extension and without the Security Extension MSPLIM_S and PSPLIM_S are invisible. These registers hold stack limit values.

A stack can descend to its stack limit value. Any attempt to descend the stack further than its stack limit value is a violation of the stack limit.

xSPLIM_x[2:0] are treated as RES0, so that all stack pointer limits are always guaranteed to be doubleword-aligned. Bits [31:3] of the xSPLIM_x registers are writeable.

R_{DKSR}

Stack limit checks are performed during the creation of a stack frame for all of the following:

- Exception entry.
- Tail-chaining from a Secure to a Non-secure exception.
- A function call from Secure code to Non-secure code.

R_{ZLZG}

On a violation of a stack limit during either exception entry or tail-chaining:

- In a PE with the Main Extension, a synchronous STKOF UsageFault is generated. Otherwise, a HardFault is generated.
- The stack pointer is set to the stack limit value.
- Push operations to addresses below the stack limit value are not performed.
- It is IMPLEMENTATION DEFINED whether push operations to addresses equal to or above the stack limit value are performed.

R_{CCSC}

On a violation of a Secure stack limit during a function call:

- In a PE with the Main Extension, a synchronous STKOF UsageFault is generated. Otherwise, a HardFault is generated.

- Push operations to addresses below the stack limit value are not performed.
- It is IMPLEMENTATION DEFINED whether push operations to addresses equal to or above the stack limit value are performed.

R_{GGRH} Unstacking operations are not subject to stack limit checking.

R_{YVWT} Updates to the stack pointer by the following instructions are subjected to stack limit checking:

- ADD (SP plus immediate).
- ADD (SP plus register).
- SUB (SP minus immediate).
- SUB (SP minus register).
- BLX, BLXNS.
- LDC, LDC2 (immediate).
- LDMDB, LDMEA.
- LDR (immediate).
- LDR (literal).
- LDR (register).
- LDRB (immediate).
- LDRD (immediate).
- LDRH (immediate).
- LDRSB (immediate).
- LDRSH (immediate).
- MOV (register).
- POP.
- PUSH.
- VPOP.
- VPUSH.
- STC, STC2.
- STM, STMIA, STMEA.
- STR (immediate).
- STRB (immediate).
- STRD (immediate).
- STRH (immediate).
- VLDM.
- VSTM.

Updates to the stack pointer by the MSR instruction targeting SP_NS are subject to stack limit checking. Updates to the stack pointer and stack pointer limit by any other MSR instruction are not subject to stack limit checking.

For all other instructions that can update the stack pointer and stack pointer limit, it is IMPLEMENTATION DEFINED whether stack limit checking is performed.

I_{BJHX} When an instruction updates the stack pointer, if it results in a violation of the stack limit, it is the modification of the stack pointer that generates the exception, rather than an access that uses the out-of-range stack pointer.

R_{DBSG} On a violation of a stack limit when an instruction updates the stack pointer:

- It is IMPLEMENTATION DEFINED whether accesses to addresses equal to or above the stack limit value are performed.
- It is IMPLEMENTATION DEFINED whether the destination register or registers of load instructions are updated as long as the base register, stack pointer and PC are not modified.
- Accesses below the stack limit are not performed.

I_{RRDX} CCR.STKOFHFNMIGN controls whether stack limit violations are ignored while executing at a requested execution priority that is negative.

RXCQL

It is UNKNOWN whether a stack limit check is performed on any use of the SP that was UNPREDICTABLE in ARMv7-M and ARMv6-M.

See also:

- [Stack pointer](#) on page B4-45.
- [Tail-chaining](#) on page B4-79.

B4.23 Exception return

R _{KPSS}	<p>The PE begins an exception return when both of the following are true:</p> <ul style="list-style-type: none"> • The PE is in Handler mode. • One of the following instructions loads an EXC_RETURN value, 0xFFXXXXX, into the PC: <ul style="list-style-type: none"> — A POP or LDM that includes loading the PC. — An LDR with the PC as a destination. — A BX with any register. <p>When both of these are true, then on detecting an EXC_RETURN value in the PC, the PE unstacks the stack and resumes execution of the code that was preempted by the exception handler.</p> <p>If an EXC_RETURN value is loaded into the PC by an instruction other than those listed, or from the vector table, the value is treated as an address.</p> <p>If an EXC_RETURN value is loaded into the PC when the PE is in Thread mode, the value is treated as an address.</p>																								
R _{BLMQ}	<p>In an EXC_RETURN value:</p> <p>Bits[31:24] These are 0xFF. This is what identifies the value as an EXC_RETURN value.</p> <p>Bits[23:7] RES1.</p> <p>Bit [6], S In a PE with the Security Extension, the exception was taken from:</p> <table border="0" style="margin-left: 20px;"> <tr> <td style="padding-right: 10px;">0</td> <td>Non-secure state. Restore registers from the Non-secure stack.</td> </tr> <tr> <td style="padding-right: 10px;">1</td> <td>Secure state. Restore registers from the Secure stack.</td> </tr> </table> <p style="margin-left: 20px;">In a PE without the Security Extension, RES0.</p> <p>Bit [5], DCRS</p> <p style="margin-left: 20px;">In a PE with the Security Extension:</p> <table border="0" style="margin-left: 20px;"> <tr> <td style="padding-right: 10px;">0</td> <td>Stacking of the additional state context can be skipped.</td> </tr> <tr> <td style="padding-right: 10px;">1</td> <td>Do not skip any stacking.</td> </tr> </table> <p style="margin-left: 20px;">In a PE without the Security Extension, RES1.</p> <p>Bit[4], FType</p> <p style="margin-left: 20px;">In a PE with the Main and Floating-point Extensions:</p> <table border="0" style="margin-left: 20px;"> <tr> <td style="padding-right: 10px;">0</td> <td>The PE allocated space on the stack for FP context.</td> </tr> <tr> <td style="padding-right: 10px;">1</td> <td>The PE did not allocate space on the stack for FP context.</td> </tr> </table> <p style="margin-left: 20px;">In a PE without the Main Extension, or with the Main Extension but without the Floating-point Extension, RES1.</p> <p>Bit[3], Mode</p> <p style="margin-left: 20px;">Return to:</p> <table border="0" style="margin-left: 20px;"> <tr> <td style="padding-right: 10px;">0</td> <td>Handler mode.</td> </tr> <tr> <td style="padding-right: 10px;">1</td> <td>Thread mode.</td> </tr> </table> <p>Bit[2], SPSEL</p> <p style="margin-left: 20px;">Restore registers from the:</p> <table border="0" style="margin-left: 20px;"> <tr> <td style="padding-right: 10px;">0</td> <td>Main stack.</td> </tr> <tr> <td style="padding-right: 10px;">1</td> <td>Process stack.</td> </tr> </table> <p>Bit[1] RES0.</p> <p>Bit[0], ES</p> <p style="margin-left: 20px;">In a PE with the Security Extension, the exception was taken to:</p> <table border="0" style="margin-left: 20px;"> <tr> <td style="padding-right: 10px;">0</td> <td>Non-secure state.</td> </tr> <tr> <td style="padding-right: 10px;">1</td> <td>Secure state.</td> </tr> </table> <p style="margin-left: 20px;">In a PE without the Security Extension, RES0.</p>	0	Non-secure state. Restore registers from the Non-secure stack.	1	Secure state. Restore registers from the Secure stack.	0	Stacking of the additional state context can be skipped.	1	Do not skip any stacking.	0	The PE allocated space on the stack for FP context.	1	The PE did not allocate space on the stack for FP context.	0	Handler mode.	1	Thread mode.	0	Main stack.	1	Process stack.	0	Non-secure state.	1	Secure state.
0	Non-secure state. Restore registers from the Non-secure stack.																								
1	Secure state. Restore registers from the Secure stack.																								
0	Stacking of the additional state context can be skipped.																								
1	Do not skip any stacking.																								
0	The PE allocated space on the stack for FP context.																								
1	The PE did not allocate space on the stack for FP context.																								
0	Handler mode.																								
1	Thread mode.																								
0	Main stack.																								
1	Process stack.																								
0	Non-secure state.																								
1	Secure state.																								
R _{TXDW}	Behavior is UNPREDICTABLE if EXC_RETURN.FType is 0 and the Floating-point Extension is not implemented.																								
R _{GBVH}	Behavior is UNPREDICTABLE if EXC_RETURN [23:7] are not all 1.																								

R _X LCP	Behavior is UNPREDICTABLE if any of the following are true and the Security Extension is not implemented: <ul style="list-style-type: none">• <code>EXC_RETURN.S</code> is 1.• <code>EXC_RETURN.DCRS</code> is 0.• <code>EXC_RETURN.ES</code> is 1.
R _S SKSD	In a PE without the Main Extension, behavior is UNPREDICTABLE if <code>EXC_RETURN[1]</code> is 1.
R _S MFLL	The following integrity checks on exception return are performed on every exception return: <ol style="list-style-type: none">1. In a PE with the Security Extension, the integrity check that is called the <i>EXC_RETURN.ES validation check</i>, as follows:<ul style="list-style-type: none">• If the PE was in Non-secure state when <code>EXC_RETURN</code> was loaded into the PC and either <code>EXC_RETURN.DCRS</code> is 0 or <code>EXC_RETURN.ES</code> is 1, an INVER SecureFault is generated and the PE sets <code>EXC_RETURN.ES</code> to 0.2. A check that the exception number being returned from, as held in the <code>IPSR</code>, is shown as active in the <code>SHCSR</code> or <code>NVIC_IABR<n></code>. If this check fails:<ul style="list-style-type: none">• In a PE with the Main Extension, an INVPC UsageFault is generated. If the PE includes the Security Extension, the INVPC UsageFault targets the Security state that the exception return instruction was executed in.• In a PE without the Main Extension, a HardFault is generated. If the PE includes the Security Extension, the HardFault targets the Security state that <code>EXC_RETURN.S</code> specifies.3. In a PE with the Main Extension, an INVPC UsageFault is generated if <code>EXC_RETURN[1]</code> is 1. If the PE includes the Security Extension, the INVPC UsageFault targets the Security state that the exception return instruction was executed in.4. A check that if the return is to Thread mode, the value restored to the <code>IPSR</code> from the <code>RETPSR</code> is zero, or that if the return is to Handler mode, the value restored to the <code>IPSR</code> from the <code>RETPSR</code> is non zero. If this check fails:<ul style="list-style-type: none">• In a PE with the Main Extension, an INVPC UsageFault is generated. If the PE includes the Security Extension, the INVPC UsageFault targets the Background Security state.• In a PE without the Main Extension, a HardFault is generated. If the PE includes the Security Extension, the HardFault targets the Security state that <code>EXC_RETURN.S</code> specifies.
R _J MJC	In a PE with the Security Extension, after the <code>EXC_RETURN.ES</code> validation check has been performed on an exception return: <ul style="list-style-type: none">• If <code>EXC_RETURN.ES</code> is 1, <code>EXC_RETURN.SPSEL</code> is written to <code>CONTROL_S.SPSEL</code>.• If <code>EXC_RETURN.ES</code> is 0, <code>EXC_RETURN.SPSEL</code> is written to <code>CONTROL_NS.SPSEL</code>.
R _R PGL	In a PE with the Security Extension, on an exception return that successfully returns to the Background Security state, with no tail-chaining or failed integrity checks, the Security state is set to <code>EXC_RETURN.S</code> .
I _C TWL	In a PE with the Security Extension, after a successful exception return to the Background Security state, the PE is in the correct Security state before the next instruction from the background code is executed. This means that in the case where the Background Security state is Secure state, there is no need for an SG instruction at the exception return address.
I _R QVB	In a PE with the Floating-Point Extension, on exception entry: <ol style="list-style-type: none">1. <code>EXC_RETURN.FType</code> is saved as the inverse of <code>CONTROL.FPCA</code>.2. <code>CONTROL.FPCA</code> is then cleared to 0 if it was 1, or remains unchanged if it was 0. On exception return, the inverse of <code>EXC_RETURN[4]</code> is written to <code>CONTROL.FPCA</code> .
R _C GML	In a PE with the Floating-point Extension, when the following conditions are met on exception return, the PE hardware sets <code>S0-S15</code> and the <code>FPSCR</code> to zero: <ul style="list-style-type: none">• <code>CONTROL.FPCA</code> is 1.• <code>FPCCR.CLRONRET</code> is 1.• <code>FPCCR.LSPACT</code> is 0. If all of these fields are 1 on exception return, the PE generates an LSERR SecureFault instead.

R_{XNNG} In a PE with the Floating-point Extension, when the following conditions are met on exception return, the PE generates an LSERR SecureFault:

- [EXC_RETURN\[4\]](#) is 0.
- The stack contains Secure FP context, that would be unstacked on the return. That is, FPCCR_S.LSPACT is 1.
- The return is to Non-secure state.

R_{HCXX} In a PE with the Floating-point Extension, if the PE abandons unstacking of the floating-point registers to tail-chain into another exception:

- If the Security Extension is implemented, the PE must clear to zero any floating-point registers that would have been unstacked.
- If the Security Extension is not implemented, the floating-point registers that would have been unstacked become UNKNOWN.

See also:

- [Exception handling on page B4-63](#).

B4.24 Integrity signature

R_{PHBP}

In a PE with the Main Extension, the integrity signature value is:

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	1	1	1	0	1	1	1	1	1	0	1	0	0	0	0	1	0	0	1	0	0	1	0	1	1	0	1	SFTC

Stack Frame Type Check ↵

In a PE with the Main Extension, when returning from a Non-secure exception to Secure state, if the unstacked integrity signature does not match this value, including if SFTC does not match [EXC_RETURN\[4\]](#), a SecureFault is generated.

R_{RJSP}

In a PE without the Main Extension, the integrity signature value is:

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	1	1	1	0	1	1	1	1	1	0	1	0	0	0	0	1	0	0	1	0	0	1	0	1	1	0	1	1

In a PE without the Main Extension, when returning from a Non-secure exception to Secure state, if the unstacked integrity signature does not match this value, a Secure HardFault is generated.

I_{FFTS}

The integrity signature is an XN address. When performing a function return from Non-secure code, if the integrity signature value is restored to the PC as the function return address, a MemManage fault is generated when the PE attempts execution.

See also:

- [Exception entry, context stacking](#) on page B4-64.
- [Exception return](#) on page B4-73.

B4.25 Exceptions during exception entry

- I_{LBGQ} During exception entry exceptions can occur, for example asynchronous exceptions, or the exception entry sequence itself might cause an exception, for example a MemManage fault on the push to the stack.
- Any exception that occurs during exception entry is a late-arriving exception, and:
- The exception that caused the original entry sequence is the *original exception*.
 - The priority of the code stream running at the time of the original exception is the *preempted priority*.
- When the exception entry sequence itself causes an exception, the latter exception is a *derived exception*.
- The following mechanism is called *late-arrival preemption*:
- The PE takes a late-arriving exception during an exception entry if the late-arriving exception is higher priority, including taking into account any priority adjustment by [AIRCR.PRIS](#). In this case:
 - The late-arriving exception uses the exception entry sequence started by the original exception. The original exception remains pending.
 - The PE takes the original exception after returning from the late-arriving exception.
- R_{MRTT} For:
- Derived exceptions, late-arrival preemption is mandatory.
 - Late-arriving asynchronous exceptions, it is IMPLEMENTATION DEFINED whether late-arrival preemption is used. If the PE does not implement late-arrival preemption for late-arriving asynchronous exceptions, late-arriving asynchronous exceptions become pending.
- R_{GDNT} If the group priority field value of a derived exception is higher than or equal to the preempted priority:
- If the derived exception is a DebugMonitor exception, it is ignored.
 - Otherwise, the PE escalates the derived exception to Hardfault.
- R_{GVHV} If a higher priority late-arriving Secure exception occurs during entry to a Non-secure exception when the Background Security state is Secure, it is IMPLEMENTATION DEFINED whether:
- The stacking of the additional state context is rolled back.
 - The stacking of the additional state context is completed and [EXC_RETURN.DCRS](#) is set to 0.
- I_{NJCW} The architecture does not specify the point during exception entry at which the PE recognizes the arrival of an asynchronous exception.
- See also:
- [Exception numbers and exception priority numbers on page B4-46](#).
 - [Priority model on page B4-56](#).
 - [Exception states on page B4-55](#).
 - [Exception handling on page B4-63](#).
 - [Tail-chaining on page B4-79](#).

B4.26 Exceptions during exception return

I _{KXPV}	<p>During exception return exceptions can occur, for example asynchronous exceptions, or the exception return might itself cause an exception.</p> <p>Any exception that occurs during exception return is a late-arriving exception.</p> <p>When the exception return sequence itself causes an exception, the latter exception is a derived exception.</p>
R _{TRFM}	<p>When a late-arriving exception during exception return is higher priority than the priority being returned to, the PE takes the late-arriving exception by using tail-chaining.</p>
I _{MBNG}	<p>The architecture does not specify the point during exception return at which the PE recognizes the arrival of an asynchronous exception. If a PE recognizes an asynchronous exception after an exception return has completed, there is no opportunity to tail-chain the asynchronous exception.</p>
R _{MJDN}	<p>If the priority of a derived exception during exception return is equal to or lower than the priority being returned to:</p> <ul style="list-style-type: none">• If the derived exception is a DebugMonitor exception, the PE ignores the derived exception.• Otherwise, the PE escalates the derived exception to Hardfault and the escalated exception is tail-chained.
R _{DHFK}	<p>If the priority of a derived exception during exception return, after priority escalation if appropriate, is higher priority than the priority being returned to, the PE uses tail-chaining to take the derived exception.</p>

See also:

- [Exception numbers and exception priority numbers on page B4-46.](#)
- [Priority model on page B4-56.](#)
- [Exception return on page B4-73.](#)
- [Tail-chaining on page B4-79.](#)

B4.27 Tail-chaining

R_HDGF


Tail-chaining behavior is as follows:

- On detecting an `EXC_RETURN` value in the PC, if there is a pending exception that is higher priority than the priority being returned to, the PE hardware:
 - Does not unstack the stack.
 - Takes the pending exception.

I_FJWK

Tail-chaining is an optimization. It removes unstacking and stacking operations. In the following example the 2nd exception is a *tail-chained exception*:

All in Non-secure state:

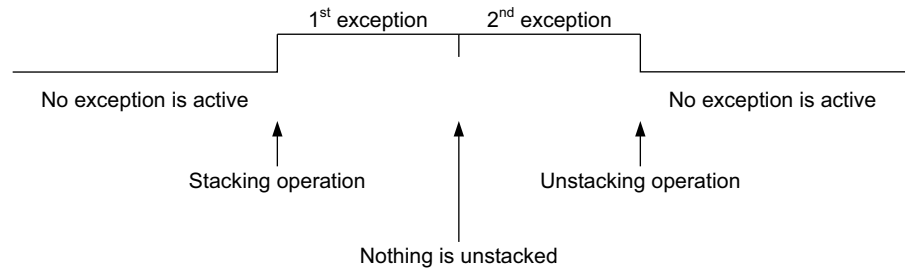

I_KKVL

The *Background Security state* is the Security state when no exception is active.


I_RWDT

If tail-chaining prevents a derived exception on exception return, the derived exception might instead be generated on the return from the last tail-chained exception.

R_PXVB


When the Background Security state is Secure state, if tail-chaining causes a change of Security state from Secure to Non-secure, additional context is saved on taking the Non-secure exception:

In a PE without the FP Extension:

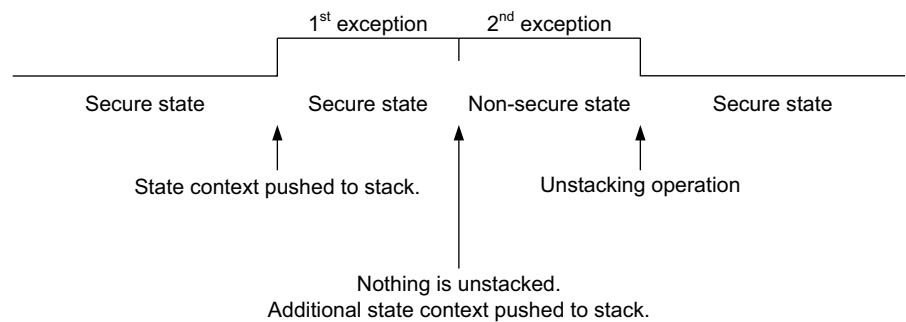

I_{TKLM}

When multiple exceptions are tail-chained, `EXC_RETURN.DCRS` is used to keep track of whether the additional context is stacked. The following figure is an example:

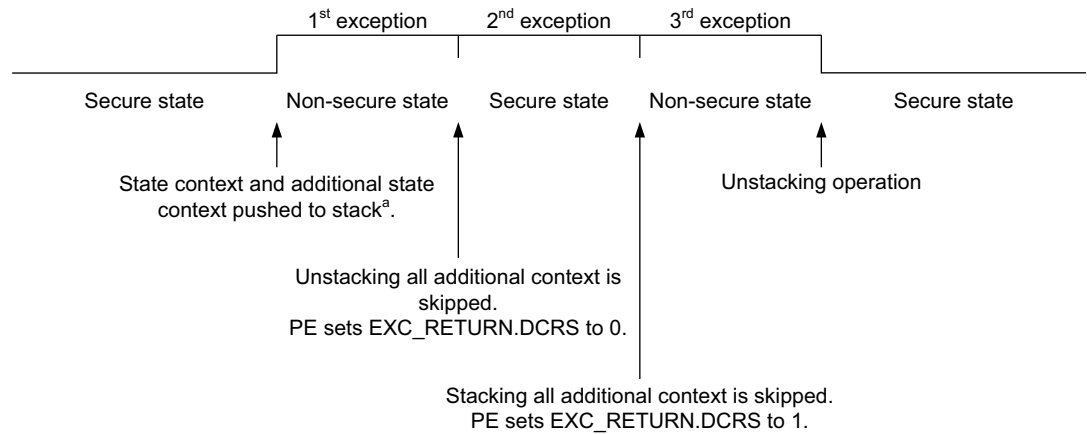

a In a PE with the FP Extension, FP context and additional FP context is also stacked if `CONTROL.FPCA` is 1.

I_{TMVF}

When multiple exceptions are tail-chained, a Secure tail-chained exception after a Non-secure exception cannot rely on any registers containing the values they had when no exception was active.

R_{CVRD}

ARM recommends that Secure exception handlers clear the FP context registers to zero before they return.

I_{LNPQ}

If software has set `FPCCR.CLRONRET` to 1, hardware automatically clears the FP context registers to zero on exception return.

R_{JMHS}

If the PE recognizes a new asynchronous exception while it is tail-chaining, and the new asynchronous exception has a higher priority than the next tailed-chained exception, the PE can, instead, take the new asynchronous exception, using late-arrival preemption.

This rule is true even if the next tail-chained exception is a derived exception on exception return. The PE can, instead, take the new asynchronous exception. If it does, the derived exception becomes pending.

See also:

- [Exception entry, context stacking on page B4-64.](#)
- [Exceptions during exception return on page B4-78.](#)

B4.28 Exceptions, instruction resume or instruction restart

- R_{PGRC}** The PE can take an exception during execution of a Load Multiple or Store Multiple instruction, effectively halting the instruction, and resume execution of the instruction after returning from the exception. This is called *instruction resume*. Instruction resume is supported only when the Main Extension is implemented.
- R_{KRLL}** The PE can abandon execution of a Load Multiple or Store Multiple instruction to take an exception, and after returning from the exception, restart the Load Multiple or Store Multiple instruction again from the start of the instruction. This is called *instruction restart*. Instruction restart is supported regardless of whether the Main Extension is implemented.
- I_{NDQT}** Instructions that the PE can halt to use instruction resume are called *exception-continuable instructions*.
- R_{RJVL}** The exception-continuable instructions are LDM, LDMDB, STM, STMDB, POP, and PUSH. In a PE with the Floating-point Extension, the floating-point exception-continuable instructions are VLDM, VSTM, VPOP, and VPUSH.
- R_{QVFC}** When the PE is using instruction resume, EPSR.ICI is set to a non-zero value that is the continuation state of the exception-continuable instruction:
- For LDM, LDMDB, STM, STMDB, POP, and PUSH instructions, ICI contains the number of the first register in the register list that must be loaded or stored after instruction resume.
 - For the floating-point instructions VLDM, VSTM, VPOP, and VPUSH, ICI contains the number of the lowest numbered doubleword Floating-point Extension register that was not completely loaded or stored before the PE took the exception.

The ICI values shown in the following table are *valid EPSR.ICI values*:

EPSR[26:25]	EPSR[15:12]	EPSR[11:10]
ICI[7:6] = 0b00	ICI[5:2] = reg_num	ICI[1:0] = 0b00
ICI[7:6] = 0b00	ICI[5:2] = 0b0000	ICI[1:0] = 0b00

- R_{XFGN}** Behavior is UNPREDICTABLE if EPSR.ICI contains a valid EPSR.ICI non-zero value and the register number that it contains is either:
- Not in the register list of the exception-continuable Load Multiple or Store Multiple instruction.
 - The first register in the register list of the exception-continuable Load Multiple or Store Multiple instruction.
- R_{CGFL}** The PE generates an INVSTATE UsageFault if EPSR.ICI contains a valid EPSR.ICI non-zero value and the instruction being executed is not a Load Multiple or Store Multiple instruction.
- R_{JXKQ}** If the PE uses instruction resume during a Load Multiple instruction, then after the exception return, the values of all registers in the register list are UNKNOWN, except for the following:
- Registers that are marked by EPSR.ICI as already loaded.
 - The base register.
 - The PC.
- I_{JJQX}** If the PE is using instruction restart, ARM recommends that software does not use Load Multiple or Store Multiple instructions with data in volatile memory.
- R_{NKNQ}** When a Load Multiple instruction has the PC in its register list, if the PE uses instruction resume or instruction restart during the instruction:
- If the PC is loaded before generation of the exception, the PE must restore the PC before taking the exception, so that after the exception the PE returns to either:
 - Continue execution of the Load Multiple instruction, if the PE used instruction resume.
 - Restart the Load Multiple instruction, if the PE used instruction restart.
- R_{LSCQ}** In a PE without the Main Extension, if the PE takes any exception during any Load Multiple or Store Multiple instruction, including PUSH and POP, the PE uses instruction restart and the base register is restored to the original value.

R_{RFGF}

In a PE with the Main Extension, if the PE takes an exception during any Load Multiple or Store Multiple instruction, including [PUSH](#) and [POP](#):

- If the instruction is not in an IT block and the exception is an asynchronous exception, the PE uses instruction resume and EPSR.ICI holds the continuation state. The base register is restored to the original value except in the following cases:

Interrupt of an instruction that is using SP as the base register

The SP that is presented to the exception entry sequence is lower than any element pushed by an STM, or not yet popped by an LDM.

For Decrement Before (DB) variants of the instruction, the SP is set to the final value. This is the lowest value in the list.

For Increment After (IA) variants of the instruction, the SP is restored to the initial value. This is the lowest value in the list.

Interrupt of an instruction that is not using SP as the base register

The base register is set to the final value, whether the instruction is a Decrement Before (DB) variant or an Increment After (IA) variant.

- For all other cases:
 - The PE uses instruction restart and the base register is restored to the original value. If the instruction is not in an IT block, EPSR.ICI is cleared to zero.

R_{SGWB}

When a Load Multiple instruction includes its base register in its register list, if the PE takes an exception during the instruction:

- The base register is restored to the original value, and:
 - If the instruction is in an IT block, the PE uses instruction restart.
 - If the instruction is not in an IT block, and the PE takes the exception after it loads the base register, EPSR.ICI can be set to an IMPLEMENTATION DEFINED value that will load at least the base register and subsequent locations again after returning from the interrupt.

See also:

- [Exception during a singleword load operation on page B4-92.](#)

B4.29 Vector tables

R_{NWFF} In a PE with the Security Extension, two vector tables are implemented, the Secure Vector table and the Non-secure Vector table, and it is IMPLEMENTATION DEFINED which of the following is true:

- The PE supports configurability of each vector table base, and two Vector Table Offset Registers, VTOR_S and VTOR_NS, are provided for this purpose.
- The PE does not support configurability of either vector table base, and VTOR_S and VTOR_NS are RAZ/WI.

If the PE supports configurability of each vector table base:

- Exceptions that target Secure state use VTOR_S to determine the base address of the Secure vector table.
- Exceptions that target Non-secure state use VTOR_NS to determine the base address of the Non-secure vector table.

R_{GTJQ} In a PE without the Security Extension, a single vector table is implemented, and it is IMPLEMENTATION DEFINED which of the following is true:

- The PE supports configurability of the vector table base, and a single Vector Table Offset Register, VTOR, is provided for this purpose.
- The PE does not support configurability of the vector table base, and VTOR is RAZ/WI.

I_{WFGX} ARM recommends that VTOR_S points to memory that is Secure and not Non-secure callable.

R_{WPRT} A vector table contains both:

- The initialization value for the main stack pointer on reset.
- The start address of each exception handler.

The *exception number* defines the order of entries.

Word offset in vector table	Value held at offset
0	Initial value for the main stack pointer on reset
Exception number	Start address for the handler for the exception with that number
Exception number	Start address for the handler for the exception with that number
.	.
.	.
.	.
Exception number	Start address for the handler for the exception with that number

R_{LFDL} In a PE with a configurable vector table base, the vector table must be naturally aligned to a power of two, with an alignment value that is:

- A minimum of 128 bytes.
- Greater than or equal to (Number of Exceptions supported x4).

R_{XPPT} For all vector table entries other than the entry at offset 0, if bit[0] is not set to 1, the first instruction in the exception will result in an INVSTATE UsageFault.

I_{BVSC} For all vector table entries other than the entry at offset 0, bit[0] defines EPSR.T on exception entry. Setting bit[0] to 1 indicates that the exception handler is in the T32 Instruction set state.

See also:

- [Exception numbers and exception priority numbers on page B4-46.](#)
- [Execution Program Status Register \(EPSR\) on page B4-41.](#)

B4.30 Hardware-controlled priority escalation to HardFault

R_{GNVS} When current execution has a priority number ≥ 0 :

- If a synchronous exception with an equal or lower priority is pending, the PE hardware escalates it to become a HardFault. This rule applies to all synchronous exceptions and DebugMonitor exceptions caused by the [BKPT](#) instruction. This rule does not apply to asynchronous exceptions and all other DebugMonitor exceptions.

R_{PBJQ} When current execution has a priority number ≥ 0 , if a disabled software configurable priority exception occurs:

- If it is a synchronous exception, the PE hardware escalates the exception to become a HardFault.
- If it is an interrupt, the PE does not escalate the interrupt. The interrupt remains pending.

See also:

- [Exception numbers and exception priority numbers on page B4-46.](#)

B4.31 Special-purpose mask registers, PRIMASK, BASEPRI, FAULTMASK, for software-controlled priority boosting

I_{BNJG}

In a PE with the Main Extension, software can use the [PRIMASK](#), [FAULTMASK](#), and [BASEPRI](#) registers as follows. A PE without the Main Extension implements [PRIMASK](#), but does not implement [FAULTMASK](#) and [BASEPRI](#).

PRIMASK

In a PE without the Security Extension:

- Setting this bit to 1 boosts the current execution priority to 0, masking all exceptions with a lower priority.

In a PE with the Security Extension:

- Setting PRIMASK_S to 1 boosts the current execution priority to 0.
- If [AIRCR.PRIS](#) is:

0 Setting PRIMASK_NS to 1 boosts the current execution priority to 0.

1 Setting PRIMASK_NS to 1 boosts the current execution priority to 0x80.

In a PE with the Security Extension, when the current execution priority is boosted to a particular value, all exceptions with a lower priority are masked.

FAULTMASK

In a PE without the Security Extension:

- Setting this bit to 1 boosts the current execution priority to -1, masking all exceptions with a lower priority.

In a PE with the Security Extension, if [AIRCR.BFHFNMINS](#) is:

0 Setting FAULTMASK_S to 1 boosts the current execution priority to -1.

If [AIRCR.PRIS](#) is:

0 Setting FAULTMASK_NS to 1 boosts the current execution priority to 0.

1 Setting FAULTMASK_NS to 1 boosts the current execution priority to 0x80.

1 Setting FAULTMASK_S to 1 boosts the current execution priority to -3.

Setting FAULTMASK_NS to 1 boosts the current execution priority to -1.

In a PE with the Security Extension, when the current execution priority is boosted to a particular value, all exceptions with a lower priority are masked.

BASEPRI

In a PE without the Security Extension:

- Software can set this field to a priority number between 1 and the maximum supported priority number. This boosts the current execution priority to that number, masking all exceptions with a lower priority.

In a PE with the Security Extension:

- Software can set BASEPRI_S to a priority number between 1 and the maximum supported priority number.

- If [AIRCR.PRIS](#) is:

0 Software can set BASEPRI_NS to a priority number between 1 and the maximum supported priority number.

1 Software can set BASEPRI_NS to a priority number between 1 and the maximum supported priority number. The value in BASEPRI_NS is then mapped to the bottom half of the priority range, so that the current execution priority is boosted to the mapped-to value in the bottom half of the priority range.

In a PE with the Security Extension, when the current execution priority is boosted to a particular value, all exceptions with a lower priority are masked.

R_{FHMC}

The [PRIMASK](#), [FAULTMASK](#), and [BASEPRI](#) priority boosting mechanisms only boost the group priority, not the subpriority.

- R_{KBNF} Without the Security Extension:
- An exception return other than from an NMI sets **FAULTMASK** to 0.
- With the Security Extension:
- An exception return other than from an NMI sets **FAULTMASK** to 0 if the *raw execution priority* is greater than or equal to 0. **EXC_RETURN.ES** indicates which banked instance of **FAULTMASK** is set to 0.
- I_{PLKD} The *raw execution priority* is:
- The execution priority minus the effects of **AIRCR.PRIS** == 1, and minus any software-controlled **PRIMASK**, **FAULTMASK**, or **BASEPRI** priority boosting.
- I_{GBVL} The *requested execution priority* is negative when any of the following are true:
- The banked **FAULTMASK** bit for the current Security state is 1, including when **AIRCR.PRIS** is also 1.
 - HardFault for the current Security state is active.
 - **AIRCR.BFHFNMINS**.

See also:

- [Priority model on page B4-56.](#)
- [Exception numbers and exception priority numbers on page B4-46.](#)

B4.32 Lockup

I _{RKJB}	<i>Lockup</i> is a PE state where the PE stops executing instructions in response to an error for which escalation to an appropriate HardFault handler is not possible because of the current execution priority. An example is a synchronous exception that would escalate to a Secure HardFault, but that cannot escalate to a Secure HardFault because Secure HardFault is already active.
I _{FSFR}	ARM recommends that an implementation provides a LOCKUP signal that, when the PE is in lockup, signals to the external system that the PE is in lockup.
R _{MBTM}	When the PE is in lockup: <ul style="list-style-type: none"> • DHCSR.S_LOCKUP reads as 1. • The PC reads as 0xEFFFFFFE. This is an XN address. • The PE stops fetching and executing instructions. • If the implementation provides an external LOCKUP signal, LOCKUP is asserted HIGH.
R _{JJC}	Exit from lockup is by any of the following: <ul style="list-style-type: none"> • A Cold reset. • A Warm reset. • Entry to Debug state. • Preemption by a higher priority exception.
R _{HJNP}	Exit from lockup causes both DHCSR.S_LOCKUP and, if implemented, the external LOCKUP signal, to be deasserted.
R _{SPPN}	On an exit from lockup by entry to Debug state, or by preemption by a higher priority exception, the return address is 0xEFFFFFFE.
I _{CRHJ}	After exit from lockup by entry to Debug state, or by preemption by a higher priority exception, a subsequent return from Debug state or that exception without modifying the return address attempts to execute from 0xEFFFFFFE. Execution from this address is guaranteed to generate an IACCVIOL MemManage fault, causing the PE to reenter lockup if the execution priority has not been modified. Modification of the return address would enable execution to be resumed, however ARM recommends treating entry to lockup as fatal and requiring the PE to be reset.

See also:

- [Instruction-related lockup behavior](#).
 - [Instruction execution](#).
 - [Floating-point lazy FP context preservation on page B4-88](#).
- [Exception-related lockup behavior on page B4-88](#).
 - [Vector or stack pointer error on reset on page B4-88](#).
 - [Errors on preemption and stacking for exception entry on page B4-89](#).
 - [Vector read error on NMI or HardFault entry on page B4-89](#).
 - [Integrity checks on exception return on page B4-90](#).
 - [Errors when unstacking state on exception return on page B4-90](#).

B4.32.1 Instruction-related lockup behavior

Instruction execution

R _{VGMR}	A synchronous exception results in lockup when: <ul style="list-style-type: none"> • The synchronous exception would escalate to a Secure HardFault and any of the following is true: <ul style="list-style-type: none"> — Secure HardFault is already active. — NMI is active and AIRCR.BFHFNMINs is 0. — FAULTMASK_S.FM is 1.
-------------------	--

- The synchronous exception would escalate to a Non-secure HardFault and any of the following is true:
 - Non-secure HardFault or Secure HardFault is already active.
 - NMI is active.
 - FAULTMASK_NS.FM or FAULTMASK_S.FM is 1.

R_VGNW

Entry to lockup from an exception causes:

- Any Fault Status Registers associated with the exception to be updated.
- No update to the exception state, pending or active.
- The PC to be set to 0xEFFFFFFE.
- [EPSR.IT](#) to be become UNKNOWN.

In addition, [HFSR.FORCED](#) is not set to 1.

R_DWKP

Asynchronous BusFaults never cause lockup. The standard rules for asynchronous BusFaults are applied.

I_XXKW

When a BusFault does not cause lockup, the value read or written to the location that generated the BusFault is UNKNOWN.

Floating-point lazy FP context preservation

R_RNKB

When [FPCCR.LSPACT](#) is 1, a NOCP UsageFault, SAU violation, MPU violation, or synchronous bus error during lazy FP context preservation causes lockup if any of the following is true:

- [FPCCR.HFRDY](#) is 0.
- The exception would escalate to a Secure HardFault and any of the following is true:
 - Secure HardFault is already active.
 - NMI is active and [AIRCR.BFHFNMINs](#) is 0.
 - FAULTMASK_S.FM is 1.
 - Non-secure Hardfault is active and [AIRCR.BFHFNMINs](#) is 0.
- The exception would escalate to a Non-secure HardFault and any of the following is true:
 - Non-secure HardFault or Secure HardFault is already active.
 - NMI is active.
 - FAULTMASK_NS.FM or FAULTMASK_S.FM is 1.

R_MMBJ

When [FPCCR.LSPEN](#) is 0, any faults caused by floating-point register reads or writes during exception entry or exception return are handled as faults on stacking or unstacking respectively.

R_XFQJ

When [FPCCR.LSPEN](#) is 1 and a NOCP UsageFault, SAU violation, MPU violation, or synchronous bus error during FP context stacking causes lockup, that entry to lockup causes:

- Any Fault Status Registers associated with the exception to be updated.
- No update to the exception state, pending or active.
- The PC to be set to 0xEFFFFFFE.
- [EPSR.IT](#) to be become UNKNOWN.

In addition, [HFSR.FORCED](#) is not set to 1.

B4.32.2 Exception-related lockup behavior

Vector or stack pointer error on reset

R_BHVG

On reset, if reading the vector table to obtain either the vector for the reset handler or the initialization value for the main stack pointer causes a bus error, the PE enters lockup in HardFault with the following behavior:

- [HFSR.VECTBL](#) is set to 1.
- In a PE with the Security Extension, Secure Hardfault is made active. That is, SHCSR_S.HARDFULTACT is set to 1.

- In a PE without the Security Extension, HardFault is made active. That is, SHCSR.HARDFULTACT is set to 1.
- An UNKNOWN value is loaded into the main stack pointer.
- The **IPSR** is set to 0.
- **EPSR.T** is UNKNOWN.
- **EPSR.IT** is set to zero.
- The PC is set to 0xEFFFFFFE.
- The LR is set to 0xFFFFFFFF.

I_{XP}NL

Because the PE always resets into Secure state and the highest privilege, SAU and MPU violations are not possible on accesses to the reset vector.

Errors on preemption and stacking for exception entry

R_{VK}TX

An SAU violation, MPU violation, NOCP UsageFault, STKOF UsageFault, LSERR SecureFault, or synchronous bus error during context stacking causes lockup when:

- The exception would escalate to a Secure HardFault and any of the following is true:
 - Secure HardFault is already active.
 - NMI is active and **AIRCR.BFHFNMIN** is 0.
 - **FAULTMASK_S.FM** is 1.
- The exception would escalate to a Non-secure HardFault and any of the following is true:
 - Non-secure HardFault or Secure HardFault is already active.
 - NMI is active.
 - **FAULTMASK_NS.FM** or **FAULTMASK_S.FM** is 1.

In these cases the point of PE lockup is when, after the exception to be taken has been chosen, the handler for that exception is entered. These cases do not in themselves cause any additional exception to become pending.

R_QSSB

When an SAU violation, MPU violation, NOCP UsageFault, STKOF UsageFault, LSERR SecureFault, or synchronous bus error occurs during context stacking, it is IMPLEMENTATION DEFINED whether the PE continues to stack any of the remaining context.

R_GJG

At the point of encountering an SAU violation, MPU violation, NOCP UsageFault, STKOF UsageFault, LSERR SecureFault, or synchronous bus error during context stacking, the PE:

- Updates any Fault Status Registers associated with the error.
- Does not set **HFSR.FORCED** to 1.

At the point of lockup:

- All state, including the LR, **IPSR**, and active and pending bits, is modified as though the fault on context stacking had never occurred, other than the following:
 - **EPSR.T** becomes UNKNOWN.
 - **EPSR.IT** is set to zero.
 - The PC is set to 0xEFFFFFFE.

Vector read error on NMI or HardFault entry

R_{CT}KP

On entry to an NMI or HardFault, if reading the vector table to obtain the vector for the NMI or HardFault handler causes a bus error, the PE enters lockup with the following behavior:

- **HFSR.VECTBL** is set to 1.
- The **IPSR** is updated to hold the exception number of the exception taken.
- The active bit of the exception taken is set to 1.
- The pending bit of the exception taken is cleared to 0.
- **EPSR.T** is UNKNOWN.
- **EPSR.IT** is set to zero.

- The LR is set to the [EXC_RETURN](#) value that would have been used had the fault not occurred.
- The PC is set to 0xEFFFFFFE.

I_{NMRW}

Because SAU violations on vector reads are required to be treated as late-arriving, they cannot cause lockup, instead resulting in a higher priority exception being taken. Vector reads always use the default memory map and cannot generate MPU violations.

Integrity checks on exception return

R_{TRFJ}

A fault generated by a failed *integrity check on exception return* is generated after either the active bit for the returning exception, or the active bit for NMI or HardFault, has been cleared to 0, and if applicable, after [FAULTMASK](#) has also been cleared to 0. A fault generated by a failed integrity check on exception return causes lockup when:

- The exception would escalate to a Secure HardFault and any of the following is true:
 - Secure HardFault is already active.
 - NMI is active and [AIRCR.BFHFNMINs](#) is 0.
 - [FAULTMASK_S.FM](#) is 1.
 - Non-secure Hardfault is active and [AIRCR.BFHFNMINs](#) is 0.
- The exception would escalate to a Non-secure HardFault and any of the following is true:
 - Non-secure HardFault or Secure HardFault is already active.
 - NMI is active.
 - [FAULTMASK_NS.FM](#) or [FAULTMASK_S.FM](#) is 1.

R_{WBVC}

The target Security state of an INVPC UsageFault generated because of a failed integrity check on exception return is the Security state that the exception return instruction was executed in.

R_{DFKP}

When the PE enters lockup because of a fault generated by a failed integrity check, the PE:

- Updates any Fault Status Registers associated with the error.
- Sets [IPSR](#) to 0, if [EXC_RETURN](#) for the returning exception indicated a return to Thread mode.
- Sets [IPSR](#) to 3, if [EXC_RETURN](#) for the returning exception indicated a return to Handler mode.
- Sets the stack pointer used for unstacking to the value it would have had if the fault had not occurred.
 - If the XPSR load faults, the SP is 64-bit aligned.
- Updates [CONTROL.FPCA](#), based on [EXC_RETURN.FType](#).
- Sets the PC to 0xEFFFFFFE.

In addition, the [APSR](#), [EPSR](#), [FPSCR](#), R0-R12, LR, and S0-S31 are UNKNOWN.

Errors when unstacking state on exception return

R_{WKSJ}

Context unstacking is performed after any clearing of exception active bits or [FAULTMASK](#), that is required by the exception return, has been made visible. An SAU violation, MPU violation, or synchronous bus error during context unstacking causes lockup when:

- The exception would escalate to a Secure HardFault and any of the following is true:
 - Secure HardFault is already active.
 - [FAULTMASK_S.FM](#) is 1.
 - Non-secure Hardfault is active and [AIRCR.BFHFNMINs](#) is 0.
- The exception would escalate to a Non-secure HardFault and any of the following is true:
 - Non-secure HardFault or Secure HardFault is already active.
 - NMI is active.
 - [FAULTMASK_NS.FM](#) or [FAULTMASK_S.FM](#) is 1.

R_{XFCQ}

When an SAU violation, MPU violation, or synchronous bus error during context unstacking causes lockup, the PE:

- Updates any Fault Status Registers associated with the error.

- Sets `IPSR` to 0, if `EXC_RETURN` for the returning exception indicated a return to Thread mode.
- Sets `IPSR` to 3, if `EXC_RETURN` for the returning exception indicated a return to Handler mode.
- Sets the stack pointer used for unstacking to the value it would have had if the fault had not occurred.
 - If the XPSR load faults, the SP is 64-bit aligned.
- Updates `CONTROL.FPCA`, based on `EXC_RETURN.FType`.
- Sets the PC to `0xEFFFFFFE`.

In addition, the `APSR`, `EPSR`, `FPSCR`, R0-R12, LR, and S0-S31 are UNKNOWN.

B4.33 Exception during a singleword load operation

R_{KCMD}

To support *instruction restart*, Singleword load instructions must not update the destination register when the PE takes an exception during execution.

See also:

- [Exceptions, instruction resume or instruction restart on page B4-81.](#)

B4.34 Special-purpose CONTROL register

R _{CSPP}	Software can use MRS and MSR instructions to access the CONTROL register.
R _{GKVO}	Privileged execution can write to the CONTROL register. The PE ignores unprivileged writes to the CONTROL register. All reads of the CONTROL register, regardless of privilege, are allowed.
I _{RJMP}	The architecture requires a <i>Context Synchronization Operation</i> (CSO) to guarantee visibility of a change to the CONTROL register.
R _{HVGB}	The PE automatically updates CONTROL.SPSEL on exception entry and exception return.
I _{NMBL}	CONTROL.SPSEL selects the stack pointer when the PE is in Thread mode.

See also:

- [Context Synchronization Operation](#) on page B4-95.
- In [Chapter D2 Register Specification](#):
 - [CONTROL, Control Register](#) on page D2-827. See this for the [CONTROL](#) register field descriptions.

B4.35 Saving context on process switch

I_{WNGQ}

When switching between different processes, software must save all context for the old process, including its associated [EXC_RETURN](#) value, before switching to the new process, and restore that context before returning to the old process.

B4.36 Context Synchronization Operation

- I_{QVJV} A *context synchronization operation* (CSO) is one of:
- Performing an ISB operation. An ISB operation is performed when an ISB instruction is executed and does not fail its condition check.
 - Taking an exception.
 - Returning from an exception.
 - Entering Debug state.
 - Exiting Debug state.
- Security state transitions are not context synchronization operations.
- R_{QXWD} The architecture requires a CSO to guarantee visibility of any change to a system control register.
- R_{TVHX} Between any change to a System control register and a subsequent CSO, it is UNPREDICTABLE whether an indirect read of the register by the PE uses the old or new values.

B4.37 Coprocessor support

I _{QRRH}	Coprocessor support is optional.
R _{XSQH}	The architecture supports 0 - 16 coprocessors, CP0 to CP15.
R _{HJDH}	CP0 to CP7 are IMPLEMENTATION DEFINED.
R _{QSRC}	ARM reserves CP8 to CP15.
R _{CRMD}	CP10 to CP11 are reserved to support the Floating-point extension.
R _{XXDG}	Instructions issued to unimplemented or disabled coprocessors will result in a NOCP UsageFault.
R _{RMLV}	If a coprocessor cannot complete an instruction an UNDEFINSTR UsageFault is generated.

See also:

- [Floating Point Support on page B5-97](#)
- [CPACR, Coprocessor Access Control Register on page D2-829](#)
- [CPPWR, Coprocessor Power Control Register on page D2-831](#)

Chapter B5

Floating-point Support

This chapter describes floating-point support in ARMv8-M. It contains the following sections:

- *The optional Floating-point Extension, Fpv5* on page B5-98.
- *About the Floating-point Status and Control Register (FPSCR)* on page B5-99.
- *Registers for floating-point data processing, S0-S31 or D0-D15* on page B5-100.
- *Floating-point standards and terminology* on page B5-101.
- *Floating-point data representable* on page B5-102.
- *Floating-point encoding formats, half-precision, single-precision, and double-precision* on page B5-103.
- *The IEEE 754 floating-point exceptions* on page B5-105.
- *The Flush-to-zero mode* on page B5-106.
- *The Default NaN mode, and NaN handling* on page B5-107.
- *The Default NaN* on page B5-108.
- *Combinations of floating-point exceptions* on page B5-109.
- *Priority of floating-point exceptions relative to other floating-point exceptions* on page B5-110.

B5.1 The optional Floating-point Extension, FPv5

I_VBNH	The optional Floating-point Extension defines a <i>Floating Point Unit</i> (FPU). Coprocessors 10 and 11 support the Extension.
I_RXQX	Floating-point is sometimes abbreviated to FP.
R_GQBM	The version of Floating-point Extension that is supported is FPv5.
I_FGSG	<p>FPv5 provides all of the following:</p> <ul style="list-style-type: none"> • Single-precision arithmetic operations. • Optional double-precision arithmetic operations. • Conversions between integer, double-precision, single-precision, and half-precision formats. • Registers for floating-point processing, S0-S31 or D0-D15. • Data transfers, between ARM general-purpose registers and FPv5 Extension registers S0-S31 or D0-D15, of single-precision and double-precision values. • A Flush-to-zero mode that software can enable or disable. • A Default NaN mode that software can enable or disable. • An optional <i>alternative half-precision</i> interpretation of the IEEE 754 half-precision encoding format. <p>FPv5 adds the following system registers:</p> <ul style="list-style-type: none"> • The FPSCR, to the CP10 and CP11 system register space. • The FPCAR, FPCCR, FPDSCR, MVFR0, MVFR1, and MVFR2, to the <i>System Control Block</i> (SCB).
I_PVBQ	When the Floating-point Extension is implemented, some software tools might require the following information:

Extension	Single-precision arithmetic operations only	Single and double-precision arithmetic operations
FPv5	FPv5-SP-D16-M	FPv5-D16-M

I_FTDS	When the Floating-point Extension is implemented, software can interrogate MVFR0 , MVFR1 , and MVFR2 to discover the floating-point features that are implemented.
I_JDQJ	To use the Floating-point Extension, software must enable access to CP10, by programming CPACR .CP10.
R_PDMV	The value of CPACR .CP11 is UNKNOWN if it is not programmed to the same value as CPACR .CP10.

See also:

- [ARMv8-M variants](#) on page A1-24.
- [The System Control Space \(SCS\)](#) on page B8-166.
- [About the Floating-point Status and Control Register \(FPSCR\)](#) on page B5-99.
- [Registers for floating-point data processing, S0-S31 or D0-D15](#) on page B5-100.
- [The Flush-to-zero mode](#) on page B5-106.
- [The Default NaN mode, and NaN handling](#) on page B5-107.
- [Floating-point encoding formats, half-precision, single-precision, and double-precision](#) on page B5-103.

B5.2 About the Floating-point Status and Control Register (FPSCR)

R_{VPRV} The register map of the CP10 and CP11 system register space shows the location of the [FPSCR](#):

Location	Register	Information
0b0000	Reserved	All accesses are UNPREDICTABLE
0b0001	FPSCR	-
0b0010-0b1111	Reserved	All accesses are UNPREDICTABLE

I_{GJWP} Software can use [VMRS](#) and [VMSR](#) instructions to access the [FPSCR](#). The [FPSCR](#) holds configurable control fields to control the Floating-point Extension, and also status information fields.

R_{FXBJ} Execution of floating-point instructions that generate floating-point exceptions update the appropriate status fields of [FPSCR](#).

See also:


- [The optional Floating-point Extension, Fpv5 on page B5-98.](#)
- In [Chapter D2 Register Specification](#):
 - [FPSCR, Floating-point Status and Control Register on page D2-931.](#) See this for the [FPSCR](#) field descriptions.

B5.3 Registers for floating-point data processing, S0-S31 or D0-D15

R_{TWCB} Software can view the registers that Fpv5 adds for floating-point processing as either:

- 32 single-precision registers, S0-S31.
- 16 double-precision registers, D0-D15.

These map as follows:

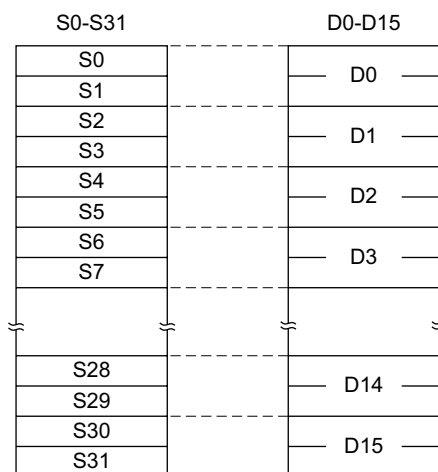

R_{XWJQ} After a reset, the values of S0-S31 or D0-D15 are UNKNOWN.

See also:

- [The optional Floating-point Extension, Fpv5 on page B5-98.](#)
- [Exception handling on page B4-63.](#)

B5.4 Floating-point standards and terminology

I_{XN}MN There are two editions of the IEEE 754 standard:

- IEEE 754-1985.
- IEEE 754-2008.

In this specification, references to IEEE 754 that do not include the year apply to either edition.

I_{MQ}FS The floating-point terminology that this specification uses differs from that used in IEEE 754-2008 as follows:

This specification	IEEE 754-2008
Normalized	Normal
Denormal, or denormalized	Subnormal
Round towards Minus Infinity (RM)	roundTowardsNegative
Round towards Plus Infinity (RP)	roundTowardsPositive
Round towards Zero (RZ)	roundTowardZero
Round to Nearest (RN)	roundTiesToEven
Round to Nearest with Ties to Away	roundTiesToAway
Rounding mode	Rounding-direction attribute

I_{BG}PN The following is called *ARM standard floating-point operation*:

- IEEE 754-2008 plus the following **FPSCR** configuration:
 - Flush-to-zero mode enabled.
 - Default NaN mode enabled.
 - Round to Nearest mode selected.
 - Alternative half-precision interpretation not selected.

See also:

- [IEEE 754-2008, IEEE Standard for Floating-point Arithmetic, August 2008.](#)
- [The Flush-to-zero mode on page B5-106.](#)
- [The Default NaN mode, and NaN handling on page B5-107.](#)
- [Floating-point encoding formats, half-precision, single-precision, and double-precision on page B5-103.](#)

B5.5 Floating-point data representable

R_{FWXC} FPv5 supports the following, as defined by IEEE 754:

- Normalized numbers.
- Denormalized numbers.
- Zeros, +0 and -0.
- Infinities, $+\infty$ and $-\infty$.
- NaNs, signaling NaN and quiet NaN.


See also:

- [Floating-point standards and terminology on page B5-101.](#)
- [IEEE 754-2008, IEEE Standard for Floating-point Arithmetic, August 2008.](#)
- [Floating-point encoding formats, half-precision, single-precision, and double-precision on page B5-103.](#)


B5.6 Floating-point encoding formats, half-precision, single-precision, and double-precision

R_{PHRC} The half-precision, single-precision, and double-precision encoding formats defined by IEEE 754-2008 are used.


I_{LGTJ} The half-precision encoding format defined by IEEE 754-2008 is:

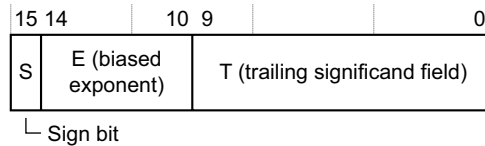

I_{CWBP} The single-precision encoding format defined by IEEE 754-2008 is:

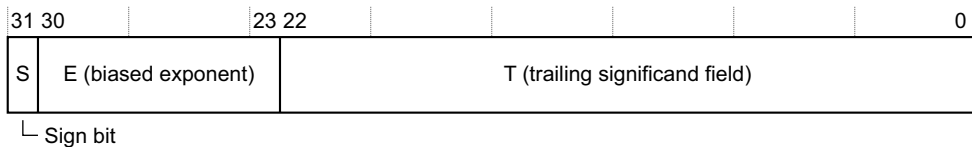

I_{FVWV} The double-precision encoding format defined by IEEE 754-2008 is:

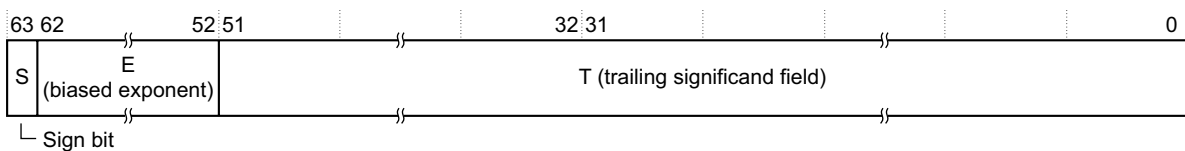

R_{RWRW} The interpretations of the IEEE 754-2008 half-precision, single-precision, and double-precision encoding formats are as follows.

Half-precision

The interpretation depends on what software has set [FPSCR.AHP](#) to. It is either:

- The interpretation that IEEE 754-2008 defines.
- *Alternative half-precision* interpretation.

Single-precision

The interpretation is the interpretation that IEEE 754-2008 defines.

Double-precision

The interpretation is the interpretation that IEEE 754-2008 defines.

See the following table:

E (biased exponent)	T (trailing significand)	S (Sign bit)	MSB of T ^a	Value
Zero, for all formats.	Non-zero	-	-	A denormalized number
	Zero	0	-	Zero, +0
		1	-	Zero, -0
Zero < E < 0x1F, if half-precision format.	-	-	-	A normalized number
Zero < E < 0xFF, if single-precision format.				
Zero < E < 0x7FF, if double-precision format.				

E (biased exponent)	T (trailing significand)	S (Sign bit)	MSB of T ^a	Value
0x1F, if half-precision format, IEEE interpretation.	Non-zero	-	0	A signaling NaN
0xFF, if single-precision format.		-	1	A quiet NaN
0x7FF, if double-precision format.	Zero	0	-	Infinity, +∞
		1	-	Infinity, -∞
0x1F, if half-precision, alternative half-precision interpretation.	-	-	-	A normalized number

a. MSB = most significant bit.

R_{DPHH}

The value of a normalized number is equal to:

Half-precision IEEE 754-2008 interpretation

$$(-1)^S \times 2^{(E-15)} \times (1.T)$$

Half-precision alternative half-precision interpretation

$$(-1)^S \times 2^{16} \times (1.T)$$

Single-precision

$$(-1)^S \times 2^{(E-127)} \times (1.T)$$

Double-precision

$$(-1)^S \times 2^{(E-1023)} \times (1.T)$$

I_{MHVP}

The value of a denormalized number is equal to:

Half-precision

$$(-1)^S \times 2^{-14} \times (0.T)$$

Single-precision

$$(-1)^S \times 2^{-126} \times (0.T)$$

Double-precision

$$(-1)^S \times 2^{-1022} \times (0.T)$$

I_{GBBJ}

Denormalized numbers can be flushed to zero. Fpv5 provides a Flush-to-zero mode that software can enable.

See also:

- [IEEE 754-2008, IEEE Standard for Floating-point Arithmetic, August 2008.](#)
- [Floating-point data representable on page B5-102.](#)

B5.7 The IEEE 754 floating-point exceptions

R_{BCCL}

The IEEE 754 floating-point exceptions are:

Invalid Operation

This exception is as IEEE 754-2008 (7.2) describes.

Division by zero

This exception is as IEEE 754-2008 (7.3) describes, with the following assumption:

- For the reciprocal and reciprocal square root estimate functions the dividend is assumed to be +1.0.

Overflow

This exception is as IEEE 754-2008 (7.4) describes.

Underflow

This exception is as IEEE 754-2008 (7.5) describes, with the additional clarification that:

- Assessing whether a result is tiny and non-zero is done before rounding.

Inexact

This exception is as IEEE 754-2008 (7.6) describes.

I_{ICWS}

The criteria for the Underflow exception to be generated are different in Flush-to-zero mode.

I_{NFHK}

The corresponding status flags for the IEEE 754 floating-point exceptions are [FPSCR](#), {IOC, DZC, OFC, UFC, IXC}.

See also:

- [The Flush-to-zero mode on page B5-106.](#)

B5.8 The Flush-to-zero mode

I _{XGFP}	Software can enable Flush-to-zero mode by setting FPSCR.FZ to 1.
I _{WMKJ}	Using Flush-to-zero mode is a deviation from IEEE 754.
R _{JQHX}	Half-precision floating-point numbers are exempt from Flush-to-zero mode.
R _{VJSF}	When Flush-to-zero mode is enabled, all single-precision denormalized inputs and double-precision denormalized inputs to floating-point operations are treated as though they are zero. They are said to be <i>flushed to zero</i> .
R _{KBJJ}	When an input to a floating-point operation is flushed to zero, the PE generates an Input Denormal exception.
R _{SBCK}	Input Denormal exceptions are only generated in Flush-to-zero mode.
R _{WJDM}	When Flush-to-zero mode is enabled, the sequence of events for an input to a floating-point operation is: <ol style="list-style-type: none">1. Flush to zero processing takes place. If appropriate, the input is flushed to zero and the PE generates an Input Denormal exception.2. Tests for the generation of any other floating-point exceptions are done after flush to zero processing.
R _{PHPT}	When Flush-to-zero mode is enabled, the result of a floating-point operation is treated as if it is zero if, before rounding, it satisfies the condition: $0 < \text{Abs}(\text{result}) < \text{MinNorm}$, where: <ul style="list-style-type: none">• MinNorm is 2^{-126} for single-precision.• MinNorm is 2^{-1022} for double-precision. The result is said to be <i>flushed to zero</i> .
R _{QPQF}	When the result of a floating-point operation is flushed to zero, the PE generates an Underflow exception.
R _{TPVD}	In Flush-to-zero mode, the PE generates Underflow exceptions only when a result is flushed to zero. This is different criteria than when Flush-to-zero mode is disabled.
R _{RTPH}	When a floating-point number is flushed to zero, the sign is preserved. That is, the sign bit of the zero matches the sign bit of the number being flushed to zero.
R _{RWRT}	The PE does not generate an Inexact exception when a floating-point number is flushed to zero.
I _{SQCI}	The corresponding status flag for the Input Denormal exception is FPSCR.IDC .

See also:

- [The IEEE 754 floating-point exceptions on page B5-105.](#)

B5.9 The Default NaN mode, and NaN handling

- I_{FGPN} Software can enable Default NaN mode by setting [FPSCR.DN](#) to 1.
- I_{DJVH} Using Default NaN mode is a deviation from IEEE 754.
- R_{QMQC} When Default NaN mode is enabled, the *Default NaN* is the result of both:
- All floating-point operations that produce an untrapped Invalid Operation exception.
 - All floating-point operations whose inputs include at least one quiet NaN but no signaling NaNs.
- R_{NPRL} IEEE 754 specifies that:
- An operation that produces an untrapped Invalid Operation exception returns a quiet NaN as its result.
- When Default NaN mode is disabled, behavior complies with this and adds:
- If the Invalid Operation exception was generated because one of the inputs to the operation was a signaling NaN, the quiet NaN result is equal to the first signaling NaN input with its most significant bit set to 1.
 - The quiet NaN result is the Default NaN otherwise.
- The *first signaling NaN input* means the first argument, in the left-to-right ordering of arguments, that is passed to the pseudocode function describing the operation.
- R_{VCSB} IEEE 754 specifies that:
- An operation using a quiet NaN as an input, but no signaling NaNs as inputs, returns one of its quiet NaN inputs as its result.
- When Default NaN mode is disabled, behavior complies with this and adds:
- The quiet NaN result is the first quiet NaN input.
- The *first quiet NaN input* means the first argument, in the left-to-right ordering of arguments, that is passed to the pseudocode function describing the operation.
- I_{LXLF} Depending on the floating-point operation, the exact value of a quiet NaN result might differ in both sign and the number of T bits from its source.
- See also:
- [The Default NaN on page B5-108.](#)
 - [Floating-point encoding formats, half-precision, single-precision, and double-precision on page B5-103.](#)

B5.10 The Default NaN

R_{FQFG} The Default NaN is:

Field	Half-precision, IEEE 754-2008 interpretation	Single-precision	Double-precision
S	0	0	0
E	0x1F	0xFF	0x7FF
T	Bit[9] == 1, bits[8:0] == 0	bit[22] == 1, bits[21:0] == 0	bit[51] == 1, bits[50:0] == 0

See also:

- [Floating-point encoding formats, half-precision, single-precision, and double-precision on page B5-103.](#)
- [The Default NaN mode, and NaN handling on page B5-107.](#)

B5.11 Combinations of floating-point exceptions

I_{BTT}H

In compliance with IEEE 754:

- An Inexact floating-point exception can occur with an Overflow floating-point exception.
- An Inexact floating-point exception can occur with an Underflow floating-point exception.

R_{LFV}H

An Input Denormal exception can occur with other floating-point exceptions.

See also:

- [The IEEE 754 floating-point exceptions on page B5-105.](#)
- [The Flush-to-zero mode on page B5-106.](#)

B5.12 Priority of floating-point exceptions relative to other floating-point exceptions

R_{PLHJ}

Some floating-point instructions specify more than one floating-point operation. In these cases, an exception on one operation is higher priority than an exception on another operation when generation of the second exception depends on the result of the first operation. Otherwise, it is UNPREDICTABLE which exception is higher priority.

See also:

- [The IEEE 754 floating-point exceptions on page B5-105.](#)

Chapter B6

Memory Model

This chapter specifies the ARMv8-M memory model architecture rules. It contains the following sections:

- *Memory accesses* on page B6-113.
- *Address space* on page B6-114.
- *Endianness* on page B6-115.
- *Alignment behavior* on page B6-117.
- *Atomicity* on page B6-118.
- *Concurrent modification and execution of instructions* on page B6-119.
- *Observability and completion of memory accesses* on page B6-120
- *Ordering requirements for memory accesses* on page B6-122
- *Ordering of implicit memory accesses* on page B6-123.
- *Ordering of explicit memory accesses* on page B6-124.
- *Memory barriers* on page B6-125.
- *Shareability domains* on page B6-128.
- *Shareability attributes* on page B6-129.
- *Normal memory* on page B6-130.
- *Device memory* on page B6-131.
- *Device memory attributes* on page B6-132.
- *Memory access restrictions* on page B6-135
- *Mismatched memory attributes* on page B6-136
- *Load-Exclusive and Store-Exclusive accesses to Normal memory* on page B6-138.
- *Load-Acquire and Store-Release accesses to memory* on page B6-139.
- *Caches* on page B6-141.
- *Behavior of Preload Data (PLD) and Preload Instruction (PLI) instructions with caches* on page B6-144.
- *Branch predictors* on page B6-145.
- *Cache maintenance operations* on page B6-146.

- [Branch predictor maintenance operations](#) on page B6-149.

B6.1 Memory accesses

I_{SHWD}

The following terms are used in describing memory accesses:

Explicit access

A read from memory, or a write to memory, generated by a load or store instruction that is executed by the PE.

Implicit access

An access that is not explicit.

Direct access

A read or write of a System register that is performed by a System register access instruction.

Indirect access

A read or write of a System register that is not a direct access.

For example, an indirect write to a register might occur as the side-effect of executing an instruction that does not perform a direct write to the register, or because of some operation that is performed by an external agent.

I_{XRDS}

The memory accesses that are referred to in describing the memory model are instruction fetches from memory and load or store data accesses.

R_{LKQN}

The instruction operation uses the [MemA\[\]](#) or [MemU\[\]](#) helper functions. If the Main Extension is not implemented unaligned accesses using the [MemU\[\]](#) helper functions generate an alignment fault.

R_{B_{BNF}}

A memory access is governed by whether the access is a read or write, its address alignment, data endianness, and memory attributes.

See also:

- [Ordering of implicit memory accesses](#) on page B6-123.
- [Ordering of explicit memory accesses](#) on page B6-124.
- [Normal memory](#) on page B6-130.
- [Device memory](#) on page B6-131.
- [Memory access restrictions](#) on page B6-135

B6.2 Address space

R _{FFMK}	The address space is a single, flat address space of 2^{32} bytes.
R _{SNPV}	In the address space, byte addresses are unsigned numbers in the range $0-2^{32}-1$.
R _{RGBT}	If an address calculation overflows or underflows the address space, it wraps around. Address calculations are modulo 2^{32} .
I _{JTKM}	Normal sequential execution cannot overflow the top of the address space, because the top of memory always has the Execute Never (XN) memory attribute.
R _{BPMP}	LDC, LDM, LDRD, POP , PUSH , STC, STRD, STM, VLDM , VPOP , VPUSH , VSTM , VLDR.64 , and VSTR.64 instructions access a sequence of words at increasing memory addresses, effectively incrementing the address by 4 for each load or store. If this calculation overflows the top of the address space, the result is UNPREDICTABLE.

See also:

- In [Chapter B8 The System Address Map](#):
 - [System address map on page B8-164](#).


B6.3 Endianness

I_{CTVV}


In memory:

- The following figures show the relationship between:
 - The word at address A.
 - The halfwords at addresses A and A+2.
 - The bytes at addresses A, A+1, A+2, and A+3.


Data arranged in a little-endian format

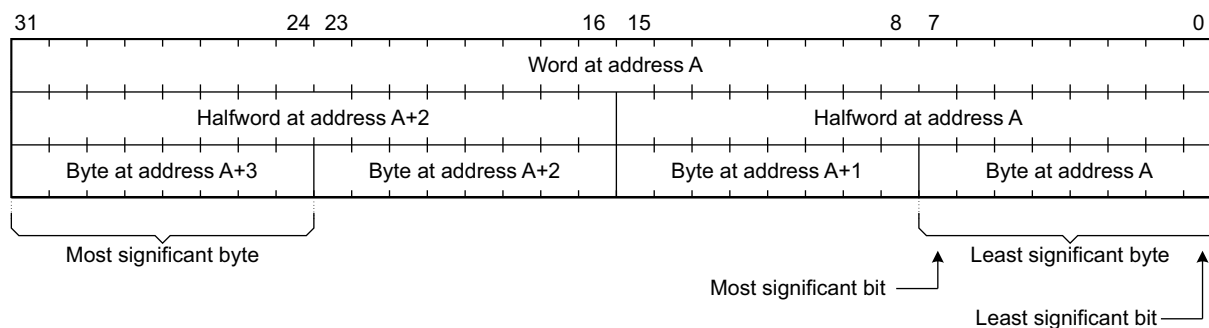

Data arranged in a big-endian format

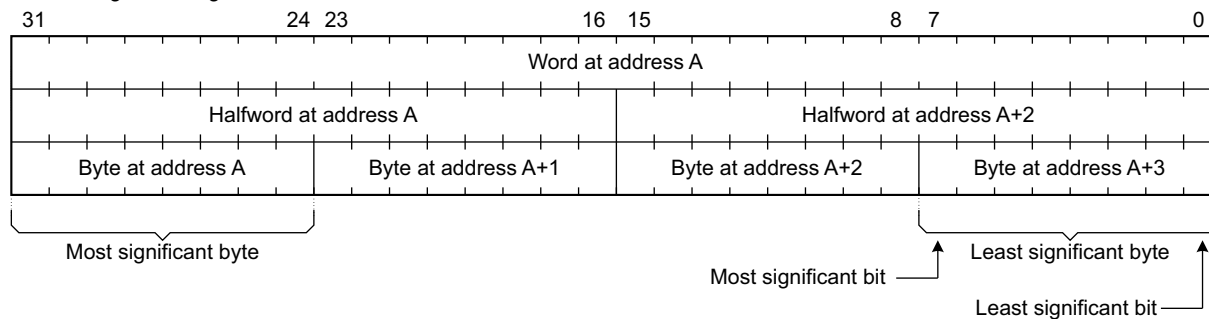

Instruction alignment and byte ordering

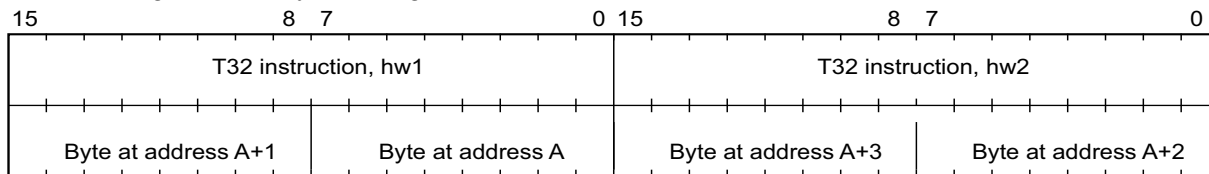

R_{JJQL}

Instruction fetches are always little-endian, which means that the PE assumes a little-endian arrangement of instructions in memory.

R_{MNSB}

All accesses to the Private Peripheral Bus (PPB) are always little-endian, which means that the PE assumes a little-endian arrangement of the PPB registers.

R_{TFKG}

The endianness of data accesses is IMPLEMENTATION DEFINED, as indicated by [AIRCR.ENDIANNESS](#).

R_{KPCF}

[AIRCR.ENDIANNESS](#) is either:

- Implemented with a static value.
- Configured by a hardware input on reset.

R_{QHW}C

For data accesses, the following table shows the data element size that endianness applies to, for endianness conversion purposes.

Instruction class	Instructions	Element size
Load or store byte	LDR{S}B{T}, LDAB, LDAEXB, STLB, STLEXB, STRB{T}, TBB, LDREXB, STREXB	Byte
Load or store halfword	LDR{S}H{T}, LDAH, LDAEXH, STLH, STLEXH, and STRH{T}, TBH, LDREXH, STREXH	Halfword
Load or store word	LDR{T}, LDA, LDAEX, STL, STLEX, and STR{T}, LDREX, STREX, VLDR.F32, VSTR.F32	Word
Load or store two words	LDRD, STRD, VLDR.F64, VSTR.F64	Word
Load or store multiple words	LDM{IA,DB}, STM{IA,DB}, PUSH, POP, LDC, STC, VLDM, VSTM, VPUSH, VPOP, BLX, BLXNS, BX, BXNS, VLLDM, VLSTM.	Word

R_{XNV}S

The following instructions change the endianness of data that is loaded or stored:

- REV Reverse word (four bytes) register, for transforming 32-bit representations.
- REVSH Reverse halfword and sign extend, for transforming signed 16-bit representations.
- REV16 Reverse packed halfwords in a register for transforming unsigned 16-bit representations.

B6.4 Alignment behavior

R _{LKGV}	All instruction fetches must be halfword-aligned.
R _{GHRX}	The following are unaligned data accesses that always generate an alignment fault: <ul style="list-style-type: none">• Non halfword-aligned LDREXH, LDAEXH, STLEXH, and STREXH.• Non word-aligned LDREX, LDAEX, STLEX, and STREX.• Non word-aligned LDR (literal), LDRD, LDMIA, LDMDB, POP, LDC, VLDR, VLDM, and VPOP.• Non word-aligned STMIA, STMDB, PUSH, STC, VSTR, VSTM, VPUSH, VLLDM, and VLSTM.
R _{MHCM}	If CCR.UNALIGN_TRP is set to 1, the following are unaligned data accesses that generate an alignment fault: <ul style="list-style-type: none">• Non halfword-aligned LDR{S}H{T}, LDAH, STLH, and STRH{T}.• Non halfword-aligned TBH.• Non word-aligned LDR{T}, LDA, STL, and STR{T}.
R _{TRNR}	Unaligned accesses are only supported if the Main Extension is implemented. If the Main Extension is not implemented unaligned access generate an alignment fault.
R _{WCVX}	Accesses to Device memory are always aligned.

See also:

- [Normal memory on page B6-130](#).
- [Device memory on page B6-131](#).

B6.5 Atomicity

There are two types of atomicity:

- *Single-copy atomicity*.
- *Multi-copy atomicity*.

B6.5.1 Single-copy atomicity

I_{NWVK}

Store operations are *single-copy atomic* if, when they overlap bytes in memory:

1. All of the writes from one of the stores are inserted into the coherence order of each overlapping byte.
2. All of the writes from another of the stores are inserted into the coherence order of each overlapping byte.
3. Step 2 repeats, for each single-copy store atomic operation that overlaps.

R_{BSHJ}

The following data accesses are single-copy atomic:

- All byte accesses.
- All halfword accesses to halfword-aligned locations.
- All word accesses to word-aligned locations.

R_{QNPX}

Instruction fetches are single-copy atomic at halfword granularity.

R_{MXWC}

For instructions that access a sequence of word-aligned words, each word access is single-copy atomic.

R_{LKPM}

For instructions that access a sequence of word-aligned words, the architecture does not require two or more subsequent word accesses to be single-copy atomic.

B6.5.2 Multi-copy atomicity

I_{BCHK}

In a multiprocessing environment, writes to memory are multi-copy atomic if all of the following are true:

- All writes to the same location are observed in the same order by all observers, although some of the observers might not observe all of the writes.
- A read of a location does not return the value of a write to that location until all observers have observed that write.

B6.6 Concurrent modification and execution of instructions

I _{TFGC}	The ARMv8 architecture limits the set of instructions that can be executed by one thread of execution as they are being modified by another thread of execution without requiring explicit synchronization.
R _{KMZG}	The hw1 of a 32-bit BL immediate instruction can be concurrently modified to the most significant halfword of another BL immediate instruction.
R _{PWJF}	The hw1 of a 32-bit BLX immediate instruction can be concurrently modified to the most significant halfword of another BLX immediate instruction.
R _{HKGP}	The hw1 of a 32-bit BL immediate or BLX immediate instruction can be concurrently modified to a 16-bit B, BL, BLX, BKPT, or SVC instruction. This modification also works in reverse.
R _{FGBT}	The hw2 of a 32-bit BL immediate instruction can be concurrently modified to the least significant halfword of another BL instruction with a different immediate.
R _{YMPR}	The hw2 of a 32-bit BLX immediate instruction can be concurrently modified to the least significant halfword of another BLX immediate instruction with a different immediate.
R _{NTVD}	The hw2 of a 32-bit B immediate instruction with a condition field can be concurrently modified to the least significant halfword of another 32-bit B immediate instruction with a condition field with a different immediate.
R _{CMZX}	The hw2 of a 32-bit B immediate instruction without a condition field can be concurrently modified to the least significant halfword of another 32-bit B immediate instruction without a condition field.

See also:

- [Endianness on page B6-115.](#)

B6.7 Observability and completion of memory accesses

I _{JWBJ}	An <i>observer</i> is a master in the system that is capable of observing memory accesses.
R _{PNDH}	For a PE, the following mechanisms must be treated as independent observers: <ul style="list-style-type: none">• The mechanism that performs reads from or writes to memory.• A mechanism that causes an instruction cache to be filled from memory or that fetches instructions to be executed directly from memory. These accesses are treated as reads.
R _{DVFW}	The set of observers that can observe a memory access is defined by the system.
I _{VSKC}	In the context of observability, <i>subsequent</i> means whichever of the following descriptions are appropriate: <ul style="list-style-type: none">• After the point in time where the location is observed by the observer.• After the point in time where the location is globally observed.
I _{JFNN}	A write to a location in memory is said to be <i>observed</i> by an observer when: <ul style="list-style-type: none">• A subsequent read of the location by the same observer returns the value that was written by the observed write or written by a write to that location by any observer that is sequenced in the coherence order of the location after the observed write.• A subsequent write of the location by the same observer is sequenced in the coherence order of the location after the observed write. <p>In addition, for Device-nGnRnE memory, a write to a memory-mapped location in a peripheral that exhibits side-effects can only be said to be observed by an observer if it meets the general condition and:</p> <ul style="list-style-type: none">• The write can begin to affect the state of the memory-mapped peripheral.• The write can trigger all associated side-effects.
I _{MMQJ}	A write to a location in memory is said to be <i>globally observed</i> for a Shareability domain or set of observers when: <ul style="list-style-type: none">• A subsequent read of the location by any observer in that Shareability domain that is capable of observing the write returns the value that is written by the globally observed write or by a write to that location by any observer that is sequenced in the coherence order of the location after the globally observed write.• A subsequent write to the location by any observer in that Shareability domain is sequenced in the coherence order of the location after the globally observed write. <p>In addition, for Device-nGnRnE memory, a write to a memory-mapped location in a peripheral that exhibits side-effects can only be said to be globally observed for a Shareability domain if it meets the general condition and:</p> <ul style="list-style-type: none">• The write can begin to affect the state of the memory-mapped peripheral.• The write can trigger all associated side-effects.
I _{XQHX}	A read of a location in memory is said to be <i>observed</i> by an observer when a subsequent write to the location by the same observer has no effect on the value that is returned by the read. For Device-nGnRnE memory, a read from a memory-mapped location in a peripheral that exhibits side-effects can only be said to be observed by an observer if it meets the general condition and: <ul style="list-style-type: none">• The read can begin to affect the state of the memory-mapped peripheral.• The read can trigger all associated side-effects.
I _{GCXK}	A read of a location in memory is said to be <i>globally observed</i> for a Shareability domain when a subsequent write to the location by any observer in that Shareability domain that is capable of observing the write has no effect on the value that is returned by the read. For Device-nGnRnE memory, a read from a memory-mapped location in a peripheral that exhibits side-effects can only be said to be globally observed for a Shareability domain if it meets the general condition and: <ul style="list-style-type: none">• The read can begin to affect the state of the memory-mapped peripheral.• The read can trigger all associated side-effects.
R _{XCTL}	A read or write is complete for a Shareability domain when the following conditions are true: <ul style="list-style-type: none">• The read or write is globally observed for that Shareability domain.

- All instruction fetches by observers within the Shareability domain have observed the read or write.

R_{WCMQ}

A cache or branch predictor maintenance instruction is complete for a Shareability domain when the effects of the instruction are globally observed for that Shareability domain.

R_{SFLM}

The completion of a memory access in Device-nGnRnE or Device-nGnRE memory does not guarantee the visibility of the side-effects of the access to all observers. The mechanism that ensures such visibility is IMPLEMENTATION DEFINED.

B6.8 Ordering requirements for memory accesses

R _{RBDL}	ARMv8-M defines access restrictions in the permitted ordering of memory accesses. These restrictions depend on the memory attributes of the accesses involved.
I _{MKMJ}	<p><i>Speculative writes</i> are all of:</p> <ul style="list-style-type: none">• Writes generated by store instructions that appear in the <i>Execution stream</i> after a branch that is not architecturally resolved.• Writes generated by store instructions that appear in the Execution stream after an instruction where a synchronous exception condition has not been architecturally resolved.• Writes generated by conditional store instructions for which the conditions for the instruction have not been architecturally resolved.• Writes generated by store instructions for which the data being written comes from a register that has not been architecturally committed.
I _{SFRC}	<p>An instruction is <i>architecturally executed</i> only if it would be executed in a simple sequential execution of the program. When such an instruction has been executed and retired it has been architecturally executed.</p> <p>Any instruction that, in a simple sequential execution of a program, is treated as a NOP because it fails its condition code check is architecturally executed. In a PE that performs speculative execution, an instruction is not architecturally executed if the PE discards the results of a speculative execution.</p>
R _{GJDH}	For all accesses to all memory types, the only stores by an observer that can be observed by another observer are those stores that have been architecturally executed. Speculative writes by an observer cannot be observed by another observer.
R _{RXPL}	Reads and writes can be observed in any order provided that, if an address dependency exists between two reads or between a read and a write, then those memory accesses are observed in program order by all observers within the common Shareability domain of the memory addresses being accessed.
I _{BHBH}	A <i>single peripheral</i> is a region of memory of an IMPLEMENTATION DEFINED size that is defined by the peripheral.
R _{VMHG}	For Device memory with the non-Reordering attribute, memory accesses arrive at a <i>single peripheral</i> in program order.
R _{WGCF}	Memory accesses caused by instruction fetches are not required to be observed in program order, unless they are separated by a context synchronization operation.
I _{CGFQ}	<p>A <i>register data dependency</i> exists between a first data value and a second data value when either:</p> <ul style="list-style-type: none">• The register that is used to hold the first data value is used in the calculation of the second data value, and the calculation between the first data value and the second data value does not consist of either:<ul style="list-style-type: none">— A conditional branch whose condition is determined by the first data value.— A conditional selection, move, or computation whose condition is determined by the first data value, where the input data values for the selection, move, or computation do not have a data dependency on the first data value.• There is a register data dependency between the first data value and a third data value, and between the third data value and the second data value.
R _{RJMK}	A register data dependency between the value that is returned by a load instruction and the address that is used by a subsequent memory transaction creates order between that load instruction and the subsequent memory transaction.

B6.9 Ordering of implicit memory accesses

R_{KPFC}

There are no ordering requirements for implicit accesses to any type of memory.

B6.10 Ordering of explicit memory accesses

I _{QVDF}	Other sections in this document also define requirements that apply to the ordering of <i>direct memory accesses</i> . See the list of sections at the end of this section.
I _{TCTD}	Terms used: Address dependency An address dependency exists when the value returned by a read is used to compute the address of a subsequent access. An address dependency exists even if the value returned by the first read does not change the address of the second read or write. Control dependency A control dependency exists when the data value returned by a read access is used to determine the condition flags, and the values of the flags are used to determine the address of a subsequent read access. This address determination might be through conditional execution, or through the evaluation of a branch. Coherent Data accesses from a set of observers to a byte in memory are coherent if accesses to that byte by the members of the set are consistent with there being a single total order of all writes to that byte by all members of the set.
R _{JSCJ}	For <i>Non-shareable</i> memory, hardware is not required to make direct data accesses by different observers coherent. If a number of observers share the memory, software must use cache maintenance instructions if the presence of caches might lead to coherency issues. This cache maintenance requirement is in addition to the barrier operations that are required to ensure memory ordering.
R _{WFMV}	Accesses to a shareable memory location must be coherent within the Shareability domain of that location.
R _{BMMN}	For all of memory, for accesses from a single observer, the requirements of uniprocessor semantics must be maintained, for example respecting dependencies between instructions in a single PE.
R _{QHCT}	For all memory, if there is an address dependency between two direct accesses, the two accesses are observed in program order by any observer in the common Shareability domain of the two accesses.
R _{WTRP}	For all memory, if there is a control dependency between a direct read and a subsequent direct write, the two accesses are observed in program order by any observer in the common Shareability domain of the two accesses.
R _{XGNP}	For all memory, if the value returned by a direct read is used to compute data that is written by a subsequent direct write, the two accesses are observed in program order by any observer in the common Shareability domain of the two accesses.
R _{MBNW}	It is impossible for an observer to observe a write from a store that both: <ul style="list-style-type: none">• Has not been executed.• Will not be executed. For example if the store exists in a simple sequential execution of the program, but the PE takes a branch before the store. See also: <ul style="list-style-type: none">• Memory accesses on page B6-113.• Normal memory on page B6-130.• Device memory on page B6-131.• Device memory attributes on page B6-132.• Shareability domains on page B6-128.• Shareability attributes on page B6-129.

B6.11 Memory barriers

- R_{WRCT}** The ARM architecture supports out-of-order completion of instructions.
- I_{NSFS}** *Memory barrier* is the general term that is applied to an instruction, or sequence of instructions, that forces synchronization events by a PE regarding retiring Load/Store instructions.
- R_{GKDW}** ARMv8 supports the following memory barriers:
- *Instruction Synchronization Barrier* (ISB).
 - *Data Memory Barrier* (DMB).
 - *Data Synchronization Barrier* (DSB).

B6.11.1 Instruction Synchronization Barrier

- R_{TRJR}** An **ISB** instruction flushes the pipeline in the PE, so that all instructions that come after the **ISB** instruction in program order are fetched from the cache or memory only after the **ISB** instruction has completed.

See also:

- [InstructionSynchronizationBarrier\(\)](#).
- [Context Synchronization Operation on page B4-95](#).

B6.11.2 Data Memory Barrier

- I_{KFWQ}** The PE that executes a **DMB** instruction is referred to as the *executing PE*.
- R_{LQXF}** A **DMB** memory barrier affects reads and writes to the memory system that are generated by Load/Store instructions and data or unified cache maintenance instructions that are executed by the PE. Instruction fetches are not explicit accesses.
- R_{MPSG}** The required Shareability is *Full system* and applies to all observers in the Shareability domain.
- R_{HFTX}** A **DMB** that is intended to ensure the completion of cache maintenance instructions must have an access type of both loads and stores.
- R_{WMRT}** A **DMB** instruction creates two groups of memory accesses, Group A and Group B, and does not affect memory accesses that are in not in Group A or Group B:
- Group A** Contains:
- All explicit memory accesses of the required access types from observers in the same Shareability domain as PE_e that are observed by PE_e before the **DMB** instruction.
 - All loads of required access types from an observer PE_x in the same required Shareability domain as PE_e that have been observed by any given different observer, PE_y, in the same required Shareability domain as PE_e before PE_y has performed a memory access that is a member of Group A.
- Group B** Contains:
- All explicit memory accesses of the required access types by PE_e that occur in program order after the **DMB** instruction.
 - All explicit memory accesses of the required access types by any given observer PE_x in the same required Shareability domain as PE_e that can only occur after a load by PE_x has returned the result of a store that is a member of Group B.

Any observer with the same required Shareability domain as PE_e observes all members of Group A before it observes any member of Group B to the extent that those group members are required to be observed, as determined by the Shareability and Cacheability of the memory addresses accessed by the group members.

If members of Group A and members of Group B access the same memory-mapped peripheral of arbitrary system-defined size, then members of Group A that are accessing Device or Normal Non-cacheable memory arrive at that peripheral before members of Group B that are accessing Device or Normal Non-cacheable memory. Where the members of Group A and Group B that must be ordered are from the same PE, a **DMB** provides for this guarantee.

See also:

- [DataMemoryBarrier\(\)](#).

B6.11.3 Data Synchronization Barrier

ICNFG	The DSB is a memory barrier that synchronizes the execution stream with memory accesses.
R _{NK} WJ	The required Shareability is Full system and applies to all observers in the Shareability domain.
R _X TKW	The PE that executes a DSB instruction is referred to as the <i>executing PE</i> .
R _V LBF	<p>A DSB instruction creates two groups of memory accesses, Group A and Group B, and does not affect memory accesses that are in not in Group A or Group B:</p> <p>Group A Contains:</p> <ul style="list-style-type: none">• All explicit memory accesses of the required access types from observers in the same Shareability domain as PEE that are observed by PEE before the DSB instruction.• All loads of required access types from an observer PEX in the same required Shareability domain as PEE that have been observed by any given different observer, PEY, in the same required Shareability domain as PEE before PEY has performed a memory access that is a member of Group A. <p>Group B Contains:</p> <ul style="list-style-type: none">• All explicit memory accesses of the required access types by PEE that occur in program order after the DSB instruction.• All explicit memory accesses of the required access types by any given observer PEX in the same required Shareability domain as PEE that can only occur after a load by PEX has returned the result of a store that is a member of Group B. <p>Any observer with the same required Shareability domain as PEE observes all members of Group A before it observes any member of Group B to the extent that those group members are required to be observed, as determined by the Shareability and Cacheability of the memory addresses accessed by the group members.</p> <p>If members of Group A and members of Group B access the same memory-mapped peripheral of arbitrary system-defined size, then members of Group A that are accessing Device or Normal Non-cacheable memory arrive at that peripheral before members of Group B that are accessing Device or Normal Non-cacheable memory. Where the members of Group A and Group B that must be ordered are from the same PE, a DSB provides for this guarantee.</p>
R _K MGH	<p>A DSB completes when all of the following conditions apply:</p> <ul style="list-style-type: none">• All explicit memory accesses that are observed by PEE before the DSB is executed and are of the required access types, and are from observers in the same required Shareability domain as PEE, are complete for the set of observers in the required Shareability domain.• If the required access types of the DSB is reads and writes, then all cache and branch predictor maintenance instructions and all TLB maintenance instructions that are issued by PEE before the DSB are complete for the required Shareability domain.
R _K MBX	No instruction that appears in program order after the DSB instruction can execute until the DSB completes.
R _G LJV	A DSB memory barrier affects reads and writes to the memory system that are generated by Load/Store instructions and data or unified cache maintenance instructions that are executed by the PE. Instruction fetches are not explicit accesses.

See also:

- [DataSynchronizationBarrier\(\)](#).

B6.12 Shareability domains


R_{JMHL} A shareability domain must have one of the following names:

- *Inner shareability domain.*
- *Outer shareability domain.*

R_{MCPS} All observers in an Inner Shareability domain are data coherent for data accesses to memory that has the *inner-shareable shareability attribute*.

R_{SVCR} All observers in an Outer Shareability domain are data coherent for data accesses to memory that has the *outer-shareable shareability attribute*.

I_{XQWM} The following diagram shows the shareability domains:

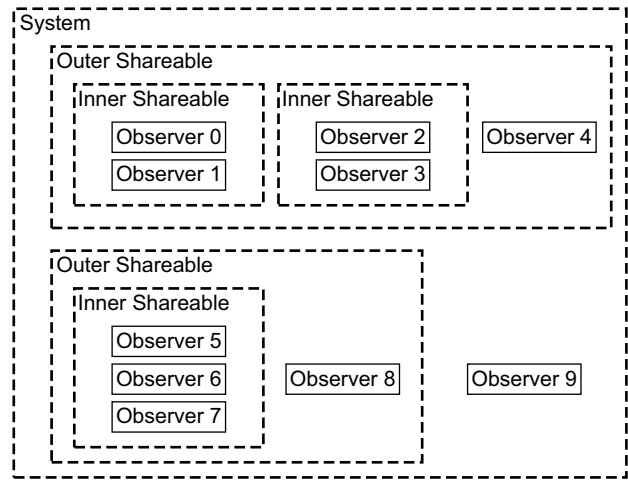

R_{JMFS} Each observer is a member of only a single Inner Shareability domain.

R_{BNWH} Each observer is a member of only a single Outer Shareability domain.

R_{FVBG} All members of the same Inner Shareability domain are always members of the same Outer Shareability domain.

I_{DHJF} An Inner Shareability domain is a subset of an Outer Shareability domain, although it is not required to be a proper subset.

See also:

- [Observability and completion of memory accesses on page B6-120.](#)
- [Shareability attributes on page B6-129.](#)

B6.13 Shareability attributes

R _{CJRF}	Each Normal cacheable memory region must be assigned one of the following Shareability attributes: <ul style="list-style-type: none">• <i>Non-shareable.</i>• <i>Inner-shareable.</i>• <i>Outer-shareable.</i>
R _{PDVV}	For Non-shareable memory, hardware is not required to make data accesses by different observers coherent. If a number of observers share the memory, software must use cache maintenance instructions if the presence of caches might lead to coherency issues. This cache maintenance requirement is in addition to the barrier operations that are required to ensure memory ordering.
R _{XTVD}	All data accesses to Non-cacheable normal memory locations are data coherent to all observers, Non-cacheable normal memory locations are always treated as Outer Shareable.

See also:

- [Memory accesses on page B6-113.](#)
- [Normal memory on page B6-130.](#)
- [Device memory on page B6-131.](#)
- [Shareability domains on page B6-128.](#)

B6.14 Normal memory

I _{NVRF}	Memory locations that are <i>idempotent</i> have the following properties: <ul style="list-style-type: none">• Read accesses can be repeated with no side-effects.• Repeated read accesses return the last value that is written to the resource being read.• Read accesses can fetch additional memory locations with no side-effects.• Write accesses can be repeated with no side-effects, if the contents of the location that is accessed are unchanged between the repeated writes or as the result of an exception.• Unaligned accesses can be supported.• Accesses can be merged before accessing the target memory system.
R _{RYTG}	Normal memory is a <i>memory type</i> that is assigned to regions of memory that are idempotent.
R _{CGJX}	Normal memory can be marked as Cacheable or Non-cacheable. Normal memory must be assigned Cacheability attributes.
R _{LCPI}	Normal Non-cacheable memory is always treated as shareable.
R _{PKXL}	Speculative data accesses to Normal memory are permitted
R _{GJGP}	Writes to Normal memory are not required to be multi-copy atomic.
R _{WLVR}	A write to Normal memory completes in finite time.
R _{WLCV}	A write to a Non-cacheable Normal memory location must reach the endpoint for that location in the memory system in finite time.
R _{MJWF}	A completed write to Normal memory is globally observed for the <i>Shareability domain</i> in finite time without the need for cache maintenance instructions or barriers.
R _{NHFQ}	For multi-register Load/Store instructions that access Normal memory, the architecture does not define the order in which the registers are accessed.
R _{CFHV}	There is no requirement for the memory system beyond the PE to be able to identify the size of the elements accessed.

See also:

- [Memory accesses on page B6-113.](#)
- [Shareability domains on page B6-128.](#)
- [Load-Exclusive and Store-Exclusive accesses to Normal memory on page B6-138.](#)
- [MAIR_ATTR, Memory Attribute Indirection Register Attributes on page D2-1013](#)

B6.15 Device memory

R _{WJKQ}	Device memory is a <i>memory type</i> that is assigned to regions of memory where accesses can have side effects, for example where the value returned for a read access can vary depending on the number of read accesses performed.
R _{WTZL}	Device memory is not cacheable.
R _{LDDN}	Device memory is always treated as shareable.
R _{PQXS}	Speculative data accesses to Device memory are not permitted. However, for instructions that access a sequence of word-aligned words, the accesses might occur multiple times, for example if the PE takes an interrupt during execution of the instruction and the instruction restarts after the interrupt.
R _{NLHC}	Hardware does not prevent speculative instruction fetches to Device memory unless the location is marked as Execute-never for all Exception levels.
R _{CSKG}	Any unaligned access to Device memory generates an UNALIGNED UsageFault exception.
R _{YMTK}	Device memory must be assigned a combination of <i>Device memory attributes</i> .
R _{LBGB}	Writes to Device memory with the Gathering attribute are not required to be multi-copy atomic.
R _{WHJR}	For Device memory with the non-Gathering attribute, writes that are single-copy atomic are also multi-copy atomic.
R _{LFTG}	A write to Device memory completes in finite time.
R _{FSCD}	A write to a Device memory location must reach the endpoint for that location in the memory system in finite time.
R _{GTTQ}	A completed write to a Device memory location is globally observed for the Shareability domain in finite time without the need for cache maintenance instructions or barriers.
R _{XMCH}	If the content of a Device memory location changes without a direct write, for example a change in a peripheral location that holds status information, the change must be observed for the Shareability domain in finite time.
R _{KJHG}	For an instruction fetch from Device memory, if a branch causes the program counter to point to an area of memory that is not marked as Execute-never for the current Exception level, the implementation can either: <ul style="list-style-type: none"> • Treat the fetch as if it is to a location in Normal non-cacheable memory. • Take a Permission fault.
R _{DFJX}	There is no requirement for the memory system beyond the PE to be able to identify the size of the elements that are accessed, for instructions that load the following from Device memory: <ul style="list-style-type: none"> • More than one general-purpose register. • One or more registers from the floating-point register file.
R _{KVHT}	For an LDM, STM, LDRD, or STRD instruction with a register list that includes the PC, the architecture does not define the order in which the registers are accessed.
R _{SFPK}	For a LDM, STM, VLDM, or VSTM instruction with a register list that does not include the PC, all registers are accessed in the order that they appear in the register list, for Device memory with the non-Reordering attribute.

See also:

- [Memory accesses on page B6-113.](#)
- [Shareability attributes on page B6-129.](#)
- [Device memory attributes on page B6-132.](#)
- [Shareability domains on page B6-128.](#)

B6.16 Device memory attributes

R_{VNSJ} Each Device memory region must be assigned a combination of Device memory attributes. The attributes are:

Gathering, G and nG

The *Gathering* and *non-Gathering* attributes.

Reordering, R and nR

The *Reordering* and *non-Reordering* attributes.

Early Write Acknowledgement, E and nE

The *Early Write Acknowledgement* and *no Early Write Acknowledgement* attributes.

R_{CFFC} Each Device memory region must be assigned one of the combinations that the following table shows:

Name	nG	nR	nE	G	R	E
Device-nGnRnE	Y	Y	Y	-	-	-
Device-nGnRE	Y	Y	-	-	-	Y
Device-nGRE	Y	-	-	-	Y	Y
Device-GRE	-	-	-	Y	Y	Y

I_{SJBD} Device-nGnRnE is the most constrained, so it is the strongest. Device-GRE is the least constrained, so it is the weakest. Going down the table, the combinations are described as *getting weaker*.

R_{LJKD} Weaker memory can be accessed according to the rules specified for stronger memory:

- Memory with the:
 - G attribute can be accessed according to the rules specified for the nG attribute.
 - nG attribute cannot be accessed according to the rules specified for the G attribute.
- Memory with the:
 - R attribute can be accessed according to the rules specified for the nR attribute.
 - nR attribute cannot be accessed according to the rules specified for the R attribute.

Because the nE attribute is a hint:

- An implementation is permitted to perform an access with the E attribute in a manner consistent with the requirements specified by the nE attribute.
- An implementation is permitted to perform an access with the nE attribute in a manner consistent with the relaxations allowed by the E attribute.

R_{FJXX} For Device-GRE and Device-nGRE memory, the use of barriers is required to order accesses.

See also:

- [Gathering and non-Gathering Device memory attributes](#).
- [Reordering and non-Reordering Device memory attributes on page B6-133](#).
- [Early Write Acknowledgement and no Early Write Acknowledgement Device memory attributes on page B6-133](#).
- [Device memory on page B6-131](#).

B6.16.1 Gathering and non-Gathering Device memory attributes

G attribute

R _{DBSX}	If multiple accesses of the same type, read or write, are to: <ul style="list-style-type: none"> The same location, with the G attribute, they can be merged into a single transaction. Different locations, all with the G attribute, they can be merged into a single transaction.
R _{KCMX}	Gathering of accesses that are separated by a memory barrier is not permitted.
R _{JSRD}	Gathering of accesses that are generated by a Load-Acquire/Store-Release is not permitted.
R _{MGKJ}	A read can come from intermediate buffering of a previous write, provided that: <ul style="list-style-type: none"> The accesses are not separated by a DMB or DSB barrier. The accesses are not separated by any other ordering construction that requires that the accesses are in order, for example a combination of Load-Acquire and Store-Release. The accesses are not generated by a Store-Release instruction.
I _{SRDS}	The architecture only defines programmer visible behavior. Therefore, if a programmer cannot tell whether gathering has occurred, gathering can be performed.

nG attribute

R _{GVTf}	Multiple accesses cannot be merged into a single transaction.
R _{BTWD}	A read cannot come from a cache or a buffer, but must come from the endpoint for that address in the memory system.

B6.16.2 Reordering and non-Reordering Device memory attributes

R attribute

R _{RPTB}	This attribute imposes no restrictions or relaxations.
-------------------	--

nR attribute

R _{DFXL}	If the access is to a: <ul style="list-style-type: none"> Peripheral, it must arrive at the peripheral in program order. If there is a mixture of accesses to Device nGnRE and Device-nGnRnE in the same peripheral, these accesses must occur in program order. Non-peripheral, this attribute imposes no restrictions or relaxations.
I _{BDWB}	The IMPLEMENTATION DEFINED size of the single peripheral is the same as applies for the ordering guarantee that is provided by the DMB instruction.
R _{NDHC}	The non-Reordering attribute does not require any additional ordering, other than the ordering that applies to Normal memory, between: <ul style="list-style-type: none"> Accesses with the non-Reordering attribute and accesses with the Reordering attribute. Accesses with the non-Reordering attribute and accesses to Normal memory. Accesses with the non-Reordering attribute and accesses to different peripherals of IMPLEMENTATION DEFINED size.

B6.16.3 Early Write Acknowledgement and no Early Write Acknowledgement Device memory attributes

E attribute

R_{PVSH} This attribute imposes no restrictions or relaxations.

nE attribute

R_{FWFR} Assigning the nE attribute recommends that only the endpoint of the write access returns a write acknowledgement of the access, and that no earlier point in the memory system returns a write acknowledgement.

I_{QWQ} The E attribute is treated as a hint. ARM strongly recommends that this hint is not ignored by a PE, but is made available for use by the system.

B6.17 Memory access restrictions

R_{KSXT}	For accesses to any two bytes that are accessed by the same instruction, the two bytes must have the same memory type and Shareability attributes.
I_{WRBT}	Except for possible differences in cache allocation hints, ARM deprecates having different Cacheability attributes for accesses to any two bytes that are generated by the same instruction.
R_{BFKS}	If the accesses of an instruction that cause multiple accesses to any type of Device memory cross the boundaries of memory regions then the behavior is CONstrained UNPREDICTABLE.

B6.18 Mismatched memory attributes

I _{WSDR}	In the ARMv8 architecture, mismatched memory attributes are controlled by privileged software.
R _{XHTK}	Physical memory locations are accessed with <i>mismatched attributes</i> if all accesses to the location do not use a common definition of all the following memory attributes of that location: <ul style="list-style-type: none">• Memory type - Device or Normal.• Shareability.• Cacheability, for the same level of the inner or outer cache, but excluding any cache allocation hints.
R _{VKHJ}	When a memory location is accessed with mismatched attributes, the only software visible effects are one or more of the following: <ul style="list-style-type: none">• Uniprocessor semantics for reads and writes to that memory location might be lost. This means:<ul style="list-style-type: none">— A read of the memory location by one agent might not return the value that was most recently written to that memory location by the same agent.— Multiple writes to the memory location by one agent with different memory attributes might not be ordered in program order.• There might be a loss of coherency when multiple agents attempt to access a memory location.• There might be a loss of the properties that are derived from the memory type.• If all Load-Exclusive or Store-Exclusive instructions that are executed across all threads to access a given memory location do not use consistent memory attributes, the exclusive monitor state becomes UNKNOWN.• Bytes that are written without the Write-Back cacheable attribute and that are within the same Write-Back granule as bytes that are written with the Write-Back cacheable attribute might have their values reverted to the old values as a result of cache Write-Back.
R _{NJLB}	The loss of the properties that are associated with mismatched memory type attributes refers only to the following properties of Device memory that are additional to the properties of Normal memory: <ul style="list-style-type: none">• Prohibition of speculative read accesses.• Prohibition on Gathering.• Prohibition on Re-ordering.
R _{QCKK}	If the only memory type mismatch that is associated with a memory location across all users of the memory location is between different types of Device memory, then all accesses might take the properties of the weakest Device memory type.
R _{HCCD}	Any agent that reads that physical memory location using the same common definition of the Shareability and Cacheability attributes is guaranteed to access it coherently, to the extent required by that common definition of the memory attributes, only if all the following conditions are met: <ul style="list-style-type: none">• All aliases to the memory location with write permission both use a common definition of the Shareability and Cacheability attributes for the memory location, and have the Inner Cacheability attribute the same as the Outer Cacheability attribute.• All aliases to a memory location use a definition of the Shareability attributes that encompasses all the agents with permission to access the location.
R _{GBKH}	The possible software-visible effects that are caused by mismatched attributes for a memory location are defined more precisely if all the mismatched attributes define the memory location as one of: <ul style="list-style-type: none">• Any Device memory type.• Normal Inner Non-cacheable, Outer Non-cacheable memory. In these cases, the only permitted software-visible effects of the mismatched attributes are one or more of the following: <ul style="list-style-type: none">• Possible loss of properties that are derived from the memory type when multiple agents attempt to access the memory location.

- Possible reordering of memory transactions to the same memory location with different memory attributes, potentially leading to a loss of coherency or uniprocessor semantics. Any possible loss of coherency or uniprocessor semantics can be avoided by inserting DMB barrier instructions between accesses to the same memory location that might use different attributes.

R_{XHJL}

Hardware is required to ensure coherency and ordering within the Shareability domain if all of the following apply:

- Before writing to a location not using the Write-Back attribute, a location in the caches that might have been written with the Write-Back attribute by an agent has been invalidated or cleaned.
- After writing the location with the Write-Back attribute, the location has been cleaned from the caches to make the write visible to external memory.
- Before reading the location with a cacheable attribute, the location has been invalidated from the caches, to ensure that any value that is held in the caches reflects the last value made visible in external memory.
- A DMB barrier instruction has been executed, with a scope that applies to the common Shareability of the accesses, between any accesses to the same memory location that use different attributes.

R_{VVBS}

If the mismatched attributes for a location mean that multiple cacheable accesses to the location might be made with different Shareability attributes, then ordering and coherency are guaranteed only if:

- Each PE that accesses the location with a cacheable attribute performs a clean and invalidate of the location before and after accessing that location.
- A DMB barrier with scope that covers the full Shareability of the accesses is placed between any accesses to the same memory location that use different attributes.

R_{VCXW}

If multiple agents attempt to use Load-Exclusive or Store-Exclusive instructions to access a location, and the accesses from the different agents have different memory attributes associated with the location, the exclusive monitor state becomes UNKNOWN.

I_{TPWG}

ARM strongly recommends that software does not use mismatched attributes for aliases of the same location. An implementation might not optimize the performance of a system that uses mismatched aliases.

B6.19 Load-Exclusive and Store-Exclusive accesses to Normal memory

R_{KDWC}

For Normal memory that is:

- Non-shareable, it is IMPLEMENTATION DEFINED whether Load-Exclusive and Store-Exclusive instructions take account of the possibility of accesses by more than one observer.
- Shareable, Load-Exclusive, and Store-Exclusive instructions take account of the possibility of accesses by more than one observer.

See also:

- [Normal memory on page B6-130.](#)
- [Memory accesses on page B6-113.](#)

B6.20 Load-Acquire and Store-Release accesses to memory

I_VVTX The following table summarizes the Load-Acquire/Store-release instructions.

Data type	Load-Acquire	Store-Release	Load-Acquire Exclusive	Store-Release Exclusive
32-bit word	LDA	STL	LDAEX	STLEX
16-bit halfword	LDAH	STLH	LDAEXH	STLEXH
8-bit byte	LDAB	STLB	LDAEXB	STLEXB

R_XBRM A Store-Release followed by a Load-Acquire is observed in program order by each observer within the Shareability domain of the memory address being accessed by the Store-Release and the memory address being accessed by the Load-Acquire.

R_RRFK For a Load-Acquire, observers in the Shareability domain of the address that is accessed by the Load-Acquire observe accesses in the following order:

1. The read caused by the Load-Acquire.
2. Reads and writes caused by loads and stores that appear in program order after the Load-Acquire for which the Shareability of the address that is accessed by the load or store requires that the observer observes the access.

There are no other ordering requirements on loads or stores that appear before the Load-Acquire.

R_WLWT For a Store-Release, observers in the Shareability domain of the address that is accessed by the Store-Release observe accesses in the following order:

1. All of the following for which the Shareability of the address that is accessed requires that the observer observes the access:
 - Reads and writes caused by loads and stores that appear in program order before the Store-Release.
 - Writes that were observed by the PE executing the Store-Release before it executed the Store-Release.
2. The write caused by the Store-Release.

There are no other ordering requirements on loads or stores that appear in program order after the Store-Release.

R_HCKC All Store-Release instructions must be multi-copy atomic when they are observed with Load-Acquire instructions.

R_DGXR A Load-Acquire to an address in a memory-mapped peripheral of an arbitrary system-defined size that is defined as any type of Device memory access ensures that all memory accesses using Device memory types to the same memory-mapped peripheral that are architecturally required to be observed after the Load-Acquire will arrive at the memory-mapped peripheral after the memory access of the Load-Acquire.

R_CKRC A Store-Release to an address in a memory-mapped peripheral of an arbitrary system-defined size that is defined as any type of Device memory access ensures that all memory accesses using Device memory types to the same memory-mapped peripheral that are architecturally required to be observed before the Store-Release will arrive at the memory-mapped peripheral before the memory access of the Store-Release.

R_GJHK If a Load-Acquire to a memory address in a memory-mapped peripheral of an arbitrary system-defined size that is defined as any type of Device memory access has observed the value that is stored to that address by a Store-Release, then any memory access to the memory-mapped peripheral that is architecturally required to be ordered before the memory access of the Store-Release will arrive at the memory-mapped peripheral before any memory access to the same peripheral that is architecturally required to be ordered after the memory access of the Load-Acquire.

R_WRLC Load-Acquire and Store-Release access only a single data element.

R_KCTN Load-Acquire and Store-Release accesses are single-copy atomic.

R_BXRP If a Load-Acquire or Store-Release instruction accesses an address that is not aligned to the size of the data element being accessed, the access generates an Alignment fault.

R_{NVRJ} A Store-Release Exclusive instruction only has the release semantics if the store is successful.

B6.21 Caches

R _{JT XF}	ARMv8-M supports memory-mapped caches.
I _{QC QG}	The allocation of a memory address to a cache location is IMPLEMENTATION DEFINED.
R _{XX BW}	In situations in which a breakdown in coherency can occur, the way that software manages the data coherency of caches is IMPLEMENTATION DEFINED.

See also:

- [Cache identification](#).
- [Cache enabling and disabling](#).
- [General cache behavior on page B6-142](#).
- [Cache behavior at reset on page B6-143](#).
- [CLIDR](#).
- [CTR](#).

B6.21.1 Cache identification

R _{WB GH}	ARMv8-M cache identification consists of the following set of registers that describes the implemented caches that are under the control of the PE: <ul style="list-style-type: none"> • A single Cache Type Register, CTR. • A single Cache Level ID Register, CLIDR. • A single Cache Size Selection Register, CSSELR. • For each implemented cache, across all levels of caching, a Cache Size Identification Register, CCSIDR.
R _{XJ TL}	The number of levels of cache is IMPLEMENTATION DEFINED and can be determined from the Cache Level ID Register.
R _{HG QK}	The lower the cache level, the closer the cache is to the PE.
R _{QX RC}	Sets are numbered from 0.
R _{GX HS}	The set number is an IMPLEMENTATION DEFINED function of an address.
R _{GW WJ}	Ways are numbered from 0.
R _{TB CP}	The CTR defines the minimum length values.

B6.21.2 Cache enabling and disabling

R _{MG JW}	The Configuration and Control Register, CCR , is used to enable and disable caches across all levels of cache that are visible to the PE. CCR.DC enables or disables all data and unified caches and CCR.IC enables or disables all instruction caches.
I _{TN HX}	An implementation can use control bits in the Auxiliary Control Register, ACTLR , for finer-grained control of cache enabling. For example, an implementation might define control bits to enable and disable the caches at a particular level.
R _{HT LD}	It is IMPLEMENTATION DEFINED whether the CCR.DC and CCR.IC bits affect the memory attributes that are generated by an enabled MPU.
R _{JD SJ}	When a cache is disabled, a memory location that is not held in the cache is never brought into the cache as the result of a memory access.
R _{DS TQ}	If the MPU is disabled, MPU_CTRL.ENABLE == 0, the CCR.DC and CCR.IC bits determine the cache state for cacheable regions of the default address map.

B6.21.3 General cache behavior

I_JSPB	<p>When a memory location is marked with a Normal Cacheable memory attribute, determining whether a copy of the memory location is held in a cache can depend on many aspects of the implementation, such as the following factors:</p> <ul style="list-style-type: none">• The size, line length, and associativity of the cache.• The cache allocation algorithm.• Activity by other elements of the system that can access the memory.• Speculative instruction fetching algorithms.• Speculative data fetching algorithms.• Interrupt behaviors.
R_JVJN	<p>The architecture cannot guarantee whether:</p> <ul style="list-style-type: none">• A memory location that is present in the cache remains in the cache.• A memory location that is not present in the cache is brought into the cache.
R_PHWM	<p>If the cache is disabled, it is guaranteed that no new allocation of memory locations into the cache occurs.</p>
R_QRLS	<p>If the cache is enabled, it is guaranteed that no memory location that does not have a cacheable attribute is allocated into the cache.</p>
R_XXVH	<p>If the cache is enabled, it is guaranteed that no memory location is allocated to the cache if the access permissions for that location are such that the location cannot be accessed by reads and cannot be accessed by writes.</p>
R_SCKQ	<p>Any memory location is not guaranteed to remain incoherent with the rest of memory.</p>
I_HFCR	<p>The maximum size of the memory that can be overwritten is called the <i>Cache Write-back Granule</i>. In some implementations, the CTR identifies the Cache Write-back Granule.</p>
R_LJQB	<p>The allocation of a memory location into a cache cannot cause the most recent value of that memory location to become invisible to an observer, if it had previously been visible to that observer.</p>
R_SBGJ	<p>A cache entry covers at least 16 bytes and no more than 2KB of contiguous address space, aligned to its size.</p>
R_WDBP	<p>It is UNPREDICTABLE whether the location is returned from cache or from memory when:</p> <ul style="list-style-type: none">• The location is not marked as cacheable but is contained in the cache. This situation can occur if a location is marked as non-cacheable after it has been allocated into the cache.• The location is marked as cacheable and might be contained in the cache, but the cache is disabled.
R_XRWS	<p>The Cacheability attributes are:</p> <ul style="list-style-type: none">• Write-Through Cacheable.• Write-Back Cacheable.
R_XXQW	<p>It is IMPLEMENTATION DEFINED whether Write-Through Cacheable and Write-Back Cacheable can have the additional attribute Transient or Non-transient.</p>
I_LDXP	<p>The Transient attribute is a memory hint that indicates that the benefit of caching is for a short period. The architecture does not define what is meant by a <i>short period</i>.</p>
R_KXJV	<p>The architecture provides Cacheability attributes that are defined independently for each of two conceptual levels of cache, the Inner cache and the Outer cache.</p>
I_NNRVD	<p>The relationship between the conceptual levels of cache and the implemented physical levels of cache is IMPLEMENTATION DEFINED.</p>
R_CFKN	<p>Cacheability attributes other than Non-cacheable can be complemented by the following cache allocation hints:</p> <ul style="list-style-type: none">• Read-Allocate, Transient Read-Allocate, or no Read-Allocate.• Write-Allocate, Transient Write Allocate, or no Write-Allocate.

I _{FRVF}	A Cacheable location with no Read-Allocate and no Write-Allocate hints is not the same as a Non-cacheable location. A Non-cacheable location has coherency guarantees for all observers within the system that do not apply to a location that is Cacheable, no Read-Allocate, no Write-Allocate. The architecture does not require an implementation to make any use of cache allocation hints. This means an implementation might not make any distinction between memory locations with attributes that differ only in their cache allocation hint.
R _{QLVB}	For the purposes of data coherency the architecture requires: <ul style="list-style-type: none"> • A completed write to a memory location that is Non-cacheable or Write-Through Cacheable for a level of cache made by an observer accessing the memory system inside the level of cache is visible to all observers accessing the memory system outside the level of cache without the need of explicit cache maintenance. • A completed write to a memory location that is Non-cacheable for a level of cache made by an observer accessing the memory system outside the level of cache is visible to all observers accessing the memory system inside the level of cache without the need of explicit cache maintenance.

B6.21.4 Cache behavior at reset

R _{KCFK}	All caches are disabled at reset.
I _{DSXS}	An implementation can require the use of a specific cache initialization routine to invalidate its storage array before it is enabled.
R _{QXNG}	The exact form of any required cache initialization routine is IMPLEMENTATION DEFINED, and the routine must be documented clearly as part of the documentation of the device.
R _{MDJX}	If a required initialization routine is not performed, the state of an enabled cache is UNPREDICTABLE.
R _{RQXN}	It is IMPLEMENTATION DEFINED whether an access can generate a cache hit when the cache is disabled.
R _{TVKQ}	If an implementation permits cache hits when the cache is disabled, the cache initialization routine must: <ul style="list-style-type: none"> • Provide a mechanism to ensure the correct initialization of the caches. • Be documented clearly as part of the documentation of the device.
R _{CJGV}	If an implementation permits cache hits when the cache is disabled and the cache contents are not invalidated at reset, the initialization routine must avoid any possibility of running from an uninitialized cache.
I _{JSQQ}	An initialization routine can require a fixed instruction sequence to be placed in a restricted range of memory.
I _{JCTD}	ARM recommends that whenever an invalidation routine is required, it is based on the ARMv8-M cache maintenance operations.

B6.22 Behavior of Preload Data (PLD) and Preload Instruction (PLI) instructions with caches

I _{CQLR}	The instructions are memory system hints and their effect is IMPLEMENTATION DEFINED.
I _{TPPK}	The instructions do not generate exceptions but the memory system operations might generate an imprecise fault (asynchronous exception) due to the memory access.
I _{HRLJ}	Examples of the asynchronous events that the instructions might trigger are: <ul style="list-style-type: none">• Asynchronous abort.• Interrupt.
R _{QNGJ}	A PLD instruction is guaranteed not to cause any effect to the caches or memory other than the effects that, for permission or other reasons, can be caused by the equivalent load from the same location with the same context and at the same privilege level.
R _{SFNK}	A PLD instruction is guaranteed not to access Device-nGnRnE or Device-nGnRE memory.
R _{HNLN}	A PLI instruction is guaranteed not to cause any effect to the caches or memory other than the effects that, for permission or other reasons, can be caused by the fetch resulting from changing the PC to the location specified by the PLI instruction with the same context and at the same privilege level.
R _{MRFG}	A PLI instruction must not perform any access that might be performed by a speculative instruction fetch by the PE. Therefore a PLI instruction cannot access memory that has the Device-nGnRnE or Device-nGnRE attribute.

B6.23 Branch predictors

I_{GTPB} Branch predictor hardware typically uses a form of cache to hold branch information.

R_{MTBD} Branch predictors are not architecturally visible. The [BPIALL](#) operation is provided for timing and determinism.

See also:

- [Branch predictor maintenance operations on page B6-149.](#)

B6.24 Cache maintenance operations

I _{MRMG}	Cache maintenance operations act on particular memory locations.
R _{JILL}	The Clean operation ensures that updates made by an observer that controls the cache are made visible to other observers that can access memory at the point to which the operation is performed.
R _{VRBP}	The cleaning of a cache entry from a cache can overwrite memory that has been written by another observer only if the entry contains a location that has been written to by an observer in the Shareability domain of that memory location.
R _{SJFS}	The Invalidate operation ensures that updates made visible by observers that access memory at the point to which the invalidate is defined are made visible to an observer that controls the cache. This might result in the loss of updates to the locations affected by the invalidate operation that have been written by observers that access the cache.
R _{TKBD}	If the address of an entry on which the invalidate operates does not have a Normal cacheable attribute, or if the cache is disabled, then an invalidate operation also ensures that this address is not present in the cache.
R _{JTXK}	Entries for addresses with a Normal cacheable attribute can be allocated to an enabled cache at any time so the cache invalidate operation cannot ensure that the address is not present in an enabled cache.
R _{SDVP}	A Clean and invalidate operation behaves as the execution of a clean operation followed immediately by an invalidate operation. Both operations are performed to the same location.
R _{VKSN}	The Clean operation cleans from the level of cache that is specified through at least the next level of cache away from the PE.
R _{GFXB}	The Invalidate operation invalidates only at the level specified.
R _{KVSM}	For set/way operations and for All (entire cache) operations, the cache maintenance operation is to the next level of caching.
R _{JTWT}	For address operations, the cache maintenance operation is to the point of coherency (PoC) or to the point of unification (PoU) depending on the settings in CLIDR.LoC and CLIDR.LOUU.
I _{TWLF}	The term <i>Modified Virtual Address (MVA)</i> is used throughout this manual in place of <i>Virtual Address (VA)</i> and <i>Physical Address (PA)</i> for consistency with other ARM Architecture Reference Manuals. In all cases in this manual, MVA, VA, and PA have the same value.
R _{XLHX}	Data cache operations can be used on unified caches as well.
R _{QKMF}	Instruction cache operations must be used only on instruction caches.
R _{RSVL}	Cache operations are memory mapped, 32-bit write-only operations that can be executed only by privileged software.
I _{SBVC}	Cache maintenance operations can have side effects: <ul style="list-style-type: none">• Any location in the cache might be cleaned.• Any unlocked location in the cache might be cleaned and invalidated.
R _{GCNB}	All cache and branch predictor maintenance operations that do not specify an address execute, relative to each other, in program order.
R _{GXNL}	All cache maintenance operations that specify an address: <ul style="list-style-type: none">• Execute in program order relative to all cache operations that do not specify an address.• Execute in program order relative to all cache maintenance operations that specify the same address.• Can execute in any order relative to cache maintenance operations that specify a different address.
R _{SWBG}	ICIALLU, the value is ignored in the register specified by the STR instruction that performs the cache maintenance operation.

MOV <Rt>, 0xE000E000 ; Create pointer to base of System Control Space
STR <Ry>, [<Rt>, #0xF64] ; Clean data cache by address to point of unification
DSB ; Ensure visibility of the data cleaned from the cache
STR <Ry>, [<Rt>, #0xF58] ; Invalidate instruction cache by address to PoU
STR <Ry>, [<Rt>, #0xF78] ; Invalidate branch predictor
DSB ; Ensure completion of the invalidations
ISB ; Synchronize fetched instruction stream

See also:

- [Cache Maintenance Operations](#) on page D2-799.
- [Cache Maintenance Operations \(NS alias\)](#) on page D2-804.

B6.25 Branch predictor maintenance operations

R _{HVXX}	Branch predictor maintenance is handled independently of cache maintenance operations.
R _{NSRK}	A context synchronization operation is required after a branch predictor maintenance operation to guarantee that the effects of the branch predictor maintenance operation are visible to all instructions after the context synchronization operation.
R _{PHNH}	The ARM architecture does not restrict the ordering of data or unified maintenance operations relative to an explicit load or store.
I _{GWXS}	A DSB instruction can be used to restrict the ordering of data or unified maintenance operations relative to an explicit load or store.
R _{HRXF}	For BPIALL, the value is ignored in the register specified by the STR instruction that performs the cache maintenance operation.

See also:

- [Cache Maintenance Operations](#) on page D2-799.
- [Cache Maintenance Operations \(NS alias\)](#) on page D2-804.
- [BPIALL, Branch Predictor Invalidate All](#) on page D2-818.
- [Memory barriers](#) on page B6-125.
- [DSB](#) on page C2-361.

Chapter B7

Synchronization and Semaphores

This chapter specifies the architecture rules for exclusive access instructions and non-blocking synchronization of shared memory. It contains the following sections:

- *Exclusive access instructions* on page B7-152.
- *Exclusive access instructions and Non-shareable memory locations* on page B7-153.
- *Local monitors* on page B7-154.
- *Exclusive access instructions and shareable memory locations* on page B7-156.
- *The global monitor* on page B7-157.
- *Load-Exclusive and Store-Exclusive instruction usage restrictions* on page B7-160.
- *Use of WFE and SEV instructions by spinlocks* on page B7-162.

B7.1 Exclusive access instructions

- R_{LQDX}** ARMv8 provides non-blocking synchronization of shared memory, using synchronization primitives for accesses to both Normal and Device memory.
- I_{RHKT}** Use of the ARMv8 synchronization primitives scales for multiprocessing system designs.
- R_{RGCP}** Synchronization primitives and associated instructions:

Function	A32/T32 Instruction
Load-Exclusive	
Byte	LDREXB, LDAEXB
Halfword	LDREXH, LDAEXH
Word	LDREX, LDAEX
Doubleword	LDREXD, LDAEXD
Store-Exclusive	
Byte	STREXB, STLEXB
Halfword	STREXH, STLEXH
Word	STREX, STLEX
Clear-Exclusive	CLREX

- R_{MTN}** When a Load-Exclusive instruction is executed, a marked block of size 2^a bytes is created by ignoring the least significant bits of the memory address. A marked address is any address within this marked block.
- R_{JHMH}** The size of the marked memory block is called the *Exclusives reservation granule*. The Exclusives reservation granule is IMPLEMENTATION DEFINED in the range 4 - 512 words.
- I_{BKQS}** The Exclusives reservation granule is:
- 4 words in an implementation where a is 4.
 - 512 words in an implementation where a is 11.
- For example, in an implementation where a is 4, a successful LDREXB of address 0x341B4 defines a marked block using bits[47:4] of the address. This means that the four words of memory from 0x341B0 to 0x341BF are marked for exclusive access.
- R_{FMXK}** In some implementations the **CTR** identifies the Exclusives reservation granule. Otherwise, software must assume that the maximum Exclusives reservation granule, 512 words, is implemented.
- R_{HLRV}** The model for the use of a Load-Exclusive/Store-Exclusive instruction pair accessing a non-aborting memory address x is:
- The Load-Exclusive instruction reads a value from memory address x .
 - The corresponding Store-Exclusive instruction succeeds in writing back to memory address x only if no other observer, process, or thread has performed a more recent store to address x .
 - The Store-Exclusive instruction returns a status bit that indicates whether the memory write succeeded.
 - A Load-Exclusive instruction marks a small block of memory for exclusive access. The size of the marked block is IMPLEMENTATION DEFINED,

B7.2 Exclusive access instructions and Non-shareable memory locations

- R_{JGRF} The model for the use of a Load-Exclusive/Store-Exclusive instruction pair accessing a memory locations for which the Shareability attribute is Non-shareable, the exclusive access instructions rely on a *local monitor* that marks any address from which the PE executes a Load-Exclusive instruction.
- I_{QNFF} Any non-aborted attempt by the same PE to use a Store-Exclusive instruction to modify any address is guaranteed to clear the marking.

B7.3 Local monitors

R_{DTRN} A Store-Exclusive instruction performs a conditional store to memory that depends on the state of the local monitor:

If the local monitor is in the Exclusive Access state

- If the address of the Store-Exclusive instruction is the same as the address that has been marked in the monitor by an earlier Load-Exclusive instruction, then the store occurs. Otherwise, it is IMPLEMENTATION DEFINED whether the store occurs.
- A status value is returned to a register:
 - If the store took place the status value is 0.
 - Otherwise, the status value is 1.
- The local monitor of the executing PE transitions to the Open Access state.

If the local monitor is in the Open Access state


- No store takes place.
- A status value of 1 is returned to a register.
- The local monitor remains in the Open Access state.

R_{NJWC} When a PE writes using any instruction other than a Store-Exclusive instruction:

- If the write is to a physical address that is not marked as Exclusive Access by its local monitor and that local monitor is in the Exclusive Access state it is IMPLEMENTATION DEFINED whether the write affects the state of the local monitor.
- If the write is to a physical address that is marked as Exclusive Access by its local monitor it is IMPLEMENTATION DEFINED whether the write affects the state of the local monitor.

R_{PFFT} It is IMPLEMENTATION DEFINED whether a store to a marked physical address causes a mark in the local monitor to be cleared if that store is by an observer other than the one that caused the physical address to be marked.

R_{KXNM} State machine for the local monitor:

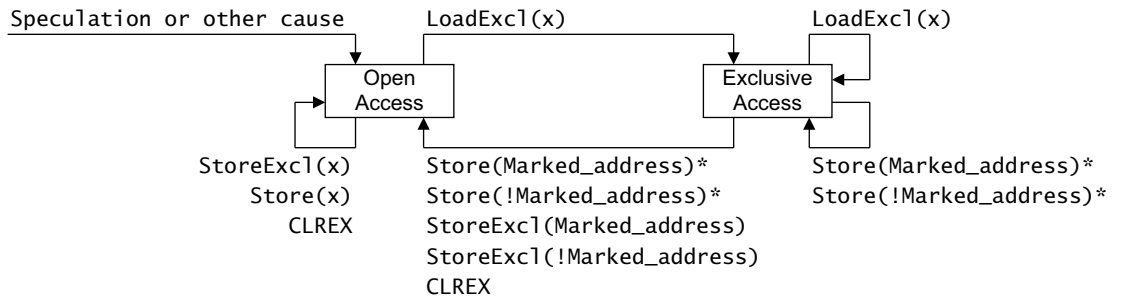

Operations marked * are possible alternative IMPLEMENTATION DEFINED options.

In the diagram: LoadExc1 represents any Load-Exclusive instruction
 StoreExc1 represents any Store-Exclusive instruction
 Store represents any other store instruction.

Any LoadExc1 operation updates the marked address to the most significant bits of the address x used for the operation.

An implementation must ensure that:

- The local monitor cannot be seen to transition to the Exclusive Access state except as a result of the architectural execution of one of the operations shown.
- Any transition of the local monitor to the Open Access state not caused by the architectural execution of an operation shown must not indefinitely delay forward progress of execution.

R_{WTHJ} The local monitor does not hold any physical address, but instead treats any access as matching the address of the previous Load-Exclusive instruction.

R_{JWQS} A local monitor implementation can be unaware of Load-Exclusive and Store-Exclusive instructions from other PEs.

R _{XMML}	It is IMPLEMENTATION DEFINED whether the transition from Exclusive Access to Open Access state occurs when the Store or StoreExcl is from another observer.
R _{MRS}	The architecture permits a local monitor to transition to the Open Access state as a result of speculation, or from some other cause.
I _{QFBJ}	An exception return clears the local monitor. As a result, performing a CLREX instruction as part of a context switch is not required in most situations.

B7.4 Exclusive access instructions and shareable memory locations

R_XMGB	A shareable memory location is a memory location that has, or is treated as if it has, a Shareability attribute of Inner Shareable or Outer Shareable.
R_VFXN	<p>For shareable memory locations, exclusive access instructions rely on:</p> <ul style="list-style-type: none">• A <i>global monitor</i> that marks a physical address as exclusive access for a particular PE.• A <i>local monitor</i> for each PE in the system, that marks any address from which the PE executes a Load-Exclusive. <p>The local monitor can ignore accesses from other PEs in the system.</p>
R_NPQB	<p>For shareable memory, the local monitor operates like that for Non-shareable memory but any Store-Exclusive is subject to checking by the global monitor doing at least one of the following:</p> <ul style="list-style-type: none">• Updating memory.• Returning a status value of 0.
R_WMSV	The marking done by the global monitor is used later to determine whether a Store-Exclusive to that address that has not been failed by the local monitor can occur.
R_JPDG	Any successful write to the marked block by any other observer in the Shareability domain of the memory location is guaranteed to clear the marking.

See also:

- [Local monitors on page B7-154.](#)

B7.5 The global monitor

R _{FKFB}	For each PE in the system, the global monitor: <ul style="list-style-type: none"> • Can hold at least one marked block. • Maintains a state machine for each marked block it can hold.
R _{VDLP}	For each PE, the architecture only requires global monitor support for a single marked address. Any situation that might benefit from the use of multiple marked addresses on a single PE is CONstrained UNPREDICTABLE.
R _{NNDC}	The global monitor can either reside in a block that is part of the hardware on which the PE executes or exist as a secondary monitor at the memory interfaces.
I _{XTLH}	The IMPLEMENTATION DEFINED aspects of the monitors mean that the global monitor and local monitor can be combined into a single unit, provided that the unit performs the global monitor and local monitor functions defined in this manual.
I _{KDWM}	For shareable memory locations, in some implementations and for some memory types, the properties of the global monitor require functionality outside the PE. Some system implementations might not implement this functionality for all locations of memory. In particular, this can apply to: <ul style="list-style-type: none"> • Any type of memory in the system implementation that does not support hardware cache coherency. • Non-cacheable memory, or memory treated as Non-cacheable, in an implementation that does support hardware cache coherency. In such a system, it is defined by the system: <ul style="list-style-type: none"> • Whether the global monitor is implemented. • If the global monitor is implemented, which address ranges or memory types it monitors.
I _{QJNL}	Implementations can choose which memory types are treated as Non-cacheable, the only memory types for which it is architecturally guaranteed that a global exclusive monitor is implemented are: <ul style="list-style-type: none"> • Inner Shareable, Inner Write-Back, Outer Write-Back Normal memory with Read allocation hint and Write allocation hint and not transient. • Outer Shareable, Inner Write-Back, Outer Write-Back Normal memory with Read allocation hint and Write allocation hints and not transient.
R _{BTRF}	If the global monitor is not implemented for an address range or memory type, then performing a Load-Exclusive/Store-Exclusive instruction to such a location has one or more of the following effects: <ul style="list-style-type: none"> • The instruction generates an external abort. • The instruction generates an IMPLEMENTATION DEFINED fault with IMPLEMENTATION DEFINED priority. • The instruction is treated as a NOP. • The Load-Exclusive instruction is treated as if it were accessing a Non-shareable location, but the state of the local monitor becomes UNKNOWN. • The Store-Exclusive instruction is treated as if it were accessing a Non-shareable location, but the state of the local monitor becomes UNKNOWN. • The value held in the result register of the Store-Exclusive instruction becomes UNKNOWN.
R _{FQRT}	For write transactions generated by non-PE observers that do not implement exclusive accesses or other atomic access mechanisms, the effect that writes have on the global and local monitors used by an ARM PE is IMPLEMENTATION DEFINED.
R _{MPRJ}	The writes might not clear the global monitors of other PEs for: <ul style="list-style-type: none"> • Some address ranges. • Some memory types.
R _{HKQT}	A Load-Exclusive instruction from shareable memory performs a load from memory, and causes the physical address of the access to be marked as exclusive access for the requesting PE. This access can also cause the exclusive access mark to be removed from any other physical address that has been marked by the requesting PE.
R _{RXVB}	The global monitor only supports a single outstanding exclusive access to shareable memory for each PE.
R _{MPKM}	A Load-Exclusive instruction by one PE has no effect on the global monitor state for any other PE.

R_{MFGC} A Store-Exclusive instruction performs a conditional store to memory:


- The store is guaranteed to succeed only if the physical address accessed is marked as exclusive access for the requesting PE and both the local monitor and the global monitor state machines for the requesting PE are in the Exclusive Access state. In this case:
 - A status value of 0 is returned to a register to acknowledge the successful store.
 - The final state of the global monitor state machine for the requesting PE is IMPLEMENTATION DEFINED.
 - If the address accessed is marked for exclusive access in the global monitor state machine for any other PE then that state machine transitions to Open Access state.
- If no address is marked as exclusive access for the requesting PE, the store does not succeed:
 - A status value of 1 is returned to a register to indicate that the store failed.
 - The global monitor is not affected and remains in Open Access state for the requesting PE.
- If a different physical address is marked as exclusive access for the requesting PE, it is IMPLEMENTATION DEFINED whether the store succeeds or not:
 - If the store succeeds a status value of 0 is returned to a register, otherwise a value of 1 is returned.
 - If the global monitor state machine for the PE was in the Exclusive Access state before the Store-Exclusive instruction it is IMPLEMENTATION DEFINED whether that state machine transitions to the Open Access state.

R_{NNMG} In a shared memory system, the global monitor implements a separate state machine for each PE in the system. The state machine for accesses to shareable memory by PE(n) can respond to all the shareable memory accesses visible to it.

R_{WKPJ} In a shared memory system, the global monitor implements a separate state machine for each observer that can generate a Load-Exclusive or a Store-Exclusive instruction in the system.

R_{NWWH} Whenever the global monitor state for a PE changes from Exclusive access to Open access, an event is generated and held in the Event register for that PE. This register is used by the Wait for Event mechanism.

R_{GDMD} State machine for PE(n) in a global monitor.

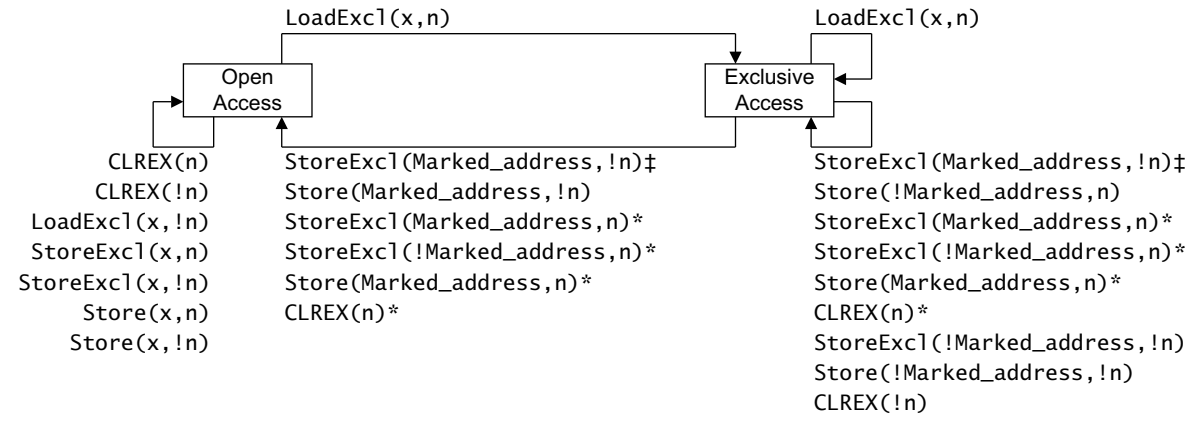

‡StoreExc1(Marked_address, !n) clears the monitor only if the StoreExc1 updates memory
 Operations marked * are possible alternative IMPLEMENTATION DEFINED options.
 In the diagram: LoadExc1 represents any Load-Exclusive instruction
 StoreExc1 represents any Store-Exclusive instruction
 Store represents any other store instruction.

Any LoadExc1 operation updates the marked address to the most significant bits of the address x used for the operation.

R_{GXLf} The architecture does not require a load instruction by another PE, that is not a Load-Exclusive instruction, to have any effect on the global monitor.

R_{RGFK} Whether a Store-Exclusive instruction successfully updates memory or not depends on whether the address accessed matches the marked shareable memory address for the PE issuing the Store-Exclusive instruction, and whether the local and global monitors are in the exclusive state.

R _{DLMP}	A Load-Exclusive instruction can only update the marked shareable memory address for the PE issuing the Load-Exclusive instruction.
R _{QVWF}	When the global monitor is in the Exclusive Access state, it is IMPLEMENTATION DEFINED whether a CLREX instruction causes the global monitor to transition from Exclusive Access to Open Access state.
R _{BSSB}	<p>It is IMPLEMENTATION DEFINED:</p> <ul style="list-style-type: none">• Whether a modification to a Non-shareable memory location can cause a global monitor to transition from Exclusive Access to Open Access state.• Whether a Load-Exclusive instruction to a Non-shareable memory location can cause a global monitor to transition from Open Access to Exclusive Access state.

See also:

- [DFSR, Debug Fault Status Register](#) on page D2-864.
- [HFSR, HardFault Status Register](#) on page D2-958.
- [Use of WFE and SEV instructions by spinlocks](#) on page B7-162.
- [Power management](#) on page B3-32.

B7.6 Load-Exclusive and Store-Exclusive instruction usage restrictions

The Load-Exclusive and Store-Exclusive instructions are intended to work together as a pair, for example a LDREX/STREX pair or a LDREXB/STREXB pair. If the functions are used in different implementations, software must follow these rules:

R _{BHPN}	The exclusives support a single outstanding exclusive access for each PE thread that is executed. The architecture makes use of this by not requiring an address or size check as part of the <code>IsExclusiveLocal()</code> function.
R _{LHLG}	<p>If two StoreExc1 instructions are executed without an intervening LoadExc1 instruction the second StoreExc1 instruction returns a status value of 1. This means that:</p> <ul style="list-style-type: none">ARM recommends that, in a given thread of execution, every StoreExc1 instruction has a preceding LoadExc1 instruction associated with it. <p>It is not necessary for every LoadExc1 instruction to have a subsequent StoreExc1 instruction.</p>
R _{JXXS}	<p>An implementation of the Load-Exclusive and Store-Exclusive instructions can require that, in any thread of execution, the transaction size of a StoreExc1 instruction is the same as the transaction size of the preceding LoadExc1 instruction executed in that thread. If the transaction size of a StoreExc1 instruction is different from the preceding LoadExc1 instruction in the same thread of execution, behavior can be CONstrained UNPREDICTABLE with the following behavior:</p> <ul style="list-style-type: none">The StoreExc1 either passes or fails, and the status value returned by the StoreExc1 is UNKNOWN. <p style="text-align: center;">Note</p> <p>This means the StoreExc1 might pass for some instances of a LoadExc1/StoreExc1 pair with mismatched transaction sizes, and fail for other instances of a LoadExc1/StoreExc1 pair with mismatched transaction sizes.</p> <ul style="list-style-type: none">The block of data of the size of the larger of the transaction sizes used by the LoadExc1/StoreExc1 pair at the address accessed by the LoadExc1/StoreExc1 pair, is UNKNOWN. <p>This means software can rely on a LoadExc1/StoreExc1 pair to eventually succeed only if the LoadExc1 and the StoreExc1 have the same transaction size.</p>
R _{JJDF}	Software must, in any single thread of execution, avoid having any explicit memory accesses, System register updates, or cache maintenance instructions between the LoadExc1 instruction and the associated StoreExc1 instruction.
I _{RFXR}	Implementations can benefit from keeping the LoadExc1 and StoreExc1 operations close together in a single thread of execution. This minimizes the likelihood of the exclusive monitor state being cleared between the LoadExc1 instruction and the StoreExc1 instruction. Therefore, for best performance, ARM strongly recommends a limit of 128 bytes between LoadExc1 and StoreExc1 instructions in a single thread of execution.
R _{PKQF}	The architecture sets an upper limit of 2048 bytes on the exclusive reservation granule that can be marked as exclusive.
I _{PGGN}	For performance reasons, ARM recommends that objects that are accessed by exclusive accesses are separated by the size of the exclusive reservations granule.
R _{XPDN}	After taking a Data Abort exception, the state of the exclusive monitors is UNKNOWN.
R _{FCRN}	For the memory location accessed by a LoadExc1/StoreExc1 pair, if the memory attributes for a StoreExc1 instruction are different from the memory attributes for the preceding LoadExc1 instruction in the same thread of execution, behavior is CONstrained UNPREDICTABLE.
R _{DMJW}	The effect of a data or unified cache invalidate, clean, or clean and invalidate instruction on a local or global exclusive monitor that is in the Exclusive Access state is CONstrained UNPREDICTABLE, and the instruction might clear the monitor, or it might leave it in the Exclusive Access state. For address-based maintenance instructions, this also applies to the monitors of other PEs in the same Shareability domain as the PE executing the cache maintenance instruction, as determined by the Shareability domain of the address being maintained.

———— **Note** —————

ARM strongly recommends that implementations ensure that the use of such maintenance instructions by a PE in the Non-secure state cannot cause a denial of service on a PE in the Secure state.

R_{RR}TJ

In the event of repeatedly-contending LoadExc1/StoreExc1 instruction sequences from multiple PEs, an implementation must ensure that forward progress is made by at least one PE.

B7.7 Use of WFE and SEV instructions by spinlocks

I_{RJXQ}

WFE and SEV can assist with reducing power consumption and bus contention caused by PEs repeatedly attempting to obtain a spinlock. These instructions can be used at the application level but a complete understanding of what they do depends on a system level understanding of exceptions.

See also:

- [Power management on page B3-32.](#)

Chapter B8

The System Address Map

This chapter contains the following sections:

- *System address map* on page B8-164.
- *The System region of the system address map* on page B8-165.

B8.1 System address map

R_{FQSD} The address space is divided into the following regions:

Address	Region	Memory type	XN?	Cache	Information
0x00000000-0x1FFFFFFF	Code	Normal	-	WT ^a RA ^b	Typically ROM or flash memory.
0x20000000-0x3FFFFFFF	SRAM	Normal	-	WBWA ^c RA	SRAM region typically used for on-chip RAM.
0x40000000-0x5FFFFFFF	Peripheral	Device, nGnRE	XN ^d	-	On-chip peripheral address space.
0x60000000-0x7FFFFFFF	RAM	Normal	-	WBWA RA	Memory with write-back, write allocate cache attribute for L2/L3 cache support.
0x80000000-0x9FFFFFFF	RAM	Normal	-	WTRA	Memory with write-through cache attribute.
0xA0000000-0xBFFFFFFF	Device	Device, nGnRE	XN	-	Shared device space.
0xC0000000-0xDFFFFFFF	Device	Device, nGnRE	XN	-	Non-shared device space.
0xE0000000-0xE00FFFFFFF	System PPB	Device, nGnRE	XN	-	1 MB region reserved as the PPB. This supports key resources, including the System Control Space, and debug features.
0xE0100000-0xFFFFFFFF	System Vendor_SYS	Device, nGnRnE	XN	-	Vendor System Region.

- a. Write-through.
- b. Read-allocate.
- c. Write-back, write allocate.
- d. Memory with the Execute Never (XN) memory attribute.

R_{MBRB} An access that crosses a boundary is UNPREDICTABLE. This rule also applies to the 0xFFFFFFFF - 0x00000000 boundary.


See also:

- [The System region of the system address map on page B8-165.](#)
- In [Chapter B6 Memory Model](#):
 - [Address space on page B6-114.](#)
 - [Memory accesses on page B6-113.](#)
 - [General cache behavior on page B6-142.](#)

B8.2 The System region of the system address map

R_{JJGN}

In a PE with the Security Extension, the system region of the system address map is as follows:

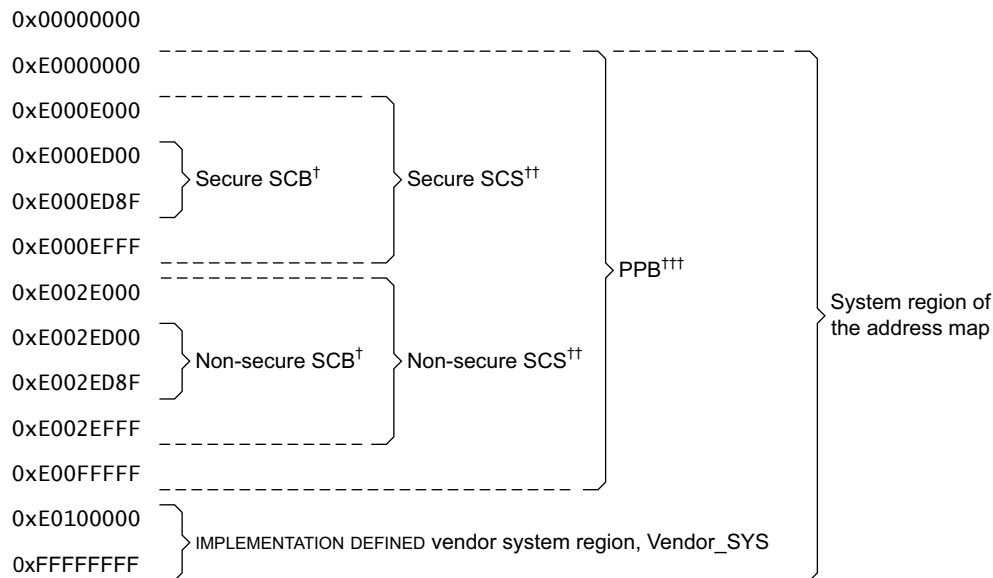

- † System Control Block (SCB).
- †† System Control Space (SCS).
- ††† Private Peripheral Bus (PPB).

In a PE without the Security Extension, the Non-secure SCS is RAZ/WI.

I_{FWLM}

ARM recommends that Vendor_SYS is divided as follows:

- 0xE0100000-0xFFFFFFFF is reserved.
- Vendor resources start at 0xF0000000.

R_{DQQS}

Unprivileged access to the PPB causes BusFault errors unless otherwise stated. Unprivileged accesses can be enabled to the Software Trigger Interrupt Register in the System Control Space by programming a control bit in the Configuration and Control Register.

See also:

- [System address map on page B8-164.](#)
- [The System Control Space \(SCS\) on page B8-166.](#)
- [STIR, Software Triggered Interrupt Register on page D2-1073.](#)
- [CCR, Configuration and Control Register on page D2-819.](#)
- [Debug resources on page B12-178.](#)

B8.3 The System Control Space (SCS)

R _{CQVK}	The System Control Space (SCS) provides registers for control, configuration, and status reporting.
R _{CFPK}	The Secure view of the NS alias is identical to the Non-secure view of normal addresses except for bits that can be modified.
R _{GLNG}	Privileged accesses to unimplemented registers are RES0.
R _{NDML}	Unprivileged accesses to unimplemented registers will generate a BusFault unless otherwise stated.

See also:

- [The System region of the system address map](#) on page B8-165.
- In [Chapter D2 Register Specification](#):
 - [System Control Block](#) on page D2-796.
 - [System Control Block \(NS alias\)](#) on page D2-801.
 - [Debug Control Block](#) on page D2-798.
 - [Debug Control Block \(NS alias\)](#) on page D2-803.
 - [STIR, Software Triggered Interrupt Register](#) on page D2-1073.
 - [SYST_CSR, SysTick Control and Status Register](#) on page D2-1076.
 - [Nested Vector Interrupt Controller](#) on page B11-173.
 - [The Memory Protection Unit](#) on page B8-163.

Chapter B9

The ARMv8-M Protected Memory System Architecture

This chapter specifies the architecture rules for the *Protected Memory System Architecture* (PMSAv-8), in particular for the *Memory Protection Unit* (MPU). It contains the following sections:

- [MPU definition on page B9-168.](#)
- [MPU operation on page B9-170.](#)

B9.1 MPU definition

R _{HBNG}	Memory attributes are determined from the default system address map or by using an MPU.
R _{TBPJ}	PMSAv8-M only supports a unified memory model. All enabled regions support instruction and data accesses.
R _{JVIC}	When the MPU is disabled or not present, accesses use memory attributes from the default system address map.
I _{WTCL}	Because the MPU_TYPE register is banked, it is permitted for implementations to have different number of MPU regions, including zero regions, in each Security state.
R _{QGVN}	All boundaries between address ranges with different security attributes must be aligned to 32-byte boundaries.
R _{RPKG}	The following units can provide security attribution information: <ul style="list-style-type: none">• A <i>security attribution unit</i> (SAU) inside the PE.• An <i>implementation defined attribution unit</i> (IDAU) external to the PE. The presence of such a unit is IMPLEMENTATION DEFINED,
R _{MGXN}	The attribution information from the SAU is used unless the IDAU specifies attributes with a higher security, in which case the IDAU attributes override the SAU attributes. This rule does not apply to architecturally defined ranges exempt from memory attribution.
R _{BLJT}	The behavior of the following address ranges is fixed, so they are exempt from memory attribution by both the SAU and IDAU: 0xF0000000 - 0xFFFFFFFF If the PE implements the Security Extension, this memory range is always marked as Secure and not Non-secure callable for instruction fetches. If the Security Extension is not present, this range is marked as Non-secure. Ranges exempt from checking security violation The following address ranges are marked with the Security state indicated by NS-Req, that is, the current state of the processor for non-debug accesses. This property sets the NS-Attr to NS-Req: 0xE0000000 - 0xE0002FFF: ITM, DWT, FPB. 0xE000E000 - 0xE000EFFF: SCS range. 0xE002E000 - 0xE002EFFF: SCS NS alias range. 0xE0040000 - 0xE0041FFF: TPIU, ETM. 0xE00FF000 - 0xE00FFFFF: ROM table. 0xE0000000 - 0xFFFFFFFF for instruction fetch only. Additional address ranges specified by the IDAU.

RVPWL

Security attribution and MPU check.



R_{NBFD}

When the SAU is enabled, an address is defined as matching a region in the SAU if the following is true:
SAU_REGIONn.BADDR <= Address <= SAU_REGIONn.LADDR.

R_{WGDK}

An address that matches multiple SAU regions is marked as Secure and not Not-secure callable regardless of the attributes specified by the regions that matched the address.

R_{GVFQ}

When the SAU is not enabled:

- Addresses are not checked against the SAU regions.
- The attribution of the address space is determined by the SAU_CTRL.ALLNS field.

See also:

- [System address map](#) on page B8-164.
- [MPU_CTRL, MPU Control Register](#) on page D2-1018.
- [SAU_CTRL, SAU Control Register](#) on page D2-1051.

B9.2 MPU operation

R _{BXCN}	MPU support in ARMv8-M is optional.
R _{PBPJ}	When the MPU is enabled, the PE can be configured to use the default system map when it processes NMI and HardFault exceptions.
R _{MCCL}	The default memory map can be configured to provide a background region for privileged accesses.
R _{DBBM}	The MPU divides the memory into regions.
R _{MNDS}	The number of supported regions is IMPLEMENTATION DEFINED.
R _{XGFK}	All regions are aligned to a multiple of 32 bytes.
R _{BPGB}	Privileged software can use the XN attribute in the MPU_RBAR to specify whether the PE can fetch and execute instructions from each region.
R _{MNSK}	Accesses to the <i>Private Peripheral Bus</i> (PPB) always use memory attributes from the default system address map.
R _{RPWB}	Exception vector reads from the Vector Address Table always use the default system address map.
R _{CPMW}	<p>The MPU is restricted in how it can change the default memory map attributes associated with System space, that is, for addresses 0xE0000000 and higher, in the following ways:</p> <ul style="list-style-type: none">• System space is always XN.• The MPU can map system space regions that default to Device-nGnRE to Device-nGnRnE.• The effect of remapping a System space region that defaults to Device memory as Normal memory is UNPREDICTABLE.
R _{DCHP}	<p>The following accesses generate a MemManage fault:</p> <ul style="list-style-type: none">• An access to an address that matches in more than one region.• An access that does not match all access conditions for that region.• An access that matches a background region or default memory map if the MPU is enabled. <p>Except that privileged accesses are permitted:</p> <ul style="list-style-type: none">• if MPU_CTRL.PRIVDEFENA == 1, or• if executing at a priority less than zero and HFNMIENA is set.
R _{GLNQ}	A memory access to an address that matches in more than one region, or does not match all access conditions of a region address match, with the MPU enabled, or a background or default memory map match, generates a precise fault.
R _{KMTF}	For data accesses, the MPU memory attribution and privilege checking uses the configuration registers that correspond to the current executing Security state of the PE.
R _{RLBR}	For instruction fetches, the MPU memory attribution and privilege checking uses the configuration registers associated with the address that is fetched.
R _{PLJG}	In a PE with the Security Extension, MPU_CTRL.HFNMIENA disables the MPU if the requested priority for the security domain that the MPU is associated with is negative.

See also:

- [System address map on page B8-164.](#)

Chapter B10

The System Timer, SysTick

This chapter contains the following section:

- [The system timer, SysTick on page B10-172.](#)

B10.1 The system timer, SysTick

R _{BQ} RG	In a PE without the Main and Security Extensions, either: <ul style="list-style-type: none">• No system timers are implemented.• One system timer, SysTick, is implemented.
R _P DDL	In a PE without the Main Extension but with the Security Extension, one of the following is true: <ul style="list-style-type: none">• No system timers are implemented.• One system timer, SysTick, is implemented. ICSR.STTNS determines which Security state owns the SysTick.• Two system timers are implemented:<ul style="list-style-type: none">— SysTick, Secure instance.— SysTick, Non-secure instance.
R _C NTG	In a PE with the Main Extension but without the Security Extension, one system timer, SysTick, is implemented.
R _X PCW	In a PE with the Main and Security Extensions, two system timers are implemented: <ul style="list-style-type: none">• SysTick, Secure instance.• SysTick, Non-secure instance.
I _D XSQ	There are the following SysTick registers: <ul style="list-style-type: none">• SysTick Control and Status Register (SYST_CSR).• SysTick Reload Value Register (SYST_RVR).• SysTick Current Value Register (SYST_CVR).• SysTick Calibration Value Register (SYST_CALIB). In a PE with the Security Extension and a SysTick instance dedicated to each Security state, these registers are banked.
I _V HDT	Each implemented SysTick is a 24-bit decrementing, wrap-on-zero, clear-on-write counter: <ul style="list-style-type: none">• When enabled, the counter counts down from the value in SYST_CVR. When it reaches zero, SYST_CVR is reloaded with the value held in SYST_RVR on the next clock edge.• Reading SYST_CVR returns the value of the counter at the time of the read access.• When the counter reaches zero, it sets SYST_CSR.COUNTFLAG to 1. Reading SYST_CSR.COUNTFLAG clears it to 0.• A write to SYST_CVR clears both SYST_CVR and SYST_CSR.COUNTFLAG to 0. SYST_CVR is then reloaded with the value held in SYST_RVR on the next clock edge.
R _T LGK	Writing the value zero to SYST_RVR disables the SysTick on the next wrap-on-zero. The value zero is held by the counter after the wrap. This is true even when SYST_CSR.ENABLE is 1.
R _T TFT	A write to SYST_CVR does not cause a SysTick exception.
I _V DJQ	Setting SYST_CSR.TICKINT to 1 causes the SysTick exception to become pending on the SysTick reaching zero.
I _P PGV	ARM recommends that before enabling a SysTick by SYST_CSR.ENABLE , software writes the required counter value to the SYST_RVR , and then writes to the SYST_CVR to clear the SYST_CVR to zero.
I _M MRQ	Software can optionally use SYST_CALIB.TENMS to scale the counter to other clock rates within the dynamic range of the counter.
R _Q SKV	When the PE is halted in Debug state, any implemented SysTicks do not decrement.
I _R WFQ	Each implemented SysTick is clocked by a reference clock, either the PE clock or an external system clock. It is IMPLEMENTATION DEFINED which clock is used as the external reference clock. ARM recommends that if an external system clock is used, the relationship between the PE clock and the external clock is documented, so that system timings can be calculated taking into account metastability, clock skew, jitter.

Chapter B11

Nested Vectored Interrupt Controller

This chapter specifies the architecture rules for the *Nested Vectored Interrupt Controller* (NVIC). It contains the following sections:

- [NVIC definition on page B11-174.](#)
- [NVIC operation on page B11-175.](#)

B11.1 NVIC definition

R_XIJQ	An ARMv8-M PE includes an integral interrupt controller.
R_FSGP	The NVIC behavior aligns with the behavior that the <i>ARM General Interrupt Controller</i> (ARM GIC) specification describes.
R_WQHG	The Interrupt Controller Type Register (ICTR) defines how many external interrupt lines are supported.

See also:

- [ICTR, Interrupt Controller Type Register](#) on page D2-966.

B11.2 NVIC operation

R _{SNVK}	It is IMPLEMENTATION DEFINED which NVIC interrupts are implemented.
R _{SGCR}	When a particular NVIC interrupt line is not implemented, its associated registers are reserved.
R _{WTFS}	ARMv8-M supports level-sensitive and pulse-sensitive interrupts.
R _{HVQO}	Pulse interrupt sources must be held long enough so that the PE clock can sample them reliably to ensure they are latched and become pending.
R _{RLCX}	A subsequent pulse can add the pending state to an active interrupt, making the status of the interrupt active and pending.
R _{RKFC}	Multiple pulses that occur during the active period only register as a single event for interrupt scheduling.
R _{PDPQ}	Pulses held for a clock period act like edge-sensitive interrupts.
R _{LWBW}	Edge-sensitive interrupts can become pending again while the interrupt is active.
R _{XVWM}	A pulse must be cleared before the assertion of AIRCR.VECTCLRACTIVE or the associated exception return. Otherwise the interrupt signal behaves as a level-sensitive input and the pending bit is asserted again.
R _{QDDK}	Level-based interrupts first become pending then make the interrupt active. The <i>Interrupt Service Routine (ISR)</i> then accesses the peripheral to cause it to deassert the interrupt.
R _{BNQO}	If the interrupt is still asserted on return from the ISR, it becomes pending again.
R _{QKFW}	All NVIC interrupts have a programmable priority value and an associated exception number.
R _{XNQW}	NVIC interrupts can be enabled and disabled by writing to their corresponding Interrupt Set-Enable or Interrupt Clear-Enable register bit field.
R _{CCVJ}	When an interrupt is disabled, interrupt assertion causes the interrupt to become pending but the interrupt cannot become active.
R _{XCLJ}	If an interrupt is active when it is disabled, it remains in the active state until this is cleared by a reset or an exception return.
I _{WGDJ}	An implementation can hard-wire interrupt enable bits to zero if the associated interrupt line does not exist.
I _{RSDJ}	An implementation can hard-wire interrupt enable bits to one if the associated interrupt line cannot be disabled.
R _{NRJV}	It is IMPLEMENTATION DEFINED for each interrupt line supported whether an interrupt supports either or both setting and clearing of the associated pending state under software control.

See also:

- [Exception numbers and exception priority numbers on page B4-46.](#)
- [Exception states on page B4-55.](#)
- [Priority model on page B4-56.](#)
- [Nested Vectored Interrupt Controller on page D2-796.](#)

Chapter B12

Debug

This chapter specifies the ARMv8-M debug rules. It contains the following sections:

- *About debug* on page B12-178.
- *Accessing debug features* on page B12-182.
- *Debug authentication interface* on page B12-184.
- *Multiprocessor support* on page B12-190.
- *CoreSight and identification registers* on page B12-191.
- *Debug event behavior* on page B12-192.
- *Exiting Debug state* on page B12-200.
- *Debug System registers* on page B12-201.

B12.1 About debug

B12.1.1 Debug feature overview

I_{KNWQ}

The debug architecture supports the following features:

- High-level trace using the ITM.
- Profiling various system events, including associated timing information.
- PC sampling and event counts associated with load and store operations, instruction folding, and performance statistics that are based on *cycles-per-instruction* (CPI) counts.
- Instruction trace, using an *Embedded Trace Macrocell* (ETM).
- Warm reset functionality to reset the PE and support debug of reset events.
- A control register that a debugger can write to halt the PE.
- An external signal to asynchronously halt the PE, which might be connected to a *Cross Trigger Interface* (CTI).
- Step functionality, with or without interrupt masking.
- Run functionality, with or without interrupt masking.
- For register access, reading and writing PE registers when software execution is halted.
- Access to exception-related information through the *System Control Space* (SCS) resources.
- The *BKPT* instruction to provide software breakpoints.
- Hardware breakpoints, and remapping of code memory locations.
- Hardware watchpoints.
- Access to all memory through the *Debug Access Port* (DAP).
- The ability to add other system debug features such as a bus monitor or cross-trigger facility.
- Application and data trace, typically through either a low pin-count *Serial Wire Viewer* (SWV) or a parallel trace port.

B12.1.2 Debug mechanisms

R_{HWCH}

ARMv8-M supports a range of invasive and non-invasive debug mechanisms.

The *invasive debug mechanisms* are:

- The ability to halt the PE. This provides a run-stop debug model.
- Debugging code using the DebugMonitor exception. This provides less intrusive debug than halting the PE.

The *non-invasive debug techniques* are:

- Generating application trace by writing to the *Instrumentation Trace Macrocell* (ITM), causing a low level of intrusion.
- Non-intrusive program trace and profiling.

I_{LBLF}

When the PE is halted, it is in *Debug state*.

I_{SXVR}

When the PE is not halted, it is in *Non-debug state*.

See also:

- [Accessing debug features on page B12-182](#).

B12.1.3 Debug resources

R_{TZVG}

In the system address map, debug resources are in the *Private Peripheral Bus* (PPB) region.

R_{FBHD} Except for the resources in the SCS, each debug component occupies a fixed 4KB address region.

R_{WXTK} The debug resources in the SCS are:

- The *Debug Control Block* (DCB).
- Debug controls in the *System Control Block* (SCB).

R_{SWTB} The ARMv8-M debug components are:

- The *Instrumentation Trace Macrocell* on page B13-204, only available if the Main Extension is implemented.
- The *Data Watchpoint and Trace unit* on page B13-210.
- The *Flash Patch and Breakpoint unit* on page B13-226.
- The *Embedded Trace Macrocell* on page B13-224.
- The *Trace Port Interface Unit* on page B13-225.
- The ROM table.

R_{FHRN} The following optional debug components are not part of the ARMv8-M architecture:

- The *Cross-Trigger Interface* (CTI).
- The CoreSight basic trace router (MTB).

R_{QCPL} The addresses of the debug resources are:

Address range	Debug resource
0xE0000000-0xE0000FFF	<i>Instrumentation Trace Macrocell</i> (ITM)
0xE0001000-0xE0001FFF	<i>Data Watchpoint and Trace</i> (DWT) unit
0xE0002000-0xE0002FFF	<i>Flash Patch and Breakpoint</i> (FPB) unit
0xE000ED00-0xE000EFFF	SCS
0xE000ED00-0xE000ED8F	<i>System Control Block</i> (SCB)
0xE000EDF0-0xE000EEFF	<i>Debug Control Block</i> (DCB)
0xE0040000-0xE0040FFF	<i>Trace Port Interface Unit</i> (TPIU), when not implemented as a shared resource, otherwise reserved
0xE0041000-0xE0041FFF	<i>Embedded Trace Macrocell</i> (ETM)
0xE0042000-0xE00FEFFF	IMPLEMENTATION DEFINED
0xE00FF000-0xE00FFFFF	ROM table

R_{WXRJ} The configuration of an implementation of an optional debug component is IMPLEMENTATION DEFINED.

R_{VMGD} ROM table entries identify which debug components are implemented.

See also:

- *Instrumentation Trace Macrocell* on page B13-204.
- *Data Watchpoint and Trace unit* on page B13-210.
- *Flash Patch and Breakpoint unit* on page B13-226.
- Chapter B8 *The System Address Map*.
- *Debug System registers* on page B12-201.
- *Trace Port Interface Unit* on page B13-225.
- *Embedded Trace Macrocell* on page B13-224.

- [ROM table on page B12-182.](#)
- [Accessing debug features on page B12-182.](#)

B12.1.4 Trace

R_{LJVL}

Trace can be generated by using the:

- *Embedded Trace Macrocell (ETM).*
- *Instrumentation Trace Macrocell (ITM), only available if the Main Extension is implemented.*
- *Data Watchpoint and Trace (DWT) unit, only available if the Main Extension is implemented.*

R_{NFVB}

A debug implementation that generates trace must include a trace sink, such as a TPIU, which exports the trace data from the device.

A TPIU can be either the ARMv8-M TPIU implementation, or an external system resource.

See also:

- [Chapter F1 ITM and DWT Packet Protocol Specification.](#)
- The applicable ETM Architecture Specification.

B12.1.5 Levels of debug

ISFSG The recommended debug implementation levels are:

Level	With Main Extension	Without Main Extension
Minimum	<p>Support for the DebugMonitor exception, including:</p> <ul style="list-style-type: none"> • The BKPT instruction. • DEMCR monitor debug features. • Monitor entry from External debug requests. • DFSR. <p>DHCSR, DCRSR, DCRDR, and the Halting debug features in DFSR and DEMCR are RES0. ID_DFR0 is RAZ.</p>	<p>No debug support.</p> <p>DFSR, DHCSR, DCRSR, DCRDR, and DEMCR are RES0. ID_DFR0 is RAZ.</p>
Basic	<p>Adds support for Halting debug with:</p> <ul style="list-style-type: none"> • Debug Access Port. • DHCSR, DCRSR, DCRDR, and the Halting debug features in DEMCR are implemented. • FPB with at least two breakpoints. Remap is optional if the Security Extension is not implemented. • DWT with at least: <ul style="list-style-type: none"> — One watchpoint, that supports instruction, data address, and data value matching. — DWT_PCSR. • Optional support for a CTI in a multiprocessor system. <p>This support is identified in ID_DFR0.</p>	<p>Adds support for Halting debug with:</p> <ul style="list-style-type: none"> • Debug Access Port. • SHCSR, DFSR, DHCSR, DCRSR, DCRDR, and DEMCR are implemented. Access from the PE is IMPLEMENTATION DEFINED. • FPB with at least two breakpoints. Remap is not implemented. • DWT with at least: <ul style="list-style-type: none"> — One watchpoint, that supports instruction and data address matching. — DWT_PCSR. • Optional support for a CTI in a multiprocessor system. <p>This support is identified in ID_DFR0.</p>
Comprehensive	<p>Adds basic trace support with:</p> <ul style="list-style-type: none"> • ITM. • DWT with: <ul style="list-style-type: none"> — Trace support. — Profiling support. — Cycle counter. • TPIU. 	<p>Not applicable without the Main Extension.</p>
Program trace	<p>Adds ETM.</p>	<p>Adds ETM and TPIU.</p>

B12.2 Accessing debug features

R _{WVSZ}	The mechanism by which an external debugger accesses the PE and system is IMPLEMENTATION DEFINED.
I _{QPHR}	A debugger can use a <i>Debug Access Port (DAP)</i> interface, such as that provided by the <i>ARM® Debug Interface v5 Architecture Specification (ADIv5)</i> , to interrogate a system for memory access ports (MEM-APs). The BASE register in a memory access port provides the address of the ROM table, or the first of a series of ROM tables in a ROM table hierarchy. The memory access port can then be used to fetch the ROM table entries. ARM recommends implementation of an ADIv5 DAP for compatibility with tools.
R _{WPGQ}	Writes from a DAP are complete when the DAP reports them as complete.
R _{WCQK}	For SCS registers, a write from a DAP is complete when the write has completed and the SCS register has been updated.
R _{JRHS}	Software configures and controls the debug model through memory-mapped registers. See also: <ul style="list-style-type: none"> • ROM table. • DAP access permissions on page B12-187. • The <i>ARM® Debug Interface v5 Architecture Specification</i>.

B12.2.1 ROM table

I _{XFVN}	The ROM table is a table of entries providing a mechanism to identify the debug infrastructure that is supported by the implementation.
I _{FWPG}	The ROM table indicates the implemented debug components, and the position of those components in the memory map. See the <i>ARM® Debug Interface v5 Architecture Specification</i> for the format of a ROM table entry.
I _{PHJ}	For an ARMv8-M ROM table, all address offsets are negative.
I _{RGVM}	The entry 0x00000000 is the end-of-table marker.
R _{BQSP}	Bit[0] of the ROM table entries indicates whether the corresponding unit is implemented and is accessible through the PPB at the indicated address. If the corresponding unit is not implemented, this bit has a value of 0.
R _{NDQW}	If a unit is implemented, debug registers can provide additional information about the implemented features of that unit.
R _{DPVG}	The format of the ROM table is:

Table B12-1 ARMv8-M DAP accessible ROM table

Offset	Value	Name	Description
0x000	0xFFFF0F03	ROMSCS	Points to the SCS at 0xE000E000.
0x004	0xFFFF02002 or 0xFFFF02003	ROMDWT	Points to the Data Watchpoint and Trace unit at 0xE001000.
0x008	0xFFFF03002 or 0xFFFF03003	ROMFPB	Points to the Flash Patch and Breakpoint unit at 0xE002000.
0x00C	0xFFFF01002 or 0xFFFF01003	ROMITM ^a	Points to the Instrumentation Trace unit at 0xE000000.
0x010	0xFFFF41002 or 0xFFFF41003	ROMTPIU ^b	Points to the Trace Port Interface Unit.
0x014	0xFFFF42002 or 0xFFFF42003	ROMETM ^b	Points to the Embedded Trace Macrocell unit.

Table B12-1 ARMv8-M DAP accessible ROM table (continued)

Offset	Value	Name	Description
0x018	0x00000000	End	End-of-table marker. It is IMPLEMENTATION DEFINED whether the table is extended with pointers to other system debug resources. The table entries always terminate with a null entry.
0x020-0xEFC	-	Not Used	Reserved for additional ROM table entries.
0xF00-0xFC8	-	Reserved	Reserved, must not be used for ROM table entries.
0xFCC	0x00000001	MEMTYPE	Bit[0] is set to 1 to indicate that resources other than those listed in the ROM table are accessible in the same 32-bit address space, using the DAP. Bits[31:1] of the MEMTYPE entry are RES0.
0xFD0	IMP DEF	PID4	CIDx values are fully defined for the ROM table, and are CoreSight compliant. PIDx values must be CoreSight compliant or RAZ.
0xFD4	0	PID5	
0xFD8	0	PID6	
0xFDC	0	PID7	
0xFE0	IMP DEF	PID0	
0xFE4	IMP DEF	PID1	
0xFE8	IMP DEF	PID2	
0xFEC	IMP DEF	PID3	
0xFF0	0x0000000D	CID0	
0xFF4	0x00000010	CID1	
0xFF8	0x00000005	CID2	
0xFFC	0x000000B1	CID3	

- a. Accesses cannot cause a non-existent memory exception.
- b. It is IMPLEMENTATION DEFINED whether a shared resource is managed by the local PE or a different resource.

See also:

- [CoreSight and identification registers on page B12-191.](#)

B12.3 Debug authentication interface

R _M CBM	The physical details of the debug authentication interface are IMPLEMENTATION DEFINED.
I _G WTN	The following pseudocode functions provide an abstracted description of the authentication interface: <ul style="list-style-type: none">ExternalInvasiveDebugEnabled().ExternalSecureInvasiveDebugEnabled().ExternalNoninvasiveDebugEnabled().ExternalSecureNoninvasiveDebugEnabled().
I _R CXR	This manual describes the authentication interface in terms of the CoreSight signals DBGEN , NIDEN , SPIDEN , and SPNIDEN .
I _S SWT	For an implementation using the CoreSight signals: <ul style="list-style-type: none">ExternalInvasiveDebugEnabled() returns TRUE if DBGEN is asserted.ExternalSecureInvasiveDebugEnabled() returns TRUE if both DBGEN and SPIDEN are asserted.ExternalNoninvasiveDebugEnabled() returns TRUE if either NIDEN or DBGEN is asserted.ExternalSecureNoninvasiveDebugEnabled() returns TRUE if both of the following conditions apply:<ul style="list-style-type: none">— Either NIDEN or DBGEN is asserted.— Either SPNIDEN or SPIDEN is asserted.
R _H VGN	For any implementation of the authentication interface, if ExternalInvasiveDebugEnabled() is FALSE, then ExternalSecureInvasiveDebugEnabled() must be FALSE.
R _J WCS	For any implementation of the authentication interface, if ExternalNoninvasiveDebugEnabled() is FALSE, then ExternalSecureNoninvasiveDebugEnabled() must be FALSE.
R _X CMD	For any implementation of the authentication interface, if ExternalInvasiveDebugEnabled() is TRUE, then ExternalNoninvasiveDebugEnabled() must be TRUE.
R _L CHH	For any implementation of the authentication interface, if ExternalSecureInvasiveDebugEnabled() is TRUE, then ExternalSecureNoninvasiveDebugEnabled() must be TRUE.
I _M SRG	Secure self-hosted debug is controlled by the authentication interface. The pseudocode function ExternalSecureSelfHostedDebugEnabled() provides an abstracted description of this authentication interface.
R _G LWM	Between a change to the debug authentication interface and a following CSO, it is UNPREDICTABLE whether the PE uses the old or the new values.

See also:

- [Halting debug authentication.](#)
- [DebugMonitor authentication on page B12-185.](#)
- [Non-invasive debug authentication on page B12-186.](#)
- [DAP access permissions on page B12-187.](#)

B12.3.1 Halting debug authentication

R _D MFG	Halting debug authentication is controlled by the DBGEN signal, and, if the Security Extension is implemented, the SPIDEN signal.
--------------------	---

R_{BCZM} If the Security Extension is not implemented, there are two Halting debug authentication modes:

DBGEN	DHCSR.S_HALT	Halting debug authentication mode
LOW	0	Halting is prohibited
HIGH	X	Halting is allowed
LOW	1	

R_{LDTR} If the Security Extension is implemented, there are three Halting debug authentication modes:

DBGEN	DHCSR.S_HALT	DHCSR.S_SDE	Halting debug authentication mode
LOW	0	X	Halting is prohibited in all states
HIGH	X	0	Halting is allowed in Non-secure state. Halting is prohibited in Secure state.
LOW	1		
HIGH	X	1	Halting is allowed
LOW	1		

R_{KCZR} If the Security Extension is implemented, **DHCSR.S_SDE** has a value of 0 if one or more of the following conditions is true:

- The PE is halted and the PE entered Debug state from Non-secure state when `SecureHaltingDebugEnabled()` was FALSE.
- The PE is not halted and `SecureHaltingDebugEnabled() == FALSE`.
- The PE is not halted and **DBGEN** is not asserted.

R_{FWJM} If the Security Extension is implemented, **DHCSR.S_SDE** has a value of 1 if one or more of the following conditions is true:

- The PE is halted and the PE entered Debug state from either:
 - Secure state.
 - Non-secure state when `SecureHaltingDebugEnabled()` was TRUE.
- The PE is not halted, **DBGEN** is asserted, and `SecureHaltingDebugEnabled() == TRUE`.

R_{BMRJ} If the Security Extension is implemented and `DAUTHCTRL.SPIDENSEL == 1`, the PE behaves as if **SPIDEN** has the value of `DAUTHCTRL.INTSPIDEN`.

R_{FXCB} When `DHCSR.C_DEBUGEN == 0` or the PE is in a state in which halting is prohibited, the PE must not enter Debug state.

R_{RKKB} When the PE is in a state in which halting is prohibited, if `DHCSR.C_HALT == 1` and `DHCSR.C_DEBUGEN == 1`, then `DHCSR.C_HALT` remains set unless it is cleared by a direct write to `DHCSR`. If the PE enters a state in which halting is allowed while `DHCSR.C_HALT` is set to 1, then the PE enters Debug state.

See also:

- `CanHaltOnEvent()`.

B12.3.2 DebugMonitor authentication

R_{MXTM} DebugMonitor authentication is only available if the Main Extension is implemented.

R_{LQCN} If the Security Extension is implemented, DebugMonitor authentication is controlled by the **SPIDEN** signal.

RWCWZ If the Security Extension is not implemented, there is only one DebugMonitor authentication mode, *DebugMonitor* allowed.

RRZXJ If the Security Extension is implemented, there are two DebugMonitor authentication modes, which are controlled by [DEMCR.SDME](#):

DEMCR.SDME	Target state for DebugMonitor exception	DebugMonitor authentication mode
0	Non-secure	Non-secure DebugMonitor
1	Secure	Secure DebugMonitor

RYFPK If the Security Extension is implemented and [DEMCR.SDME](#) == 1, [SHPR3.PRI_12](#) behaves as RES0 when accessed from Non-secure state.

RJVSC A direct write to [DEMCR](#) can set [DEMCR.MON_PEND](#) to 1 at any time to make the DebugMonitor exception pending or can set [DEMCR.MON_PEND](#) to 0 to remove a pending DebugMonitor exception.

RWGMB If the DebugMonitor group priority is greater than the current execution priority and [DEMCR.MON_EN](#) == 1, an External debug request that does not generate an entry to Debug state sets [DEMCR.MON_PEND](#) to 1.

RXPBN When [DEMCR.MON_PEND](#) == 1, the PE takes the DebugMonitor exception according to the exception prioritization rules, regardless of the value of [DEMCR.SDME](#) and [DEMCR.MON_EN](#).

RHXLX When set to 1, [DEMCR.MON_PEND](#) remains set to 1 until either the DebugMonitor exception is taken or a write sets the field to 0.

See also:

- [CanPendMonitorOnEvent\(\)](#).

B12.3.3 Non-invasive debug authentication

RGWXP Non-invasive authentication is controlled by the **NIDEN** signal and, if the Security Extension is implemented, the **SPNIDEN** signal.

RPHPR If the Security Extension is not implemented, there are two non-invasive debug authentication modes:

HaltingDebugAllowed()	NIDEN	Non-invasive debug authentication mode
FALSE	LOW	Non-invasive debug prohibited
	HIGH	Non-invasive debug allowed
TRUE	X	

RKWBT If the Security Extension is implemented, there are three non-invasive debug authentication modes:

NoninvasiveDebugAllowed()	DHCSR.S_SDE	SPNIDEN	Non-invasive debug authentication mode
FALSE	X	X	Non-invasive debug prohibited in all states
TRUE	0	LOW	Non-invasive debug of only Non-secure operations allowed. Non-invasive debug of Secure operations prohibited.
		HIGH	Non-invasive debug allowed
	1	X	

I _{NPSH}	If <code>DAUTHCTRL.SPNIDENSEL == 1</code> , the PE behaves as if <code>SPNIDEN</code> has the value of <code>DAUTHCTRL.INTSPNIDEN</code> .
R _{LXRK}	The PE must not generate any trace or profiling data when non-invasive debug is prohibited in all states.
R _{VYGT}	If the Security Extension is implemented and non-invasive debug of Secure operations is prohibited, the PE must not generate any trace or profiling data that contains secure information.
R _{TWDH}	If non-invasive debug is prohibited in the current Security state, an ETM must behave as if it is disabled.

See also:

- [NoninvasiveDebugAllowed\(\)](#).
- [SecureNoninvasiveDebugAllowed\(\)](#).
- [DWT unit operation on page B13-211](#).


B12.3.4 DAP access permissions

All types of debug allowed

R _{VZKT}	When halting and non-invasive debug are both allowed, regardless of the value of <code>DHCSR.S_SDE</code> , the external debugger can access the whole physical address space.
R _{FFPN}	If the Security Extension is implemented, the DAP must be capable of requesting Secure and Non-secure accesses.
R _{JHBC}	If the Security Extension is implemented, <code>DHCSR.S_SDE == 1</code> , and the DAP requests a Secure access, NS-Req is set to Secure.
R _{LVBG}	If the Security Extension is implemented and either <code>DHCSR.S_SDE == 0</code> or the DAP requests a Non-secure access, NS-Req set to Non-secure.

R_{WMRR}

DAP accesses are checked by the IDAU and the SAU, if applicable. That is, if NS-Req on a DAP access specifies Non-secure access, and the IDAU or SAU prohibits Non-secure access to the address, an error response is returned to the DAP.

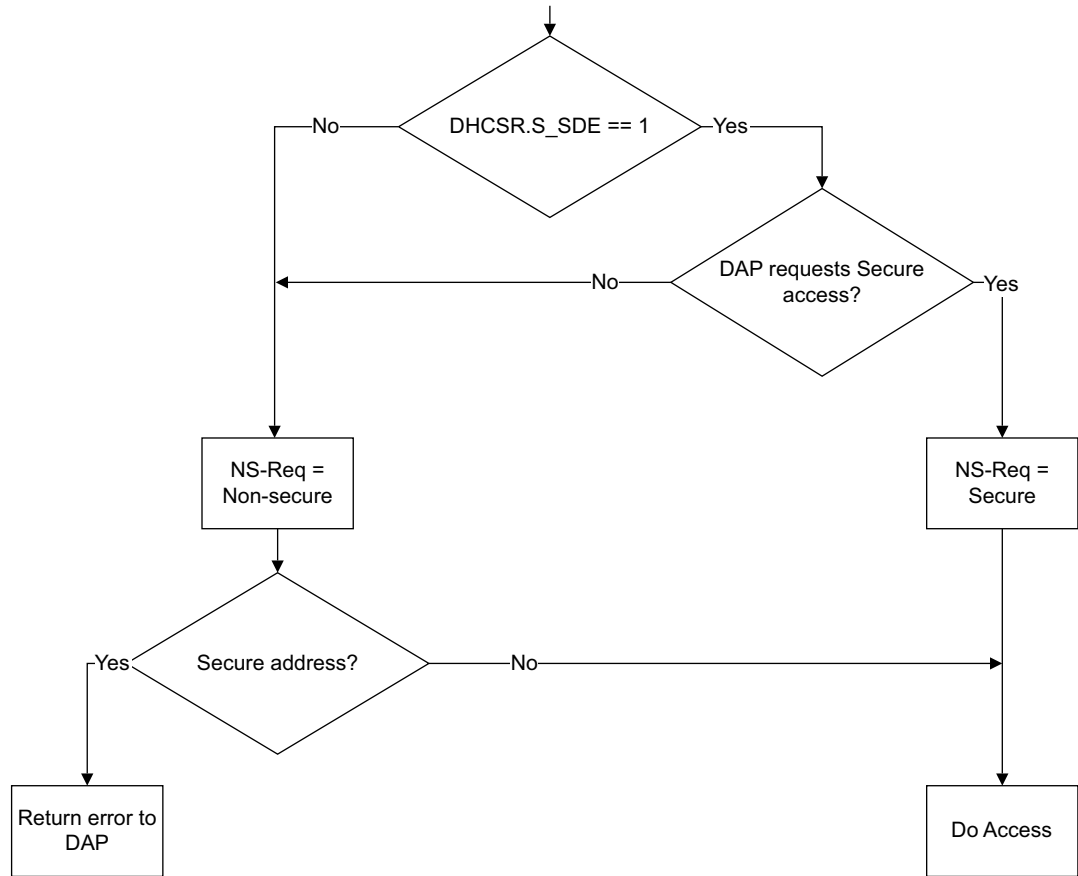

R_{VTTN}

DAP accesses are not checked by the MPU.

R_{SSVN}

If the Security Extension is implemented, permitted DAP accesses to banked SCS registers in the range 0xE000E000-0xE000EFFF are affected by the values of [DHCSR.S_SDE](#), [DSCSR.SBRSELEN](#), and [DSCSR.SBRSEL](#), as well as by the current Security state of the PE. The following table shows the effect of these factors on the banked register that is accessed.

DHCSR.S_SDE	DSCSR.SBRSELEN	DSCSR.SBRSEL	Current Security state of the PE	Banked register accessed
0	X	X	X	Non-secure
1	1	0	X	Non-secure
		1	X	Secure
	0	X	Non-secure	Non-secure
		X	Secure	Secure

R_{HXMG}

Permitted DAP accesses to the region 0xE002E000-0xE002EFFF are RAZ/WI if the access is privileged and return an error if the access is unprivileged.

Only some types of debug allowed

I _{NLBP}	In this section <i>All debug is prohibited</i> means that both halting and non-invasive debug are prohibited in all Security states. This does not mean that DebugMonitor is prohibited.
I _{QMVV}	In this section <i>Only non-invasive debug is allowed</i> means that halting is prohibited in all Security states and non-invasive debug is allowed in at least Non-secure state.
I _{TKVL}	In this section <i>No access</i> means that the access is blocked. Blocked accesses return an error response to the DAP. For a read, the DAP returns an UNKNOWN data value.
R _{DVSN}	The DAP access permissions are:

Address range	Region or registers	Debug authentication mode	
		All debug prohibited	Only non-invasive debug allowed
0x00000000-0xDFFFFFFF	Rest of memory	No access	No access
0xE0000000-0xE00FFFFF	PPB		
0xE00xxFB0-0xE00xxFB7 ^a	CoreSight Software Lock registers	No access	RW
0xE00xxFD0-0xE00xxFFF ^b	All ID registers	RO	RO
0xE0000000-0xE0000FCF	ITM	No access	RW
0xE0001000-0xE0001FCF	DWT	No access	RW
0xE0040000-0xE0040FFF	TPIU	RW	RW
0xE0041000-0xE0041FFF	ETM	RW	RW
0xE0042000-0xE00FEFFF	IMPLEMENTATION DEFINED	IMPLEMENTATION DEFINED	IMPLEMENTATION DEFINED
0xE00FF000-0xE00FFFFFFF	ROM table	RO	RO
All other PPB regions and registers		No access	No access
0xE0100000-0xFFFFFFFF	Vendor_SYS	No access	RW

- For each debug component implementing the CoreSight Software Lock registers. These registers are optional.
- For each debug component implementing the CoreSight ID registers. These registers are optional.

I _{PQSV}	<p>The architecture does not describe how a DAP requests Secure or Non-secure memory accesses. In the recommended ADIv5 Memory Access Port (MEM-AP), ARM recommends that:</p> <ul style="list-style-type: none"> CSW[30], CSW.Prot[6], selects a Secure or Non-secure access: <ul style="list-style-type: none"> 0 Request a Secure access. 1 Request a Non-secure access. CSW[23], CSW.SPIDEN, is Read-As-One. This is because the DAP can always request a Secure access.
I _{DPHD}	In a CoreSight DAP, the SPIDEN input to the ARMv8-M MEM-AP is independent of the SPIDEN input of the PE, and should be tied HIGH.

B12.4 Multiprocessor support

R_{QXLS} Systems that support debug of more than one PE, either within a single device or as heterogeneous PEs in a more complex system, require each PE to support all of the following to enable cross-triggering of debug events between PEs:

- An external debug request.
- A cross-halt event.
- An external restart request.

Support for these features is OPTIONAL in other systems.

See also:

- [External debug request](#).
- [Cross-halt event](#).
- [External restart request](#).

B12.4.1 External debug request

R_{XZCP} When the PE is in Non-debug state, an external agent can signal an external debug request.

R_{GTGX} An external debug request can cause a debug event, that causes either:

- Entry to Debug state.
- If the Main Extension is implemented, a DebugMonitor exception.

R_{FGCV} The PE ignores external debug requests when it is in Debug state.

R_{BXRD} If the Security Extension is implemented, then when `DHCSR.C_DEBUGEN == 0` or the PE is in a state in which halting is prohibited, an External debug request does not generate an entry to Debug state and is ignored if no DebugMonitor exception is generated.

See also:

- [Debug event behavior on page B12-192](#).
- `DFSR.EXTERNAL`.

B12.4.2 Cross-halt event

R_{DLCV} When the PE enters Debug state, it signals to an external agent that it is entering Debug state.

B12.4.3 External restart request

R_{ZKVV} When the PE is in Debug state, an external agent can signal an external restart request that causes the PE to exit Debug state.

R_{WJST} An external restart request is not ordered with respect to accesses to memory-mapped registers. It is UNPREDICTABLE whether an access to a memory-mapped register from a DAP completes before an external restart request. Therefore, a debugger must ensure that any read or write of a memory-mapped register by the DAP completes before issuing an external restart request.

R_{NJQN} The PE ignores external restart requests when it is in Non-debug state.

See also:

- [Exiting Debug state on page B12-200](#).

B12.5 CoreSight and identification registers

I_{CMLH} ARM recommends that CoreSight-compliant ID registers are implemented to allow identification and discovery of the components to a debugger.

R_{CBCM} The address spaces that are reserved in each of the debug components for IMPLEMENTATION DEFINED ID registers and CoreSight compliance are:

Debug component	Space reserved for ID registers	Space reserved for CoreSight compliance
ITM	0xE0000FD0-0xE0000FFC	0xE0000FA0-0xE0000FCC
DWT	0xE0001FD0-0xE0001FFC	0xE0001FA0-0xE0001FCC
FPB	0xE0002FD0-0xE0002FFC	0xE0002FA0-0xE0002FCC
SCS	0xE000EFD0-0xE000EFFC	0xE000EFA0-0xE000EFCC
TPIU	0xE0040FD0-0xE0040FFC	0xE0040FA0-0xE0040FCC
ETM	0xE0041FD0-0xE0041FFC	0xE0041FA0-0xE0041FCC
ROM table	0xE00FFFD0-0xE00FFFC	0xE00FFFA0-0xE00FFFC

R_{VWSX} For the ROM table, the ID register space must be used for a set of CoreSight-compliant ID registers.

R_{HXDK} For all components other than the ROM table, if the registers in the ID register space are not used for ID registers they must be RAZ.

R_{VQPM} If CoreSight-compliant ID registers are implemented, the Class field in Component ID Register 1 must be:

- 0x1 for the ROM table.
- 0x9 for other components.

I_{HQSR} The Part number in the PIDR registers should be assigned a unique value for each implementation, as with all other CoreSight components.

CoreSight permits that two or more functionally different components are permitted to share the same Part number, so long as they have different values of the DEVTYPE or DEVARCH registers.

I_{CTBF} The Part number in the PIDR registers do not need to be unique for different implementation options of the same part.

B12.6 Debug event behavior

B12.6.1 About debug events

ICBWT An event that is triggered for debug reasons is known as a *debug event*.

R_VHVP A debug event that is not ignored causes one of the following to occur:

- Entry to Debug state.
- If the Main Extension is implemented, a DebugMonitor exception.
- A HardFault exception.
- An unrecoverable error.

R_MNKP The HardFault exceptions or unrecoverable errors that are caused by debug events are generated by:

- A [BKPT](#) instruction that is executed when the PE can neither halt nor generate a DebugMonitor exception.
- In some circumstances, the FPB.

R_WCPW The debug events are:

Table B12-2 Debug events

Debug event	Actions
Step request	Halt or DebugMonitor
Halt request	Halt
Breakpoint	Halt, DebugMonitor, or HardFault
Watchpoint	Halt or DebugMonitor
Vector catch	Halt only
External	Halt or DebugMonitor

R_LDRZ The [DFSR](#) contains a status bit for each debug event. These bits are set to 1 when a debug event causes the PE to halt or generate a DebugMonitor exception, and are then write-one-to-clear.

The following table shows which bit is set for each debug event.

Table B12-3 Debug events

Event cause	DFSR bit
Step request	HALTED
Halt request	HALTED
Breakpoint	BKPT
Watchpoint	DWTTRAP
Vector catch	VCATCH
External	EXTERNAL

R_HNRV It is IMPLEMENTATION DEFINED whether the [DFSR](#) debug event bits are updated when an event is ignored.

I_NSMV Debug events are either synchronous or asynchronous.

R_VSVN	<p>The synchronous debug events are:</p> <ul style="list-style-type: none"> • Breakpoint debug events, caused by execution of a BKPT instruction or by a match in the FPB. • Vector catch debug events, caused when one or more DEMCR.VC_* bits are set to 1, and the PE takes the corresponding exception. • Step debug events, caused by DHCSR.C_STEP or DEMCR.MON_STEP.
R_PVGM	A single instruction can generate several synchronous debug events.
R_WJFB	Synchronous debug events are associated with the instruction that generated them and are taken instead of executing the instruction. The PE does not generate any other synchronous exception or debug event that might have occurred as a result of executing the instruction.
R_RNRD	The Step debug event is taken on the instruction following the instruction being stepped. This means that prioritization of the event applies relative to any other exception or debug event for the following instruction, not for the instruction being stepped.
R_JSPS	<p>If multiple synchronous debug events and exceptions are generated on the same instruction, they are prioritized as follows:</p> <ol style="list-style-type: none"> 1. Halt request (halting only), including where DHCSR.C_HALT is set by DHCSR.C_STEP of the previous instruction. 2. Highest-priority pending exception that is eligible to be taken. If the Main Extension is implemented, this might be a DebugMonitor exception, if DEMCR.MON_PEND == 1. This includes where DEMCR.MON_PEND is set by DEMCR.MON_STEP of the previous instruction. 3. Vector catch. 4. Fault from an instruction fetch, including synchronous BusFault error. 5. Breakpoint that is signaled by an FPB unit. 6. BKPT instruction or other exception that results from decoding the instructions. This includes the cases where exceptions from the instruction are UNDEFINED, an unimplemented or disabled coprocessor is targeted, or the EPSR.T bit has a value of 1. 7. Other synchronous exception that is generated by executing the instruction, including an exception that is generated by a memory access that is generated by the instruction.
R_BQVF	The highest-priority synchronous debug event is reported in the DFSR .
R_FWQQ	It is UNPREDICTABLE whether synchronous debug events that occur on the same instruction as a debug event with a higher priority are reported in the DFSR .
R_TKRS	<p>The asynchronous debug events are:</p> <ul style="list-style-type: none"> • Watchpoint debug events caused by a match in the DWT, including instruction address match watchpoints. • Halt request debug events, where either <ul style="list-style-type: none"> — A debugger write that has set DHCSR.C_HALT to 1 and C_DEBUGEN set to 1. — A software write that sets DHCSR.C_HALT to 1 when C_DEBUGEN was set to 1. • External debug request debug events caused by assertion of an IMPLEMENTATION DEFINED external debug request.
R_MRMC	When DHCSR.C_DEBUGEN == 0 or the PE is in a state in which halting is prohibited, DHCSR.C_HALT and DHCSR.C_STEP are ignored, and the PE behaves as if these bits are zero.

See also:

- [Halting debug on page B12-194.](#)
- [DebugMonitor exception on page B12-195.](#)
- [Vector catch on page B12-198.](#)
- [BKPTInstrDebugEvent\(\)](#).

Halting debug

R_WLFCF	Setting the <code>DHCSR.C_DEBUGEN</code> bit to 1 enables Halting debug.
R_RZTGTG	A debug event sets <code>DHCSR.C_HALT</code> to 1 if all of the following conditions apply: <ul style="list-style-type: none">• <code>DHCSR.C_DEBUGEN</code> == 1.• Unless otherwise stated, halting is allowed.
R_THLS	If <code>DHCSR.C_HALT</code> has a value of 1 and halting is allowed, the PE halts and enters Debug state.
R_FKWB	A debug event that sets <code>DHCSR.C_HALT</code> to 1 pends entry to Debug state.
R_FCCW	If the Security Extension is implemented, a debug event might set <code>DHCSR.C_HALT</code> and remain pending through execution in Secure state, which might not be a finite time. If halting is prohibited in Secure state and allowed in Non-secure state, then on transition from Secure to Non-secure state by an exception entry, exception return, Non-secure function call or function return, if <code>DHCSR.C_HALT</code> has a value of 1, the PE must halt and enter Debug state before the first instruction executed in Non-secure state completes its execution.
R_VDPD	If <code>DHCSR.C_HALT</code> has a value of 1 or <code>EDBGRQ</code> is asserted before a Context Synchronization Operation (CSO), and halting is allowed after the CSO, then the PE must halt and enter Debug state before the first instruction following the CSO completes its execution.
R_JXQF	<code>DFSR</code> is updated at the same time as the PE sets <code>DHCSR.C_HALT</code> to 1.
R_TXWB	If an instruction that is being stepped or an instruction that generates a debug event reads <code>DFSR</code> or <code>DHCSR</code> , the value that is read for the relevant <code>DFSR</code> bit or for <code>DHCSR.C_HALT</code> is UNKNOWN.
R_FRJC	For asynchronous debug events, if halting is allowed, the PE must enter Debug state in finite time.
R_VJKX	Entering Debug state has no architecturally defined effect on the Event Register and exclusive monitors.
I_JNGH	<code>DHCSR.C_SNAPSTALL</code> allows imprecise entry into the Debug state, for example by forcing any stalled load or store instructions to be abandoned.
R_FKXH	Before leaving Debug state caused by an imprecise entry the PE must reset the system.
R_DVLN	To transfer a word to R0 - R12, to a special-purpose register, or to a Floating-point extension register, a debugger: <ol style="list-style-type: none">1. Writes the required word to <code>DCRDR</code>.2. Writes to the <code>DCRSR</code>, with the <code>REGSEL</code> value indicating the required register, and the <code>REGWnR</code> bit set to one to indicate a write access. This clears the <code>DHCSR.S_REGRDY</code> bit to zero.3. If required, polls <code>DHCSR</code> until <code>DHCSR.S_REGRDY</code> reads-as-one. This shows that the PE has transferred the <code>DCRDR</code> value to the selected register.
R_BBBK	To transfer a word from R0 - R12, special-purpose register, or Floating-point extension register, a debugger: <ol style="list-style-type: none">1. Writes to <code>DCRSR</code>, with the <code>REGSEL</code> value indicating the required register, and the <code>REGWnR</code> bit as zero to indicate a read access.2. Polls <code>DHCSR</code> until <code>DHCSR.S_REGRDY</code> reads-as-one. This shows that the PE has transferred the value of the selected register to <code>DCRDR</code>.3. Reads the required value from <code>DCRDR</code>.
R_QDCP	In Debug state, writing to <code>DCRDR</code> clears the <code>DHCSR.S_REDGRDY</code> bit to zero, and the PE then sets the bit to 1 when the transfer between the <code>DCRDR</code> and R0 to R12, special-purpose register, or Floating-point extension register completes.
R_JKBB	When using this mechanism to write to R0 - R12, special-purpose registers, or Floating-point extension registers all bits of the xPSR registers are fully accessible. The effect of writing an illegal value is UNPREDICTABLE.
I_RXQB	This mechanism differs from the behavior of <code>MSR</code> or <code>MRS</code> instruction accesses to the xPSR, where some bits are ignored on writes.

RQLRN	The debugger can write to the EPSR.IT bits. If the debugger does this, it must write a value consistent with the instruction to be executed on exiting Debug state, otherwise instruction execution will be UNPREDICTABLE.
RRCXV	The EPSR.IT bits must be zero on exit from Debug state if the instruction indicated by DebugReturnAddress is outside an IT block.
IRRFN	The debugger can always set FAULTMASK to one, but doing so might cause unexpected behavior on exit from Debug state. An MSR instruction cannot set FAULTMASK to 1 when the execution priority is -1 or higher.
RXRRQ	The debugger can write to the ESPR.ICI bits, and on exiting Debug state any interrupted LDM or STM instruction will use these new values. Clearing the ICI bits to zero will cause the interrupted LDM or STM instruction to restart or continue.
RRTST	The Debugger can write to the DebugReturnAddress, and on exiting Debug state the PE starts executing from executing from the updated address. The Debugger must ensure the EPSR.IT bits and the EPSR.ICI bits are consistent with the new DebugReturnAddress.
RGGMJ	DebugReturnAddress is the address of the first instruction to be executed on exit from Debug state. This address indicates the point in the execution stream where the debug event was invoked. For a breakpoint this is the address of the breakpointed instruction. For all other debug events DebugReturnAddress is the address of the first instruction that both: <ul style="list-style-type: none"> • In a simple sequential execution of the program, executes after the instruction that caused the debug event. • Has not been executed, where the PE has executed all instructions that are earlier in a simple sequential execution of the program than the instruction indicated by DebugReturnAddress.
RXCCB	Bit[0] of a DebugReturnAddress value is RAZ/SBZ. When writing a DebugReturnAddress, writing bit [0] of the address does not affect the EPSR.T bit.

See also:

- [DHCSR, Debug Halting Control and Status Register on page D2-866](#)
- [Debug stepping on page B12-196](#)

DebugMonitor exception

IDPCC	The DebugMonitor exception is only available if the Main Extension is implemented.
RZBSJ	The DebugMonitor exception is enabled when the DEMCR.MON_EN bit is set to 1.
RPLPF	A debug event sets DEMCR.MON_PEND to 1 if all of the following conditions apply: <ul style="list-style-type: none"> • The debug event supports generating DebugMonitor exceptions and does not generate an entry to Debug state. • DEMCR.MON_EN == 1. • The DebugMonitor group priority is greater than the current execution priority.
RXLKQ	If a Debug event does not generate an entry to Debug state, DEMCR.MON_EN is set to 1 and the DebugMonitor group priority is less than or equal to the current execution priority: <ul style="list-style-type: none"> • The PE escalates a breakpoint debug event that is generated by executing a BKPT instruction to a HardFault. • There are UNPREDICTABLE circumstances in which the breakpoint generated by the FPB can be escalated to a HardFault. • The PE might set DEMCR.MON_PEND to 1 for a watchpoint debug event. • The PE ignores the other debug events.
RCHXQ	A debug event that sets DEMCR.MON_PEND to 1 pending a DebugMonitor exception.
RVSPX	DEMCR.MON_PEND is cleared to 0 when the PE takes a DebugMonitor exception. This means that a value of 1 for DEMCR.MON_PEND might never be observed for a synchronous DebugMonitor exception.

R _{BRXT}	DFSR is updated at the same time as the PE sets DEMCR.MON_PEND to 1.
R _{BKHP}	If an instruction that is being stepped or that generates a debug event reads DFSR or DEMCR, the value that is read for the relevant DFSR bit or for DEMCR.MON_PEND is UNKNOWN.
R _{VFLQ}	For asynchronous debug events, if taken as a DebugMonitor exception, and if the current priority is lower than the DebugMonitor group priority, a DebugMonitor exception must be taken in finite time.

See also:

- [DWT unit operation on page B13-211.](#)
- [FPB unit operation on page B13-226.](#)

B12.6.2 Debug stepping

R _{HMCN}	The ARMv8-M architecture supports debug stepping in both Halting debug and monitor debug.
R _{THTG}	It is IMPLEMENTATION DEFINED whether stepping a WFE or WFI instruction causes the WFE or WFI instruction to: <ul style="list-style-type: none">• Retire and take the debug event.• Go into a sleep state and take the debug event only when another wake up event occurs.
R _{LLVC}	If a debug event wakes a WFE or WFI instruction, then on taking the debug event, the instruction has retired.

See also:

- [Halting debug stepping.](#)
- [Debug monitor stepping on page B12-197.](#)

Halting debug stepping

I _{QMXC}	A debugger can use Halting debug stepping to exit from Debug state, execute a single instruction, and then reenter Debug state.
R _{SWKC}	Halting debug stepping is active when all of the following apply: <ul style="list-style-type: none">• DHCSR.C_DEBUGEN is set to 1, Halting debug is enabled, and halting is allowed.• DHCSR.C_STEP is set to 1, halting stepping is enabled.• The PE is in Non-debug state.
R _{ZVKS}	When the PE exits Debug state and Halting debug stepping becomes active, the PE performs a Halting debug step as follows: <ol style="list-style-type: none">1. Performs one of the following:<ul style="list-style-type: none">• Executes the next instruction without generating any exception.• Takes any pending exception entry of sufficient priority.• Executes the next instruction, generating a synchronous exception, that is taken. Only one exception can be taken, that is, only a single PushStack() update can occur in a step sequence.2. Sets DFSR.HALTED to 1. A read of the DFSR.HALTED bit performed by an instruction that is executed by stepping returns an UNKNOWN value.3. Sets DHCSR.C_HALT to 1. A read of DHCSR.C_HALT performed by an instruction that is executed by stepping returns an UNKNOWN value.4. Returns to Debug state, if halting is still allowed.
I _{LTRX}	The debugger can optionally set the DHCSR.C_MASKINTS bit to 1 to prevent PendSV, SysTick, and external configurable interrupts from being taken. When DHCSR.C_MASKINTS is set to 1, if a permitted exception becomes active, the PE steps into the exception handler and halts before executing the first instruction of the associated exception handler.

- RZDYR If `DHCSR.C_DEBUGEN == 0` or `HaltingDebugEnabled() == FALSE`, `DHCSR.C_MASKINTS` and `DHCSR.C_SNAPSTALL` are ignored and the PE behaves as if these bits are zero.
- R_FWSN If `DHCSR.C_DEBUGEN == 1`, `DHCSR.S_SDE == 0`, `HaltingDebugEnabled() == TRUE`, and the Security Extension is implemented:
- `DHCSR.C_MASKINTS` is ignored for exceptions targeting Secure state.
 - `DHCSR.C_SNAPSTALL` ignores writes from the debugger.
- R_MBCB `DHCSR.{C_HALT, C_STEP, C_MASKINTS}` can be written in a single write to `DHCSR`, as follows:

Table B12-4 Debug stepping control using the DHCSR

DHCSR write ^a			Effect
C_HALT	C_STEP	C_MASKINTS	
0	0	0	Exit Debug state and start instruction execution. Exceptions can become active ^b .
0	0	1	Exit Debug state and start instruction execution. PendSV, SysTick and, external configurable interrupts are disabled, otherwise exceptions can become active ^b .
0	1	0	Exit Debug state, step an instruction and halt. Exceptions can become active ^b .
0	1	1	Exit Debug state, step an instruction and halt. PendSV, SysTick and, external configurable interrupts are disabled, otherwise exceptions can become active ^b .
1	x	x	Remain in Debug state

a. Assumes `DHCSR.C_DEBUGEN` and `DHCSR.S_HALT` are both set to 1 when the write occurs, meaning the PE is halted.

b. That is, exceptions become active, based on their configuration, according to the exception priority rules.

R_CLWK When `DHCSR.C_DEBUGEN` is 1 and `DHCSR.S_HALT` is 0, meaning the PE is in Non-debug state with Halting debug enabled, the effect of modifying `DHCSR.C_STEP` or `DHCSR.C_MASKINTS` is UNPREDICTABLE.

R_PTHV When `DHCSR.C_DEBUGEN` is 0, the PE ignores the values of `DHCSR.C_HALT`, `DHCSR.C_STEP` and `DHCSR.C_MASKINTS`, and these values are UNKNOWN on `DHCSR` reads.

Debug monitor stepping

IDXCT A debugger can use debug monitor stepping to return from the DebugMonitor exception handler, execute a single instruction, and then reenter the DebugMonitor exception handler.

R_MLRM Debug monitor stepping is active when all of the following apply:

- `DHCSR.C_DEBUGEN` is set to 0 or the PE is in a state in which halting is prohibited.
- `DEMCR.MON_EN` is set to 1, that is monitor debug is enabled.
- `DEMCR.MON_STEP` is set to 1, that is monitor stepping is enabled.
- `DEMCR.SDME == 1` or the instruction was executed in Non-secure state or the exception was taken from Non-secure state.
- Execution priority is below the priority of the DebugMonitor exception when the instruction was executed or below the exception taken.

R _{MHKQ}	<p>When the PE returns from an exception and debug monitor stepping becomes active, the PE performs a debug monitor step as follows:</p> <ol style="list-style-type: none">1. Performs one of the following:<ul style="list-style-type: none">• Executes the next instruction without generating any exception.• Takes any pending exception entry of sufficient priority.• Executes the next instruction, generating a synchronous exception that is taken. Only one exception can be taken, that is, only a single PushStack() can be stepped.2. If the execution priority is still below the priority of the DebugMonitor exception, set the DEMCR.MON_PEND and DFSR.HALTED bits to 1.3. Takes any pending exception of sufficient priority. If, after taking a pending exception of sufficient priority, any exceptions other than the DebugMonitor exception are pending, the normal rules for exception prioritization apply. This means that another exception with a higher priority than the DebugMonitor exception might preempt execution.
I _{GPSX}	<p>In all other cases, the DebugMonitor exception preempting execution returns control to the DebugMonitor handler. Unless that handler clears DEMCR.MON_STEP to 0, returning from the handler performs the next debug monitor step.</p>
I _{KPKX}	<p>If, after the debug monitor stepping process, the taking of an exception means that the execution priority is no longer below that of the DebugMonitor exception, the values of DEMCR.MON_STEP and DEMCR.MON_PEND mean that debug monitor stepping process continues when execution priority falls back below the priority of the DebugMonitor exception.</p>

B12.6.3 Vector catch

I _{TVRX}	<p>Vector catch is the mechanism for generating a debug event and entering Debug state on entry to a particular exception handler or reset.</p>
R _{JCXR}	<p>Vector catching is only supported by Halting debug.</p>
R _{GPLH}	<p>The conditions for a vector catch, other than reset vector catch, are:</p> <ul style="list-style-type: none">• DHCSR.C_DEBUGEN == 1 and halting is allowed.• The associated vector catch enable bit, one of DEMCR[11:4] in the Main Extension or DEMCR[10] without the Main Extension, is set to 1.• An exception is taken to the relevant exception handler. The associated fault status register status bit is set to 1. <p>When these conditions are met, the PE sets DHCSR.C_HALT to 1 and enters Debug state before executing the first instruction of the exception handler.</p>
I _{QPWL}	<p>Late arrival and derived exceptions might occur, postponing when the PE halts.</p>
R _{LKNL}	<p>If the Security Extension is implemented, then when DHCSR.C_DEBUGEN == 0 or the PE is in a state in which halting is prohibited, all DEMCR.VC_* bits, other than DEMCR.VC_CORERESET, are ignored.</p>
R _{WRMQ}	<p>If debug is enabled, DHCSR.C_DEBUGEN == 1, and DEMCR.VC_CORERESET == 1 when the PE resets, the PE pends a Vector Catch debug event, even if the Security Extension is implemented, debug is prohibited in Secure state, and the PE has reset into Secure state. The PE does not halt until either it enters Non-secure state or debug is allowed in Secure state.</p>

See also:

- [Exception numbers and exception priority numbers on page B4-46.](#)
- [Exceptions during exception entry on page B4-77.](#)
- [Exceptions during exception return on page B4-78.](#)
- [Resets, Cold reset and Warm reset on page B2-30.](#)

B12.6.4 Breakpoint instructions

- R_{CRJG}** If the Security Extension is implemented, then is when `DHCSR.C_DEBUGEN == 0` or when the PE is in a state in which halting is prohibited, the **BKPT** instruction does not generate an entry to Debug state. If no DebugMonitor exception is generated, the **BKPT** instruction generates a HardFault exception or enters Lockup state.
- R_{MFHN}** A **BKPT** instruction halts the PE if all of the following conditions apply:
- `HaltingDebugEnabled() == TRUE`.
 - `DHCSR.C_DEBUGEN == 1`.
 - The Security Extension is not implemented, the instruction is executed in Non-secure state, or `DHCSR.S_SDE == 1`.
- R_{FLKK}** A **BKPT** instruction generates a DebugMonitor exception if it does not halt the PE and all of the following conditions apply:
- `DEMCR.MON_EN == 1`.
 - The DebugMonitor group priority is greater than the current execution priority.
 - The Security Extension is not implemented, the instruction is executed in Non-secure state, or `DEMCR.SDME == 1`.

B12.7 Exiting Debug state

R _{MQWL}	The PE exits Debug state: <ul style="list-style-type: none">• When the debugger writes 0 to DHCSR.C_HALT.• On receipt of an external restart request.
R _{HNKB}	Exiting Debug state has no architecturally defined effect on the Event Register and exclusive monitors.
R _{WKSD}	If software clears DHCSR.C_HALT to 0 when the PE is in Debug state, a subsequent read of the DHCSR that returns 1 for both DHCSR.C_HALT and DHCSR.S_HALT indicates that the PE has reentered Debug state because it has detected a new debug event.

B12.8 Debug System registers

- R_{RHDW} The debug provision in the *System Control Block* (SCB) comprises:
- Two handler-related flag bits, [ICSR.ISRPREEMPT](#) and [ICSR.ISRPENDING](#).
 - The [DFSR](#).
- R_{WBDH} The ARMv8-M architecture defines extra debug registers in the Debug Control Block.

See also:

- [Chapter D2 Register Specification](#).
- [Debug Control Block on page D2-798](#)

Chapter B13

Debug and trace components

This chapter specifies the ARMv8-M debug and trace component rules. It contains the following sections:

- *Instrumentation Trace Macrocell* on page B13-204.
- *Data Watchpoint and Trace unit* on page B13-210
- *Embedded Trace Macrocell* on page B13-224.
- *Trace Port Interface Unit* on page B13-225.
- *Flash Patch and Breakpoint unit* on page B13-226.

B13.1 Instrumentation Trace Macrocell

See also:

- [Data Watchpoint and Trace unit on page B13-210.](#)

B13.1.1 About the ITM

R_{GDNG} The *Instrumentation Trace Macrocell* (ITM) provides a memory-mapped register interface that applications can use to generate **Instrumentation packets**.

I_{BXWJ} The ITM is only available if the Main Extension is implemented.


R_{LMXS} The ITM generates Instrumentation packets, Synchronization packets, and the following protocol packets:

- Overflow packets.
- Local timestamp packets.
- Global timestamp packets.
- Extension packets.

R_{XQRX} The ITM combines the following packets into a single trace stream:

- Instrumentation packets.
- Synchronization packets.
- Protocol packets.
- Hardware source packets that are generated by the DWT.

I_{FQLR} The following figure shows how the ITM relates to other debug components.

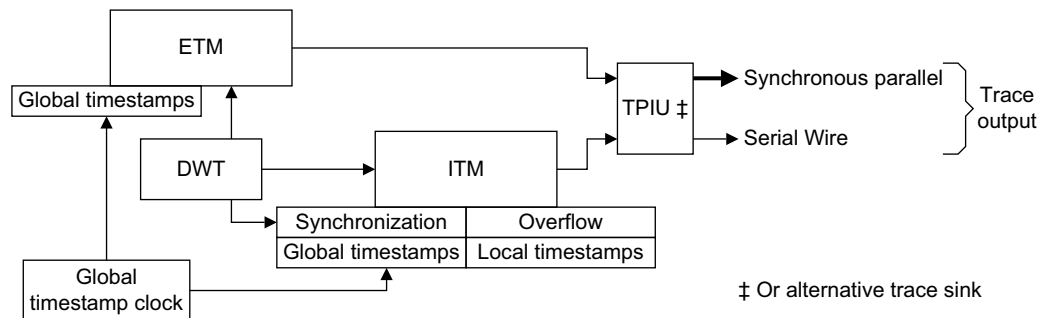

R_{BWJJ} When multiple sources are generating data at the same time, the ITM arbitrates using the following priorities:

Synchronization, when required

- Synchronization** Priority level -1, highest.
- Instrumentation** Priority level 0.
- Hardware source** Priority level 1.
- Local timestamps** Priority level 2.
- Global timestamp 1** Priority level 3.
- Global timestamp 2** Priority level 4.

See also:

- [Global timestamping on page B13-208.](#)
- [Data Watchpoint and Trace unit on page B13-210.](#)
- [Chapter F1 ITM and DWT Packet Protocol Specification.](#)

B13.1.2 ITM operation

R _{NKSC}	The ITM consists of: <ul style="list-style-type: none"> Up to 256 stimulus port registers, ITM_STIM<n>. Up to eight enable registers, ITM_TER<n>. An access control register, ITM_TPR. A general control register, ITM_TCR.
R _{MFDV}	The number of ITM_STIM<n> registers is an IMPLEMENTATION DEFINED multiple of eight. Software can discover the number of supported stimulus ports by writing all ones to the ITM_TPR , and then reading how many bits are set to 1.
R _{CGVD}	If the ITM is disabled or not implemented, any Secure or Non-secure write to ITM_STIM<n> is ignored.
R _{XQDD}	Unprivileged code can always read the ITM_STIM<n> registers.
R _{CSFV}	The ITM_TPR defines whether each group of eight ITM_STIM<n> registers, and their corresponding ITM_TER<n> bits, can be written by an unprivileged access.
R _{PTXV}	ITM_STIM<n> registers are 32-bit registers that support the following word-aligned accesses: <ul style="list-style-type: none"> Byte accesses, to access register bits[7:0]. Halfword accesses, to access register bits[15:0]. Word accesses, to access register bits[31:0].
R _{LNMW}	Non-word-aligned accesses are UNPREDICTABLE.
R _{NQVK}	ITM_TCR.ITMENA is a global enable bit for the ITM. A Cold reset clears this bit to 0, disabling the ITM.
R _{VRGV}	The ITM_TER<n> registers provide an enable bit for each stimulus port.
R _{NTCR}	When software writes to an enabled ITM_STIM<n> register, the ITM combines the identity of the port, the size of the write access, and the data that is written, into an Instrumentation packet that it writes to a FIFO output buffer. The ITM transmits packets from the output buffer to a trace sink.
R _{TCTH}	If DEMCR.TRCENA == 0 or NoninvasiveDebugAllowed() == FALSE, the ITM does not generate trace.
R _{GRNM}	The size of the stimulus port output buffer is IMPLEMENTATION DEFINED, but must have at least one entry. The stimulus port output buffer is shared by all ITM_STIM<n> registers.
R _{SXNK}	When the stimulus port output buffer is full, if software writes to any ITM_STIM<n> register, the ITM discards the write data, and generates an Overflow packet.
R _{SRPP}	Reading the ITM_STIM<n> register of any enabled stimulus port returns a value indicating the output buffer status and that the port is enabled.
R _{XVVB}	Reading an ITM_STIM<n> register when the ITM is disabled, or when the individual stimulus port is disabled in the corresponding ITM_TER<n> register, returns the value indicating that the output buffer is full and the port is disabled.
R _{FXSL}	Hardware source packets that are generated by the DWT unit use a separate output buffer. The output buffer status that is obtained by reading an ITM_STIM<n> register is not affected by trace that is generated by the DWT unit.
R _{GMXW}	Stalling is supported through an optional control, ITM_TCR.STALLENA . When implemented and set to 1, the ITM can stall the PE to guarantee delivery of data trace packets.
R _{NFJN}	Stalling does not affect the DWT counters.
R _{TNDP}	The ITM might generate an Overflow packet while the PE is stalled, if the DWT generates: <ul style="list-style-type: none"> A Hardware source packet other than a Data trace packet. A Data trace PC value packet or Data trace match packet from a Cycle Counter comparator.
R _{CRKK}	The ITM must not stall the PE in Secure state if SecureHaltingDebugAllowed() == FALSE.

RGRHW	The ITM must not stall the PE if <code>HaltingDebugAllowed() == FALSE</code> .
RBGCP	The ITM must not stall the PE in such a way as to deadlock the system.
RFRJG	The ITM must not stall if the trace output is disabled.
RXRVL	The ITM must not stall for writes to the <code>ITM_STIM<n></code> registers.
RHDLH	Instrumentation trace packets must appear in the trace output in the order in which writes arrive at the <code>ITM_STIM<n></code> registers.
RXNHX	It is IMPLEMENTATION DEFINED whether an ITM requires flushing of trace data to guarantee that data is output.
RTSXR	If periodic flushing is required, the ITM must flush trace data: <ul style="list-style-type: none">• When a Synchronization packet is generated.• When trace is disabled, meaning that either <code>DEMCR.TRCENA</code> is cleared to 0 or one or more of <code>ITM_TCR.{TXENA, SYNCENA, TSENA, SYNCENA}</code> is cleared to 0, and the buffered trace includes at least one corresponding packet type.• In response to other IMPLEMENTATION DEFINED flush requests from the system.
RMKFS	If a system supports multiple trace streams, the debugger must write a unique nonzero trace ID value to the <code>ITM_TCR.TraceBusID</code> field. The system uses this value to identify the ITM and DWT trace stream. To avoid trace stream corruption, before modifying the <code>ITM_TCR.TraceBusID</code> a debugger must: <ul style="list-style-type: none">• Clear the <code>ITM_ITMENA</code> bit to zero, to disable the ITM.• Poll the <code>ITM_TCR.BUSY</code> bit until it returns to zero, indicating that the ITM is inactive.

B13.1.3 ITM_STIM<n> register access permissions

RBJXF	Unprivileged and privileged software can always read all ITM registers. If the ITM is not implemented, these registers are RAZ/WI.
RHQVJ	For privileged write accesses to all ITM registers, the ITM: <ul style="list-style-type: none">• Ignores the access if <code>ITM_TCR.ITMENA</code> is set to 0.• Accepts the access if <code>ITM_TCR.ITMENA</code> is set to 1.
RLKPT	For unprivileged write accesses: <ul style="list-style-type: none">• The ITM always ignores accesses to the <code>ITM_TCR</code> and <code>ITM_TPR</code>.• For each stimulus port, the setting in the appropriate <code>ITM_TPR</code> determines whether the ITM accepts or ignores an access to the corresponding <code>ITM_TER<n></code> register field or <code>ITM_STIM<n></code> register.

B13.1.4 Timestamp support

RRVLT	Timestamps provide information on the timing of event generation regarding their visibility at a trace output port.
RTFDG	An ARMv8-M PE can implement either or both of the following types of timestamp: <ul style="list-style-type: none">• Local timestamps.• Global timestamps.

Local timestamping

RRMXM	Local timestamps provide delta timestamp values, meaning each local timestamp indicates the elapsed time since generating the previous local timestamp.
RWGBG	The ITM generates the local timestamps from the timestamp counter in the ITM unit.
RXLBH	The timestamp counter size is an IMPLEMENTATION DEFINED value that must be less than or equal to 28 bits.
RGPXT	It is IMPLEMENTATION DEFINED whether the ITM supports synchronous clocking of the timestamp counter mode.

R _{SRJH}	It is IMPLEMENTATION DEFINED whether the ITM and TPIU support asynchronous clocking of the timestamp counter mode.
R _{GHPS}	ITM_TCR.TSENA enables Local timestamp packet generation.
R _{FSWG}	When local timestamping is enabled and the DWT or ITM transfers a Hardware source or Instrumentation trace packet to the appropriate output FIFO, and the timestamp counter is non-zero, the ITM: <ul style="list-style-type: none">• Generates a Local timestamp packet.• Resets the timestamp counter to zero.
R _{BRRL}	If the timestamp counter overflows, it continues counting from zero and the ITM generates an Overflow packet and transmits an associated Local timestamp packet at the earliest opportunity. If higher priority trace packets delay transmission of this Local timestamp packet, the timestamp packet has the appropriate non-zero local timestamp value.
R _{XFRH}	The ITM can generate a Local timestamp packet relating to a single event packet, or to a stream of back-to-back packets if multiple events generate a packet stream without any idle time.
R _{QJB}	Local timestamp packets include status information that indicates any delay in one or both of: <ul style="list-style-type: none">• Transmission of the timestamp packet relative to the corresponding event packet.• Transmission of the corresponding event packet relative to the event itself.
R _{NDCK}	If the ITM cannot generate a Local timestamp packet synchronously with the corresponding event packet, the timestamp count continues to increment until the ITM can generate a Local timestamp packet.
R _{TBMX}	The ITM compresses the count value in the timestamp packet by removing leading zeroes, and transmits the smallest packet that can hold the required count value.

See also:

- [Local timestamp clocking options](#).

Local timestamp clocking options

R _{DSTG}	If the implementation supports both synchronous and asynchronous clocking of the local timestamp counter, ITM_TCR.SWOENA selects the clocking mode.
R _{BDWS}	When software selects synchronous clocking, when local timestamping is enabled, the PE clock drives the timestamp counter, and the counter increments on each PE clock cycle.
I _{JQJD}	When software selects synchronous clocking, whether local timestamps are generated in Debug state is IMPLEMENTATION DEFINED. ARM recommends that entering Debug state must disable local timestamping, regardless of the value of the ITM_TCR.TSENA bit.
R _{JDRD}	When software selects asynchronous clocking, and enables local timestamping, the TPIU output interface clock drives the timestamp counter, through a configurable prescaler. The rate of asynchronous clocking depends upon the output encoding scheme. This clock might be asynchronous to the PE clock.
R _{NGDW}	When asynchronous clocking is implemented, whether the incoming clock signal can be divided before driving the local timestamping counter is IMPLEMENTATION DEFINED.
R _{RMTN}	If the implementation supports division of the incoming asynchronous clock signal, ITM_TCR.TSPrescale sets the prescaler divide value.
R _{SKCP}	Software must only select asynchronous clocking when the TPIU is configured to use an output mode that supports asynchronous clocking.
R _{JGCF}	When software selects asynchronous clocking and the TPIU asynchronous interface is idle, the ITM holds the timestamp counter at zero. This means that the ITM does not generate a local timestamp on the first packet after an idle on the asynchronous interface.

See also:

- [Trace Port Interface Unit on page B13-225](#).

Global timestamping

IDKSD	Global timestamps provide absolute timestamp values, which are based on a system global timestamp clock. They provide synchronization between different trace sources in the system.
RHBWD	If an implementation includes global timestamping, the ITM generates <i>Global timestamp</i> (GTS) packets, which are based on a global timestamp clock.
RKWQJ	The size of the global timestamp is either 48 bits or 64 bits. The choice between these two options is IMPLEMENTATION DEFINED.
RSRDF	To transfer the global timestamp, two formats of Global timestamp packets are defined: <ul style="list-style-type: none">• The first packet format, Global timestamp 1 packet, holds the value of the least significant timestamp bits[25:0], and wrap and clock change indicators.• The second packet format, Global timestamp 2 packet, holds the value of the high-order timestamp bits:<ul style="list-style-type: none">— Bits[47:26], if a 48-bit global timestamp is supported.— Bits[63:26], if a 64-bit global timestamp is supported.
RVGBT	The global timestamp that is generated by the ITM must be a full global timestamp: <ul style="list-style-type: none">• When software first enables global timestamps, by changing the value of the <code>ITM_TCR.GTSFREQ</code> field from zero to a nonzero value.• When the system asserts the clock ratio change signal in the external ITM timestamp interface.• In response to a Synchronization packet request, even if <code>ITM_TCR.SYNECENA == 0</code> meaning it does not generate a Synchronization packet.• If, when it has to generate a global timestamp, it detects that the values of the high-order bits of the global timestamp have changed.
RGGMK	If the global timestamp generated by the ITM does not have to be a full global timestamp, the ITM generates only a single Global timestamp 1 packet. The ITM might compress the packet by omitting significant bits, if they are unchanged from the previous timestamp value. The compression scheme that is used is similar to the one used for local timestamps.
RWDCX	When the ITM must generate a full global timestamp: <ol style="list-style-type: none">1. The ITM first generates the Global timestamp 1 packet with timestamp bits[25:0], with the applicable bit of the Wrap and ClockCh bits in that packet set to 1 to indicate that the high-order bits of the timestamp will also be output. This is the packet that the ITM outputs immediately after a non-delayed trace packet.2. Because of packet prioritization, the ITM might have to transmit other trace packets before it can output the Global timestamp 2 packet that contains the high-order bits of the timestamp. It might also have to transmit another Global timestamp packet. If so, it outputs the Global timestamp 1 packet with timestamp bits[25:0] and the Wrap bit set to 1.3. The ITM later generates the Global timestamp 2 packet with the high-order timestamp bits for the most recently transmitted Global timestamp 1 packet.

See also:

- [Synchronization support on page B13-209](#).
- [Continuation bits on page B13-209](#).
- [Chapter F1 ITM and DWT Packet Protocol Specification](#).

B13.1.5 Synchronization support

- I_{LRJT}** An external debugger uses [Synchronization packets](#) to recover bit-to-byte alignment information in a serial data stream.
- I_{LVGD}** Synchronization packets are independent of timestamp packets.
- I_{JNV}** ARM recommends that software disables Synchronization packets when using an asynchronous serial trace port, to reduce the data stream bandwidth.

R_{FFQN} If [ITM_TCR.SYNCENA](#) == 1, the ITM outputs a Synchronization packet:

- When it is first enabled.
- If [DWT_CYCCNT](#) is implemented and [DWT_CTRL.SYNCTAP](#) is nonzero, in response to a Synchronization packet request from the DWT unit.
- If [TPIU_PSCR](#) is implemented, in response to a Synchronization packet request from the TPIU:
 - If [DWT_CYCCNT](#) is not implemented, [TPIU_PSCR](#) must be implemented.
 - If [DWT_CYCCNT](#) is implemented, it is IMPLEMENTATION DEFINED whether [TPIU_PSCR](#) is implemented.
- In response to other IMPLEMENTATION DEFINED Synchronization packet requests from the system.

See also:

- [DWT_CTRL.SYNCTAP](#).

B13.1.6 Continuation bits

- I_{BFMX}** A Synchronization packet consists of a bit stream of at least 47 zero bits followed by a one bit. The final bit is the byte alignment marker, and therefore bit [7] of the last byte of a Synchronization packet is always one.
- R_{JNVH}** The longest Extension packet is always 5 bytes. In an Extension packet, bit [7] of each byte, including the header byte, but not including the last byte of a 5-byte packet, is a continuation bit, C. Bit [7] of the last byte of a 5-byte Extension packet is part of the extension field. Bit [7] of the last byte of a fewer-than-5-byte Extension packet is always zero.
- R_{XFTL}** For all other protocol packets, bit [7] of each byte, including the header byte, but not including the last byte of a 7-byte packet, is a continuation bit, C. Bit [7] of the last byte of a packet is always zero.
- R_{BBSF}** Each packet type defines its maximum packet length. Except for Global timestamp 2 and Synchronization packets, the longest defined packet is 5 bytes.
- R_{DPIG}** The continuation bit, C, is defined as:
- | | |
|----------|--|
| 0 | This is the last byte of the packet. |
| 1 | This is not the last byte of the packet. |

B13.2 Data Watchpoint and Trace unit

This section describes the *Data Watchpoint and Trace* (DWT) unit. It contains the following subsections:

- [About the DWT.](#)
- [DWT unit operation on page B13-211.](#)
- [Constraints on programming DWT comparators on page B13-213.](#)
- [CMPMATCH\[N\] trigger events on page B13-216.](#)
- [Matching in detail on page B13-217.](#)
- [DWT match restrictions and relaxations on page B13-218.](#)
- [DWT trace restrictions and relaxations on page B13-220.](#)
- [DWT counter definitions on page B13-220.](#)

B13.2.1 About the DWT

R _{QQLQ}	The <i>Data Watchpoint and Trace</i> (DWT) unit provides the following features: <ul style="list-style-type: none">• Comparators that support:<ul style="list-style-type: none">— Use as a single comparator for instruction address matching or data address matching.— Use in linked pairs for instruction address range matching or data address range matching.• Generation, on a comparator match, of:<ul style="list-style-type: none">— A debug event that causes the PE either to enter Debug state or, if the Main Extension is implemented, to take a DebugMonitor exception.— Signaling a match to an ETM, if implemented.— Signaling a match to another external resource.• External PC sampling using a PC sample register.
R _{KBMX}	If the Main Extension is implemented, the DWT provides the following features: <ul style="list-style-type: none">• An optional cycle counter.• Comparators that support:<ul style="list-style-type: none">— Use as a single comparator for cycle counter matching, if the cycle counter is implemented.— Use as a single comparator for data value matching.— Use in linked pairs for data value matching at a specific data address.
R _{DVJV}	If the Main Extension and the ITM are implemented, the DWT provides the following trace generation features: <ul style="list-style-type: none">• Generating one or more trace packets on a comparator match.• Generating periodic trace packets for software profiling.• Exception trace.• Performance profiling counters that generate trace.
R _{CPXJ}	If <code>DWT_CTRL.NOTRCPKT</code> is 1, there is no DWT trace or exception trace support.
R _{FKFP}	If <code>DWT_CTRL.NOCYCCNT</code> is 1, there is no cycle counter support.
R _{BKGF}	If <code>DWT_CTRL.NOPRFCNT</code> is 1, there is no profiling counter support.
R _{HFTT}	The <code>DWT_CTRL.NUMCOMP</code> field indicates the number of implemented DWT comparators, which must be in the range 0-15.
R _{WQLX}	If the Main Extension is not implemented, Cycle counter, Data value, Linked data value, and Data address with value comparators and all trace features are not supported.
R _{SSWT}	Data trace packets are only generated for comparators 0-3.
R _{CRHX}	When a DWT implementation includes one or more comparators, which comparator features are supported, and by which comparators, is IMPLEMENTATION DEFINED.

B13.2.2 DWT unit operation

I _{WTSS}	<p>For each implemented comparator, a set of registers defines the comparator operation. For comparator <i>n</i>:</p> <ul style="list-style-type: none"> • <code>DWT_COMP<n></code> holds a value for the comparison. • <code>DWT_FUNCTION<n></code> defines the operation of the comparator.
R _{SPJQ}	<p>A <i>Secure match</i> is a match that is generated by:</p> <ul style="list-style-type: none"> • Vector fetches where NS-Req has a value of Secure for the operation. • The hardware stacking or unstacking of registers, where NS-Req has a value of Secure for the operation, on any of: <ul style="list-style-type: none"> — Exception entry. — Exception exit. — Function call entry. — Function return. — Lazy state preservation. • When the Main Extension is implemented, a cycle counter match in Secure state if <code>DWT_CTRL.CYCDISS == 1</code>. • An operation that is generated by an instruction that is executed in Secure state, including: <ul style="list-style-type: none"> — An Instruction address match for an instruction that is executed in Secure state. — A Data address or Data value match for a load or store that is generated by an instruction that is executed in Secure state.
R _{MGGT}	<p>For a comparator <i><n></i>, matching is prohibited if one or more of the following conditions apply:</p> <ul style="list-style-type: none"> • <code>DEMCR.TRCENA == 0</code> or <code>NoninvasiveDebugAllowed() == FALSE</code>. • <code>DWT_FUNCTION.ACTION</code> specifies a Debug event and all the following conditions apply: <ul style="list-style-type: none"> — <code>HaltingDebugAllowed() == FALSE</code> or <code>DHCSR.C_DEBUGEN == 0</code>. — If the Main Extension is implemented, <code>DEMCR.MON_EN == 0</code>.
R _{GFLN}	<p>In addition, if the Security Extension is implemented, Secure matches are further prohibited if one of the following conditions applies:</p> <ul style="list-style-type: none"> • <code>DWT_FUNCTION.ACTION</code> specifies a Debug event and any of the following conditions applies: <ul style="list-style-type: none"> — <code>HaltingDebugAllowed() == TRUE</code>, <code>DHCSR.C_DEBUGEN == 1</code>, and <code>DHCSR.S_SDE == 0</code>. — The Main Extension is implemented, <code>DEMCR.MON_EN == 1</code>, <code>DEMCR.SDME == 0</code>, and any of: <code>HaltingDebugAllowed() == FALSE</code>, <code>DHCSR.C_DEBUGEN == 0</code>, <code>DHCSR.S_SDE == 0</code>. • <code>DWT_FUNCTION.ACTION</code> specifies a trace or trigger event and <code>SecureNoninvasiveDebugAllowed() == FALSE</code>.
R _{HCFP}	<p>For address and value comparisons, the control register values and the current execution priority and Security state relate to the state of the PE when it generated the transaction that is being matched against.</p>
R _{MVFK}	<p>Between a change to the debug authentication interface, <code>DHCSR</code> or <code>DEMCR</code>, that disables debug and a following CSO, it is UNPREDICTABLE whether the DWT uses the old values or the new values.</p>
R _{VTNJ}	<p>Where the DWT operation rules prohibit a match being generated, a match must not be generated, even if the programmer's model defines it as being UNPREDICTABLE whether a comparator generates a match as the result of the way in which the DWT is programmed.</p>
R _{PKRK}	<p>If <code>DEMCR.TRCENA == 0</code> or <code>NoninvasiveDebugAllowed() == FALSE</code>, <code>DWT_CTRL.FOLDEVTENA</code>, <code>DWT_CTRL.LSUEVTENA</code>, <code>DWT_CTRL.SLEEPEVTENA</code>, <code>DWT_CTRL.EXCEVTENA</code>, and <code>DWT_CTRL.CPIEVTENA</code> are ignored, and the PE behaves as if they have a value of 0.</p>
R _{GDMN}	<p>If <code>DEMCR.TRCENA == 0</code> or <code>NoninvasiveDebugAllowed() == FALSE</code>, the DWT does not generate any trace packets.</p>

R _{FHWV}	If the Security Extension is implemented and <code>SecureNoninvasiveDebugAllowed() == FALSE</code> , <code>DWT_CTRL.FOLDEVTENA</code> , <code>DWT_CTRL.LSUEVTENA</code> , <code>DWT_CTRL.SLEEPEVTENA</code> , <code>DWT_CTRL.EXCEVTENA</code> , and <code>DWT_CTRL.CPIEVTENA</code> are ignored and the PE behaves as if they have a value of zero in Secure state.
R _{WSRR}	If the Security Extension is implemented and <code>SecureNoninvasiveDebugAllowed() == FALSE</code> , exception trace packets are not generated if the exception number in the packet represents a Secure exception: <ul style="list-style-type: none">• Exception entry packets are not generated for exceptions that are taken to Secure state.• Exception exit packets are not generated for exits from Secure state.• Exception return packets are not generated for returns to Secure state.
R _{XDVS}	The cycle counter, <code>DWT_CYCCNT</code> , and the <code>POSTCNT</code> counter are disabled when <code>DEMCR.TRCENA == 0</code> , but are not otherwise affected by debug authentication.
R _{RTJR}	If the Security Extension is implemented, the cycle counter does not count in Secure state when <code>DWT_CTRL.CYCDISS</code> is set to 1. This is independent of Secure debug authentication.
R _{BRSR}	When the DWT generates a match, <code>DWT_FUNCTION.MATCHED</code> is set to 1, unless the comparator is a Data address limit or Instruction address limit comparator, in which case <code>DWT_FUNCTION.MATCHED</code> is UNKNOWN.
R _{NRGV}	When the DWT generates a match, then if <code>DWT_FUNCTION.ACTION</code> specifies a Debug event, then <code>DHCSR.C_HALT</code> is set to 1 if all of the following conditions are true: <ul style="list-style-type: none">• <code>HaltingDebugAllowed() == TRUE</code>.• <code>DHCSR.C_DEBUGEN == 1</code>.• Either the match is not a Secure match or <code>DHCSR.S_SDE == 1</code>.
R _{PIGW}	When the DWT generates a match, then if <code>DWT_FUNCTION.ACTION</code> specifies a Debug event, and the Main Extension is implemented, then <code>DEMCR.MON_PEND</code> is set to 1 if all of the following conditions apply: <ul style="list-style-type: none">• <code>HaltingDebugAllowed() == FALSE</code>, <code>DHCSR.C_DEBUGEN == 0</code>, or the match is a Secure match and <code>DHCSR.S_SDE == 0</code>.• <code>DEMCR.MON_EN == 1</code>.• Either the DebugMonitor group priority is greater than the current execution priority and the watchpoint was not generated by a lazy state preservation access, or <code>FPCCR.MONRDY</code> has a value of 1 and the watchpoint was generated by lazy state preservation.
R _{FTBG}	When the DWT generates a match, then if the Main Extension is implemented, a Data trace match packet is generated, if all of the following conditions apply: <ul style="list-style-type: none">• The Security Extension is implemented.• <code>SecureNoninvasiveDebugAllowed() == FALSE</code>.• <code>DWT_FUNCTION.ACTION</code> specifies generating a Data trace PC value packet.• The PC value that would be included in the packet refers to an instruction that was executed in Secure state. Otherwise, the type of trace packet that is specified by <code>DWT_FUNCTION.ACTION</code> is generated.
R _{FNDW}	An access that results in a MemManage fault or SecureFault exception because of the alignment, SAU, IDAU, or MPU checks, is not observed by the DWT, and cannot generate a Watchpoint debug event.

Hardware stack accesses

R _{PGJB}	The DWT treats hardware accesses to the stack as data accesses: <ul style="list-style-type: none">• For registers pushed to the stack by hardware as part of an exception entry or lazy state preservation.• For registers popped from the stack by hardware as part of an exception return.• If the Security Extension is implemented:<ul style="list-style-type: none">— For registers pushed to the stack by hardware as part of a Non-secure function call.— For registers popped from the stack by hardware as part of a Non-secure function.
-------------------	---

B13.2.3 Constraints on programming DWT comparators

R_{MSPS} If a DWT comparator, <n>, or pair of comparators, <n> and <n+1>, is programmed with a reserved combination of **DWT_FUNCTION.MATCH** and **DWT_FUNCTION.ACTION**, then it is UNPREDICTABLE whether any comparator:

- Behaves as if disabled.
- Generates a match, asserting **CMPMATCH**, and generate zero, one, or more of the following:
 - A debug event.
 - A Data trace match packet, Data trace PC value packet, Data trace data address packet, or Data trace data value packet.

R_{GPLQ} Combinations of **DWT_FUNCTION.MATCH** and **DWT_FUNCTION.ACTION** that are not specified as valid combinations are reserved.

R_{CNHN} The valid combinations of **DWT_FUNCTION.MATCH** and **DWT_FUNCTION.ACTION** for a single comparator, and the events and Data trace packets that the comparator can generate from matching a single access, are identified in the following table.

In the table:

- means that the packet or event is not generated.
- Yes** means that the packet or event is generated on a comparator match.
- x** means that the Action is ignored.

Comparator type	MATCH	ACTION	Debug event	Data trace match packet	Data trace PC value packet	Data trace data address packet	Data trace data value packet
Disabled	0b0000	0bxx	-	-	-	-	-
		0b00	-	-	-	-	-
		0b01	Yes	-	-	-	-
		0b10	-	Yes	-	-	-
Cycle counter ^a	0b0001	0b11	-	-	Yes	-	-
		0b00	-	-	-	-	-
		0b01	Yes	-	-	-	-
		0b10 ^a	-	Yes	-	-	-
Instruction address	0b0010	0b00	-	-	-	-	-
		0b01	Yes	-	-	-	-
		0b10 ^a	-	Yes	-	-	-
		0b11 ^a	-	-	Yes	-	-
Data address	0b01xx (not 0b0111)	0b00	-	-	-	-	-
		0b01	Yes	-	-	-	-
		0b10 ^a	-	Yes	-	-	-
		0b11 ^a	-	-	Yes	-	-
Data value ^a	0b10xx (not 0b1011)	0b00	-	-	-	-	-
		0b01	Yes	-	-	-	-
		0b10	-	Yes	-	-	-
Data address with value ^a	0b11xx (not 0b1111)	0b10	-	-	-	-	Yes
		0b11	-	-	Yes	-	Yes

a. Only if the Main Extension is implemented.

Instruction address range

R_{DKHG} To match an instruction that is in an instruction address range, the following conditions must be met:

- The first comparator, <n-1>, must be programmed for *Instruction address*.
- The second comparator, <n>, must be programmed for *Instruction address limit*.

R_{LNQD} The valid combinations of [DWT_FUNCTION.MATCH](#) and [DWT_FUNCTION.ACTION](#) for an instruction address range, and the events and data trace packets that matching a single access can generate, are specified in the following table.

In the table:

- means that the packet or event is not generated.

First means that the packet or event is generated by the first comparator match.

Second means that the packet or event is generated by the second comparator match.

MATCH		ACTION		Debug event	Data trace match packet	Data trace PC value packet	Data trace data address packet	Data trace data value packet
<n-1>	<n>	<n-1>	<n>					
		0b00	0b00	-	-	-	-	-
0b0010	0b0011	0b00	0b11 ^a	-	-	Second	-	-
		0b01	0b00	First	-	-	-	-
		0b10	0b00	-	First	-	-	-

a. Only if the Main Extension is implemented.

Data address range

R_{LDGR} To match a data access in a data address range, the following conditions must be met:

- The first comparator, <n-1>, must be programmed for either *Data address* or *Data address with value*.
- The second comparator, <n>, must be programmed for *Data address limit*.

R_{PSBJ} The valid combinations of [DWT_FUNCTION.MATCH](#) and [DWT_FUNCTION.ACTION](#) for a data address range, and the events and data trace packets that matching a single access can generate, are specified in the following table.

In the table:

- means that the packet or event is not generated.

First means that the packet or event is generated by the first comparator match.

Second means that the packet or event is generated by the second comparator match.

MATCH		ACTION		Debug event	Data trace match packet	Data trace PC value packet	Data trace data address packet	Data trace data value packet
<n-1>	<n>	<n-1>	<n>					
0b01xx (not 0b0111)	0b011 1	0b00	0b00	-	-	-	-	-
		0b00	0b11 ^a	-	-	-	Second	-
		0b01	0b00	First	-	-	-	-
		0b10 ^a	0b00	-	First	-	-	-
		0b11 ^a	0b00	-	-	First	-	-
0b11xx ^a (not 0b1111)	0b011 1	0b11 ^a	0b11	-	-	First	Second	-
		0b10	0b00	-	-	-	-	First
		0b10	0b11	-	-	-	Second	First
		0b11	0b00	-	-	First	-	First
		0b11	0b11	-	-	First	Second	First

a. Only if the Main Extension is implemented.

Data value at specific address

R_{KFHV}

Matching data values at specific data addresses is possible only if the Main Extension is implemented.

R_{NNXD}

To match a data value at a specific data address, the following conditions must be met:

- The first comparator, <n-1>, must be programmed for either *Data address* or *Data address with value*.
- The second comparator, <n>, must be programmed for *Linked data value*.

R_{JKGJ}

The first comparator matches any access that matches the address. The second matches only accesses that match the address and the data value.

R_{NTSD}

The valid combinations of [DWT_FUNCTION.MATCH](#) and [DWT_FUNCTION.ACTION](#) for a linked data value, and the events and data trace packets that matching a single access can generate, are specified in the following table.

In the table:

- means that the packet or event is not generated.

First means that the packet or event is generated by the first comparator match.

Second means that the packet or event is generated by the second comparator match.

Both means that a first packet is generated by a first comparator match, even if the Linked data value comparator does not match, and a second packet is generated by the second comparator match, if both comparators match.

MATCH		ACTION		Debug event	Data trace match packet	Data trace PC value packet	Data trace data address packet	Data trace data value packet
<n-1>	<n>	<n-1>	<n>					
0b01xx (not 0b0111)	0b1011	0b00	0b00	-	-	-	-	-
		0b00	0b01	Second	-	-	-	-
		0b00	0b10	-	Second	-	-	-
		0b01	0b00	First	-	-	-	-
		0b01	0b10	First	Second	-	-	-
		0b10	0b00	-	First	-	-	-
		0b10	0b01	Second	First	-	-	-
		0b10	0b10	-	Both	-	-	-
		0b11	0b00	-	-	First	-	-
		0b11	0b01	Second	-	First	-	-
0b11xx (not 0b1111)	0b1011	0b10	0b00	-	-	-	-	First
		0b10	0b01	Second	-	-	-	First
		0b10	0b10	-	Second	-	-	First
		0b11	0b00	-	-	First	-	First
		0b11	0b01	Second	-	First	-	First
		0b11	0b10	-	Second	First	-	First

B13.2.4 CMPMATCH[N] trigger events

I _{VNCC}	The CMPMATCH events signal watchpoint matches.
R _{PRJG}	The implementation of CMPMATCH[n] is IMPLEMENTATION DEFINED.
R _{FTWC}	If an ETM is implemented, CMPMATCH events are output to the ETM.
R _{TMZX}	If an ETM is not implemented, the effect of CMPMATCH[n] is IMPLEMENTATION DEFINED, including whether the trigger event has any observable effect or whether observable effects are visible to other components in the system.
R _{XXKM}	For all enabled watchpoints, if DWT_FUNCTION<n> is not programmed as an Instruction address limit comparator and is not programmed as a Data address limit comparator, CMPMATCH[n] is triggered on a comparator match.
R _{GVHS}	For all enabled watchpoints, if DWT_FUNCTION<n> is programmed as an Instruction address limit or Data address limit comparator, it is UNPREDICTABLE whether CMPMATCH[n] is triggered on a comparator match.

B13.2.5 Matching in detail

Instruction address matching in detail

R _{GNVB}	The DWT checks all instructions that are executed by a simple sequential execution of the program and do not generate any exception for an instruction address match, including conditional instructions that fail their condition code check.
R _{NQGR}	An instruction might be checked by the DWT for an instruction address match if it either: <ul style="list-style-type: none"> • Is executed by a simple sequential execution of the program and generates a synchronous exception. • Would be executed by the sequential execution of the program but is abandoned because of an asynchronous exception.
R _{KJJC}	Speculative instruction prefetches, other than those that would be executed by the sequential execution of the program but that are abandoned because of asynchronous exceptions, must not generate matches.
R _{DSDT}	For all instruction address matches, if bit[0] of the comparator address has a value of 1, it is UNPREDICTABLE whether a match is generated when the other address bits match.
R _{KLXM}	For single instruction address matches, an instruction matches if the address of the first byte of the instruction matches the comparator address.
R _{RLKW}	For single address matches, if the instruction is a 4-byte T32 instruction, and the address of the first byte of the upper halfword matches but the address of the first byte of the lower halfword does not match, it is UNPREDICTABLE whether a match is generated.
R _{DNKD}	For instruction address range matches, an instruction matches if the address of the first byte of the instruction lies between the lower comparator address, which is specified by comparator <n-1>, and the limit comparator address, which is specified by comparator <n>. Both addresses are inclusive to the range.
R _{DSGT}	For instruction address range matches, if the instruction is a 4-byte T32 instruction, and the address of the first byte of the upper halfword lies in the range but the address of the first byte of the lower halfword does not lie in the range, it is UNPREDICTABLE whether a match is generated.
R _{MLMQ}	For instruction address range matches, if so configured, a Data trace PC value packet or Data trace match packet is generated for the first instruction that is executed in the range.
I _{VHHW}	For instruction address range matches, if so configured, a branch or sequential execution that stays within the range does not necessarily generate a new packet.
R _{HMNX}	For instruction address range matches, if so configured, CMPMATCH[n-1] is triggered for each instruction that is executed inside the range, where n-1 is the lower of the two comparators that configure the range.

Data address matching in detail

R _{BPWC}	For all Data Address matches, all bits of the comparator address are considered.
R _{GSLX}	Speculative reads might generate data address matches.
R _{WWBH}	Speculative writes must not generate data address matches.
R _{VJFB}	Prefetches into a cache must not generate data address matches.
R _{CMRP}	For single data address matches, an access matches if any accessed byte lies between the comparator address and a limit that is defined by DWT_FUNCTION.DATAVSIZE .
R _{KHRF}	For single data address matches, the comparator address must be naturally aligned to DWT_FUNCTION.DATAVSIZE otherwise generation of watchpoint events is UNPREDICTABLE.
R _{KKRJ}	For data address range matches, an access matches if any accessed byte lies between the lower comparator address, which is specified by comparator <n-1>, and the limit comparator address, which is specified by comparator <n>. Both addresses are inclusive to the range.

R_{CFMR} For data address range matches, [DWT_FUNCTION.DATAVSIZE](#) must be set to 0b00 for both the lower comparator address and the limit comparator address otherwise it is UNPREDICTABLE whether or not a match is generated.

Data value matching in detail

R_{BMSM} Data value matching is only possible if the Main Extension is implemented.

R_{FVFQ} Speculative reads might generate data value matches.

R_{VGJF} Speculative writes must not generate data value matches.

R_{MLFK} Prefetches into a cache must not generate data value matches.

R_{RMDB} For data value matches, if the access size is smaller than [DWT_FUNCTION.DATAVSIZE](#), there is no match.

R_{ZDPM} For unlinked data value matches, an access matches if all bytes of any naturally-aligned subset of the access of the size that is specified by [DWT_FUNCTION.DATAVSIZE](#) match the data value in [DWT_COMP<n>](#). The data value in [DWT_COMP<n>](#) is in little-endian order with respect to memory.

I_{HMMS} If the access is unaligned then this might generate a higher priority alignment fault, depending on the instruction type, profile, and configuration. In these cases no match is generated.

R_{SQKS} For unlinked data value matches, if an access is unaligned, it is IMPLEMENTATION DEFINED whether it either treated as:

- A sequence of byte accesses.
- A sequence of naturally-aligned accesses covering the accessed bytes. For a read, this access might access more bytes than the original access.

R_{QRPW} For linked data value matching, if an access is larger than [DWT_FUNCTION.DATAVSIZE](#), then only the naturally-aligned subset of the access of size [DWT_FUNCTION.DATAVSIZE](#) at the matching address is compared for a match.

R_{QVRK} For linked data value matching, the data address comparator address must be naturally aligned to [DWT_FUNCTION.DATAVSIZE](#), and the [DWT_FUNCTION.DATAVSIZE](#) values for both comparators must be the same.

R_{KRCV} A Data value comparator that is linked to a Data address comparator does not change the behavior of the address comparator.

See also:

- [DWT_AddressCompare\(\)](#).
- [DWT_ValidMatch\(\)](#).
- [DWT_InstructionAddressMatch\(\)](#).
- [DWT_DataAddressMatch\(\)](#).
- [DWT_DataValueMatch\(\)](#).

B13.2.6 DWT match restrictions and relaxations

R_{KBHM} It is IMPLEMENTATION DEFINED whether the DWT treats a fetch from the exception vector table as part of an exception entry as a data access or ignores these accesses, for the purposes of DWT comparator matches.

R_{DTHW} A fetch by the DWT from the exception vector table as part of an exception entry must never be treated as an instruction fetch.

R_{FDKL} If the Main Extension and the Flash Patch function of the FPB are implemented, and if an FPB comparator remaps one word-aligned address onto another, then if an instruction fetch is remapped by the FPB comparator, the PE might check for an instruction address match for any or none of the two addresses.

R_QDDR	If the Main Extension and Flash Patch function of the FPB are implemented, and if an FPB comparator remaps one word-aligned address onto another, then if a literal load is remapped by the FPB comparator, the PE might check for a data address match for any or none of the two addresses.
R_JQHW	If a return is tail-chained, it is IMPLEMENTATION DEFINED whether hardware accesses the stack and therefore IMPLEMENTATION DEFINED whether the DWT can generate events or trace.
R_VJTK	The DWT does not match accesses from the DAP.
R_MNBX	Any executed NOP or IT that matches an appropriately configured PC watchpoint must cause a match.
R_SLPX	For the main extension only, it is IMPLEMENTATION DEFINED whether a failed STREX instruction can generate a data access match.
R_NHLN	If an instruction or operation makes multiple or unaligned data accesses, then, if so configured, it is UNPREDICTABLE whether any nonmatching access generated by an instruction that generated a matching access is treated as a matching access.
R_CSSQ	If an instruction or operation makes multiple or unaligned data accesses, then, if so configured, CMPMATCH is triggered for each matching access.
R_VEXT	If the Main Extension is implemented and an instruction or operation makes multiple or unaligned data accesses, then, if so configured, only a data value match of at least a part of the value that is guaranteed to be single-copy atomic can generate a match.
R_WJNR	If an instruction or operation makes multiple or unaligned data accesses, then, if so configured, for a matching data access that generates a debug event, if permitted, DHCSR.C_HALT or DEMCR.MON_PEND, as applicable, is set to 1. A pending DebugMonitor exception does not interrupt the multiple accesses, but another interrupt might, which means that the debug event might be taken before the multiple operations complete.
R_QCJL	The DWT can match on the address of an access that generates a BusFault.
R_QVHL	In the Main Extension, it is IMPLEMENTATION DEFINED whether a stored value for an access that generates a BusFault: <ul style="list-style-type: none">• Can generate a data value match.• Can be traced.
R_KLFC	In the Main Extension, for a load access that returns a BusFault, any data that is returned by the memory system is invalid, and the DWT must not: <ul style="list-style-type: none">• Generate a data value match.• Generate a Data trace data value packet.
R_TQCF	A data access that generates any fault other than a BusFault does not generate a data address or data value match at the DWT and is not traced.
R_FRHP	DWT matches are generated asynchronously.
R_THHR	A DSB barrier guarantees that the effect of a DWT match is visible to a subsequent read of DWT_FUNCTION.MATCHED, DHCSR, or DEMCR. In the absence of a DSB barrier, the effect is only guaranteed to be visible in finite time.
R_HPGH	The effects of a DWT match never affect instructions appearing in program order before the operation that generates the match.

See also:

- [Tail-chaining on page B4-79](#)

B13.2.7 DWT trace restrictions and relaxations

R _{HDKK}	Where a single instruction or operation, or multiple instructions, generate multiple accesses that each one or more trace packets, then if the architecture guarantees the order in which a pair of these accesses is observed by the PE, the first trace packets that are generated for each of those accesses must appear in the trace output in the same order.
R _{WSKK}	Where a single instruction or operation, or multiple instructions, generate multiple accesses that each generate one or more trace packets, then if the architecture does not guarantee the order of the accesses, the order of trace packets in the trace output is not defined.
R _{XCNB}	If a single instruction or operation makes multiple or unaligned data accesses, then, if so configured, only the first access is guaranteed to generate a Data trace PC value packet, Data trace data address packet, or Data trace match packet. If the architecture does not guarantee the order of the accesses, the first access might be any of the accesses.
R _{XVBT}	If a single instruction or operation makes multiple or unaligned data accesses, then, if so configured, a Data trace data value packet is generated for each matching access.
R _{QSCF}	If a single instruction or operation makes multiple or unaligned data accesses, then, if so configured, it is UNPREDICTABLE how many Data trace data value packets are generated for each unaligned matching access. An implementation might over-read, meaning that more data outside the access might be traced.
R _{KXBL}	If a single instruction or operation makes multiple or unaligned data accesses, then, if so configured, for a matching data access that generates a Data trace data value packet, at least that part of the value that is guaranteed to be single-copy atomic is traced.
R _{QWQS}	Duplicate Data trace PC value packets, Data trace data address packets, and Data trace data value packets from a single access are not generated for a single access.
R _{CPXW}	Where a comparator or linked pair of comparators generates multiple packet types for a single access, the packets must appear in the trace output in the following order: <ol style="list-style-type: none">1. Data trace PC value packet.2. Data trace match packet, generated by a Data address or Data address with value comparator match.3. Data trace data address packet.4. Data trace match packet, generated by a Data value comparator match.5. Data trace data value packet.
R _{QXBC}	Where a comparator or linked pair of comparators generates multiple packet types for a single access, packets must not be interleaved with packets that are generated by other accesses by the same comparator or linked pair of comparators.
R _{RHNF}	Where a comparator or linked pair of comparators generates multiple packet types for a single access, if a comparator other than this comparator or this linked pair of comparators generates a trace packet of the same type for the same access, then only one of these packets is output. It is IMPLEMENTATION DEFINED which comparator is chosen.
I _{MJXG}	ARM recommends that the packet from the lowest-numbered comparator is output.
R _{DKMV}	Where a comparator or linked pair of comparators generates multiple packet types for a single access, if any of the packets cannot be output and an Overflow packet is generated, then the remaining packets for that access are not generated.
R _{LNWB}	Where a comparator or linked pair of comparators generates multiple packet types for a single access, packets might be interleaved with packets that are generated by comparators other than this comparator or this linked pair of comparators.

B13.2.8 DWT counter definitions

I_{QRPG} If the Main extension is implemented the following equation must hold:
$$ICNT = CNT_{CYCLES} + CNT_{FOLD} - (CNT_{LSU} + CNT_{EXC} + CNT_{SLEEP} + CNT_{CPI})$$

Where:

ICNT is the total number of instructions architecturally executed.

CNT_{CYCLES} is the number of cycles counted by **DWT_CYCCNT**.

CNT_{FOLD} is the number of instructions counted by **DWT_FOLDCNT**.

CNT_{LSU} is the number of cycles counted by **DWT_LSUCNT**.

CNT_{EXC} is the number of cycles counted by **DWT_EXCCNT**.

CNT_{SLEEP} is the number of cycles counted by **DWT_SLEEP CNT**.

CNT_{CPI} is the number of cycles counted by **DWT_CPICNT**.

B13.2.9 CYCCNT cycle counter and related timers

R_{SVPW} CYCCNT is an optional free-running 32-bit cycle counter. If the DWT unit implements CYCCNT then **DWT_CTRL.NOCYCCNT** is RAZ.

R_{KRFP} When implemented and enabled, CYCCNT increments on each cycle of the PE clock.

R_{NFJW} When the counter overflows it transparently wraps to zero.

R_{GXJK} **DWT_CTRL.CYCCNTENA** enables the CYCCNT counter.

R_{BKCG} **POSTCNT** is a 4-bit countdown counter derived from CYCCNT, that acts as a timer for the periodic generation of Periodic PC sample packets or Event counter packets, when these packets are enabled.

Periodic PC sample packets are not the same as the Data trace PC value packets that are generated by the DWT comparators.

R_{DKGR} The DWT does not support the generation of Periodic PC sample packets or Event packets if it does not implement the CYCCNT timer and **DWT_CTRL.NOTRCPKT** is RAO.

R_{RNTV} The **DWT_CTRL.CYCTAP** bit selects the CYCCNT tap bit for **POSTCNT**. [Table B13-1](#) shows the effect of this bit:

Table B13-1 CYCCNT tap bit for POSTCNT timer

CYCTAP bit	CYCCNT tap at	POSTCNT clock rate
0	Bit[6]	(PE clock)/64
1	Bit[10]	(PE clock)/1024

R_{SXXX} A write to **DWT_CTRL** will initialise **POSTCNT** to the previous value of **DWT_CTRL.POSTINIT** if all of:

- **DWT_CTRL.PCSAMEPLEENA** was set to 0 prior to the write.
- **DWT_CTRL.CYCEVTENA** was set to 0 prior to the write.
- The write sets either **DWT_CTRL.PCSAMPLEENA** or **DWT_CTRL.CYCEVTENA** to 1.

It is UNPREDICTABLE whether any other write to **DWT_CTRL** that alters the value of either **DWT_CTRL.PCSAMPLEENA** and **DWT_CTRL.CYCEVTENA** sets **POSTCNT** to **DWT_CTRL.POSTINIT** or leaves **POSTCNT** unchanged.

R_{XFRM} When either **DWT_CTRL.CYCEVTENA** or **DWT_CTRL.PCSAMPLEENA** is set to 1, and the CYCCNT tap bit transitions, either from 0 to 1 or from 1 to 0:

- If **POSTCNT** is nonzero, **POSTCNT** decrements by 1.
- If **POSTCNT** is zero, the DWT:
 - Reloads **POSTCNT** from **DWT_CTRL.POSTRESET**.
 - Generates a Periodic PC Sample packets if **DWT_CTRL.PCSAMPLEENA** is set to 1.
 - Generates an Event Counter packet with the Cyc bit set to 1 if **DWT_CTRL.CYCEVTENA** is set to 1.

IPNNS	The enable bit for the POSTCNT counter underflow event is DWT_CTRL.CYCENTENA. There is no overflow event for the CYCCNT counter. When CYCCNT overflows it wraps to zero transparently. Software cannot access the POSTCNT value directly, or change this value.
IJRVV	This means that, to initialize POSTCNT, software must: <ol style="list-style-type: none">1. Ensure that DWT_CTRL.CYCCNTENA and DWT_PCSAMPLEENA are set to 0. This can be achieved with a single write to DWT_CTRL. This is also the reset value of these bits.2. Write the required initial value of POSTCNT to the DWT_CTRL.POSTINIT field, leaving DWT_CTRL.CYCCNTENA and DWT_CTRL.PCSAMPLEENA set to 0.3. Set either DWT_CTRL.CYCEVTENA or DWT_CTRL.PCSAMPLEENA to 1 to enable the POSTCNT counter. Each of these must be separate writes to DWT_CTRL.
RKNHF	Disabling CYCCNT stops POSTCNT.
RTMHN	Writes to DWT_CTRL.POSTINIT are ignored if either DWT_CTRL.PCSAMPLEENA was set to 1 or DWT_CTRL.CYCEVTENA was set to 1 prior to the write.

B13.2.10 Profiling counter support

IHXPV	Profiling counter support is an optional debug feature.
RWHWR	If Profiling counter support is implemented the DWT provides five 8-bit Event counters for software profiling: <ul style="list-style-type: none">• DWT_FOLDCNT.• DWT_LSUCNT.• DWT_EXCCNT.• DWT_SLEEPCNT.• DWT_CPICNT.
RBJFK	The DWT_CPICNT is a general counter for instruction cycle count estimation.
RNSRV	The DWT_CPICNT counter increments on each additional cycle to execute a multi-cycle instruction, including each cycle of any instruction fetch stall, but does not increment for those instructions recorded by DWT_LSUNCT.
RPXVN	The DWT_EXCCNT is the exception overhead counter. DWT_EXCCNT increments on each cycle associated with entry stacking, return unstacking, preemption, and other exception-related processes.
RMVCD	The DWT_SLEEPCNT is the sleep overhead counter. DWT_SLEEPCNT increments on each cycle associated with power saving, whether initiated by a WFI or WFE instruction or sleep-on-exit functionality. It is IMPLEMENTATION DEFINED whether the counter advances in SLEEPDEEP.
RQSSL	The DWT_LSUCNT is the load-store counter. DWT_LSUCNT increments on each additional cycle required to execute a multi-cycle load-store instruction. It does not count the first cycle required to execute any instruction.
RXBQD	The DWT_FOLDCNT is the folded instruction counter. DWT_FOLDCNT increments on any instruction that executes in zero cycles.
RGLMJ	Counters do not increment when the PE is halted. In Debug state the overhead associated with STEP and RUN commands from and to the halt condition is IMPLEMENTATION DEFINED.
RLMPK	A counter overflows on every 256th cycle counted and then wraps to 0. If the appropriate counter overflow event is enabled in DWT_CTRL the DWT outputs an Event counter packet with the appropriate counter flag set to 1.
RLHMB	Setting one of the enable bits to one clears the corresponding counter to zero.

See also:

- [Trace Port Interface Unit on page B13-225](#)

B13.2.11 Generating overflow packets from event counters

R _{KWDH}	<p>If a counter value wraps round to zero and the previous Event Counter packet has been delayed and has not yet been output, then it is IMPLEMENTATION DEFINED whether:</p> <ul style="list-style-type: none">• The DWT attempts to generate a second Event counter packet.• The DWT updates the delayed Event counter packet to include the new wrap event.
R _{HKTL}	<p>If a counter value wraps round to zero and the previous Event counter packet has been delayed and has not yet been output but has the bit for the counter value set, the DWT must attempt to generate a second Event counter packet.</p>
R _{VPXK}	<p>If the DWT unit attempts to generate a packet when its output buffer is full, an Overflow packet is output.</p>
R _{SFFL}	<p>The size of the DWT output buffer is IMPLEMENTATION DEFINED.</p>
R _{DFWR}	<p>Exception trace packets must appear in the same order as for a simple sequential execution of the exception handling.</p>

B13.3 Embedded Trace Macrocell

I_{LCCX} An *Embedded Trace Macrocell* (ETM) is an optional feature of an ARMv8-M implementation.

R_{NGTT} An ETM implementation must comply with one of the following versions of the ETM architecture:

Data trace	Security Extension	
	Implemented	Not implemented
Implemented	ETMv3 not permitted	ETMv3 not permitted
	ETMv4, version 4.2 or later	ETMv4, version 4.0 or later
Not implemented	ETMv3, version 3.5 or later	ETMv3, version 3.5 or later
	ETMv4, version 4.2 or later	ETMv4, version 4.0 or later

R_{LPJM} If an ETM is implemented a trace sink must also be implemented. If the trace sink implemented is the TPIU it must be CoreSight compliant, and must comply with the TPIU architecture for compatibility with ARM and other CoreSight-compatible debug solutions.

R_{NLNS} When an ARMv8-M implementation includes an ETM, the **CMPMATCH[N]** signals from the DWT unit are available as control inputs to the ETM unit.

R_{NJDK} If the Main Extension is not implemented, it is IMPLEMENTATION DEFINED whether the ETM is accessible only to the debugger and is RES0 to software.

R_{WPBN} If the ETM is implemented the debugger must program the TRC_TRACEIDR with a unique nonzero Trace ID for the ETM trace stream.

See also:

- [ARM® CoreSight™ Architecture Specification](#)
- [CMPMATCH\[N\] trigger events on page B13-216.](#)

B13.4 Trace Port Interface Unit

IPWXP	The <i>Trace Port Interface Unit</i> (TPIU) support for ARMv8-M provides an output path for trace data from the DWT, ITM, and ETM. The TPIU is a trace sink.
RCRTQ	It is IMPLEMENTATION DEFINED whether the TPIU supports a parallel trace port output.
RGTRP	It is IMPLEMENTATION DEFINED whether the TPIU supports low-speed asynchronous serial port output using NRZ encoding. This operates as a traditional UART.
RLKQT	It is IMPLEMENTATION DEFINED whether the TPIU supports medium-speed asynchronous serial port output using Manchester encoding.
ISDDK	ARM recommends that the TPIU provides both parallel and asynchronous serial ports, for maximum flexibility with external capture devices.
RHJXK	Whether the trace port clock is synchronous to the PE clock is IMPLEMENTATION DEFINED.
RJBKJ	Software must ensure that all trace is output and flushed to the trace sink before setting the DEMCR.TRCENA bit to 0.
RSTLV	The TPIU is not directly affected by DEMCR.TRCENA being set to 0 or <code>NoninvasiveDebugAllowed()</code> being FALSE.
RJLCQ	The output formatting modes that are supported by the TPIU are IMPLEMENTATION DEFINED. They are: <ul style="list-style-type: none">• Bypass.• Continuous.
RDMFP	Bypass mode is only supported if a serial port output is supported.
RRRJP	Continuous mode must be supported if the parallel trace port is implemented. Software must select Continuous mode when the parallel trace port is used.
RFCTT	Continuous mode must be supported if the ETM is implemented. Software must select Continuous mode when the ETM is used.

See also:

- [TPIU_FFCR, TPIU Formatter and Flush Control Register](#) on page D2-1087.
- [Instrumentation Trace Macrocell](#) on page B13-204.
- [Embedded Trace Macrocell](#) on page B13-224.

B13.5 Flash Patch and Breakpoint unit

B13.5.1 About the FPB unit

R _{FTWL}	The <i>Flash Patch and Breakpoint</i> (FPB) unit supports setting breakpoints on instruction fetches.
R _{QLVF}	In the Main Extension, if the Security Extension is not implemented, it is IMPLEMENTATION DEFINED whether the FPB unit supports: <ul style="list-style-type: none">• Remapping data accesses from specific locations from the Code region of system memory to addresses in the SRAM region. This is referred to as <i>literal remapping</i>.• Remapping instruction fetches from specific addresses from the Code region of system memory to addresses in the SRAM region. This is referred to as <i>instruction remapping</i>.
R _{GDWW}	The number of implemented instruction address comparators is IMPLEMENTATION DEFINED. Software can discover the number of implemented instruction address comparators from FP_CTRL.NUM_CODE .
R _{QKCT}	If literal remapping is supported, the number of implemented literal address comparators is IMPLEMENTATION DEFINED. Software can discover the number of implemented literal address comparators from FP_CTRL.NUM_LIT .
R _{HTWV}	If the Main Extension is not implemented or the Security Extension is implemented, the FPB unit does not support remapping functions.
R _{LPRC}	If the FPB does not support remapping functions, the FP_REMAP.RMPSPT and FP_CTRL.NUM_LIT fields have a value of 0.

See also:

- [Chapter B8 The System Address Map](#).
- [DWT trace restrictions and relaxations on page B13-220](#).
- [Chapter D2 Register Specification](#).

B13.5.2 FPB unit operation

R _{RKFD}	The FPB contains the following register types: <ul style="list-style-type: none">• A general control register, FP_CTRL.• A remap address register, FP_REMAP, if instruction or literal remapping is supported.• Comparator registers.
R _{CTFH}	The FPB uses separate comparators for instruction address comparison and for literal address comparison.
R _{BKKW}	Each implemented instruction address comparator must support breakpoint generation.
R _{SLGM}	If instruction remapping is supported, each implemented instruction address comparator must support instruction remapping.
R _{FNQF}	The FP_CTRL register provides a global enable bit for the FPB, and ID fields that indicate the numbers of instruction address comparison and literal comparison registers implemented.
R _{QXRP}	If instruction or literal remapping is supported, FP_REMAP provides the base address for the remapped accesses.
R _{QCPN}	If remapping is supported, software can configure an instruction address comparator to remap the instruction, or to generate a breakpoint.
R _{VDLL}	If literal remapping is supported, each implemented literal address comparator must support literal remapping.
R _{KMTK}	The literal address comparators only support remapping of data read accesses. Each comparator has its own enable bit that enables operation of the comparator only when the global enable bit is also set to 1.

RCKBL	When configured for breakpoint generation, instruction address comparators can be configured to match any halfword-aligned addresses in the whole address map.
RHPTM	When configured for instruction remapping, instruction address comparators can be configured to match any word-aligned address in the Code memory region, by ignoring bits[1:0] of each instruction fetch.
RXPXS	Instruction address comparators match only on instruction fetches.
ICNBW	Bit[0] of each instruction fetch address is always zero.
RGKNQ	Literal address comparators can be configured to match any word-aligned address in the Code memory region, by ignoring bits[1:0] of each access.
RWRHG	Literal address comparators match only on data reads and ignore data writes. Data writes always access the original location.
RFVNG	When configured for remapping, a match causes the instruction or data to be read from the remapped location.
RKWWG	Comparator n remaps to address (<code>FP_REMAP.REMAP:'00000' + 4n</code>) when it is configured for remapping and a match occurs.
RPTNZ	If a remapped instruction reads the PC, then the value that is returned is calculated from the original instruction address and not the remapped address.
RHTKB	Literal address matching can remap word, halfword, or byte data accesses. A match fetches the appropriate-sized data item from the remapped location.
RMHVF	It is IMPLEMENTATION DEFINED how remapping affects unaligned literal accesses.
RTGVX	When an MPU is enabled, it performs its checks on the original address, and applies the attributes for that address to the remapped location. The MPU does not check the remapped address.
RMPWN	The FPB can remap a Load exclusive accesses, but whether the remapped access is performed as an exclusive access is UNPREDICTABLE.
RCJKK	When an Instruction address matching comparator is configured for breakpoint generation, a match on the address of a 32-bit instruction must be configured to match the first halfword or both halfwords of the instruction.
RWSXN	If a Breakpoint debug event is generated by the FPB on the second halfword of a 32-bit T32 instruction, it is UNPREDICTABLE whether the breakpoint generates a debug event.
RXKJW	An FPB match specifying a Breakpoint debug event generates a Breakpoint debug event that halts the PE if all of the following conditions are true: <ul style="list-style-type: none"> • <code>HaltingDebugAllowed() == TRUE</code>. • <code>DHCSR.C_DEBUGEN == 1</code>. • <code>DHCSR.S_HALT == 0</code>. • The Security Extension is not implemented, the matching instruction is executed in Non-secure state, or <code>DHCSR.S_SDE == 1</code>.
RHXMP	If the Main Extension is implemented, an FPB match specifying a Breakpoint debug event generates a DebugMonitor exception if it does not halt the PE and all of the following conditions are true: <ul style="list-style-type: none"> • <code>DEMCR.MON_EN == 1</code>. • <code>DHCSR.S_HALT == 1</code>. • The DebugMonitor group priority is greater than the current execution priority. • The Security Extension is not implemented, the matching instruction is executed in Non-secure state, or <code>DEMCR.SDME == 1</code>.
RBFPK	An FPB match that specifies a Breakpoint debug event is ignored if it does not meet the conditions for generating either: <ul style="list-style-type: none"> • A Breakpoint debug event that halts the PE.

	<ul style="list-style-type: none"> • A DebugMonitor exception.
R _{CLNV}	<p>Between a change to the debug authentication interface, DHCSR or DEMCR, that disables debug, and a following <i>context synchronization operation</i> (CSO), it is UNPREDICTABLE whether any breakpoints generated by the FPB:</p> <ul style="list-style-type: none"> • Generate a Breakpoint debug event based on the old values and either: <ul style="list-style-type: none"> — If the Main Extension is implemented, generate a DebugMonitor exception. — Halts the PE. • Are escalated to HardFault. • Are ignored.
R _{WSXM}	The FPB treats hardware accesses to the stack as data accesses for registers that are pushed to the stack by hardware as part of an exception entry or lazy state preservation.
R _{XGJS}	The FPB treats hardware accesses to the stack as data accesses for registers popped from the stack by hardware as part of an exception return.
R _{SMPK}	If the Security Extension is implemented, the FPB treats hardware accesses to the stack as data accesses for registers that are pushed to the stack by hardware as part of a Non-secure function return.
R _{QKNS}	If the Security Extension is implemented, the FPB treats hardware accesses to the stack as data accesses for registers popped from the stack by hardware as part of a Non-secure function call.
R _{TDHG}	It is IMPLEMENTATION DEFINED whether the FPB treats a fetch from the exception vector table as part of an exception entry as a data access, or ignores these accesses, for the purposes of FPB address comparator matches. The fetch must never be treated as an instruction fetch.
R _{QGKT}	The FPB does not match access from the DAP.

See also:

- [Halting debug authentication on page B12-184.](#)
- [About debug events on page B12-192.](#)
- [BKPTInstrDebugEvent\(\)](#).
- [FPB_BreakpointMatch\(\)](#).

Multiple FPB comparators

I _{LVNM}	In this section, A, B, and C are word-aligned addresses and comparators <i>n</i> and <i>m</i> are different FPB comparators.
R _{DCLG}	If instruction address comparator <i>n</i> remaps A to B, and instruction address comparator <i>m</i> specifies a breakpoint on A, then, for an instruction that is executed from A, the PE generates a breakpoint.
R _{RHGJ}	If instruction address comparator <i>n</i> remaps A to B, and instruction address comparator <i>m</i> specifies a breakpoint on A+2, then, for an instruction that is executed from A+2, the PE generates a breakpoint.
R _{RKQJ}	If instruction address comparator <i>n</i> remaps A to B, and instruction address comparator <i>m</i> specifies a breakpoint on A, then, for an instruction that is to be executed from A+2, the PE does one of the following: <ul style="list-style-type: none"> • Executes the instruction from A+2. • Executes the instruction from B+2.
R _{TSGV}	If instruction address comparator <i>n</i> remaps A to B, and instruction address comparator <i>m</i> specifies a breakpoint on A+2, then, for an instruction to be executed from A, the PE does one of the following: <ul style="list-style-type: none"> • Executes the instruction from A. • Executes the instruction from B.
R _{RFHV}	If instruction address comparator <i>n</i> remaps A to B, and instruction address comparator <i>m</i> specifies a breakpoint on either B, then, for an instruction that is to be executed from A, the PE does one of the following: <ul style="list-style-type: none"> • Executes the instruction from A.

- Executes the instruction from B.
- Generates a breakpoint.

R_{PDRR}

If instruction address comparator *n* remaps A to B, and instruction address comparator *m* specifies a breakpoint at B+2, then, for an instruction that is to be executed from A+2, the PE does one of the following:

- Executes the instruction from A+2.
- Executes the instruction from B+2.
- Generates a breakpoint.

R_{LGSL}

If instruction address comparator *n* remaps A to B, and instruction address comparator *m* remaps A to C, then, for an instruction that is executed from A or A+2, the PE does one of the following:

- Executes the instruction from A.
- Executes the instruction from A+2.
- Executes the instruction from B.
- Executes the instruction from B+2.
- Executes the instruction from C.
- Executes the instruction from C+2.

R_{CCFF}

If instruction address comparator *n* specifies a breakpoint on A or A+2, and instruction address comparator *m* also has a breakpoint on A or A+2 then, for all combinations of A and A+2 in comparators *n* and *m*, for an instruction that is executed from either A or A+2, the PE does one of the following:

- Executes the instruction from A.
- Executes the instruction from A+2.
- Generates a breakpoint.

I_{XNXD}

The following table shows multiple instruction address comparator cases on instruction fetches. In this table, an outcome of A, B, or C means the instruction from A, B, or C, respectively, is executed.

Comparator <i>n</i>	Comparator <i>m</i>	Instruction executed from	Permitted outcomes
Remap A to B	Breakpoint at A	A	Breakpoint
Remap A to B	Breakpoint at A	A+2	A+2, B+2
Remap A to B	Breakpoint at A+2	A	A, B
Remap A to B	Breakpoint at A+2	A+2	Breakpoint
Remap A to B	Breakpoint at B	A	A, B, Breakpoint
Remap A to B	Breakpoint at B	A+2	A+2, B+2
Remap A to B	Breakpoint at B+2	A	A, B
Remap A to B	Breakpoint at B+2	A+2	A+2, B+2, Breakpoint
Remap A to B	Remap A to C	A+x where x is either 0 or 2	A+x, B+x, C+x
Breakpoint at A or A+2	Breakpoint at A or A+2	A+x where x is either 0 or 2	A+x, Breakpoint

R_{NHHW}

If literal address comparator *n* remaps A to B and literal address comparator *m* remaps A to C, then, for a literal access from A, A+1, A+2, or A+3, the PE does one of the following:

- Uses data from A, A+1, A+2, or A+3, respectively.
- Uses data from B, B+1, B+2, or B+3, respectively.
- Uses data from C, C+1, C+2, or C+3, respectively.

The following table shows multiple comparator cases on literal fetches.

Comparator <i>n</i>	Comparator <i>m</i>	Literal fetched from	Permitted outcomes
Remap A to B	Remap A to C	A+x, where x is 0, 1, 2, or 3	A+x, B+x, C+x

Cache maintenance

R_{GVTV}

Instruction and data caches are permitted to cache the results of the Flash Patch remap function. This means that software must perform cache maintenance operations when enabling, disabling, or modifying a Flash Patch remap.

R_{BWSW}

Instruction caches are not permitted to cache breakpoints that are generated by a Flash Patch and Breakpoint unit.

Part C

ARMv8-M Instruction Set

Chapter C1

Instruction Set Overview

This chapter describes the *instruction descriptions* contained in [Chapter C2 Instruction Specification](#). It contains the following sections:

- [Instruction set on page C1-234](#).
- [Instruction set, interworking support on page C1-235](#).
- [Instruction set, interstating support on page C1-236](#).
- [Format of instruction descriptions on page C1-237](#).
- [Standard assembler syntax fields on page C1-240](#).
- [Conditional execution on page C1-241](#).
- [Instruction set, encoding on page C1-246](#).
- [Modified immediate constants on page C1-249](#).
- [Pseudocode descriptions of operations on general-purpose registers and PC on page C1-250](#).
- [NOP-compatible hint instructions on page C1-251](#).

C1.1 Instruction set

There is one instruction set, called T32.

See also:

- [Instruction set, encoding on page C1-246](#).
- [Chapter C2 Instruction Specification](#). See this for descriptions of each T32 instruction.

C1.2 Instruction set, interworking support

In the A profile version of the ARMv8 architecture, ARMv8-A, the *AArch32 Execution state* supports two instruction sets, T32 and A32, and software can use *interworking branches* to select which of these to execute, as follows:

- In ARMv8-A, some instructions are *interworking branches*, that write an address to the PC that both:
 - Causes a branch to that address.
 - Also selects the instruction set to execute after the branch.

It is bit[0] of the address that selects the instruction set to execute after the branch. If bit[0] is:

- 0** The instruction set to execute after the branch is A32.
- 1** The instruction set to execute after the branch is T32.

In ARMv8-M, the following instructions are interworking branches:

- BX and BLX.
- POP and all forms of LDM, when the register list includes the PC.
- LDR (*immediate*), LDR (*literal*), and LDR (*register*), with <Rt> equal to the PC.

In ARMv8-M, if bit [0] of an interworking address is:

- 0** EPSR.T is assigned the value 0b0, causing the PE to take an INVSTATE UsageFault on the next instruction it attempts to execute.
- 1** EPSR.T is assigned the value 0b1. The Instruction set state is T32 state and all instructions are decoded as T32 instructions.

See also:

- [Instruction set on page C1-234](#).
- [BXWritePC on page E3-1153](#).

C1.3 Instruction set, interstating support

There are the following *interstating branches*:

- BXNS and BLXNS.

When an interstating branch is executed in Secure state, the lsb of the target address indicates the target Security state:

- 0** The target Security state is Non-secure state.
- 1** The target Security state is Secure state.

Interstating branches are UNDEFINED in Non-secure state.

See also:

- In [Chapter B4 Programmers' Model](#):
 - [Security state transitions](#) on page B4-60.

C1.4 Format of instruction descriptions

Each instruction description in [Chapter C2](#) has the following content:

1. A title.
2. An introduction to the instruction.
3. The instruction encoding or encodings.
4. Any alias conditions, if applicable.
5. A list of the assembler symbols for the instruction.
6. Pseudocode describing how the instruction operates.
7. Notes, if applicable.

C1.4.1 The title

The title of an instruction description includes the base mnemonic for the instruction.

If different forms of an instruction use the same base mnemonic, each form has its own description. In this case, the title is the mnemonic followed by a short description of the instruction form in parentheses. This is most often used when an operand is an immediate value in one instruction form, but is a register in another form.

For example, in [Chapter C2](#) there are the following titles for different forms of the ADD instruction:

- *ADD (SP plus immediate)* on page C2-306.
- *ADD (SP plus register)* on page C2-308.
- *ADD (immediate)* on page C2-311.
- *ADD (immediate, to PC)* on page C2-314.
- *ADD (register)* on page C2-316.

C1.4.2 An introduction to the instruction

This briefly describes the function of the instruction. The introduction is not a complete description of the instruction, and it is not definitive. If there is any conflict between it and the more detailed information that follows it, the more detailed information takes priority.

C1.4.3 The instruction encoding or encodings

This shows the instruction encoding diagram, or if the instruction has multiple encodings, shows all of the encoding diagrams. Each diagram has a heading, as follows:

- The first diagram, showing the first encoding of the instruction, has the heading T1.
- The second diagram, showing the second encoding of the instruction, has the heading T2.
- The third diagram, showing the third encoding of the instruction, has the heading T3.
- ...

In a 16-bit encoding diagram:

- The bits are numbered from 15 to 0. This halfword can be described as hw1.
- For an address *A*, the diagram shows, from left to right, the bytes at addresses *A*+1 and *A*.

In a 32-bit encoding diagram:

- The bits are numbered from 15 to 0 for each halfword of the instruction, as a reminder that a 32-bit T32 instruction consists of two halfwords instead of a word. The left-hand halfword in the diagram is called hw1 and the right-hand halfword is called hw2.
- For an address *A*, the diagram shows, from left to right, the bytes at addresses *A*+1 and *A* for hw1, followed by *A*+3 and *A*+2 for hw2.

Between each encoding diagram and its T<n> heading, there is an italicized statement that describes which *ARMv8-M variant* the encoding is present in. For example, “*ARMv8-M Main Extension only.*”

Below each encoding diagram is the *assembler syntax prototype* for that encoding, written in typewriter font. In some cases an encoding has multiple variants of *assembler syntax prototype*, when the prototype differs depending on the value in one or more of the encoding fields. In these cases, the correct variant to use can be identified by either:

- Its subheading.
- An annotation to the syntax.

For a particular encoding:

- There is usually more than one assembler syntax prototype variant that assembles to it.
- The exact set of prototype variants that assemble to it usually depends on the operands to the instruction, for example the register numbers or immediate constants. As an example, for the **AND (register)** instruction, the syntax `AND R0, R0, R8` selects a 32-bit encoding, but `AND R0, R0, R1` selects a 16-bit encoding.

Each encoding diagram, and its associated assembler syntax prototypes, is followed by encoding-specific pseudocode that translates the fields of that encoding into inputs for the encoding-independent pseudocode that describes the operation of the instruction. See [Pseudocode describing how the instruction operates on page C1-239](#).

C1.4.4 Any alias conditions, if applicable

This is an optional part of an instruction description. If included, it describes the set of conditions for which an alternative mnemonic and its associated assembler syntax prototypes are preferred for disassembly by a disassembler. It includes a link to the alias instruction description that defines the alternative syntax. The alias syntax and the original syntax can be used interchangeably in the assembler source code.

ARM recommends that if a disassembler outputs the alias syntax, it consistently outputs the alias syntax.

C1.4.5 A list of the assembler symbols for the instruction

The *Assembler symbols* subsection of an instruction description contains a list of the symbols that the assembler syntax prototype or prototypes use, if any.

The following conventions are used:

- < > Angle brackets. Any symbol enclosed by these is a name or a value that the user supplies. For each symbol, there is a description of what the symbol represents. The description usually also specifies which encoding field or fields encodes the symbol.
- { } Brace brackets. Any symbol enclosed by these is optional. For each optional symbol, there is a description of what the symbol represents and how its presence or absence is encoded.
In some assembler syntax prototypes, some brace brackets are mandatory, for example if they surround a register list. When the use of brace brackets is mandatory, they are separated from other syntax items by one or more spaces.
- # Usually precedes a numeric constant. All uses of # are optional in assembler source code. ARM recommends that disassemblers output the # where the assembler syntax prototype includes it.
- +/- Indicates an optional + or - sign. If neither is coded, + is assumed.

Single spaces are used for clarity, to separate syntax items. Where a space is mandatory, the assembler syntax prototype shows two or more consecutive spaces.

Any characters not shown in this conventions list must be coded exactly as shown in the assembler syntax prototype. Apart from brace brackets, these characters are used as part of a meta-language to define the architectural assembler syntax prototype for an instruction encoding, but have no architecturally defined significance in the input to an assembler or in the output from a disassembler.

Some assembler syntax prototype fields are standardized across all or most instructions.

See also:

- [Standard assembler syntax fields on page C1-240](#).

C1.4.6 Pseudocode describing how the instruction operates

The *Operation* subsection of the instruction description contains this pseudocode.

It is encoding-independent pseudocode that provides a precise description of what the instruction does.

———— **Note** —————

For a description of ARM pseudocode, see [Chapter E3 Pseudocode Specification](#). This chapter also describes the execution model for an instruction.

C1.4.7 Notes, if applicable

If applicable, other notes about the instruction appear under additional subheadings.

C1.5 Standard assembler syntax fields

The following assembler syntax prototype fields are standard across all or most instructions:

- <c> Specifies the condition under which the instruction is executed. If <c> is omitted, it defaults to *always* (AL). For details see [Conditional instructions on page C1-244](#).
- <q> Specifies one of the following optional assembler qualifiers on the instruction:
- .N Meaning narrow. The assembler must select a 16-bit encoding for the instruction. If this is not possible, an assembler error is produced.
 - .W Meaning wide. The assembler must select a 32-bit encoding for the instruction. If this is not possible, an assembler error is produced.

If neither .W nor .N is specified, the assembler can select either a 16-bit or 32-bit encoding. If both encoding lengths are available, it must select a 16-bit encoding. In the few cases where more than one encoding of the same length is available for an instruction, the rules for selecting between them are instruction-specific and are part of the instruction description.

C1.6 Conditional execution

Conditionally executed means that the instruction only has its normal effect on the programmers' model operation, memory and coprocessors if the N, Z, C, and V flags in the APSR satisfy a condition specified in the instruction. If the flags do not satisfy this condition, the instruction acts as a NOP, that is, execution advances to the next instruction as normal, including any relevant checks for exceptions being taken, but has no other effect.

Most T32 instructions are unconditional. Conditional execution in T32 code can be achieved using any of the following instructions:

- A 16-bit conditional branch instruction, with a branch range of -256 to $+254$ bytes. See [B on page C2-332](#) for details. Before the additional instruction support in ARMv6T2, this was the only mechanism for conditional execution in T32 code.
- A 32-bit conditional branch instruction, with a branch range of approximately ± 1 MB. See [B on page C2-332](#) for details.
- 16-bit Compare and Branch on Zero and Compare and Branch on Nonzero instructions, with a branch range of $+4$ to $+130$ bytes. See [CBNZ, CBZ on page C2-345](#) for details.
- A 16-bit If-Then instruction that makes up to four following instructions conditional. See [IT on page C2-370](#) for details. The instructions that are made conditional by an IT instruction are called its *IT block*. Instructions in an IT block must either all have the same condition, or some can have one condition, and others can have the inverse condition.

Most T32 instructions in ARMv8-M can be executed conditionally, based on the values of the APSR condition flags. [Table C1-1](#) shows the available conditions.

In T32 instructions, the condition (if it is not AL) is normally encoded in a preceding IT instruction, see [Conditional instructions on page C1-244](#), [ITSTATE on page C1-242](#), and [IT on page C2-370](#) for details. Some conditional branch instructions do not require a preceding IT instruction, and include a condition code in their encoding.

Table C1-1 Condition codes

cond	Mnemonic extension	Meaning, integer arithmetic	Meaning, floating-point arithmetic ^a	Condition flags
0000	EQ	Equal	Equal	$Z == 1$
0001	NE	Not equal	Not equal, or unordered	$Z == 0$
0010	CS ^b	Carry set	Greater than, equal, or unordered	$C == 1$
0011	CC ^c	Carry clear	Less than	$C == 0$
0100	MI	Minus, negative	Less than	$N == 1$
0101	PL	Plus, positive or zero	Greater than, equal, or unordered	$N == 0$
0110	VS	Overflow	Unordered	$V == 1$
0111	VC	No overflow	Not unordered	$V == 0$
1000	HI	Unsigned higher	Greater than, or unordered	$C == 1$ and $Z == 0$
1001	LS	Unsigned lower or same	Less than or equal	$C == 0$ or $Z == 1$
1010	GE	Signed greater than or equal	Greater than or equal	$N == V$
1011	LT	Signed less than	Less than, or unordered	$N != V$

Table C1-1 Condition codes (continued)

cond	Mnemonic extension	Meaning, integer arithmetic	Meaning, floating-point arithmetic ^a	Condition flags
1100	GT	Signed greater than	Greater than	Z == 0 and N == V
1101	LE	Signed less than or equal	Less than, equal, or unordered	Z == 1 or N != V
1110	None (AL) ^d	Always (unconditional)	Always (unconditional)	Any

- a. Unordered means at least one NaN operand.
- b. HS (unsigned higher or same) is a synonym for CS.
- c. LO (unsigned lower) is a synonym for CC.
- d. AL is an optional mnemonic extension for always, except in IT instructions. See *IT* on page C2-370 for details.

C1.6.1 Pseudocode details of conditional execution

The `CurrentCond()` pseudocode function prototype returns a 4-bit condition specifier as follows:

- For the T1 and T3 encodings of the Branch instruction shown in *B* on page C2-332, it returns the 4-bit cond field of the encoding.
- For all other T32 instructions:
 - If `ITSTATE.IT<3:0> != '0000'` it returns `ITSTATE.IT<7:4>`
 - If `ITSTATE.IT<7:0> == '00000000'` it returns '1110'
 - Otherwise, execution of the instruction is UNPREDICTABLE.

For more information, see *ITSTATE*.

The `ConditionPassed()` function uses this condition specifier and the APSR condition flags to determine whether the instruction must be executed.

C1.6.2 Conditional execution of undefined instructions


If an undefined instruction fails a condition check in ARMv8-M, the instruction behaves as a NOP and does not cause an exception.

———— **Note** —————

The Branch (B) instruction with a conditional field of '1110' is UNDEFINED and takes an exception unless qualified by a condition check failure from an IT instruction.

C1.6.3 ITSTATE

The bit assignments of the ITSTATE register are:



This register holds the If-Then Execution state bits for the T32 IT instruction. See *IT* on page C2-370 for a description of the IT instruction and the associated IT block.

ITSTATE divides into two subfields:

- IT[7:5]** Holds the *base condition* for the current IT block. The base condition is the top 3 bits of the condition specified by the IT instruction.
 This subfield is 0b000 when no IT block is active.

- IT[4:0]** Encodes:
- The size of the IT block. This is the number of instructions that are to be conditionally executed. The size of the block is implied by the position of the least significant 1 in this field, as shown in [Table C1-2](#).
 - The value of the least significant bit of the condition code for each instruction in the block.

———— **Note** —————

Changing the value of the least significant bit of a condition code from 0 to 1 has the effect of inverting the condition code.

This subfield is 0b00000 when no IT block is active.

When an IT instruction is executed, these bits are set according to the condition in the instruction, and the *Then* and *Else* (T and E) parameters in the instruction, see [IT on page C2-370](#) for more information.

An instruction in an IT block is conditional, see [Conditional instructions on page C1-244](#). The condition used is the current value of IT[7:4]. When an instruction in an IT block completes its execution normally, ITSTATE is advanced to the next line of [Table C1-2](#).

———— **Note** —————

Instructions that can complete their normal execution by branching are only permitted in an IT block as its last instruction, and so always result in ITSTATE advancing to normal execution.

Table C1-2 Effect of IT Execution state bits

IT bits ^a						
[7:5]	[4]	[3]	[2]	[1]	[0]	
cond_base	P1	P2	P3	P4	1	Entry point for 4-instruction IT block
cond_base	P1	P2	P3	1	0	Entry point for 3-instruction IT block
cond_base	P1	P2	1	0	0	Entry point for 2-instruction IT block
cond_base	P1	1	0	0	0	Entry point for 1-instruction IT block
000	0	0	0	0	0	Normal execution, not in an IT block

a. Combinations of the IT bits not shown in this table are reserved.

Pseudocode details of ITSTATE operation

ITSTATE advances after normal execution of an IT block instruction. This is described in [ITAdvance\(\)](#).

[InITBlock](#) and [LastInITBlock](#) test whether the current instruction is in an IT block, and whether it is the last instruction of an IT block.

C1.6.4 Unified Assembler Language

This document uses the ARM *Unified Assembler Language* (UAL). This assembly language syntax provides a canonical form for all ARM and T32 instructions.

UAL describes the syntax for the mnemonic and the operands of each instruction. In addition, it assumes that instructions and data items can be given labels. It does not specify the syntax to be used for labels, nor what assembler directives and options are available. See your assembler documentation for these details.

UAL includes *instruction selection* rules that specify which instruction encoding is selected when more than one can provide the required functionality. For example, both 16-bit and 32-bit encodings exist for an ADD R0,R1,R2 instruction. The most common instruction selection rule is that when both a 16-bit encoding and a 32-bit encoding are available, the 16-bit encoding is selected, to optimize code density.

Syntax options exist to override the normal instruction selection rules and ensure that a particular encoding is selected. These are useful when disassembling code, to ensure that subsequent assembly produces the original code, and in some other situations.

Conditional instructions

For maximum portability of UAL assembly language between the A32 and T32 instruction sets, ARM recommends that:

- IT instructions are written before conditional instructions in the correct way for the T32 instruction set.
- When assembling to the A32 instruction set, assemblers check that any IT instructions are correct, but do not generate any code for them.

Although other T32 instructions are unconditional, all instructions that are made conditional by an IT instruction must be written with a condition. These conditions must match the conditions imposed by the IT instruction. For example, an ITTEE EQ instruction imposes the EQ condition on the first two following instructions, and the NE condition on the next two. Those four instructions must be written with EQ, EQ, NE and NE conditions respectively.

Some instructions cannot be made conditional by an IT instruction. Some instructions can be conditional if they are the last instruction in the IT block, but not otherwise.

The branch instruction encodings that include a condition field cannot be made conditional by an IT instruction. If the assembler syntax indicates a conditional branch that correctly matches a preceding IT instruction, it is assembled using a branch instruction encoding that does not include a condition field.

Use of labels in UAL instruction syntax

The UAL syntax for some instructions includes the label of an instruction or a literal data item that is at a fixed offset from the instruction being specified. The assembler must:

1. Calculate the PC or `Align(PC, 4)` value of the instruction. The PC value of an instruction is its address plus 4 for a T32 instruction. The `Align(PC, 4)` value of an instruction is its PC value ANDed with `0xFFFFF0` to force it to be word-aligned.
2. Calculate the offset from the PC or `Align(PC, 4)` value of the instruction to the address of the labelled instruction or literal data item.
3. Assemble a *PC-relative* encoding of the instruction, that is, one that reads its PC or `Align(PC, 4)` value and adds the calculated offset to form the required address.

————— Note —————

For instructions that encode a subtraction operation, if the instruction cannot encode the calculated offset, but can encode minus the calculated offset, the instruction encoding specifies a subtraction of minus the calculated offset.

The syntax of the following instructions includes a label:

- B and BL. The assembler syntax for these instructions always specifies the label of the instruction that they branch to. Their encodings specify a sign-extended immediate offset that is added to the PC value of the instruction to form the target address of the branch.
- CBNZ and CBZ. The assembler syntax for these instructions always specifies the label of the instruction that they branch to. Their encodings specify a zero-extended immediate offset that is added to the PC value of the instruction to form the target address of the branch. They do not support backward branches.

- LDC, LDC2, LDR, LDRB, LDRD, LDRH, LDRSB, LDRSH, PLD, PLI, VLDR, and VSTR. The normal assembler syntax of these load instructions can specify the label of a literal data item that is to be loaded. The encodings of these instructions specify a zero-extended immediate offset that is either added to or subtracted from the `Align(PC,4)` value of the instruction to form the address of the data item. A few such encodings perform a fixed addition or a fixed subtraction and must only be used when that operation is required, but most contain a bit that specifies whether the offset is to be added or subtracted.

When the assembler calculates an offset of 0 for the normal syntax of these instructions, it must assemble an encoding that adds 0 to the `Align(PC,4)` value of the instruction. Encodings that subtract 0 from the `Align(PC,4)` value cannot be specified by the normal syntax.

There is an alternative syntax for these instructions that specifies the addition or subtraction and the immediate offset explicitly. In this syntax, the label is replaced by `[PC, #+/-<imm>]`, where:

`+/-` Is + or omitted to specify that the immediate offset is to be added to the `Align(PC,4)` value, or - if it is to be subtracted.

`<imm>` Is the immediate offset.

This alternative syntax makes it possible to assemble the encodings that subtract 0 from the `Align(PC,4)` value, and to disassemble them to a syntax that can be re-assembled correctly.

- ADR. The normal assembler syntax for this instruction can specify the label of an instruction or literal data item whose address is to be calculated. Its encoding specifies a zero-extended immediate offset that is either added to or subtracted from the `Align(PC,4)` value of the instruction to form the address of the data item, and some opcode bits that determine whether it is an addition or subtraction.

When the assembler calculates an offset of 0 for the normal syntax of this instruction, it must assemble the encoding that adds 0 to the `Align(PC,4)` value of the instruction. The encoding that subtracts 0 from the `Align(PC,4)` value cannot be specified by the normal syntax.

There is an alternative syntax for this instruction that specifies the addition or subtraction and the immediate value explicitly, by writing them as additions `ADD <Rd>,PC,#<imm>` or subtractions `SUB <Rd>,PC,#<imm>`. This alternative syntax makes it possible to assemble the encoding that subtracts 0 from the `Align(PC,4)` value, and to disassemble it to a syntax that can be re-assembled correctly.

———— **Note** —————

ARM recommends that where possible, you avoid using:

- The alternative syntax for the ADR, LDC, LDC2, LDR, LDRB, LDRD, LDRH, LDRSB, LDRSH, PLD, PLI, VLDR, and VSTR instructions.
- The encodings of these instructions that subtract 0 from the `Align(PC,4)` value.

C1.7 Instruction set, encoding

The T32 instruction stream is a stream of halfword-aligned halfwords. Each instruction is either a single 16-bit halfword in that stream, or a 32-bit instruction consisting of two consecutive halfwords in that stream.

If bits [15:11] of the halfword being decoded take any of the following values, the halfword is the first halfword of a 32-bit instruction:

- 0b11101.
- 0b11110.
- 0b11111.

Otherwise, the halfword is a 16-bit instruction.

C1.7.1 UNDEFINED and UNPREDICTABLE instruction set space

An attempt to execute an unallocated instruction results in either:

- Unpredictable behavior. The instruction is described as UNPREDICTABLE.
- An Undefined Instruction exception. The instruction is described as UNDEFINED.

An instruction is UNDEFINED if it is declared as UNDEFINED in an instruction description, or in this chapter

An instruction is UNPREDICTABLE if:

- A bit marked (0) or (1) in the encoding diagram of an instruction is not 0 or 1, respectively, and the pseudocode for that encoding does not indicate that a different special case applies
- It is declared as UNPREDICTABLE in an instruction description or in this chapter.

Unless otherwise specified:

- T32 instructions introduced in an architecture variant are either UNPREDICTABLE or UNDEFINED in earlier architecture variants.
- A T32 instruction that is provided by one or more of the architecture extensions is either UNPREDICTABLE or UNDEFINED in an implementation that does not include those extensions.

In both cases, the instruction is UNPREDICTABLE if it is a 32-bit instruction in an architecture variant before ARMv6T2, and UNDEFINED otherwise.

C1.7.2 Use of 0b1111 as a register specifier

The use of 0b1111 as a register specifier is not normally permitted in T32 instructions. When a value of 0b1111 is permitted, a variety of meanings is possible. For register reads, these meanings are:

- Read the PC value, that is, the address of the current instruction + 4. The base register of the table branch instructions TBB and TBH can be the PC. This enables branch tables to be placed in memory immediately after the instruction. (Some instructions read the PC value implicitly, without the use of a register specifier, for example the conditional branch instruction B<cond>.)

———— **Note** —————

Use of the PC as the base register in the STC instruction is deprecated in ARMv7.

- Read the word-aligned PC value, that is, the address of the current instruction + 4, with bits [1:0] forced to zero. The base register of LDC, LDR, LDRB, LDRD (pre-indexed, no write-back), LDRH, LDRSB, and LDRSH instructions can be the word-aligned PC. This enables PC-relative data addressing. In addition, some encodings of the ADD and SUB instructions permit their source registers to be 0b1111 for the same purpose.
- Read zero. This is done in some cases when one instruction is a special case of another, more general instruction, but with one operand zero. In these cases, the instructions are listed on separate pages, with a special case in the pseudocode for the more general instruction cross-referencing the other page.

For register writes, these meanings are:

- The PC can be specified as the destination register of an LDR instruction. This is done by encoding Rt as 0b1111. The loaded value is treated as an address, and the effect of execution is a branch to that address. bit [0] of the loaded value selects the Execution state after the branch and must have the value 1.

Some other instructions write the PC in similar ways, either:

- Implicitly, for example, B<cond>.
- By using a register mask rather than a register specifier, for example LDM.

The address to branch to can be:

- A loaded value, for example LDM.
- A register value, for example BX.
- The result of a calculation, for example TBB or TBH.

- Discard the result of a calculation. This is done in some cases when one instruction is a special case of another, more general instruction, but with the result discarded. In these cases, the instructions are listed on separate pages, with a special case in the pseudocode for the more general instruction cross-referencing the other page.
- If the destination register specifier of an LDRB, LDRH, LDRSB, or LDRSH instruction is 0b1111, the instruction is a memory hint instead of a load operation.
- If the destination register specifier of an MRC instruction is 0b1111, bits [31:28] of the value transferred from the coprocessor are written to the N, Z, C, and V flags in the APSR, and bits [27:0] are discarded.

C1.7.3 Use of 0b1101 as a register specifier

R13 is defined in the T32 instruction set so that its use is primarily as a stack pointer, and R13 is normally identified as SP in T32 instructions. In 32-bit T32 instructions, if you use SP as a general purpose register beyond the architecturally defined constraints described in this section, the results are UNPREDICTABLE.

The following subsections describe the restrictions that apply to using SP:

- [SP\[1:0\] definition.](#)
- [32-bit T32 instruction support for SP.](#)

See also [16-bit T32 instruction support for SP on page C1-248.](#)

SP[1:0] definition

Bits [1:0] of SP must be treated as *SBZP* (Should Be Zero or Preserved). Writing a non-zero value to bits [1:0] results in UNPREDICTABLE behavior. Reading bits[1:0] returns zero.

32-bit T32 instruction support for SP

32-bit T32 instruction support for SP is restricted to the following:

- SP as the source or destination register of a MOV instruction. Only register to register transfers without shifts are supported, with no flag setting:

```
MOV    SP,Rm
MOV    Rn,SP
```

- Adjusting SP up or down by a multiple of its alignment:

```
ADD{W} SP,SP,#N      ; For N a multiple of 4
SUB{W} SP,SP,#N      ; For N a multiple of 4
ADD    SP,SP,Rm,LSL #shft ; For shft=0,1,2,3
SUB    SP,SP,Rm,LSL #shft ; For shft=0,1,2,3
```

- SP as a base register, Rn, of any load or store instruction. This supports SP-based addressing for load, store, or memory hint instructions, with positive or negative offsets, with and without write-back.

- SP as the first operand, Rn, in any ADD{S}, CMN, CMP, or SUB{S} instruction. The add and subtract instructions support SP-based address generation, with the address going into a general-purpose register. CMN and CMP are useful for stack checking in some circumstances.
- SP as the transferred register, Rt, in any LDR or STR instruction.
- SP as the address in a POP or PUSH instruction.

16-bit T32 instruction support for SP

For 16-bit data processing instructions that affect high registers, SP can only be used as described in [32-bit T32 instruction support for SP on page C1-247](#). ARM deprecates any other use. This affects the high register forms of CMP and ADD, where ARM deprecates the use of SP as Rn.

C1.8 Modified immediate constants

The encoding of modified immediate constants in T32 instructions is:

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
i																imm3			a b c d e f g h												

Table C1-3 shows the range of modified immediate constants available in T32 data processing instructions, and how they are encoded in the a, b, c, d, e, f, g, h, i, and imm3 fields in the instruction.

Table C1-3 Encoding of modified immediates in T32 data-processing instructions

i:imm3:a	<const> ^a
0000x	00000000 00000000 00000000 abcdefgh
0001x	00000000 abcdefgh 00000000 abcdefgh ^b
0010x	abcdefgh 00000000 abcdefgh 00000000 ^b
0011x	abcdefgh abcdefgh abcdefgh abcdefgh ^b
01000	1bcdefgh 00000000 00000000 00000000
01001	01bcdefg h0000000 00000000 00000000
01010	001bcdef gh000000 00000000 00000000
01011	0001bcde fgh00000 00000000 00000000
.	.
.	. 8-bit values shifted to other positions
.	.
11101	00000000 00000000 000001bc defgh000
11110	00000000 00000000 0000001b cdefgh00
11111	00000000 00000000 00000001 bcdefgh0

- a. This table shows the immediate constant value in binary form, to relate abcdefgh to the encoding diagram. In assembly syntax, the immediate value is specified in the usual way (a decimal number by default).
- b. UNPREDICTABLE if abcdefgh == 00000000.

C1.8.1 Carry out

A logical operation with i:imm3:a of the form 00xxx does not affect the carry flag. Otherwise, a logical operation that sets the flags sets the Carry flag to the value of bit [31] of the modified immediate constant.

C1.8.2 Operation of modified immediate constants

T32ExpandImm on page E3-1264 and *T32ExpandImm_C* on page E3-1264 show the operation of modified immediate constants.

C1.9 Pseudocode descriptions of operations on general-purpose registers and PC

In pseudocode, the uses of the `R[]` function are:

- Reading or writing R0-R12, SP, and LR, using `n = 0-12, 13, and 14` respectively.
- Reading the PC, using `n = 15`.

[_R](#) on page E3-1279 shows the function prototypes.

Writing an address to the PC causes either a simple branch to that address or an *interworking* branch that also selects the instruction set to execute after the branch. A simple branch is performed by [BranchWritePC](#) on page E3-1155.

An interworking branch is performed by [BXWritePC](#) on page E3-1153.

[LoadWritePC](#) on page E3-1224 and [ALUWritePC](#) on page E3-1150 are used for two cases where the behavior was systematically modified between architecture versions.

C1.10 NOP-compatible hint instructions

A hint instruction only provides an indication to the PE. It is not mandated that the PE perform an operation on a hint instruction.

A NOP-compatible hint instruction either:

- Acts as a [NOP](#) (No Operation) instruction.
- Performs some IMPLEMENTATION DEFINED behavior.

A PE without the Main Extension only supports the 16-bit encodings of the ARMv8-M NOP-compatible hint instructions. A PE with the Main Extension supports both the 16-bit and the 32-bit encodings of the ARMv8-M NOP-compatible hint instructions.

- For information on the 16-bit encodings see [Hints on page C2-263](#).
- For information on the 32-bit encodings see [Hints on page C2-278](#).

Chapter C2

Instruction Specification

This chapter specifies the ARMv8-M instruction set. It contains the following sections:

- *Top level T32 instruction set encoding on page C2-254.*
- *16-bit T32 instruction encoding on page C2-255.*
- *32-bit T32 instruction encoding on page C2-266.*
- *Alphabetical list of instructions on page C2-302.*

C2.1 Top level T32 instruction set encoding

The T32 instruction stream is a sequence of halfword-aligned halfwords. Each T32 instruction is either a single 16-bit halfword in that stream, or a 32-bit instruction consisting of two consecutive halfwords in that stream.

If the value of bits[15:11] of the halfword being decoded is one of the following, the halfword is the first halfword of a 32-bit instruction:

- 0b11101.
- 0b11110.
- 0b11111.

Otherwise, the halfword is a 16-bit instruction.




Table C2-1 Main encoding table for the T32 instruction set

Decode fields		Decode group or instruction page
op0	op1	
!= 111	-	<i>16-bit T32 instruction encoding on page C2-255</i>
111	00	B - T2 variant
111	!= 00	<i>32-bit T32 instruction encoding on page C2-266</i>

C2.2 16-bit T32 instruction encoding

This section describes the encoding of the 16-bit T32 instruction encoding group. This section is decoded from *Top level T32 instruction set encoding* on page C2-254.

———— **Note** ————

In the decode tables in this section, an entry of - for a field value means the value of the field does not affect the decoding.



Table C2-2 Encoding table for the 16-bit group

Decode fields	Decode group or instruction page
op0	
00xxxx	<i>Shift (immediate), add, subtract, move, and compare</i>
010000	<i>Data-processing (two low registers) on page C2-257</i>
010001	<i>Special data instructions and branch and exchange on page C2-258</i>
01001x	LDR (literal) - T1 variant
0101xx	<i>Load/store (register offset) on page C2-259</i>
011xxx	<i>Load/store word/byte (immediate offset) on page C2-259</i>
1000xx	<i>Load/store halfword (immediate offset) on page C2-260</i>
1001xx	<i>Load/store (SP-relative) on page C2-260</i>
1010xx	<i>Add PC/SP (immediate) on page C2-261</i>
1011xx	<i>Miscellaneous 16-bit instructions on page C2-261</i>
1100xx	<i>Load/store multiple on page C2-264</i>
1101xx	<i>Conditional branch, and Supervisor Call on page C2-264</i>

C2.2.1 Shift (immediate), add, subtract, move, and compare

This section describes the encoding of the Shift (immediate), add, subtract, move, and compare group. This section is decoded from *16-bit T32 instruction encoding*.


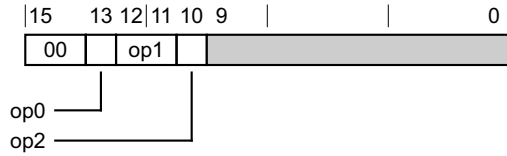


Table C2-3 Encoding table for the Shift (immediate), add, subtract, move, and compare group

Decode fields			Decode group or instruction page
op0	op1	op2	
0	11	0	<i>Add, subtract (three low registers)</i>
0	11	1	<i>Add, subtract (two low registers and immediate)</i>
0	!= 11	-	<i>MOV (register) - T2 variant on page C2-453</i>
1	-	-	<i>Add, subtract, compare, move (one low register and immediate) on page C2-257</i>

Add, subtract (three low registers)


This section describes the encoding of the Add, subtract (three low registers) instruction class. This section is decoded from *Shift (immediate), add, subtract, move, and compare* on page C2-255.



Decode fields	Instruction page
S	
0	<i>ADD (register)</i>
1	<i>SUB (register)</i>

Add, subtract (two low registers and immediate)

This section describes the encoding of the Add, subtract (two low registers and immediate) instruction class. This section is decoded from *Shift (immediate), add, subtract, move, and compare* on page C2-255.



Decode fields	Instruction page
S	
0	<i>ADD (immediate)</i>
1	<i>SUB (immediate)</i>

Add, subtract, compare, move (one low register and immediate)

This section describes the encoding of the Add, subtract, compare, move (one low register and immediate) instruction class. This section is decoded from *Shift (immediate), add, subtract, move, and compare* on page C2-255.

15	14	13	12	11	10	8	7		0
0	0	1	op	Rd			imm8		

Decode fields	
op	Instruction page
00	MOV (immediate)
01	CMP (immediate)
10	ADD (immediate)
11	SUB (immediate)

C2.2.2 Data-processing (two low registers)

This section describes the encoding of the Data-processing (two low registers) instruction class. This section is decoded from *16-bit T32 instruction encoding* on page C2-255.

15	14	13	12	11	10	9	6	5	3	2	0
0	1	0	0	0	0	op	Rs		Rd		

Decode fields	
op	Instruction page
0000	AND (register)
0001	EOR (register)
0010	MOV, MOVS (register-shifted register) - <i>Logical shift left variant</i> on page C2-457
0011	MOV, MOVS (register-shifted register) - <i>Logical shift right variant</i> on page C2-457
0100	MOV, MOVS (register-shifted register) - <i>Arithmetic shift right variant</i> on page C2-457
0101	ADC (register)
0110	SBC (register)
0111	MOV, MOVS (register-shifted register) - <i>Rotate right variant</i> on page C2-457
1000	TST (register)
1001	RSB (immediate)
1010	CMP (register)
1011	CMN (register)

Decode fields	
op	Instruction page
1100	ORR (register)
1101	MUL
1110	BIC (register)
1111	MVN (register)

C2.2.3 Special data instructions and branch and exchange

This section describes the encoding of the Special data instructions and branch and exchange group. This section is decoded from *16-bit T32 instruction encoding on page C2-255*.





Table C2-4 Encoding table for the Special data instructions and branch and exchange group

Decode fields	
op0	Decode group or instruction page
11	<i>Branch and exchange</i>
!= 11	<i>Add, subtract, compare, move (two high registers)</i>

Branch and exchange


This section describes the encoding of the Branch and exchange instruction class. This section is decoded from *Special data instructions and branch and exchange*.



Decode fields	
L	Instruction page
0	BX, BXNS
1	BLX, BLXNS

Add, subtract, compare, move (two high registers)


This section describes the encoding of the Add, subtract, compare, move (two high registers) instruction class. This section is decoded from *Special data instructions and branch and exchange*.



Decode fields			Instruction page
op	D:Rd	Rs	
00	!= 1101	!= 1101	ADD (register)
00	-	1101	ADD (SP plus register) - <i>T1 variant on page C2-308</i>
00	1101	!= 1101	ADD (SP plus register) - <i>T2 variant on page C2-308</i>
01	-	-	CMP (register)
10	-	-	MOV (register)

C2.2.4 Load/store (register offset)


This section describes the encoding of the Load/store (register offset) instruction class. This section is decoded from [16-bit T32 instruction encoding on page C2-255](#).



Decode fields			Instruction page
L	B	H	
0	0	0	STR (register)
0	0	1	STRH (register)
0	1	0	STRB (register)
0	1	1	LDRSB (register)
1	0	0	LDR (register)
1	0	1	LDRH (register)
1	1	0	LDRB (register)
1	1	1	LDRSH (register)

C2.2.5 Load/store word/byte (immediate offset)


This section describes the encoding of the Load/store word/byte (immediate offset) instruction class. This section is decoded from [16-bit T32 instruction encoding on page C2-255](#).



Decode fields		Instruction page
B	L	
0	0	STR (immediate)
0	1	LDR (immediate)
1	0	STRB (immediate)
1	1	LDRB (immediate)

C2.2.6 Load/store halfword (immediate offset)


This section describes the encoding of the Load/store halfword (immediate offset) instruction class. This section is decoded from [16-bit T32 instruction encoding on page C2-255](#).



Decode fields		Instruction page
L		
0		STRH (immediate)
1		LDRH (immediate)

C2.2.7 Load/store (SP-relative)


This section describes the encoding of the Load/store (SP-relative) instruction class. This section is decoded from [16-bit T32 instruction encoding on page C2-255](#).



Decode fields		Instruction page
L		
0		STR (immediate)
1		LDR (immediate)

C2.2.8 Add PC/SP (immediate)

This section describes the encoding of the Add PC/SP (immediate) instruction class. This section is decoded from [16-bit T32 instruction encoding on page C2-255](#).



Decode fields		Instruction page
SP		
0		ADR
1		ADD (SP plus immediate)

C2.2.9 Miscellaneous 16-bit instructions

This section describes the encoding of the Miscellaneous 16-bit instructions group. This section is decoded from [16-bit T32 instruction encoding on page C2-255](#).

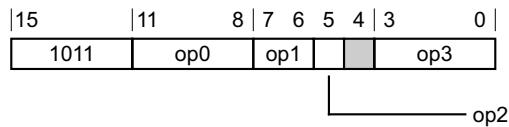


Table C2-5 Encoding table for the Miscellaneous 16-bit instructions group

Decode fields				Decode group or instruction page
op0	op1	op2	op3	
0000	-	-	-	Adjust SP (immediate) on page C2-262
0010	-	-	-	Extend on page C2-262
0110	00	-	-	Unallocated.
0110	01	0	-	Unallocated.
0110	01	1	-	CPS
0110	1x	-	-	Unallocated.
0111	-	-	-	Unallocated.
1000	-	-	-	Unallocated.
1010	10	-	-	Unallocated.
1010	!= 10	-	-	Reverse bytes on page C2-262
1110	-	-	-	BKPT
1111	-	-	0000	Hints on page C2-263

Table C2-5 Encoding table for the Miscellaneous 16-bit instructions group (continued)

Decode fields				Decode group or instruction page
op0	op1	op2	op3	
1111	-	-	!= 0000	IT
x0x1	-	-	-	CBNZ, CBZ
x10x	-	-	-	Push and Pop on page C2-263

Adjust SP (immediate)

This section describes the encoding of the Adjust SP (immediate) instruction class. This section is decoded from *Miscellaneous 16-bit instructions* on page C2-261.

15	14	13	12	11	10	9	8	7	6		0
1	0	1	1	0	0	0	0	S	imm7		

Decode fields		Instruction page
S		
0		ADD (SP plus immediate)
1		SUB (SP minus immediate)

Extend


This section describes the encoding of the Extend instruction class. This section is decoded from *Miscellaneous 16-bit instructions* on page C2-261.

15	14	13	12	11	10	9	8	7	6	5	3	2	0
1	0	1	1	0	0	1	0	U	B	Rm	Rd		

Decode fields			Instruction page
U	B		
0	0	0	SXTH
0	0	1	SXTB
1	0	0	UXTH
1	0	1	UXTB

Reverse bytes


This section describes the encoding of the Reverse bytes instruction class. This section is decoded from *Miscellaneous 16-bit instructions* on page C2-261.



Decode fields	Instruction page
op	
00	REV
01	REV16
11	REVSH

Hints


This section describes the encoding of the Hints instruction class. This section is decoded from *Miscellaneous 16-bit instructions* on page C2-261.



Decode fields	Instruction page
hint	
0000	NOP
0001	YIELD
0010	WFE
0011	WFI
0100	SEV
0101	Reserved hint, behaves as NOP .
011x	Reserved hint, behaves as NOP .
1xxx	Reserved hint, behaves as NOP .

Push and Pop


This section describes the encoding of the Push and Pop instruction class. This section is decoded from *Miscellaneous 16-bit instructions* on page C2-261.



Decode fields	Instruction page
L	
0	STMDB, STMFD
1	LDM, LDMIA, LDMFD

C2.2.10 Load/store multiple

This section describes the encoding of the Load/store multiple instruction class. This section is decoded from *16-bit T32 instruction encoding on page C2-255*.



Decode fields	Instruction page
L	
0	STM, STMIA, STMEA
1	LDM, LDMIA, LDMFD

C2.2.11 Conditional branch, and Supervisor Call

This section describes the encoding of the Conditional branch, and Supervisor Call group. This section is decoded from *16-bit T32 instruction encoding on page C2-255*.





Table C2-6 Encoding table for the Conditional branch, and Supervisor Call group

Decode fields	Decode group or instruction page
op0	
111x	Exception generation
!= 111x	B - T1 variant on page C2-332

Exception generation

This section describes the encoding of the Exception generation instruction class. This section is decoded from *Conditional branch, and Supervisor Call*.



Decode fields	Instruction page
S	
0	UDF
1	SVC

C2.3 32-bit T32 instruction encoding

This section describes the encoding of the 32-bit T32 instruction encoding group. This section is decoded from *Top level T32 instruction set encoding* on page C2-254.

———— **Note** ————

In the decode tables in this section, an entry of - for a field value means the value of the field does not affect the decoding.

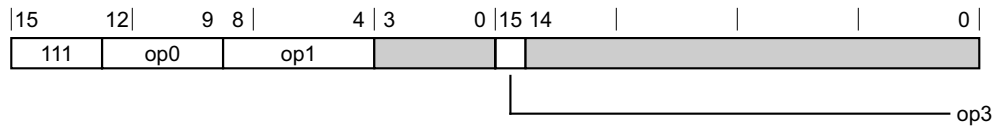


Table C2-7 Encoding table for the 32-bit group

Decode fields			Decode group or instruction page
op0	op1	op3	
x11x	-	-	<i>Coprocessor and floating-point instructions</i> on page C2-292
0100	-	-	<i>Load/store (multiple, dual, exclusive, acquire-release), table branch</i>
0101	-	-	<i>Data-processing (shifted register)</i> on page C2-272
10xx	-	1	<i>Branches and miscellaneous control</i> on page C2-277
10x0	-	0	<i>Data-processing (modified immediate)</i> on page C2-274
10x1	-	0	<i>Data-processing (plain binary immediate)</i> on page C2-275
1100	1xxx0	-	Unallocated.
1100	!= 1xxx0	-	<i>Load/store single</i> on page C2-279
1101	0xxxx	-	<i>Data-processing (register)</i> on page C2-285
1101	10xxx	-	<i>Multiply, multiply accumulate, and absolute difference</i> on page C2-289
1101	11xxx	-	<i>Long multiply and divide</i> on page C2-291

C2.3.1 Load/store (multiple, dual, exclusive, acquire-release), table branch

This section describes the encoding of the Load/store (multiple, dual, exclusive, acquire-release), table branch group. This section is decoded from *32-bit T32 instruction encoding*.


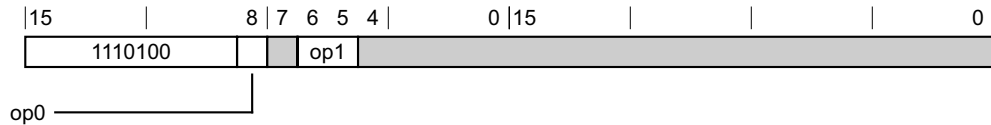


Table C2-8 Encoding table for the Load/store (multiple, dual, exclusive, acquire-release), table branch group

Decode fields		Decode group or instruction page
op0	op1	
-	0x	<i>Load/store multiple</i>
0	10	<i>Load/store exclusive, load-acquire/store-release, table branch</i>
0	11	<i>Load/store dual (post-indexed) on page C2-270</i>
1	10	<i>Load/store dual (literal and immediate) on page C2-270</i>
1	11	<i>Load/store dual (pre-indexed), secure gateway on page C2-271</i>

Load/store multiple

This section describes the encoding of the Load/store multiple instruction class. This section is decoded from *Load/store (multiple, dual, exclusive, acquire-release), table branch on page C2-266*.



Decode fields		Instruction page
opc	L	
00	-	Unallocated.
01	0	<i>STM, STMIA, STMEA</i>
01	1	<i>LDM, LDMIA, LDMFD</i>
10	0	<i>STMDB, STMFD</i>
10	1	<i>LDMDB, LDMEA</i>
11	-	Unallocated.

Load/store exclusive, load-acquire/store-release, table branch

This section describes the encoding of the Load/store exclusive, load-acquire/store-release, table branch group. This section is decoded from *Load/store (multiple, dual, exclusive, acquire-release), table branch on page C2-266*.


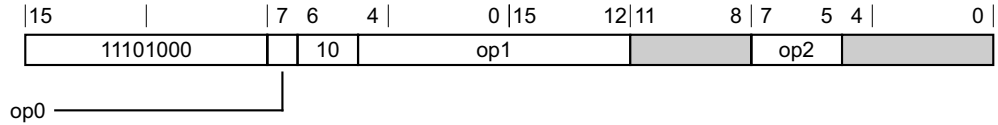


Table C2-9 Encoding table for the Load/store exclusive, load-acquire/store-release, table branch group

Decode fields			Decode group or instruction page
op0	op1	op2	
0	0xxxx1111	-	TT, TTT, TTA, TTAT
0	!= 0xxxx1111	-	Load/store exclusive
1	0xxxxxxx	000	Unallocated.
1	1xxxxxxx	000	TBB, TBH
1	-	01x	Load/store exclusive byte/half/dual
1	-	1xx	Load-acquire / Store-release on page C2-269

Load/store exclusive

This section describes the encoding of the Load/store exclusive instruction class. This section is decoded from *Load/store exclusive, load-acquire/store-release, table branch on page C2-267*.



Decode fields		Instruction page
L	Rt	
0	!= 01111	STREX
1	1xxxx	LDREX

Load/store exclusive byte/half/dual

This section describes the encoding of the Load/store exclusive byte/half/dual instruction class. This section is decoded from *Load/store exclusive, load-acquire/store-release, table branch on page C2-267*.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	0	0	1	1	0	L	Rn	Rt	Rt2	0	1	sz	Rd					

Decode fields			Instruction page
L	sz		
0	00		STREXB
0	01		STREXH
0	10		Unallocated.
0	11		Unallocated.
1	00		LDREXB
1	01		LDREXH
1	10		Unallocated.
1	11		Unallocated.

Load-acquire / Store-release

This section describes the encoding of the Load-acquire / Store-release instruction class. This section is decoded from [Load/store exclusive, load-acquire/store-release, table branch on page C2-267](#).

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	0	0	1	1	0	L	Rn	Rt	Rt2	1	op	sz	Rd					

Decode fields			Instruction page
op	L	sz	
0	0	00	STLB
0	0	01	STLH
0	0	10	STL
0	0	11	Unallocated.
0	1	00	LDAB
0	1	01	LDAH
0	1	10	LDA
0	1	11	Unallocated.
1	0	00	STLEXB
1	0	01	STLEXH
1	0	10	STLEX
1	0	11	Unallocated.

Decode fields			Instruction page
op	L	sz	
1	1	00	LDAEXB
1	1	01	LDAEXH
1	1	10	LDAEX
1	1	11	Unallocated.

Load/store dual (post-indexed)

This section describes the encoding of the Load/store dual (post-indexed) group. This section is decoded from *Load/store (multiple, dual, exclusive, acquire-release), table branch* on page C2-266.





Table C2-10 Encoding table for the Load/store dual (post-indexed) group

Decode fields	Decode group or instruction page
op0	
1111	UNPREDICTABLE
!= 1111	<i>Load/store dual (immediate, post-indexed)</i>

Load/store dual (immediate, post-indexed)

This section describes the encoding of the Load/store dual (immediate, post-indexed) instruction class. This section is decoded from *Load/store dual (post-indexed)*.



Decode fields		Instruction page
L		
0		STRD (immediate)
1		LDRD (immediate)

Load/store dual (literal and immediate)

This section describes the encoding of the Load/store dual (literal and immediate) group. This section is decoded from *Load/store (multiple, dual, exclusive, acquire-release), table branch* on page C2-266.





Table C2-11 Encoding table for the Load/store dual (literal and immediate) group

Decode fields	Decode group or instruction page
op0	
1111	LDRD (literal)
!= 1111	Load/store dual (immediate)

Load/store dual (immediate)

This section describes the encoding of the Load/store dual (immediate) instruction class. This section is decoded from *Load/store dual (literal and immediate)* on page C2-270.



Decode fields	Instruction page
L	
0	STRD (immediate)
1	LDRD (immediate)

Load/store dual (pre-indexed), secure gateway

This section describes the encoding of the Load/store dual (pre-indexed), secure gateway group. This section is decoded from *Load/store (multiple, dual, exclusive, acquire-release), table branch* on page C2-266.

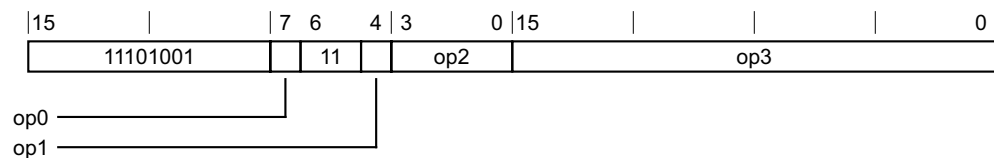


Table C2-12 Encoding table for the Load/store dual (pre-indexed), secure gateway group


Decode fields				Decode group or instruction page
op0	op1	op2	op3	
0	0	1111	-	UNPREDICTABLE
0	1	1111	1110100101111111	SG
0	1	1111	!= 1110100101111111	UNPREDICTABLE

Table C2-12 Encoding table for the Load/store dual (pre-indexed), secure gateway group

Decode fields				Decode group or instruction page
op0	op1	op2	op3	
1	0	1111	-	UNPREDICTABLE
1	1	1111	-	UNPREDICTABLE
-	-	!= 1111	-	<i>Load/store dual (immediate, pre-indexed)</i>

Load/store dual (immediate, pre-indexed)


This section describes the encoding of the Load/store dual (immediate, pre-indexed) instruction class. This section is decoded from *Load/store dual (pre-indexed), secure gateway* on page C2-271.



Decode fields	Instruction page
L	
0	<i>STRD (immediate)</i>
1	<i>LDRD (immediate)</i>

C2.3.2 Data-processing (shifted register)

This section describes the encoding of the Data-processing (shifted register) instruction class. This section is decoded from *32-bit T32 instruction encoding* on page C2-266.




Decode fields					Instruction page
op1	S	Rn	Rd	imm3:imm2:type	
0000	0	-	-	-	<i>AND (register) - AND, rotate right with extend variant</i> on page C2-322
0000	1	-	!= 1111	!= 0000011	<i>AND (register) - ANDS, shift or rotate by value variant</i> on page C2-322
0000	1	-	!= 1111	0000011	<i>AND (register) - ANDS, rotate right with extend variant</i> on page C2-322
0000	1	-	1111	!= 0000011	<i>TST (register) - Shift or rotate by value variant</i> on page C2-635
0000	1	-	1111	0000011	<i>TST (register) - Rotate right with extend variant</i> on page C2-635
0001	-	-	-	-	<i>BIC (register)</i>
0010	0	!= 1111	-	-	<i>ORR (register) - ORR, rotate right with extend variant</i> on page C2-483
0010	0	1111	-	-	<i>MOV (register) - MOV, rotate right with extend variant</i> on page C2-454

Decode fields					Instruction page
op1	S	Rn	Rd	imm3:imm2:type	
0010	1	!= 1111	-	-	ORR (register) - <i>ORRS, rotate right with extend variant</i> on page C2-483
0010	1	1111	-	-	MOV (register) - <i>MOVS, rotate right with extend variant</i> on page C2-454
0011	0	!= 1111	-	-	ORN (register) - <i>ORN, rotate right with extend variant</i> on page C2-480
0011	0	1111	-	-	MVN (register) - <i>MVN, rotate right with extend variant</i> on page C2-476
0011	1	!= 1111	-	-	ORN (register) - <i>ORNS, rotate right with extend variant</i> on page C2-480
0011	1	1111	-	-	MVN (register) - <i>MVNS, rotate right with extend variant</i> on page C2-476
0100	0	-	-	-	EOR (register) - <i>EOR, rotate right with extend variant</i> on page C2-363
0100	1	-	!= 1111	!= 000011	EOR (register) - <i>EORS, shift or rotate by value variant</i> on page C2-363
0100	1	-	!= 1111	000011	EOR (register) - <i>EORS, rotate right with extend variant</i> on page C2-363
0100	1	-	1111	!= 000011	TEQ (register) - <i>Shift or rotate by value variant</i> on page C2-632
0100	1	-	1111	000011	TEQ (register) - <i>Rotate right with extend variant</i> on page C2-632
0101	-	-	-	-	Unallocated.
0110	0	-	-	xxxxx00	PKHBT, PKHTB - <i>PKHBT variant</i> on page C2-485
0110	0	-	-	xxxxx01	Unallocated.
0110	0	-	-	xxxxx10	PKHBT, PKHTB - <i>PKHTB variant</i> on page C2-485
0110	0	-	-	xxxxx11	Unallocated.
0111	-	-	-	-	Unallocated.
1000	0	!= 1101	-	-	ADD (register) - <i>ADD, rotate right with extend variant</i> on page C2-316
1000	0	1101	-	-	ADD (SP plus register) - <i>ADD, rotate right with extend variant</i> on page C2-308
1000	1	!= 1101	!= 1111	-	ADD (register) - <i>ADDS, rotate right with extend variant</i> on page C2-317
1000	1	1101	!= 1111	-	ADD (SP plus register) - <i>ADDS, rotate right with extend variant</i> on page C2-309
1000	1	-	1111	-	CMN (register)
1001	-	-	-	-	Unallocated.
1010	-	-	-	-	ADC (register)
1011	-	-	-	-	SBC (register)
1100	-	-	-	-	Unallocated.
1101	0	!= 1101	-	-	SUB (register) - <i>SUB, rotate right with extend variant</i> on page C2-618
1101	0	1101	-	-	SUB (SP minus register) - <i>SUB, rotate right with extend variant</i> on page C2-612
1101	1	!= 1101	!= 1111	-	SUB (register) - <i>SUBS, rotate right with extend variant</i> on page C2-618
1101	1	1101	!= 1111	-	SUB (SP minus register) - <i>SUBS, rotate right with extend variant</i> on page C2-612

Decode fields					Instruction page
op1	S	Rn	Rd	imm3:imm2:type	
1101	1	-	1111	-	CMP (register)
1110	-	-	-	-	RSB (register)
1111	-	-	-	-	Unallocated.

C2.3.3 Data-processing (modified immediate)

This section describes the encoding of the Data-processing (modified immediate) instruction class. This section is decoded from *32-bit T32 instruction encoding* on page C2-266.



Decode fields				Instruction page
op1	S	Rn	Rd	
0000	0	-	-	AND (immediate) - <i>AND variant</i> on page C2-321
0000	1	-	!= 1111	AND (immediate) - <i>ANDS variant</i> on page C2-321
0000	1	-	1111	TST (immediate)
0001	-	-	-	BIC (immediate)
0010	0	!= 1111	-	ORR (immediate) - <i>ORR variant</i> on page C2-482
0010	0	1111	-	MOV (immediate) - <i>MOV variant</i> on page C2-451
0010	1	!= 1111	-	ORR (immediate) - <i>ORRS variant</i> on page C2-482
0010	1	1111	-	MOV (immediate) - <i>MOVS variant</i> on page C2-451
0011	0	!= 1111	-	ORN (immediate) - <i>Not flag setting variant</i> on page C2-479
0011	0	1111	-	MVN (immediate) - <i>MVN variant</i> on page C2-475
0011	1	!= 1111	-	ORN (immediate) - <i>Flag setting variant</i> on page C2-479
0011	1	1111	-	MVN (immediate) - <i>MVNS variant</i> on page C2-475
0100	0	-	-	EOR (immediate) - <i>EOR variant</i> on page C2-362
0100	1	-	!= 1111	EOR (immediate) - <i>EORS variant</i> on page C2-362
0100	1	-	1111	TEQ (immediate)
0101	-	-	-	Unallocated.
011x	-	-	-	Unallocated.
1000	0	!= 1101	-	ADD (immediate) - <i>ADD variant</i> on page C2-311
1000	0	1101	-	ADD (SP plus immediate) - <i>ADD variant</i> on page C2-306
1000	1	!= 1101	!= 1111	ADD (immediate) - <i>ADDS variant</i> on page C2-312

Decode fields				Instruction page
op1	S	Rn	Rd	
1000	1	1101	!= 1111	ADD (SP plus immediate) - <i>ADDS variant</i> on page C2-306
1000	1	-	1111	CMN (immediate)
1001	-	-	-	Unallocated.
1010	-	-	-	ADC (immediate)
1011	-	-	-	SBC (immediate)
1100	-	-	-	Unallocated.
1101	0	!= 1101	-	SUB (immediate) - <i>SUB variant</i> on page C2-614
1101	0	1101	-	SUB (SP minus immediate) - <i>SUB variant</i> on page C2-610
1101	1	!= 1101	!= 1111	SUB (immediate) - <i>SUBS variant</i> on page C2-615
1101	1	1101	!= 1111	SUB (SP minus immediate) - <i>SUBS variant</i> on page C2-610
1101	1	-	1111	CMP (immediate)
1110	-	-	-	RSB (immediate)
1111	-	-	-	Unallocated.

C2.3.4 Data-processing (plain binary immediate)

This section describes the encoding of the Data-processing (plain binary immediate) group. This section is decoded from *32-bit T32 instruction encoding* on page C2-266.


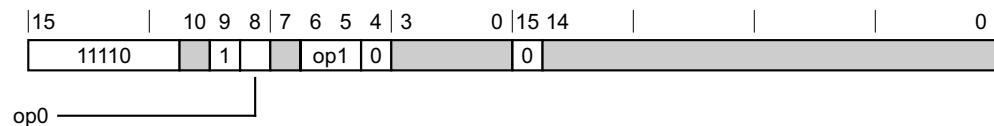


Table C2-13 Encoding table for the Data-processing (plain binary immediate) group

Decode fields		Decode group or instruction page
op0	op1	
0	0x	<i>Data-processing (simple immediate)</i>
0	10	<i>Move Wide (16-bit immediate)</i> on page C2-276
0	11	Unallocated.
1	-	<i>Saturate, Bitfield</i> on page C2-276

Data-processing (simple immediate)


This section describes the encoding of the Data-processing (simple immediate) instruction class. This section is decoded from *Data-processing (plain binary immediate)*.



Decode fields			Instruction page
o1	o2	Rn	
0	0	!= 11x1	ADD (immediate)
0	0	1101	ADD (SP plus immediate)
0	0	1111	ADR - T3 variant on page C2-319
0	1	-	Unallocated.
1	0	-	Unallocated.
1	1	!= 11x1	SUB (immediate)
1	1	1101	SUB (SP minus immediate)
1	1	1111	ADR - T2 variant on page C2-319

Move Wide (16-bit immediate)


This section describes the encoding of the Move Wide (16-bit immediate) instruction class. This section is decoded from [Data-processing \(plain binary immediate\)](#) on page C2-275.



Decode fields		Instruction page
o1		
0		MOV (immediate)
1		MOVT

Saturate, Bitfield

This section describes the encoding of the Saturate, Bitfield instruction class. This section is decoded from [Data-processing \(plain binary immediate\)](#) on page C2-275.



Decode fields			Instruction page
op1	Rn	imm3:imm2	
000	-	-	SSAT - <i>Logical shift left variant on page C2-568</i>
001	-	!= 00000	SSAT - <i>Arithmetic shift right variant on page C2-568</i>
001	-	00000	SSAT16
010	-	-	SBFX
011	!= 1111	-	BFI
011	1111	-	BFC
100	-	-	USAT - <i>Logical shift left variant on page C2-663</i>
101	-	!= 00000	USAT - <i>Arithmetic shift right variant on page C2-663</i>
101	-	00000	USAT16
110	-	-	UBFX
111	-	-	Unallocated.

C2.3.5 Branches and miscellaneous control

This section describes the encoding of the Branches and miscellaneous control group. This section is decoded from *32-bit T32 instruction encoding on page C2-266*.

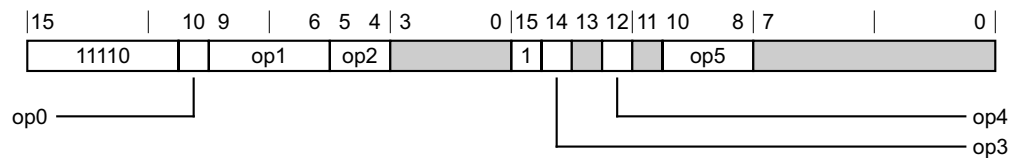


Table C2-14 Encoding table for the Branches and miscellaneous control group

Decode fields						Decode group or instruction page
op0	op1	op2	op3	op4	op5	
0	1110	0x	0	0	-	MSR (register)
0	1110	10	0	0	000	Hints on page C2-278
0	1110	10	0	0	!= 000	Unallocated.
0	1110	11	0	0	-	Miscellaneous system on page C2-279
0	1111	0x	0	0	-	Unallocated.
0	1111	1x	0	0	-	MRS

Table C2-14 Encoding table for the Branches and miscellaneous control group (continued)

Decode fields						Decode group or instruction page
op0	op1	op2	op3	op4	op5	
1	1110	-	0	0	-	Unallocated.
1	1111	0x	0	0	-	Unallocated.
1	1111	1x	0	0	-	<i>Exception generation on page C2-279</i>
-	!= 111x	-	0	0	-	<i>B - T3 variant on page C2-332</i>
-	-	-	0	1	-	<i>B - T4 variant on page C2-333</i>
-	-	-	1	0	-	Unallocated.
-	-	-	1	1	-	<i>BL</i>

Hints

This section describes the encoding of the Hints instruction class. This section is decoded from *Branches and miscellaneous control on page C2-277*.

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	4	3	0
1	1	1	1	0	0	1	1	1	0	1	0	(1)	(1)	(1)	(1)	1	0	(0)	0	(0)	0	0	0	hint	option		

Decode fields		Instruction page
hint	option	
0000	0000	<i>NOP</i>
0000	0001	<i>YIELD</i>
0000	0010	<i>WFE</i>
0000	0011	<i>WFI</i>
0000	0100	<i>SEV</i>
0000	0101	Reserved hint, behaves as <i>NOP</i> .
0000	011x	Reserved hint, behaves as <i>NOP</i> .
0000	1xxx	Reserved hint, behaves as <i>NOP</i> .
0001	-	Reserved hint, behaves as <i>NOP</i> .
001x	-	Reserved hint, behaves as <i>NOP</i> .
01xx	-	Reserved hint, behaves as <i>NOP</i> .
10xx	-	Reserved hint, behaves as <i>NOP</i> .
110x	-	Reserved hint, behaves as <i>NOP</i> .
1110	-	Reserved hint, behaves as <i>NOP</i> .
1111	-	<i>DBG</i>

Miscellaneous system

This section describes the encoding of the Miscellaneous system instruction class. This section is decoded from *Branches and miscellaneous control* on page C2-277.

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	4	3	0
1	1	1	1	0	0	1	1	1	0	1	1	(1)	(1)	(1)	(1)	1	0	(0)	0	(1)	(1)	(1)	(1)	opc		option	

Decode fields		Instruction page
opc		
000x		Unallocated.
0010		CLREX
0011		Unallocated.
0100		DSB
0101		DMB
0110		ISB
0111		Unallocated.
1xxx		Unallocated.

Exception generation

This section describes the encoding of the Exception generation instruction class. This section is decoded from *Branches and miscellaneous control* on page C2-277.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	0	
1	1	1	1	0	1	1	1	1	1	1	o1	imm4	1	0	o2	0	imm12			0

Decode fields			Instruction page
o1	o2		
0	0		Unallocated.
0	1		Unallocated.
1	0		Unallocated.
1	1		UDF

C2.3.6 Load/store single

This section describes the encoding of the Load/store single group. This section is decoded from *32-bit T32 instruction encoding* on page C2-266.





Table C2-15 Encoding table for the Load/store single group

Decode fields		Decode group or instruction page
op0	op1	
!= 1111	000000	<i>Load/store (register offset)</i>
!= 1111	10x0xx	Unallocated.
!= 1111	10x1xx	<i>Load/store (immediate, post-indexed) on page C2-281</i>
!= 1111	1100xx	<i>Load/store (negative immediate) on page C2-281</i>
!= 1111	1110xx	<i>Load/store (unprivileged) on page C2-282</i>
!= 1111	11x1xx	<i>Load/store (immediate, pre-indexed) on page C2-283</i>
!= 1111	-	<i>Load/store (positive immediate) on page C2-283</i>
1111	-	<i>Load literal on page C2-284</i>

Load/store (register offset)

This section describes the encoding of the Load/store (register offset) instruction class. This section is decoded from *Load/store single on page C2-279*.




Decode fields				Instruction page
S	size	L	Rt	
0	00	0	-	<i>STRB (register)</i>
0	00	1	!= 1111	<i>LDRB (register)</i>
0	00	1	1111	<i>PLD (register)</i>
0	01	0	-	<i>STRH (register)</i>
0	01	1	!= 1111	<i>LDRH (register)</i>
0	01	1	1111	Reserved hint, behaves as <i>NOP</i> .
0	10	0	-	<i>STR (register)</i>
0	10	1	-	<i>LDR (register)</i>
0	11	-	-	Unallocated.
1	00	1	!= 1111	<i>LDRSB (register)</i>
1	00	1	1111	<i>PLI (register)</i>

Decode fields				Instruction page
S	size	L	Rt	
1	01	1	!= 1111	LDRSH (register)
1	01	1	1111	Reserved hint, behaves as NOP .
1	1x	1	-	Unallocated.

Load/store (immediate, post-indexed)


This section describes the encoding of the Load/store (immediate, post-indexed) instruction class. This section is decoded from *Load/store single* on page C2-279.



Decode fields			Instruction page
S	size	L	
0	00	0	STRB (immediate)
0	00	1	LDRB (immediate)
0	01	0	STRH (immediate)
0	01	1	LDRH (immediate)
0	10	0	STR (immediate)
0	10	1	LDR (immediate)
0	11	-	Unallocated.
1	00	1	LDRSB (immediate)
1	01	1	LDRSH (immediate)
1	1x	1	Unallocated.

Load/store (negative immediate)


This section describes the encoding of the Load/store (negative immediate) instruction class. This section is decoded from *Load/store single* on page C2-279.



Decode fields				Instruction page
S	size	L	Rt	
0	00	0	-	STRB (immediate)
0	00	1	!= 1111	LDRB (immediate)
0	00	1	1111	PLD (immediate)
0	01	0	-	STRH (immediate)
0	01	1	!= 1111	LDRH (immediate)
0	01	1	1111	Reserved hint, behaves as NOP .
0	10	0	-	STR (immediate)
0	10	1	-	LDR (immediate)
0	11	-	-	Unallocated.
1	00	1	-	LDRSB (immediate)
1	00	1	1111	PLI (immediate, literal)
1	01	1	!= 1111	LDRSH (immediate)
1	01	1	1111	Reserved hint, behaves as NOP .
1	1x	1	-	Unallocated.

Load/store (unprivileged)

This section describes the encoding of the Load/store (unprivileged) instruction class. This section is decoded from [Load/store single on page C2-279](#).



Decode fields			Instruction page
S	size	L	
0	00	0	STRBT
0	00	1	LDRBT
0	01	0	STRHT
0	01	1	LDRHT
0	10	0	STRT

Decode fields			Instruction page
S	size	L	
0	10	1	LDRT
0	11	-	Unallocated.
1	00	1	LDRSBT
1	01	1	LDRSHT
1	1x	1	Unallocated.

Load/store (immediate, pre-indexed)


This section describes the encoding of the Load/store (immediate, pre-indexed) instruction class. This section is decoded from *Load/store single* on page C2-279.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	0
1	1	1	1	1	0	0	S	0	size	L	!	=1111	Rt	1	1	U	1	imm8			
Rn																					

Decode fields			Instruction page
S	size	L	
0	00	0	STRB (immediate)
0	00	1	LDRB (immediate)
0	01	0	STRH (immediate)
0	01	1	LDRH (immediate)
0	10	0	STR (immediate)
0	10	1	LDR (immediate)
0	11	-	Unallocated.
1	00	1	LDRSB (immediate)
1	01	1	LDRSH (immediate)
1	1x	1	Unallocated.

Load/store (positive immediate)


This section describes the encoding of the Load/store (positive immediate) instruction class. This section is decoded from *Load/store single* on page C2-279.



Decode fields				Instruction page
S	size	L	Rt	
0	00	0	-	STRB (immediate)
0	00	1	!= 1111	LDRB (immediate)
0	00	1	1111	PLD (immediate)
0	01	0	-	STRH (immediate)
0	01	1	!= 1111	LDRH (immediate)
0	01	1	1111	Reserved hint, behaves as NOP .
0	10	0	-	STR (immediate)
0	10	1	-	LDR (immediate)
1	00	1	!= 1111	LDRSB (immediate)
1	00	1	1111	PLI (immediate, literal)
1	01	1	!= 1111	LDRSH (immediate)
1	01	1	1111	Reserved hint, behaves as NOP .

Load literal

This section describes the encoding of the Load literal instruction class. This section is decoded from *Load/store single* on page C2-279.



Decode fields				Instruction page
S	size	L	Rt	
0	00	1	!= 1111	LDRB (literal)
0	00	1	1111	PLD (literal)
0	01	1	!= 1111	LDRH (literal)
0	10	1	-	LDR (literal)
0	11	-	-	Unallocated.
1	00	1	!= 1111	LDRSB (literal)
1	00	1	1111	PLI (immediate, literal)

Decode fields				Instruction page
S	size	L	Rt	
1	01	1	!= 1111	LDRSH (literal)
1	01	1	1111	Reserved hint, behaves as NOP .
1	1x	1	-	Unallocated.

C2.3.7 Data-processing (register)

This section describes the encoding of the Data-processing (register) group. This section is decoded from *32-bit T32 instruction encoding on page C2-266*.

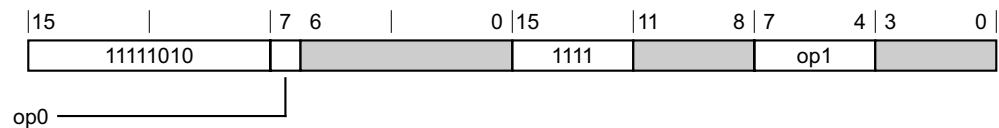


Table C2-16 Encoding table for the Data-processing (register) group

Decode fields		Decode group or instruction page
op0	op1	
0	0000	<i>MOV, MOVS (register-shifted register) - Flag setting variant on page C2-457</i>
0	0001	Unallocated.
0	001x	Unallocated.
0	01xx	Unallocated.
0	1xxx	<i>Register extends</i>
1	0xxx	<i>Parallel add-subtract on page C2-286</i>
1	10xx	<i>Data-processing (two source registers) on page C2-288</i>
1	11xx	Unallocated.

Register extends

This section describes the encoding of the Register extends instruction class. This section is decoded from *Data-processing (register)*.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	0	op1	U	Rn	1	1	1	1	Rd	1	(0)	rotate	Rm					

Decode fields				Instruction page
op1	U	Rn		
00	0	!= 1111		SXTAH
00	0	1111		SXTH
00	1	!= 1111		UXTAH
00	1	1111		UXTH
01	0	!= 1111		SXTAB16
01	0	1111		SXTB16
01	1	!= 1111		UXTAB16
01	1	1111		UXTB16
10	0	!= 1111		SXTAB
10	0	1111		SXTB
10	1	!= 1111		UXTAB
10	1	1111		UXTB
11	-	-		Unallocated.

Parallel add-subtract

This section describes the encoding of the Parallel add-subtract instruction class. This section is decoded from [Data-processing \(register\)](#) on page C2-285.

15	14	13	12	11	10	9	8	7	6	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	op1	Rn	1	1	1	1	Rd	0	U	H	S	Rm				

Decode fields				Instruction page
op1	U	H	S	
000	0	0	0	SADD8
000	0	0	1	QADD8
000	0	1	0	SHADD8
000	0	1	1	Unallocated.
000	1	0	0	UADD8
000	1	0	1	UQADD8

Decode fields				Instruction page
op1	U	H	S	
000	1	1	0	UHADD8
000	1	1	1	Unallocated.
001	0	0	0	SADD16
001	0	0	1	QADD16
001	0	1	0	SHADD16
001	0	1	1	Unallocated.
001	1	0	0	UADD16
001	1	0	1	UQADD16
001	1	1	0	UHADD16
001	1	1	1	Unallocated.
010	0	0	0	SASX
010	0	0	1	QASX
010	0	1	0	SHASX
010	0	1	1	Unallocated.
010	1	0	0	UASX
010	1	0	1	UQASX
010	1	1	0	UHASX
010	1	1	1	Unallocated.
100	0	0	0	SSUB8
100	0	0	1	QSUB8
100	0	1	0	SHSUB8
100	0	1	1	Unallocated.
100	1	0	0	USUB8
100	1	0	1	UQSUB8
100	1	1	0	UHSUB8
100	1	1	1	Unallocated.
101	0	0	0	SSUB16
101	0	0	1	QSUB16
101	0	1	0	SHSUB16
101	0	1	1	Unallocated.
101	1	0	0	USUB16
101	1	0	1	UQSUB16

Decode fields				Instruction page
op1	U	H	S	
101	1	1	0	UHSUB16
101	1	1	1	Unallocated.
110	0	0	0	SSAX
110	0	0	1	QSAX
110	0	1	0	SHSAX
110	0	1	1	Unallocated.
110	1	0	0	USAX
110	1	0	1	UQSAX
110	1	1	0	UHSAX
110	1	1	1	Unallocated.
111	-	-	-	Unallocated.

Data-processing (two source registers)

This section describes the encoding of the Data-processing (two source registers) instruction class. This section is decoded from *Data-processing (register)* on page C2-285.

15	14	13	12	11	10	9	8	7	6	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	op1			Rn	1	1	1	1	Rd	1	0	op2		Rm		

Decode fields		Instruction page
op1	op2	
000	00	QADD
000	01	QDADD
000	10	QSUB
000	11	QDSUB
001	00	REV
001	01	REV16
001	10	RBIT
001	11	REVSH
010	00	SEL
010	01	Unallocated.
010	1x	Unallocated.
011	00	CLZ

Decode fields		Instruction page
op1	op2	
011	01	Unallocated.
011	1x	Unallocated.
1xx	-	Unallocated.

C2.3.8 Multiply, multiply accumulate, and absolute difference

This section describes the encoding of the Multiply, multiply accumulate, and absolute difference group. This section is decoded from *32-bit T32 instruction encoding on page C2-266*.





Table C2-17 Encoding table for the Multiply, multiply accumulate, and absolute difference group

Decode fields		Decode group or instruction page
op0		
00		<i>Multiply and absolute difference</i>
01		Unallocated.
1x		Unallocated.

Multiply and absolute difference

This section describes the encoding of the Multiply and absolute difference instruction class. This section is decoded from *Multiply, multiply accumulate, and absolute difference*.



Decode fields			Instruction page
op1	op2	Ra	
000	00	!= 1111	MLA
000	00	1111	MUL
000	01	-	MLS
000	1x	-	Unallocated.
001	00	!= 1111	SMLABB, SMLABT, SMLATB, SMLATT - <i>SMLABB variant on page C2-544</i>
001	00	1111	SMULBB, SMULBT, SMULTB, SMULTT - <i>SMULBB variant on page C2-563</i>
001	01	!= 1111	SMLABB, SMLABT, SMLATB, SMLATT - <i>SMLABT variant on page C2-544</i>

Decode fields			Instruction page
op1	op2	Ra	
001	01	1111	SMULBB, SMULBT, SMULTB, SMULTT - <i>SMULBT variant</i> on page C2-563
001	10	!= 1111	SMLABB, SMLABT, SMLATB, SMLATT - <i>SMLATB variant</i> on page C2-544
001	10	1111	SMULBB, SMULBT, SMULTB, SMULTT - <i>SMULTB variant</i> on page C2-563
001	11	!= 1111	SMLABB, SMLABT, SMLATB, SMLATT - <i>SMLATT variant</i> on page C2-544
001	11	1111	SMULBB, SMULBT, SMULTB, SMULTT - <i>SMULTT variant</i> on page C2-563
010	00	!= 1111	SMLAD, SMLADX - <i>SMLAD variant</i> on page C2-546
010	00	1111	SMUAD, SMUADX - <i>SMUAD variant</i> on page C2-562
010	01	!= 1111	SMLAD, SMLADX - <i>SMLADX variant</i> on page C2-546
010	01	1111	SMUAD, SMUADX - <i>SMUADX variant</i> on page C2-562
010	1x	-	Unallocated.
011	00	!= 1111	SMLAWB, SMLAWT - <i>SMLAWB variant</i> on page C2-553
011	00	1111	SMULWB, SMULWT - <i>SMULWB variant</i> on page C2-566
011	01	!= 1111	SMLAWB, SMLAWT - <i>SMLAWT variant</i> on page C2-553
011	01	1111	SMULWB, SMULWT - <i>SMULWT variant</i> on page C2-566
011	1x	-	Unallocated.
100	00	!= 1111	SMLSd, SMLSdX - <i>SMLSd variant</i> on page C2-555
100	00	1111	SMUSD, SMUSDx - <i>SMUSD variant</i> on page C2-567
100	01	!= 1111	SMLSd, SMLSdX - <i>SMLSdX variant</i> on page C2-555
100	01	1111	SMUSD, SMUSDx - <i>SMUSDx variant</i> on page C2-567
100	1x	-	Unallocated.
101	00	!= 1111	SMMLA, SMMLAR - <i>SMMLA variant</i> on page C2-559
101	00	1111	SMMUL, SMMULR - <i>SMMUL variant</i> on page C2-561
101	01	!= 1111	SMMLA, SMMLAR - <i>SMMLAR variant</i> on page C2-559
101	01	1111	SMMUL, SMMULR - <i>SMMULR variant</i> on page C2-561
101	1x	-	Unallocated.
110	00	-	SMMLS, SMMLSR - <i>SMMLS variant</i> on page C2-560
110	01	-	SMMLS, SMMLSR - <i>SMMLSR variant</i> on page C2-560
110	1x	-	Unallocated.
111	00	!= 1111	USADA8
111	00	1111	USAD8
111	01	-	Unallocated.
111	1x	-	Unallocated.

C2.3.9 Long multiply and divide

This section describes the encoding of the Long multiply and divide instruction class. This section is decoded from [32-bit T32 instruction encoding on page C2-266](#).

15	14	13	12	11	10	9	8	7	6	4	3	0	15	12	11	8	7	4	3	0		
1	1	1	1	1	0	1	1	1	op1			Rn			RdLo		RdHi		op2		Rm	

Decode fields		Instruction page
op1	op2	
000	!= 0000	Unallocated.
000	0000	SMULL
001	!= 1111	Unallocated.
001	1111	SDIV
010	!= 0000	Unallocated.
010	0000	UMULL
011	!= 1111	Unallocated.
011	1111	UDIV
100	0000	SMLAL
100	0001	Unallocated.
100	001x	Unallocated.
100	01xx	Unallocated.
100	1000	SMLALBB , SMLALBT , SMLALTB , SMLALTT - SMLALBB variant on page C2-549
100	1001	SMLALBB , SMLALBT , SMLALTB , SMLALTT - SMLALBT variant on page C2-549
100	1010	SMLALBB , SMLALBT , SMLALTB , SMLALTT - SMLALTB variant on page C2-549
100	1011	SMLALBB , SMLALBT , SMLALTB , SMLALTT - SMLALTT variant on page C2-549
100	1100	SMLALD , SMLALDX - SMLALD variant on page C2-551
100	1101	SMLALD , SMLALDX - SMLALDX variant on page C2-551
100	111x	Unallocated.
101	0xxx	Unallocated.
101	10xx	Unallocated.
101	1100	SMLS LD , SMLS LD X - SMLS LD variant on page C2-557
101	1101	SMLS LD , SMLS LD X - SMLS LD X variant on page C2-557
101	111x	Unallocated.
110	0000	UMLAL
110	0001	Unallocated.

Decode fields		
op1	op2	Instruction page
110	001x	Unallocated.
110	010x	Unallocated.
110	0110	UMAAL
110	0111	Unallocated.
110	1xxx	Unallocated.
111	-	Unallocated.

C2.3.10 Coprocessor and floating-point instructions

This section describes the encoding of the Coprocessor and floating-point instructions group. This section is decoded from *32-bit T32 instruction encoding* on page C2-266.

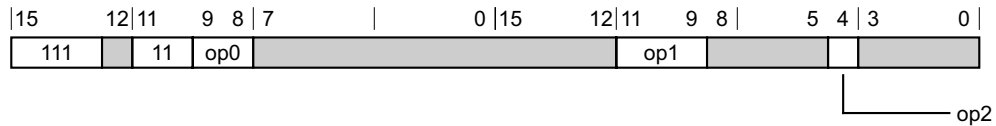


Table C2-18 Encoding table for the Coprocessor and floating-point instructions group

Decode fields			Decode group or instruction page
op0	op1	op2	
0x	101	-	<i>Floating-point load/store and 64-bit register moves</i>
10	101	0	<i>Floating-point data-processing on page C2-294</i>
10	101	1	<i>Floating-point 32-bit register moves on page C2-298</i>
11	-	-	Unallocated.
!= 11	!= 101	-	<i>Coprocessor on page C2-299</i>

Floating-point load/store and 64-bit register moves

This section describes the encoding of the Floating-point load/store and 64-bit register moves group. This section is decoded from *Coprocessor and floating-point instructions*.





Table C2-19 Encoding table for the Floating-point load/store and 64-bit register moves group

Decode fields	
op0	Decode group or instruction page
0000	Unallocated.
0010	<i>Floating-point 64-bit move</i>
!= 00x0	<i>Floating-point load/store</i>

Floating-point 64-bit move


This section describes the encoding of the Floating-point 64-bit move instruction class. This section is decoded from *Floating-point load/store and 64-bit register moves* on page C2-292.



Decode fields				Instruction page
op	o1	opc2	o3	
-	-	!= 00	-	Unallocated.
-	-	-	0	Unallocated.
0	0	00	1	<i>VMOV (between two general-purpose registers and two single-precision registers)</i>
0	1	00	1	<i>VMOV (between two general-purpose registers and a doubleword register)</i>
1	0	00	1	<i>VMOV (between two general-purpose registers and two single-precision registers)</i>
1	1	00	1	<i>VMOV (between two general-purpose registers and a doubleword register)</i>

Floating-point load/store

This section describes the encoding of the Floating-point load/store instruction class. This section is decoded from *Floating-point load/store and 64-bit register moves* on page C2-292.



Decode fields

Decode fields						Instruction page
P	U	L	sz	imm8	W	
0	0	0	0	-	1	VLSTM
0	0	1	0	-	1	VLLDM
0	0	-	1	-	1	Unallocated.
0	1	0	0	-	-	VSTM
0	1	0	1	xxxxxxx0	-	VSTM
0	1	0	1	xxxxxxx1	-	FSTMDBX, FSTMIAX - <i>Increment After variant on page C2-367</i>
0	1	1	0	-	-	VLDM
0	1	1	1	xxxxxxx0	-	VLDM
0	1	1	1	xxxxxxx1	-	FLDMDBX, FLDMIAX - <i>Increment After variant on page C2-365</i>
1	-	0	-	-	0	VSTR
1	0	0	0	-	1	VSTM
1	0	0	1	xxxxxxx0	1	VSTM
1	0	0	1	xxxxxxx1	1	FSTMDBX, FSTMIAX - <i>Decrement Before variant on page C2-367</i>
1	0	1	0	-	1	VLDM
1	0	1	1	xxxxxxx0	1	VLDM
1	0	1	1	xxxxxxx1	1	FLDMDBX, FLDMIAX - <i>Decrement Before variant on page C2-365</i>
1	-	1	-	-	0	VLDR
1	1	-	-	-	1	Unallocated.

Floating-point data-processing

This section describes the encoding of the Floating-point data-processing group. This section is decoded from [Coprocessor and floating-point instructions on page C2-292](#).


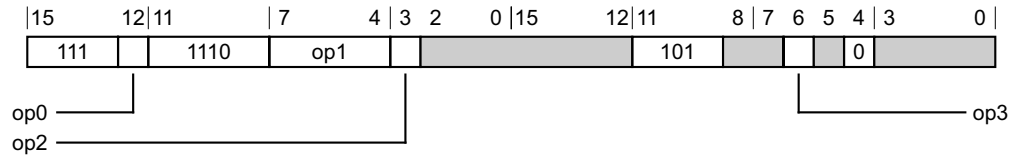


Table C2-20 Encoding table for the Floating-point data-processing group

Decode fields				Decode group or instruction page
op0	op1	op2	op3	
0	1x11	-	1	<i>Floating-point data-processing (two registers)</i>
0	1x11	-	0	VMOV (immediate)
0	!= 1x11	-	-	<i>Floating-point data-processing (three registers) on page C2-296</i>
1	0xxx	-	0	VSEL
1	0xxx	-	1	Unallocated.
1	1x00	-	-	<i>Floating-point minNum / maxNum on page C2-297</i>
1	1x01	-	-	Unallocated.
1	1x10	-	-	Unallocated.
1	1x11	0	-	Unallocated.
1	1x11	1	0	Unallocated.
1	1x11	1	1	<i>Floating-point directed convert to integer on page C2-297</i>

Floating-point data-processing (two registers)

This section describes the encoding of the Floating-point data-processing (two registers) instruction class. This section is decoded from *Floating-point data-processing on page C2-294*.




Decode fields			Instruction page
o1	opc2	o3	
0	000	0	VMOV (register)
0	000	1	VABS
0	001	0	VNEG
0	001	1	VSQRT
0	010	0	VCVTB
0	010	1	VCVTT
0	011	0	VCVTB

Decode fields			Instruction page
o1	opc2	o3	
0	011	1	VCVTT
0	100	0	VCMP - <i>Double-precision scalar variant on page C2-680</i>
0	100	1	VCMP - <i>Double-precision scalar variant on page C2-682</i>
0	101	0	VCMP - <i>Double-precision scalar variant on page C2-680</i>
0	101	1	VCMP - <i>Double-precision scalar variant on page C2-682</i>
0	110	0	VRINTR
0	110	1	VRINTZ
0	111	0	VRINTX
0	111	1	VCVT (between double-precision and single-precision)
1	000	-	VCVT (integer to floating-point)
1	001	-	Unallocated.
1	01x	-	VCVT (between floating-point and fixed-point)
1	100	0	VCVTR
1	100	1	VCVT (floating-point to integer)
1	101	0	VCVTR
1	101	1	VCVT (floating-point to integer)
1	11x	-	VCVT (between floating-point and fixed-point)

Floating-point data-processing (three registers)

This section describes the encoding of the Floating-point data-processing (three registers) instruction class. This section is decoded from *Floating-point data-processing on page C2-294*.



Decode fields			Instruction page
o0	o1	o2	
0	00	0	VMLA
0	00	1	VMLS
0	01	0	VNMLS
0	01	1	VNMLA
0	10	0	VMUL
0	10	1	VNMUL

Decode fields			Instruction page
o0	o1	o2	
0	11	0	VADD
0	11	1	VSUB
1	00	0	VDIV
1	01	0	VFNMS
1	01	1	VFNMA
1	10	0	VFMA
1	10	1	VFMS

Floating-point minNum / maxNum

This section describes the encoding of the Floating-point minNum / maxNum instruction class. This section is decoded from *Floating-point data-processing* on page C2-294.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	1	1	1	1	0	1	D	0	0	Vn	Vd	1	0	1	sz	N	op	M	0	Vm			

Decode fields		Instruction page
op		
0		VMAXNM
1		VMINNM

Floating-point directed convert to integer

This section describes the encoding of the Floating-point directed convert to integer instruction class. This section is decoded from *Floating-point data-processing* on page C2-294.

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	1	1	1	1	0	1	D	1	1	1	op	rm	Vd	1	0	1	sz	n	U	1	M	0	Vm		

Decode fields		Instruction page
op	rm	
0	00	VRINTA
0	01	VRINTN
0	10	VRINTP
0	11	VRINTM
1	00	VCVTA

Decode fields		Instruction page
op	rm	
1	01	VCVTN
1	10	VCVTP
1	11	VCVTM

Floating-point 32-bit register moves

This section describes the encoding of the Floating-point 32-bit register moves group. This section is decoded from *Coprocessor and floating-point instructions* on page C2-292.


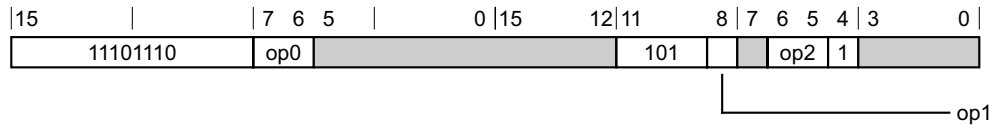


Table C2-21 Encoding table for the Floating-point 32-bit register moves group

Decode fields			Decode group or instruction page
op0	op1	op2	
00	1	00	<i>Floating-point 32-bit move doubleword</i>
00	1	!= 00	Unallocated.
!= 00	1	-	Unallocated.
-	0	-	<i>Floating-point 32-bit move</i>

Floating-point 32-bit move doubleword


This section describes the encoding of the Floating-point 32-bit move doubleword instruction class. This section is decoded from *Floating-point 32-bit register moves*.



Decode fields		Instruction page
L		
0		VMOV (single general-purpose register to half of doubleword register)
1		VMOV (half of doubleword register to single general-purpose register)

Floating-point 32-bit move

This section describes the encoding of the Floating-point 32-bit move instruction class. This section is decoded from *Floating-point 32-bit register moves*.



Decode fields		Instruction page
opc1	L	
000	-	VMOV (between general-purpose register and single-precision register)
001	-	Unallocated.
01x	-	Unallocated.
10x	-	Unallocated.
110	-	Unallocated.
111	0	VMSR
111	1	VMRS

Coprocessor

This section describes the encoding of the Coprocessor group. This section is decoded from *Coprocessor and floating-point instructions* on page C2-292.

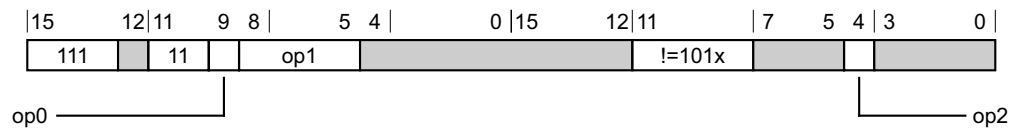


Table C2-22 Encoding table for the Coprocessor group

Decode fields			Decode group or instruction page
op0	op1	op2	
0	00x0	-	<i>Coprocessor 64-bit move</i>
0	!= 00x0	-	<i>Coprocessor load/store registers on page C2-300</i>
1	0xxx	0	CDP, CDP2
1	0xxx	1	<i>Coprocessor 32-bit move on page C2-301</i>

Coprocessor 64-bit move

This section describes the encoding of the Coprocessor 64-bit move instruction class. This section is decoded from *Coprocessor*.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	4	3	0
1	1	1	o0	1	1	0	0	0	D	0	L	Rt2	Rt	coproc	opc1	CRm					

Decode fields			Instruction page
o0	D	L	
0	0	-	Unallocated.
0	1	0	MCRR, MCRR2 - T1 variant on page C2-447
0	1	1	MRRC, MRRC2 - T1 variant on page C2-463
1	0	-	Unallocated.
1	1	0	MCRR, MCRR2 - T2 variant on page C2-447
1	1	1	MRRC, MRRC2 - T2 variant on page C2-463

Coprocessor load/store registers

This section describes the encoding of the Coprocessor load/store registers instruction class. This section is decoded from [Coprocessor on page C2-299](#).

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7		0
1	1	1	o0	1	1	0	P	U	D	W	L	Rn	CRd	coproc	imm8					

Decode fields				Instruction page
o0	P:U:W	L	Rn	
0	!= 000	1	1111	LDC, LDC2 (literal) - T1 variant on page C2-381
0	0x1	0	-	STC, STC2
0	0x1	1	!= 1111	LDC, LDC2 (immediate)
0	010	0	-	STC, STC2
0	010	1	!= 1111	LDC, LDC2 (immediate)
0	1x0	0	-	STC, STC2
0	1x0	1	!= 1111	LDC, LDC2 (immediate)
0	1x1	0	-	STC, STC2
0	1x1	1	!= 1111	LDC, LDC2 (immediate)
1	!= 000	1	1111	LDC, LDC2 (literal) - T2 variant on page C2-381
1	0x1	0	-	STC, STC2
1	0x1	1	!= 1111	LDC, LDC2 (immediate)
1	010	0	-	STC, STC2
1	010	1	!= 1111	LDC, LDC2 (immediate)

Decode fields				Instruction page
o0	P:U:W	L	Rn	
1	1x0	0	-	STC, STC2
1	1x0	1	!= 1111	LDC, LDC2 (immediate)
1	1x1	0	-	STC, STC2
1	1x1	1	!= 1111	LDC, LDC2 (immediate)

Coprocessor 32-bit move

This section describes the encoding of the Coprocessor 32-bit move instruction class. This section is decoded from [Coprocessor](#) on page C2-299.

15	14	13	12	11	10	9	8	7	5	4	3	0	15	12	11	8	7	5	4	3	0
1	1	1	o0	1	1	1	0	opc1	L	CRn	Rt	coproc	opc2	1	CRm						

Decode fields		Instruction page
o0	L	
0	0	MCR, MCR2 - T1 variant on page C2-445
0	1	MRC, MRC2 - T1 variant on page C2-461
1	0	MCR, MCR2 - T2 variant on page C2-445
1	1	MRC, MRC2 - T2 variant on page C2-461

C2.4 Alphabetical list of instructions

Every ARMv8-M instruction is listed in this section. See [Chapter C1 Instruction Set Overview](#) for the format of the instruction descriptions.

C2.4.1 ADC (immediate)

Add with Carry (immediate) adds an immediate value and the carry flag value to a register value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	12	11	8	7	0
1	1	1	1	0	i	0	1	0	1	0	S	Rn	0	imm3	Rd	imm8				

ADC variant

Applies when S == 0.

ADC{<c>}{<q>} {<Rd>}, {<Rn>, #<const>}

ADCS variant

Applies when S == 1.

ADCS{<c>}{<q>} {<Rd>}, {<Rn>, #<const>}

Decode for all variants of this encoding

```
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); setflags = (S == '1'); imm32 = T32ExpandImm(i:imm3:imm8);
if d IN {13,15} || n IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.
- <const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    (result, carry, overflow) = AddWithCarry(R[n], imm32, APSR.C);
    R[d] = result;
    if setflags then
        APSR.N = result<31>;
        APSR.Z = IsZeroBit(result);
        APSR.C = carry;
        APSR.V = overflow;
```

Exceptions

None.

C2.4.2 ADC (register)

Add with Carry (register) adds a register value, the carry flag value, and an optionally-shifted register value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	3	2	0
0	1	0	0	0	0	0	1	0	1	Rm	Rdn		

T1 variant

ADC<c>{<q>} {<Rdn>}, <Rdn>, <Rm> // Inside IT block
 ADC{<q>} {<Rdn>}, <Rdn>, <Rm> // Outside IT block

Decode for this encoding

d = UInt(Rdn); n = UInt(Rdn); m = UInt(Rm); setflags = !InITBlock();
 (shift_t, shift_n) = (SRTYPE_LSL, 0);

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	1	0	1	0	S	Rn	(0)	imm3	Rd	imm2	type	Rm						

ADC, rotate right with extend variant

Applies when S == 0 && imm3 == 000 && imm2 == 00 && type == 11.

ADC{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

ADC, shift or rotate by value variant

Applies when S == 0 && !(imm3 == 000 && imm2 == 00 && type == 11).

ADC<c>.W {<Rd>}, <Rn>, <Rm> // Inside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1
 ADC{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

ADCS, rotate right with extend variant

Applies when S == 1 && imm3 == 000 && imm2 == 00 && type == 11.

ADCS{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

ADCS, shift or rotate by value variant

Applies when S == 1 && !(imm3 == 000 && imm2 == 00 && type == 11).

ADCS.W {<Rd>}, <Rn>, <Rm> // Outside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1
 ADCS{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```

if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); setFlags = (S == '1');
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

<c>	See <i>Standard assembler syntax fields</i> on page C1-240.								
<q>	See <i>Standard assembler syntax fields</i> on page C1-240.								
<Rdn>	Is the first general-purpose source register and the destination register, encoded in the "Rdn" field.								
<Rd>	Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.								
<Rn>	Is the first general-purpose source register, encoded in the "Rn" field.								
<Rm>	Is the second general-purpose source register, encoded in the "Rm" field.								
<shift>	Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values: <table> <tr> <td>LSL</td> <td>when type = 00</td> </tr> <tr> <td>LSR</td> <td>when type = 01</td> </tr> <tr> <td>ASR</td> <td>when type = 10</td> </tr> <tr> <td>ROR</td> <td>when type = 11</td> </tr> </table>	LSL	when type = 00	LSR	when type = 01	ASR	when type = 10	ROR	when type = 11
LSL	when type = 00								
LSR	when type = 01								
ASR	when type = 10								
ROR	when type = 11								
<amount>	Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.								

Operation for all encodings

```

if ConditionPassed() then
    EncodingSpecificOperations();
    shifted = Shift(R[m], shift_t, shift_n, APSR.C);
    (result, carry, overflow) = AddWithCarry(R[n], shifted, APSR.C);
    R[d] = result;
    if setFlags then
        APSR.N = result<31>;
        APSR.Z = IsZeroBit(result);
        APSR.C = carry;
        APSR.V = overflow;

```

Exceptions


None.

C2.4.3 ADD (SP plus immediate)

ADD (SP plus immediate) adds an immediate value to the SP value, and writes the result to the destination register.

T1

ARMv8-M



T1 variant


ADD{<c>}{<q>} <Rd>, SP, #<imm8>

Decode for this encoding

d = UInt(Rd); setflags = FALSE; imm32 = ZeroExtend(imm8:'00', 32);

T2

ARMv8-M



T2 variant


ADD{<c>}{<q>} {SP,} SP, #<imm7>

Decode for this encoding

d = 13; setflags = FALSE; imm32 = ZeroExtend(imm7:'00', 32);

T3

ARMv8-M Main Extension only



ADD variant

Applies when S == 0.

ADD{<c>}.W {<Rd>}, SP, #<const> // <Rd>, <const> can be represented in T1 or T2
 ADD{<c>}{<q>} {<Rd>}, SP, #<const>

ADDS variant

Applies when S == 1 && Rd != 1111.


ADDS{<c>}{<q>} {<Rd>}, SP, #<const>

C2.4.4 ADD (SP plus register)

ADD (SP plus register) adds an optionally-shifted register value to the SP value, and writes the result to the destination register.

T1

ARMv8-M

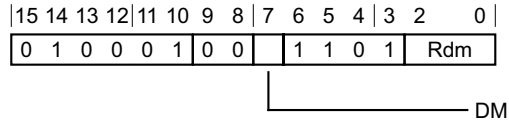

T1 variant


ADD{<c>}{<q>} {<Rdm>}, SP, <Rdm>

Decode for this encoding

```
d = UInt(DM:Rdm); m = UInt(DM:Rdm); setflags = FALSE;
if d == 15 && InITBlock() && !LastInITBlock() then UNPREDICTABLE;
(shift_t, shift_n) = (SRTYPE_LSL, 0);
```

T2

ARMv8-M



T2 variant


ADD{<c>}{<q>} {SP}, SP, <Rm>

Decode for this encoding

```
if Rm == '1101' then SEE "encoding T1";
d = 13; m = UInt(Rm); setflags = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, 0);
```

T3

ARMv8-M Main Extension only



ADD, rotate right with extend variant

Applies when S == 0 && imm3 == 000 && imm2 == 00 && type == 11.

ADD{<c>}{<q>} {<Rd>}, SP, <Rm>, RRX

ADD, shift or rotate by value variant

Applies when S == 0 && !(imm3 == 000 && imm2 == 00 && type == 11).

ADD{<c>}.W {<Rd>}, SP, <Rm> // <Rd>, <Rm> can be represented in T1 or T2
ADD{<c>}{<q>} {<Rd>}, SP, <Rm> {, <shift> #<amount>}

ADDS, rotate right with extend variant

Applies when S == 1 && imm3 == 000 && Rd != 1111 && imm2 == 00 && type == 11.

ADDS{<c>}{<q>} {<Rd>}, SP, <Rm>, RRX

ADDS, shift or rotate by value variant

Applies when S == 1 && !(imm3 == 000 && imm2 == 00 && type == 11) && Rd != 1111.

ADDS{<c>}{<q>} {<Rd>}, SP, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```
if Rd == '1111' && S == '1' then SEE "CMN (register)";
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); m = UInt(Rm); setflags = (S == '1');
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if d == 13 && (shift_t != SRTYPE_LSL || shift_n > 3) then UNPREDICTABLE;
if (d == 15 && S == '0') || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rdm> Is the general-purpose destination and second source register, encoded in the "Rdm" field. If omitted, this register is the SP. ARM deprecates using the PC as the destination register, but if the PC is used, the instruction is a simple branch to the address calculated by the operation.

<Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the SP.

<Rm> For encoding T2: is the second general-purpose source register, encoded in the "Rm" field. The PC can be used, but this is deprecated.

For encoding T3: is the second general-purpose source register, encoded in the "Rm" field.

<shift> Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values:

LSL when type = 00

LSR when type = 01

ASR when type = 10

ROR when type = 11

<amount> Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    shifted = Shift(R[m], shift_t, shift_n, APSR.C);
    (result, carry, overflow) = AddWithCarry(SP, shifted, '0');
    if d == 15 then
        ALUWritePC(result); // setflags is always FALSE here
    else
        RSPCheck[d] = result;
        if setflags then
            APSR.N = result<31>;
```

APSR.Z = IsZeroBit(result);
APSR.C = carry;
APSR.V = overflow;

Exceptions

UsageFault.

C2.4.5 ADD (immediate)

Add (immediate) adds an immediate value to a register value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M

15	14	13	12	11	10	9	8	6	5	3	2	0
0	0	0	1	1	1	0	imm3	Rn	Rd			

T1 variant

ADD<c>{<q>} <Rd>, <Rn>, #<imm3> // Inside IT block
ADD<S>{<q>} <Rd>, <Rn>, #<imm3> // Outside IT block

Decode for this encoding

d = UInt(Rd); n = UInt(Rn); setflags = !InITBlock(); imm32 = ZeroExtend(imm3, 32);

T2

ARMv8-M

15	14	13	12	11	10	8	7	0
0	0	1	1	0	Rdn	imm8		

T2 variant

ADD<c>{<q>} <Rdn>, #<imm8> // Inside IT block, and <Rdn>, <imm8> can be represented in T1
ADD<c>{<q>} {<Rdn>}, <Rdn>, #<imm8> // Inside IT block, and <Rdn>, <imm8> cannot be represented in T1
ADD<S>{<q>} <Rdn>, #<imm8> // Outside IT block, and <Rdn>, <imm8> can be represented in T1
ADD<S>{<q>} {<Rdn>}, <Rdn>, #<imm8> // Outside IT block, and <Rdn>, <imm8> cannot be represented in T1

Decode for this encoding

d = UInt(Rdn); n = UInt(Rdn); setflags = !InITBlock(); imm32 = ZeroExtend(imm8, 32);

T3

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	12	11	8	7	0
1	1	1	1	0	i	0	1	0	0	0	S	!=1101	0	imm3	Rd	imm8				

Rn

ADD variant

Applies when S == 0.

ADD<c>.W {<Rd>}, <Rn>, #<const> // Inside IT block, and <Rd>, <Rn>, <const> can be represented in T1 or T2
ADD<c>{<q>} {<Rd>}, <Rn>, #<const>

ADDS variant

Applies when S == 1 && Rd != 1111.


ADDS.W {<Rd>}, {<Rn>, #<const> // Outside IT block, and <Rd>, <Rn>, <const> can be represented in T1 or T2
 ADDS{<c>}{<q>} {<Rd>}, {<Rn>, #<const>

Decode for all variants of this encoding

```
if Rd == '1111' && S == '1' then SEE "CMN (immediate)";
if Rn == '1101' then SEE "ADD (SP plus immediate)";
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); setflags = (S == '1'); imm32 = T32ExpandImm(i:imm3:imm8);
if d == 13 || (d == 15 && S == '0') || n == 15 then UNPREDICTABLE;
```

T4

ARMv8-M Main Extension only



T4 variant

ADD{<c>}{<q>} {<Rd>}, {<Rn>, #<imm12> // <imm12> cannot be represented in T1, T2, or T3
 ADDW{<c>}{<q>} {<Rd>}, {<Rn>, #<imm12> // <imm12> can be represented in T1, T2, or T3

Decode for this encoding

```
if Rn == '1111' then SEE ADR;
if Rn == '1101' then SEE "ADD (SP plus immediate)";
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); setflags = FALSE; imm32 = ZeroExtend(i:imm3:imm8, 32);
if d IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rdn> Is the general-purpose source and destination register, encoded in the "Rdn" field.
- <imm8> Is a 8-bit unsigned immediate, in the range 0 to 255, encoded in the "imm8" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.
- <Rn> For encoding T1: is the general-purpose source register, encoded in the "Rn" field.
 For encoding T3: is the general-purpose source register, encoded in the "Rn" field. If the SP is used, see [ADD \(SP plus immediate\)](#).
 For encoding T4: is the general-purpose source register, encoded in the "Rn" field. If the SP is used, see [ADD \(SP plus immediate\)](#). If the PC is used, see [ADR](#).
- <imm3> Is a 3-bit unsigned immediate, in the range 0 to 7, encoded in the "imm3" field.
- <imm12> Is a 12-bit unsigned immediate, in the range 0 to 4095, encoded in the "i:imm3:imm8" field.
- <const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    (result, carry, overflow) = AddWithCarry(R[n], imm32, '0');
    R[d] = result;
    if setflags then
        APSR.N = result<31>;
        APSR.Z = IsZeroBit(result);
        APSR.C = carry;
        APSR.V = overflow;
```

Exceptions

None.

- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <label> For encoding T1: the label of an instruction or literal data item whose address is to be loaded into <Rd>. The assembler calculates the required value of the offset from the $\text{Align}(\text{PC}, 4)$ value of the ADR instruction to this label. Permitted values of the size of the offset are multiples of 4 in the range 0 to 1020.
- For encoding T2 and T3: the label of an instruction or literal data item whose address is to be loaded into <Rd>. The assembler calculates the required value of the offset from the $\text{Align}(\text{PC}, 4)$ value of the ADR instruction to this label. If the offset is zero or positive, encoding T3 is used, with *imm32* equal to the offset. If the offset is negative, encoding T2 is used, with *imm32* equal to the size of the offset. That is, the use of encoding T2 indicates that the required offset is minus the value of *imm32*. Permitted values of the size of the offset are 0-4095.
- <imm8> Is an unsigned immediate, a multiple of 4, in the range 0 to 1020, encoded in the "imm8" field as <imm8>/4.
- <imm12> Is a 12-bit unsigned immediate, in the range 0 to 4095, encoded in the "i:imm3:imm8" field.

Operation for all encodings


The description of [ADR](#) gives the operational pseudocode for this instruction.

C2.4.7 ADD (register)

ADD (register) adds a register value and an optionally-shifted register value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M



T1 variant


ADD<c>{<q>} <Rd>, <Rn>, <Rm> // Inside IT block
 ADDS{<q>} {<Rd>}, <Rn>, <Rm> // Outside IT block

Decode for this encoding

d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); setflags = !InITBlock();
 (shift_t, shift_n) = (SRTYPE_LSL, 0);

T2

ARMv8-M

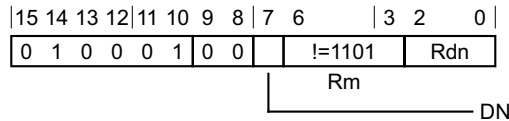

T2 variant

Applies when !(DN == 1 && Rdn == 101).


ADD<c>{<q>} <Rdn>, <Rm> // Preferred syntax, Inside IT block
 ADD{<c>}{<q>} {<Rdn>}, <Rdn>, <Rm>

Decode for this encoding

if (DN:Rdn) == '1101' || Rm == '1101' then SEE "ADD (SP plus register)";
 d = UInt(DN:Rdn); n = d; m = UInt(Rm); setflags = FALSE; (shift_t, shift_n) = (SRTYPE_LSL, 0);
 if n == 15 && m == 15 then UNPREDICTABLE;
 if d == 15 && InITBlock() && !LastInITBlock() then UNPREDICTABLE;

T3

ARMv8-M Main Extension only



ADD, rotate right with extend variant

Applies when S == 0 && imm3 == 000 && imm2 == 00 && type == 11.

ADD{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

ADD, shift or rotate by value variant

Applies when $S == 0 \ \&\& \ !(imm3 == 000 \ \&\& \ imm2 == 00 \ \&\& \ type == 11)$.

ADD<c>.W {<Rd>}, <Rn>, <Rm> // Inside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1 or T2
ADD{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

ADDS, rotate right with extend variant

Applies when $S == 1 \ \&\& \ imm3 == 000 \ \&\& \ Rd \ != \ 1111 \ \&\& \ imm2 == 00 \ \&\& \ type == 11$.

ADDS{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

ADDS, shift or rotate by value variant

Applies when $S == 1 \ \&\& \ !(imm3 == 000 \ \&\& \ imm2 == 00 \ \&\& \ type == 11) \ \&\& \ Rd \ != \ 1111$.

ADDS.W {<Rd>}, <Rn>, <Rm> // Outside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1 or T2
ADDS{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```
if Rd == '1111' && S == '1' then SEE "CMN (register)";
if Rn == '1101' then SEE "ADD (SP plus register)";
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); setFlags = (S == '1');
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if d == 13 || (d == 15 && S == '0') || n == 15 || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rdn> Is the general-purpose source and destination register, encoded in the "DN:Rdn" field. If the PC is used, the instruction is a branch to the address calculated by the operation. This is a simple branch, see [Pseudocode descriptions of operations on general-purpose registers and PC on page C1-250](#). The assembler language allows <Rdn> to be specified once or twice in the assembler syntax. When used inside an IT block, and <Rdn> and <Rm> are in the range R0 to R7, <Rdn> must be specified once so that encoding T2 is preferred to encoding T1. In all other cases there is no difference in behavior when <Rdn> is specified once or twice.

<Rd> For encoding T1: is the general-purpose destination register, encoded in the "Rd" field. When used inside an IT block, <Rd> must be specified. When used outside an IT block, <Rd> is optional, and:

- If omitted, this register is the same as <Rn>.
- If present, encoding T1 is preferred to encoding T2.

For encoding T3: is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.

<Rn> For encoding T1: is the first general-purpose source register, encoded in the "Rn" field.

For encoding T3: is the first general-purpose source register, encoded in the "Rn" field. If the SP is used, see [ADD \(SP plus register\)](#).

<Rm> For encoding T1 and T3: is the second general-purpose source register, encoded in the "Rm" field.

For encoding T2: is the second general-purpose source register, encoded in the "Rm" field. The PC can be used.

<shift> Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values:

LSL when type = 00

LSR when type = 01
ASR when type = 10
ROR when type = 11

<amount> Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation for all encodings

```
if ConditionPassed() then
  EncodingSpecificOperations();
  shifted = Shift(R[m], shift_t, shift_n, APSR.C);
  (result, carry, overflow) = AddWithCarry(R[n], shifted, '0');
  if d == 15 then
    ALUWritePC(result); // setflags is always FALSE here
  else
    R[d] = result;
    if setflags then
      APSR.N = result<31>;
      APSR.Z = IsZeroBit(result);
      APSR.C = carry;
      APSR.V = overflow;
```

Exceptions

None.

C2.4.8 ADR

Address to Register adds an immediate value to the PC value, and writes the result to the destination register.

This instruction is used by the pseudo-instructions **ADD (immediate, to PC)** and **SUB (immediate, from PC)**. The pseudo-instruction is never the preferred disassembly.

T1

ARMv8-M

15	14	13	12	11	10	8	7											0
1	0	1	0	0			Rd											imm8

T1 variant

ADR{<c>}{<q>} <Rd>, <label>

Decode for this encoding

d = UInt(Rd); imm32 = ZeroExtend(imm8:'00', 32); add = TRUE;

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7													0	
1	1	1	1	0	i	1	0	1	0	1	0	1	1	1	1	0	imm3																		imm8

T2 variant

ADR{<c>}{<q>} <Rd>, <label>

Decode for this encoding

if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); imm32 = ZeroExtend(i:imm3:imm8, 32); add = FALSE;
if d IN {13,15} then UNPREDICTABLE;

T3

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7														0
1	1	1	1	0	i	1	0	0	0	0	0	1	1	1	1	0	imm3																		imm8

T3 variant

ADR{<c>}.W <Rd>, <label> // <Rd>, <label> can be presented in T1
ADR{<c>}{<q>} <Rd>, <label>

Decode for this encoding

if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); imm32 = ZeroExtend(i:imm3:imm8, 32); add = TRUE;
if d IN {13,15} then UNPREDICTABLE;

Alias conditions

Alias or pseudo-instruction	is preferred when
ADD (immediate, to PC)	Never
SUB (immediate, from PC)	$i:imm3:imm8 == '000000000000'$

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <label> For encoding T1: the label of an instruction or literal data item whose address is to be loaded into <Rd>. The assembler calculates the required value of the offset from the `Align(PC, 4)` value of the ADR instruction to this label. Permitted values of the size of the offset are multiples of 4 in the range 0 to 1020.
- For encoding T2 and T3: the label of an instruction or literal data item whose address is to be loaded into <Rd>. The assembler calculates the required value of the offset from the `Align(PC, 4)` value of the ADR instruction to this label. If the offset is zero or positive, encoding T3 is used, with `imm32` equal to the offset. If the offset is negative, encoding T2 is used, with `imm32` equal to the size of the offset. That is, the use of encoding T2 indicates that the required offset is minus the value of `imm32`. Permitted values of the size of the offset are 0-4095.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    result = if add then (Align(PC,4) + imm32) else (Align(PC,4) - imm32);
    R[d] = result;
```

Exceptions

None.

C2.4.9 AND (immediate)

AND (immediate) performs a bitwise AND of a register value and an immediate value, and writes the result to the destination register.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	12	11	8	7	0
1	1	1	1	0	i	0	0	0	0	0	S	Rn	0	imm3	Rd	imm8				

AND variant

Applies when S == 0.

AND{<c>}{<q>} {<Rd>}, <Rn>, #<const>

ANDS variant

Applies when S == 1 && Rd != 1111.

ANDS{<c>}{<q>} {<Rd>}, <Rn>, #<const>

Decode for all variants of this encoding

```

if Rd == '1111' && S == '1' then SEE "TST (immediate)";
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); setflags = (S == '1');
(imm32, carry) = T32ExpandImm_C(i:imm3:imm8, APSR.C);
if d == 13 || (d == 15 && S == '0') || n IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.
- <const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    result = R[n] AND imm32;
    R[d] = result;
    if setflags then
        APSR.N = result<31>;
        APSR.Z = IsZeroBit(result);
        APSR.C = carry;
        // APSR.V unchanged

```

Exceptions


None.

C2.4.10 AND (register)

AND (register) performs a bitwise AND of a register value and an optionally-shifted register value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M



T1 variant


AND<c>{<q>} {<Rdn>}, <Rdn>, <Rm> // Inside IT block
ANDS{<q>} {<Rdn>}, <Rdn>, <Rm> // Outside IT block

Decode for this encoding

d = UInt(Rdn); n = UInt(Rdn); m = UInt(Rm); setflags = !InITBlock();
(shift_t, shift_n) = (SRTYPE_LSL, 0);

T2

ARMv8-M Main Extension only



AND, rotate right with extend variant

Applies when S == 0 && imm3 == 000 && imm2 == 00 && type == 11.

AND{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

AND, shift or rotate by value variant

Applies when S == 0 && !(imm3 == 000 && imm2 == 00 && type == 11).

AND<c>.W {<Rd>}, <Rn>, <Rm> // Inside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1
AND{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

ANDS, rotate right with extend variant

Applies when S == 1 && imm3 == 000 && Rd != 1111 && imm2 == 00 && type == 11.

ANDS{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

ANDS, shift or rotate by value variant

Applies when S == 1 && !(imm3 == 000 && imm2 == 00 && type == 11) && Rd != 1111.

ANDS.W {<Rd>}, <Rn>, <Rm> // Outside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1
ANDS{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```

if Rd == '1111' && S == '1' then SEE "TST (register)";
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); setflags = (S == '1');
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if d == 13 || (d == 15 && S == '0') || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rdn> Is the first general-purpose source register and the destination register, encoded in the "Rdn" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.
- <shift> Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values:
 - LSL when type = 00
 - LSR when type = 01
 - ASR when type = 10
 - ROR when type = 11
- <amount> Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation for all encodings

```

if ConditionPassed() then
    EncodingSpecificOperations();
    (shifted, carry) = Shift_C(R[m], shift_t, shift_n, APSR.C);
    result = R[n] AND shifted;
    R[d] = result;
    if setflags then
        APSR.N = result<31>;
        APSR.Z = IsZeroBit(result);
        APSR.C = carry;
        // APSR.V unchanged

```

Exceptions

None.

C2.4.11 ASR (immediate)

Arithmetic Shift Right (immediate) shifts a register value right by an immediate number of bits, shifting in copies of its sign bit, and writes the result to the destination register.

This instruction is an alias of the [MOV \(register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV \(register\)](#).
- The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	6	5	3	2	0
0	0	0	1	0	imm5	Rm	Rd			

T2 variant

ASR<c>{<q>} {<Rd>}, <Rm>, #<imm> // Inside IT block

is equivalent to

MOV<c>{<q>} <Rd>, <Rm>, ASR #<imm>

and is the preferred disassembly when InITBlock().

T3

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	0	0	0	1	0	0	1	1	1	1	(0)	imm3	Rd	imm2	1	0	Rm			

S

MOV, shift or rotate by value variant

ASR<c>.W {<Rd>}, <Rm>, #<imm> // Inside IT block, and <Rd>, <Rm>, <imm> can be represented in T2

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, ASR #<imm>

and is always the preferred disassembly.

ASR{<c>}{<q>} {<Rd>}, <Rm>, #<imm>

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, ASR #<imm>

and is always the preferred disassembly.

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.

- <Rm> Is the general-purpose source register, encoded in the "Rm" field.
- <imm> For encoding T2: is the shift amount, in the range 1 to 32, encoded in the "imm5" field as <imm> modulo 32.
For encoding T3: is the shift amount, in the range 1 to 32, encoded in the "imm3:imm2" field as <imm> modulo 32.

Operation for all encodings

The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

C2.4.12 ASR (register)


Arithmetic Shift Right (register) shifts a register value right by a variable number of bits, shifting in copies of its sign bit, and writes the result to the destination registers. The variable number of bits is read from the bottom byte of a register.

This instruction is an alias of the [MOV, MOVS \(register-shifted register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV, MOVS \(register-shifted register\)](#).
- The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

T1

ARMv8-M Main Extension only



Arithmetic shift right variant

ASR<c>{<q>} {<Rdm>}, <Rdm>, <Rs> // Inside IT block


is equivalent to

MOV<c>{<q>} <Rdm>, <Rdm>, ASR <Rs>

and is the preferred disassembly when InITBlock().

T2

ARMv8-M Main Extension only



Not flag setting variant

ASR<c>.W {<Rd>}, <Rm>, <Rs> // Inside IT block, and <Rd>, <Rm>, <type>, <Rs> can be represented in T1

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, ASR <Rs>

and is always the preferred disassembly.

ASR{<c>}{<q>} {<Rd>}, <Rm>, <Rs>

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, ASR <Rs>

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

- <q> See [Standard assembler syntax fields](#) on page C1-240.
- <Rdm> Is the first general-purpose source register and the destination register, encoded in the "Rdm" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the first general-purpose source register, encoded in the "Rm" field.
- <Rs> Is the second general-purpose source register holding a shift amount in its bottom 8 bits, encoded in the "Rs" field.

Operation for all encodings

The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

C2.4.13 ASRS (immediate)

Arithmetic Shift Right, Setting flags (immediate) shifts a register value right by an immediate number of bits, shifting in copies of its sign bit, writes the result to the destination register, and updates the condition flags based on the result.

This instruction is an alias of the [MOV \(register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV \(register\)](#).
- The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

T2

ARMv8-M

15	14	13	12	11	10		6	5		3	2	0
0	0	0	1	0	imm5			Rm	Rd			

T2 variant

ASRS{<q>} {<Rd>}, <Rm>, #<imm> // Outside IT block

is equivalent to

MOVS{<q>} <Rd>, <Rm>, ASR #<imm>

and is the preferred disassembly when !InITBlock().

T3

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	0	0	0	1	0	1	1	1	1	(0)	imm3	Rd	imm2	1	0	Rm				

S

MOVS, shift or rotate by value variant

ASRS.W {<Rd>}, <Rm>, #<imm> // Outside IT block, and <Rd>, <Rm>, <imm> can be represented in T2

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, ASR #<imm>

and is always the preferred disassembly.

ASRS{<c>}{<q>} {<Rd>}, <Rm>, #<imm>

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, ASR #<imm>

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the general-purpose destination register, encoded in the "Rd" field.

- <Rm> Is the general-purpose source register, encoded in the "Rm" field.
- <imm> For encoding T2: is the shift amount, in the range 1 to 32, encoded in the "imm5" field as <imm> modulo 32.
For encoding T3: is the shift amount, in the range 1 to 32, encoded in the "imm3:imm2" field as <imm> modulo 32.

Operation for all encodings

The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

C2.4.14 ASRS (register)


Arithmetic Shift Right, Setting flags (register) shifts a register value right by a variable number of bits, shifting in copies of its sign bit, writes the result to the destination register, and updates the condition flags based on the result. The variable number of bits is read from the bottom byte of a register.

This instruction is an alias of the [MOV, MOVS \(register-shifted register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV, MOVS \(register-shifted register\)](#).
- The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

T1

ARMv8-M



Arithmetic shift right variant

ASRS{<q>} {<Rdm>}, <Rdm>, <Rs> // Outside IT block


is equivalent to

MOVS{<q>} <Rdm>, <Rdm>, ASR <Rs>

and is the preferred disassembly when !InITBlock().

T2

ARMv8-M Main Extension only



Flag setting variant

ASRS.W {<Rd>}, <Rm>, <Rs> // Outside IT block, and <Rd>, <Rm>, <type>, <Rs> can be represented in T1

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, ASR <Rs>

and is always the preferred disassembly.

ASRS{<c>}{<q>} {<Rd>}, <Rm>, <Rs>

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, ASR <Rs>

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

- <q> See [Standard assembler syntax fields](#) on page C1-240.
- <Rdm> Is the first general-purpose source register and the destination register, encoded in the "Rdm" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the first general-purpose source register, encoded in the "Rm" field.
- <Rs> Is the second general-purpose source register holding a shift amount in its bottom 8 bits, encoded in the "Rs" field.

Operation for all encodings


The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

C2.4.15 B

Branch causes a branch to a target address.

T1

ARMv8-M



T1 variant


B<c>{<q>} <label> // Not permitted in IT block

Decode for this encoding

```
if cond == '1110' then SEE UDF;
if cond == '1111' then SEE SVC;
imm32 = SignExtend(imm8:'0', 32);
if InITBlock() then UNPREDICTABLE;
```

T2

ARMv8-M



T2 variant


B{<c>}{<q>} <label> // Outside or last in IT block

Decode for this encoding

```
imm32 = SignExtend(imm11:'0', 32);
if InITBlock() && !LastInITBlock() then UNPREDICTABLE;
```

T3

ARMv8-M Main Extension only



T3 variant


B<c>.W <label> // Not permitted in IT block, and <label> can be represented in T1
 B<c>{<q>} <label> // Not permitted in IT block

Decode for this encoding

```
if cond<3:1> == '111' then SEE "Related encodings";
if !HaveMainExt() then UNDEFINED;
imm32 = SignExtend(S:J2:J1:imm6:imm11:'0', 32);
if InITBlock() then UNPREDICTABLE;
```

T4

ARMv8-M



T4 variant

B{<c>}.W <label> // <label> can be represented in T2
B{<c>}{<q>} <label>

Decode for this encoding

```
I1 = NOT(J1 EOR S); I2 = NOT(J2 EOR S); imm32 = SignExtend(S:I1:I2:imm10:imm11:'0', 32);
if InITBlock() && !LastInITBlock() then UNPREDICTABLE;
```

Notes for all encodings

Related encodings: [Branches and miscellaneous control on page C2-277](#).

Assembler symbols

- <c> For encoding T1: see [Standard assembler syntax fields on page C1-240](#). Must not be AL or omitted.
For encoding T2 and T4: see [Standard assembler syntax fields on page C1-240](#).
For encoding T3: see [Standard assembler syntax fields on page C1-240](#). <c> must not be AL or omitted.
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <label> For encoding T1: the label of the instruction that is to be branched to. The assembler calculates the required value of the offset from the PC value of the B instruction to this label, then selects an encoding that sets imm32 to that offset. Permitted offsets are even numbers in the range –256 to 254.
For encoding T2: the label of the instruction that is to be branched to. The assembler calculates the required value of the offset from the PC value of the B instruction to this label, then selects an encoding that sets imm32 to that offset. Permitted offsets are even numbers in the range –2048 to 2046.
For encoding T3: the label of the instruction that is to be branched to. The assembler calculates the required value of the offset from the PC value of the B instruction to this label, then selects an encoding that sets imm32 to that offset. Permitted offsets are even numbers in the range –1048576 to 1048574.
For encoding T4: the label of the instruction that is to be branched to. The assembler calculates the required value of the offset from the PC value of the B instruction to this label, then selects an encoding that sets imm32 to that offset. Permitted offsets are even numbers in the range –16777216 to 16777214.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    BranchWritePC(PC + imm32);
```

Exceptions

None.

C2.4.16 BFC

Bit Field Clear clears any number of adjacent bits at any position in a register, without affecting the other bits in the register.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7	6	5	4	0
1	1	1	1	0	(0)	1	1	0	1	1	0	1	1	1	1	0	imm3	Rd	imm2	(0)	msb				

T1 variant

BFC{<c>}{<q>} <Rd>, #<lsb>, #<width>

Decode for this encoding

```

if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); msbit = UInt(msb); lsbbit = UInt(imm3:imm2);
if msbit < lsbbit then UNPREDICTABLE;
if d IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <lsb> Is the least significant bit that is to be cleared, in the range 0 to 31, encoded in the "imm3:imm2" field.
- <width> Is the number of bits to be cleared, in the range 1 to 32-<lsb>, encoded in the "msb" field as <lsb>+<width>-1.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  if msbit >= lsbbit then
    R[d]<msbit:lsbit> = Replicate('0', msbit-lsbbit+1);
    // Other bits of R[d] are unchanged
  else
    R[d] = bits(32) UNKNOWN;
  
```

Exceptions


None.

C2.4.17 BFI

Bit Field Insert copies any number of low order bits from a register into the same number of adjacent bits at any position in the destination register.

T1

ARMv8-M Main Extension only



T1 variant

BFI{<c>}{<q>} <Rd>, <Rn>, #<lsb>, #<width>

Decode for this encoding

```

if Rn == '1111' then SEE BFC;
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); msbit = UInt(msb); lsbit = UInt(imm3:imm2);
if msbit < lsbit then UNPREDICTABLE;
if d IN {13,15} || n == 13 then UNPREDICTABLE;

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.
- <lsb> Is the least significant destination bit, in the range 0 to 31, encoded in the "imm3:imm2" field.
- <width> Is the number of bits to be copied, in the range 1 to 32-<lsb>, encoded in the "msb" field as <lsb>+<width>-1.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    if msbit >= lsbit then
        R[d]<msbit:lsbit> = R[n]<(msbit-lsbit):0>;
        // Other bits of R[d] are unchanged
    else
        R[d] = bits(32) UNKNOWN;

```

Exceptions


None.

C2.4.18 BIC (immediate)

Bit Clear (immediate) performs a bitwise AND of a register value and the complement of an immediate value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M Main Extension only



BIC variant

Applies when S == 0.

BIC{<c>}{<q>} {<Rd>}, <Rn>, #<const>

BICS variant

Applies when S == 1.

BICS{<c>}{<q>} {<Rd>}, <Rn>, #<const>

Decode for all variants of this encoding

```

if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); setflags = (S == '1');
(imm32, carry) = T32ExpandImm_C(i:imm3:imm8, APSR.C);
if d IN {13,15} || n IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.
- <const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  result = R[n] AND NOT(imm32);
  R[d] = result;
  if setflags then
    APSR.N = result<31>;
    APSR.Z = IsZeroBit(result);
    APSR.C = carry;
    // APSR.V unchanged
  
```

Exceptions

None.

C2.4.19 BIC (register)

Bit Clear (register) performs a bitwise AND of a register value and the complement of an optionally-shifted register value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	3	2	0
0	1	0	0	0	0	1	1	1	0	Rm	Rdn		

T1 variant

BIC<c>{<q>} {<Rdn>}, <Rdn>, <Rm> // Inside IT block
BICS{<q>} {<Rdn>}, <Rdn>, <Rm> // Outside IT block

Decode for this encoding

d = UInt(Rdn); n = UInt(Rdn); m = UInt(Rm); setflags = !InITBlock();
(shift_t, shift_n) = (SRTYPE_LSL, 0);

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	0	0	0	1	S	Rn	(0)	imm3	Rd	imm2	type	Rm						

BIC, rotate right with extend variant

Applies when S == 0 && imm3 == 000 && imm2 == 00 && type == 11.

BIC{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

BIC, shift or rotate by value variant

Applies when S == 0 && !(imm3 == 000 && imm2 == 00 && type == 11).

BIC<c>.W {<Rd>}, <Rn>, <Rm> // Inside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1
BIC{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

BICS, rotate right with extend variant

Applies when S == 1 && imm3 == 000 && imm2 == 00 && type == 11.

BICS{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

BICS, shift or rotate by value variant

Applies when S == 1 && !(imm3 == 000 && imm2 == 00 && type == 11).

BICS.W {<Rd>}, <Rn>, <Rm> // Outside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1
BICS{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); setFlags = (S == '1');
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rdn> Is the first general-purpose source register and the destination register, encoded in the "Rdn" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.
- <shift> Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values:
- | | |
|-----|----------------|
| LSL | when type = 00 |
| LSR | when type = 01 |
| ASR | when type = 10 |
| ROR | when type = 11 |
- <amount> Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation for all encodings

```
if ConditionPassed() then
  EncodingSpecificOperations();
  (shifted, carry) = Shift_C(R[m], shift_t, shift_n, APSR.C);
  result = R[n] AND NOT(shifted);
  R[d] = result;
  if setFlags then
    APSR.N = result<31>;
    APSR.Z = IsZeroBit(result);
    APSR.C = carry;
    // APSR.V unchanged
```

Exceptions

None.

C2.4.20 BKPT

Breakpoint causes a DebugMonitor exception or a debug halt to occur depending on the configuration of the debug support.

———— **Note** —————

BKPT is an unconditional instruction and executes as such both inside and outside an IT instruction block.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	1	1	1	1	1	0	imm8							

T1 variant

BKPT{<q>} {#}<imm>

Decode for this encoding

```
imm32 = ZeroExtend(imm8, 32);
// imm32 is for assembly/disassembly only and is ignored by hardware.
```

Assembler symbols

- <q> See [Standard assembler syntax fields on page C1-240](#). A BKPT instruction must be unconditional.
- <imm> Is an 8-bit unsigned immediate, in the range 0 to 255, encoded in the "imm8" field. The PE ignores this value, but a debugger might use it to store additional information about the breakpoint.

Operation

```
EncodingSpecificOperations();
BKPTInstrDebugEvent();
```

Exceptions


DebugMonitor.

C2.4.21 BL

Branch with Link (immediate) calls a subroutine at a PC-relative address.

T1

ARMv8-M



T1 variant

BL{<c>}{<q>} <label>

Decode for this encoding

```
I1 = NOT(J1 EOR S); I2 = NOT(J2 EOR S); imm32 = SignExtend(S:I1:I2:imm10:imm11:'0', 32);
if InITBlock() && !LastInITBlock() then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<label> The label of the instruction that is to be branched to. The assembler calculates the required value of the offset from the PC value of the BL instruction to this label, then selects an encoding with imm32 set to that offset. Permitted offsets are even numbers in the range –16777216 to 16777214.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  next_instr_addr = PC;
  LR = next_instr_addr<31:1> : '1';
  BranchWritePC(PC + imm32);
```

Exceptions

None.

C2.4.22 BLX, BLXNS

Branch with Link and Exchange calls a subroutine at an address, with the address and instruction set specified by a register. Bit[0] complies with the ARM architecture interworking rules for switching between the A32 and T32 instruction sets. However, ARMv8-M only supports the T32 instruction set, so bit[0] must be 1. If bit[0] is 0 the PE takes an INVSTATE UsageFault exception on the instruction at the target address.

Branch with Link and Exchange Non-secure calls a subroutine at an address specified by a register, and if bit[0] of the target address is 0 then the instruction causes a transition from Secure to Non-secure state. This variant of the instruction must only be used when the additional steps required to make such a transition safe have been taken.

BLXNS is UNDEFINED if executed in Non-secure state, and is only implemented if the Security Extensions have been implemented.

See [GVBB](#) for further details of register and stack changes as a result of BLXNS causing a transition from Secure to Non-secure state.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	3	2	1	0
0	1	0	0	0	1	1	1	1	Rm	NS(0)	(0)	(0)	(0)

BLX variant

Applies when NS == 0.

BLX{<c>}{<q>} <Rm>

BLXNS variant

Applies when NS == 1.

BLXNS{<c>}{<q>} <Rm>

Decode for all variants of this encoding

```
m = UInt(Rm); allowNonSecure = NS == '1';
if !IsSecure() && allowNonSecure then UNDEFINED;
if m == 15 then UNPREDICTABLE;
if InITBlock() && !LastInITBlock() then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rm> Is the general-purpose register holding the address to be branched to, encoded in the "Rm" field. The SP can be used, but this is deprecated.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();

    target      = R[m];
    nextInstrAddr = PC - 2;
    nextInstrAddr = nextInstrAddr<31:1> : '1';

    if allowNonSecure && (target<0> == '0') then
```

```
if !IsAligned(SP, 8) then UNPREDICTABLE;
address = SP - 8;
RETPSR_Type savedPSR = Zeros();
savedPSR.Exception = IPSR.Exception;
savedPSR.SFPA = CONTROL_S.SFPA;
// Only the stack locations, not the store order, are architected
spName = LookUpSP();
mode = CurrentMode();
exc = Stack(address, 0, spName, mode, nextInstrAddr);
if exc.fault == NoFault then exc = Stack(address, 4, spName, mode, savedPSR);
HandleException(exc);
// Stack pointer update will raise a fault if limit violated
SP = address;
LR = 0xFEFFFFFF<31:0>;
// If in handler mode, IPSR must be non-zero. To prevent revealing which
// Secure handler is calling Non-secure code, IPSR is set to an invalid but
// non-zero value (that is, the reset exception number).
if mode == Mode_Handler then
    IPSR = 0x1<31:0>;
else
    LR = nextInstrAddr;

BLXwritePC(target, allowNonSecure);
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.

C2.4.23 BX, BXNS

Branch and Exchange causes a branch to an address, with the address and instruction set specified by a register. Bit[0] complies with the ARM architecture interworking rules for switching between the A32 and T32 instruction sets. However, ARMv8-M only supports the T32 instruction set, so bit[0] must be 1. If bit[0] is 0 the PE takes an INVSTATE UsageFault exception on the instruction at the target address.

Branch and Exchange Non-secure causes a branch to an address specified by a register. If bit[0] of the target address is 0, and the target address is not [FNC_RETURN](#) or [EXC_RETURN](#), then the instruction causes a transition from Secure to Non-secure state. This variant of the instruction must only be used when the additional steps required to make such a transition safe have been taken.

BX can also be used for an exception return.

BXNS is UNDEFINED if executed in Non-secure state, and is only implemented if the Security Extensions have been implemented.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6		3	2	1	0
0	1	0	0	0	1	1	1	0	Rm	NS	(0)	(0)		

BX variant

Applies when NS == 0.

BX{<c>}{<q>} <Rm>

BXNS variant

Applies when NS == 1.

BXNS{<c>}{<q>} <Rm>

Decode for all variants of this encoding

```
m = UInt(Rm); allowNonSecure = NS == '1';
if !IsSecure() && allowNonSecure then UNDEFINED;
if InITBlock() && !LastInITBlock() then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rm> Is the general-purpose register holding the address to be branched to, encoded in the "Rm" field. The SP can be used, but this is deprecated. The PC can be used, but:

- BX PC causes a UsageFault on the following instruction, because bit<0> of the PC is 0.
- BXNS PC in Non-secure state is UNDEFINED.
- BXNS PC in Secure state causes a transition to Non-secure state, but if the next instruction is in Secure memory then fetching it causes a SecureFault.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    exc = BXWritePC(R[m], allowNonSecure);
    HandleException(exc);
```

Exceptions


UsageFault, BusFault, MemManage, and SecureFault.

C2.4.24 CBNZ, CBZ

Compare and Branch on Nonzero and Compare and Branch on Zero compare the value in a register with zero, and conditionally branch forward a constant value. They do not affect the condition flags.

T1

ARMv8-M



CBNZ variant

Applies when `op == 1`.

CBNZ{<q>} <Rn>, <label>

CBZ variant

Applies when `op == 0`.

CBZ{<q>} <Rn>, <label>

Decode for all variants of this encoding

```
n = UInt(Rn); imm32 = ZeroExtend(i:imm5:'0', 32); nonzero = (op == '1');
if InITBlock() then UNPREDICTABLE;
```

Assembler symbols

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rn> Is the general-purpose register to be tested, encoded in the "Rn" field.

<label> Is the program label to be conditionally branched to. Its offset from the PC, a multiple of 2 in the range 0 to 126, is encoded as "i:imm5" times 4.

Operation

```
EncodingSpecificOperations();
if nonzero != IsZero(R[n]) then
    BranchWritePC(PC + imm32);
```

Exceptions

None.

C2.4.25 CDP, CDP2

Coprocessor Data Processing tells a coprocessor to perform an operation.

If no coprocessor can execute the instruction, a UsageFault exception is generated.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	4	3	0	15	12	11	8	7	5	4	3	0
1	1	1	0	1	1	1	0	opc1	CRn	CRd	!=101x	opc2	0	CRm						

coproc

T1 variant

CDP{<c>}{<q>} <coproc>, {#}<opc1>, <CRd>, <CRn>, <CRm> {, {#}<opc2>}

Decode for this encoding

```
if coproc IN '101x' then SEE "Floating-point";
if !HaveMainExt() then UNDEFINED;
cp = UInt(coproc);
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	4	3	0	15	12	11	8	7	5	4	3	0
1	1	1	1	1	1	1	0	opc1	CRn	CRd	!=101x	opc2	0	CRm						

coproc

T2 variant

CDP2{<c>}{<q>} <coproc>, {#}<opc1>, <CRd>, <CRn>, <CRm> {, {#}<opc2>}

Decode for this encoding

```
if coproc IN '101x' then SEE "Floating-point";
if !HaveMainExt() then UNDEFINED;
cp = UInt(coproc);
```

Notes for all encodings

Floating-point: [Floating-point data-processing on page C2-294](#).

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <coproc> Is the name of the coprocessor, encoded in the "coproc" field. The valid coprocessor names are p0 to p7, p10, and p11.
- <opc1> Is a coprocessor-specific opcode, in the range 0 to 15, encoded in the "opc1" field.
- <CRd> Is the destination coprocessor register, encoded in the "CRd" field.
- <CRn> Is the coprocessor register that contains the first operand, encoded in the "CRn" field.

- <CRm> Is the coprocessor register that contains the second operand, encoded in the "CRm" field.
- <opc2> Is a coprocessor-specific opcode in the range 0 to 7, defaulting to 0 and encoded in the "opc2" field.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteCPCheck(cp);
    if !Cproc_Accepted(cp, ThisInstr()) then
        GenerateCoproprocessorException();
    else
        Cproc_InternalOperation(cp, ThisInstr());
```

Exceptions

UsageFault.

C2.4.26 CLREX

Clear Exclusive clears the local record of the executing PE that an address has had a request for an exclusive access.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	0	0	1	1	1	0	1	1	(1)	(1)	(1)	(1)	1	0	(0)	0	(1)	(1)	(1)	(1)	0	0	1	0	(1)	(1)	(1)	(1)

T1 variant

CLREX{<c>}{<q>}

Decode for this encoding

// No additional decoding required

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  ClearExclusiveLocal(ProcessorID());
```

Exceptions

None.

C2.4.27 CLZ

Count Leading Zeros returns the number of binary zero bits before the first binary one bit in a value.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	1	1	Rm		1	1	1	1	Rd		1	0	0	0	Rm	

T1 variant

CLZ{<c>}{<q>} <Rd>, <Rm>

Decode for this encoding

```

if !HaveMainExt() then UNDEFINED;
if !Consistent(Rm) then UNPREDICTABLE;
d = UInt(Rd); m = UInt(Rm);
if d IN {13,15} || m IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the general-purpose source register, encoded in the "Rm" field. Its number must be encoded twice.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    result = CountLeadingZeroBits(R[m]);
    R[d] = result<31:0>;

```

Exceptions


None.

C2.4.28 CMN (immediate)

Compare Negative (immediate) adds a register value and an immediate value. It updates the condition flags based on the result, and discards the result.

T1

ARMv8-M Main Extension only



T1 variant

CMN{<c>}{<q>} <Rn>, #<const>

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); imm32 = T32ExpandImm(i:imm3:imm8);
if n == 15 then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rn> Is the general-purpose source register, encoded in the "Rn" field.

<const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  (result, carry, overflow) = AddWithCarry(R[n], imm32, '0');
  APSR.N = result<31>;
  APSR.Z = IsZeroBit(result);
  APSR.C = carry;
  APSR.V = overflow;
```

Exceptions

None.

C2.4.29 CMN (register)

Compare Negative (register) adds a register value and an optionally-shifted register value. It updates the condition flags based on the result, and discards the result.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	1	0	0	0	0	1	0	1	1	Rm	Rn				

T1 variant

CMN{<c>}{<q>} <Rn>, <Rm>

Decode for this encoding

```
n = UInt(Rn); m = UInt(Rm);
(shift_t, shift_n) = (SRTYPE_LSL, 0);
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	0	1	1	0	0	0	1	Rn	(0)	imm3	1	1	1	1	imm2	type	Rm										

Rotate right with extend variant

Applies when imm3 == 000 && imm2 == 00 && type == 11.

CMN{<c>}{<q>} <Rn>, <Rm>, RRX

Shift or rotate by value variant

Applies when !(imm3 == 000 && imm2 == 00 && type == 11).

CMN{<c>}.W <Rn>, <Rm> // <Rn>, <Rm> can be represented in T1
CMN{<c>}{<q>} <Rn>, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); m = UInt(Rm);
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if n == 15 || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rn> Is the first general-purpose source register, encoded in the "Rn" field.

<Rm> Is the second general-purpose source register, encoded in the "Rm" field.

- <shift> Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values:
- LSL when type = 00
 - LSR when type = 01
 - ASR when type = 10
 - ROR when type = 11
- <amount> Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    shifted = Shift(R[m], shift_t, shift_n, APSR.C);
    (result, carry, overflow) = AddWithCarry(R[n], shifted, '0');
    APSR.N = result<31>;
    APSR.Z = IsZeroBit(result);
    APSR.C = carry;
    APSR.V = overflow;
```

Exceptions

None.

APSR.Z = IsZeroBit(result);
APSR.C = carry;
APSR.V = overflow;

Exceptions

None.

C2.4.31 CMP (register)

Compare (register) subtracts an optionally-shifted register value from a register value. It updates the condition flags based on the result, and discards the result.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	3	2	0
0	1	0	0	0	0	1	0	1	0	Rm	Rn		

T1 variant

CMP{<c>}{<q>} <Rn>, <Rm> // <Rn> and <Rm> both from R0-R7

Decode for this encoding

```
n = UInt(Rn); m = UInt(Rm);
(shift_t, shift_n) = (SRTYPE_LSL, 0);
```

T2

ARMv8-M

15	14	13	12	11	10	9	8	7	6	3	2	0
0	1	0	0	0	1	0	1	N	Rm	Rn		

T2 variant

CMP{<c>}{<q>} <Rn>, <Rm> // <Rn> and <Rm> not both from R0-R7

Decode for this encoding

```
n = UInt(N:Rn); m = UInt(Rm);
(shift_t, shift_n) = (SRTYPE_LSL, 0);
if n < 8 && m < 8 then UNPREDICTABLE;
if n == 15 || m == 15 then UNPREDICTABLE;
```

T3

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	0	1	1	1	0	1	1	Rn	(0)	imm3	1	1	1	1	imm2	type	Rm					

Rotate right with extend variant

Applies when imm3 == 000 && imm2 == 00 && type == 11.

CMP{<c>}{<q>} <Rn>, <Rm>, RRX

Shift or rotate by value variant

Applies when !(imm3 == 000 && imm2 == 00 && type == 11).

CMP{<c>}.W <Rn>, <Rm> // <Rn>, <Rm> can be represented in T1 or T2
CMP{<c>}{<q>} <Rn>, <Rm>, <shift> #<amount>

Decode for all variants of this encoding

```
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); m = UInt(Rm);
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if n == 15 || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rn> For encoding T1 and T3: is the first general-purpose source register, encoded in the "Rn" field.
For encoding T2: is the first general-purpose source register, encoded in the "N:Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.
- <shift> Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values:
- | | |
|-----|----------------|
| LSL | when type = 00 |
| LSR | when type = 01 |
| ASR | when type = 10 |
| ROR | when type = 11 |
- <amount> Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
shifted = Shift(R[m], shift_t, shift_n, APSR.C);
(result, carry, overflow) = AddWithCarry(R[n], NOT(shifted), '1');
APSR.N = result<31>;
APSR.Z = IsZeroBit(result);
APSR.C = carry;
APSR.V = overflow;
```

Exceptions

None.

C2.4.32 CPS

Change PE State. The instruction modifies the [PRIMASK](#) and [FAULTMASK](#) special-purpose register values.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	1	1	0	1	1	0	0	1	1	im	(0)	(0)	I	F

CPSID variant

Applies when `im == 1`.

CPSID{<q>} <iflags>

CPSIE variant

Applies when `im == 0`.

CPSIE{<q>} <iflags>

Decode for all variants of this encoding

```
enable = (im == '0'); disable = (im == '1');
if InITBlock() then UNPREDICTABLE;
if (I == '0' && F == '0') then UNPREDICTABLE;
affectPRI = (I == '1'); affectFAULT = (F == '1');
if !HaveMainExt() then
    if (I == '0') then UNPREDICTABLE;
    if (F == '1') then UNPREDICTABLE;
```

Assembler symbols

<q> See [Standard assembler syntax fields](#) on page C1-240.

<iflags> Is a sequence of one or more of the following, specifying which interrupt mask bits are affected:

- i PRIMASK. When set to 1, raises the execution priority to 0. This is a 1-bit register, that can be updated only by privileged software.
- f FAULTMASK. When set to 1, raises the execution priority to -1, the same priority as HardFault. This is a 1-bit register, that can be updated only by privileged software. The register clears to 0 on return from any exception other than NMI.

Operation

```
EncodingSpecificOperations();
if CurrentModeIsPrivileged() then
    if enable then
        if affectPRI then
            PRIMASK.PM = '0';
        if affectFAULT then
            FAULTMASK.FM = '0';
    if disable then
        if affectPRI then
            PRIMASK.PM = '1';
        if affectFAULT && ExecutionPriority() > -1 then
            FAULTMASK.FM = '1';
```

Exceptions

None.

C2.4.33 DBG

Debug Hint provides a hint to debug trace support and related debug systems. See debug architecture documentation for what use (if any) is made of this instruction.

DBG is a **NOP**-compatible hint. For more information about **NOP**-compatible hints, see *NOP-compatible hint instructions* on page C1-251.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	0
1	1	1	1	0	0	1	1	1	0	1	0	(1)	(1)	(1)	(1)	1	0	(0)	0	(0)	0	0	0	1	1	1	1	option	

T1 variant

DBG{<c>}{<q>} #<option>

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
// Any decoding of 'option' is specified by the debug system
```

Assembler symbols

- <c> See *Standard assembler syntax fields* on page C1-240.
- <q> See *Standard assembler syntax fields* on page C1-240.
- <option> Is a 4-bit unsigned immediate, in the range 0 to 15, encoded in the "option" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    Hint_Debug(option);
```

Exceptions


None.

C2.4.34 DMB

Data Memory Barrier acts as a memory barrier. It ensures that all explicit memory accesses that appear in program order before the DMB instruction are observed before any explicit memory accesses that appear in program order after the DMB instruction. It does not affect the ordering of any other instructions executing on the PE.

T1

ARMv8-M



T1 variant

DMB{<c>}{<q>} {<option>}

Decode for this encoding

// No additional decoding required

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<option> Specifies an optional limitation on the barrier operation. Values are:

SY Full system barrier operation, encoded as option = 0b1111. Can be omitted.

All other encodings of option are reserved. The corresponding instructions execute as full system barrier operations, but must not be relied upon by software.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    DataMemoryBarrier(option);
```

Exceptions

None.

C2.4.35 DSB

Data Synchronization Barrier acts as a special kind of memory barrier. No instruction in program order after this instruction can execute until this instruction completes. This instruction completes only when both:

- Any explicit memory access made before this instruction is complete.
- The side-effects of any SCS access that performs a context-altering operation are visible.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	0
1	1	1	1	0	0	1	1	1	0	1	1	(1)	(1)	(1)	(1)	1	0	(0)	0	(1)	(1)	(1)	(1)	0	1	0	0	option	

T1 variant

DSB{<c>}{<q>} {<option>}

Decode for this encoding

// No additional decoding required

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<option> Specifies an optional limitation on the barrier operation. Values are:

SY Full system barrier operation, encoded as option = 0b1111. Can be omitted.

All other encodings of option are reserved. The corresponding instructions execute as full system barrier operations, but must not be relied upon by software.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    DataSynchronizationBarrier(option);
```

Exceptions


None.

C2.4.36 EOR (immediate)

Exclusive OR (immediate) performs a bitwise Exclusive OR of a register value and an immediate value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M Main Extension only



EOR variant

Applies when S == 0.

EOR{<c>}{<q>} {<Rd>}, <Rn>, #<const>

EORS variant

Applies when S == 1 && Rd != 1111.

EORS{<c>}{<q>} {<Rd>}, <Rn>, #<const>

Decode for all variants of this encoding

```

if Rd == '1111' && S == '1' then SEE "TEQ (immediate)";
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); setflags = (S == '1');
(imm32, carry) = T32ExpandImm_C(i:imm3:imm8, APSR.C);
if d == 13 || (d == 15 && S == '0') || n IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.
- <const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  result = R[n] EOR imm32;
  R[d] = result;
  if setflags then
    APSR.N = result<31>;
    APSR.Z = IsZeroBit(result);
    APSR.C = carry;
    // APSR.V unchanged
  
```

Exceptions

None.

C2.4.37 EOR (register)

Exclusive OR (register) performs a bitwise Exclusive OR of a register value and an optionally-shifted register value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	3	2	0
0	1	0	0	0	0	0	0	0	1	Rm	Rdn		

T1 variant

EOR<c>{<q>} {<Rdn>}, <Rdn>, <Rm> // Inside IT block
EORS{<q>} {<Rdn>}, <Rdn>, <Rm> // Outside IT block

Decode for this encoding

d = UInt(Rdn); n = UInt(Rdn); m = UInt(Rm); setflags = !InITBlock();
(shift_t, shift_n) = (SRTYPE_LSL, 0);

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	0	1	0	0	S	Rn	(0)	imm3	Rd	imm2	type	Rm						

EOR, rotate right with extend variant

Applies when S == 0 && imm3 == 000 && imm2 == 00 && type == 11.

EOR{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

EOR, shift or rotate by value variant

Applies when S == 0 && !(imm3 == 000 && imm2 == 00 && type == 11).

EOR<c>.W {<Rd>}, <Rn>, <Rm> // Inside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1
EOR{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

EORS, rotate right with extend variant

Applies when S == 1 && imm3 == 000 && Rd != 1111 && imm2 == 00 && type == 11.

EORS{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

EORS, shift or rotate by value variant

Applies when S == 1 && !(imm3 == 000 && imm2 == 00 && type == 11) && Rd != 1111.

EORS.W {<Rd>}, <Rn>, <Rm> // Outside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1
EORS{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```
if Rd == '1111' && S == '1' then SEE "TEQ (register)";
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); setflags = (S == '1');
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if d == 13 || (d == 15 && S == '0') || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rdn> Is the first general-purpose source register and the destination register, encoded in the "Rdn" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.
- <shift> Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values:
- | | |
|-----|----------------|
| LSL | when type = 00 |
| LSR | when type = 01 |
| ASR | when type = 10 |
| ROR | when type = 11 |
- <amount> Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
(shifted, carry) = Shift_C(R[m], shift_t, shift_n, APSR.C);
result = R[n] EOR shifted;
R[d] = result;
if setflags then
    APSR.N = result<31>;
    APSR.Z = IsZeroBit(result);
    APSR.C = carry;
    // APSR.V unchanged
```

Exceptions

None.


C2.4.38 FLDMDBX, FLDMIAX

FLDMX (Decrement Before, Increment After) loads multiple extension registers from consecutive memory locations using an address from a general-purpose register.

ARM deprecates use of FLDMDBX and FLDMIAX, except for disassembly purposes, and reassembly of disassembled code.

T1

ARMv8-M Floating-point Extension only



Decrement Before variant

Applies when P == 1 && U == 0 && W == 1.

FLDMDBX{<c>}{<q>} <Rn>{!}, <dreglist>

Increment After variant

Applies when P == 0 && U == 1.

FLDMIAX{<c>}{<q>} <Rn>{!}, <dreglist>

Decode for all variants of this encoding

```

if P == '0' && U == '0' && W == '0' then SEE "Related encodings";
if P == '1' && W == '0' then SEE VLDR;
if P == U && W == '1' then UNDEFINED;
if !HaveFPExt() then UNDEFINED;
// Remaining combinations are PUW = 010 (IA without !), 011 (IA with !), 101 (DB with !)
single_regs = FALSE; add = (U == '1'); wback = (W == '1');
d = UInt(D:Vd); n = UInt(Rn); imm32 = ZeroExtend(imm8:'00', 32);
regs = UInt(imm8) DIV 2;
if n == 15 then UNPREDICTABLE;
if regs == 0 || regs > 16 || (d+regs) > 32 then UNPREDICTABLE;
if VFPsmallRegisterBank() && (d+regs) > 16 then UNPREDICTABLE;

```

Notes for all encodings

Related encodings: [Floating-point load/store and 64-bit register moves on page C2-292](#).

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- ! Specifies base register writeback. Encoded in the "W" field as 1 if present, otherwise 0.
- <dreglist> Is the list of consecutively numbered 64-bit floating-point registers to be transferred. The first register in the list is encoded in "D:Vd", and "imm8" is set to twice the number of registers in the list plus one. The list must contain at least one register, all registers must be in the range D0-D15, and must not contain more than 16 registers.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    address = if add then R[n]          else R[n]-imm32;
    regval  = if add then R[n]+imm32   else R[n]-imm32;

    // Determine if the stack pointer limit should be checked
    if n == 13 && wback then
        (limit, applylimit) = LookUpSPLim(LookUpSP());
    else
        applylimit = FALSE;

    // Memory operation only performed if limit not violated
    if !applylimit || (UInt(regval) >= UInt(limit)) then
        for r = 0 to regs-1
            if single_regs then
                S[d+r] = MemA[address,4];
                address = address+4;
            else
                word1 = MemA[address,4]; word2 = MemA[address+4,4];
                address = address+8;
                // Combine the word-aligned words in the correct order for
                // current endianness.
                D[d+r] = if BigEndian() then word1:word2 else word2:word1;

    // If the stack pointer is being updated update a fault will be raised if
    // the limit is violated
    if wback then RSPCheck[n] = regval;
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


C2.4.39 FSTMDBX, FSTMIAX

FSTMX (Decrement Before, Increment After) stores multiple extension registers to consecutive memory locations using an address from a general-purpose register.

ARM deprecates use of FSTMDBX and FSTMIAX, except for disassembly purposes, and reassembly of disassembled code.

T1

ARMv8-M Floating-point Extension only



Decrement Before variant

Applies when P == 1 && U == 0 && W == 1.

FSTMDBX{<c>}{<q>} <Rn>{!}, <dreglist>

Increment After variant

Applies when P == 0 && U == 1.

FSTMIAX{<c>}{<q>} <Rn>{!}, <dreglist>

Decode for all variants of this encoding

```

if P == '0' && U == '0' && W == '0' then SEE "Related encodings";
if P == '1' && W == '0' then SEE VSTR;
if P == U && W == '1' then UNDEFINED;
if !HaveFPExt() then UNDEFINED;
// Remaining combinations are PUW = 010 (IA without !), 011 (IA with !), 101 (DB with !)
single_regs = FALSE; add = (U == '1'); wback = (W == '1');
d = UInt(D:Vd); n = UInt(Rn); imm32 = ZeroExtend(imm8:'00', 32);
regs = UInt(imm8) DIV 2;
if n == 15 then UNPREDICTABLE;
if regs == 0 || regs > 16 || (d+regs) > 32 then UNPREDICTABLE;
if VFPSmallRegisterBank() && (d+regs) > 16 then UNPREDICTABLE;

```

Notes for all encodings

Related encodings: [Floating-point load/store and 64-bit register moves on page C2-292](#).

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- ! Specifies base register writeback. Encoded in the "W" field as 1 if present, otherwise 0.
- <dreglist> Is the list of consecutively numbered 64-bit floating-point registers to be transferred. The first register in the list is encoded in "D:Vd", and "imm8" is set to twice the number of registers in the list plus one. The list must contain at least one register, all registers must be in the range D0-D15, and must not contain more than 16 registers.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    address = if add then R[n]      else R[n]-imm32;
    regval  = if add then R[n]+imm32 else R[n]-imm32;

    // Determine if the stack pointer limit should be checked
    if n == 13 && wback then
        (limit, applylimit) = LookUpSPLim(LookUpSP());
    else
        applylimit = FALSE;

    // Memory operation only performed if limit not violated
    if !applylimit || (UInt(regval) >= UInt(limit)) then
        for r = 0 to regs-1
            if single_regs then
                MemA[address,4] = S[d+r];
                address          = address+4;
            else
                // Store as two word-aligned words in the correct order for current endianness.
                MemA[address,4] = if BigEndian() then D[d+r]<63:32> else D[d+r]<31:0>;
                MemA[address+4,4] = if BigEndian() then D[d+r]<31:0> else D[d+r]<63:32>;
                address = address+8;

    // If the stack pointer is being updated update a fault will be raised if
    // the limit is violated
    if wback then RSPCheck[n] = regval;
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.40 ISB

Instruction Synchronization Barrier flushes the pipeline in the PE and is a context synchronization event. For more information, see [Instruction Synchronization Barrier](#) on page B6-125.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	0
1	1	1	1	0	0	1	1	1	0	1	1	(1)	(1)	(1)	(1)	1	0	(0)	0	(1)	(1)	(1)	(1)	0	1	1	0	option	

T1 variant

ISB{<c>}{<q>} {<option>}

Decode for this encoding

// No additional decoding required

Assembler symbols

<c> See [Standard assembler syntax fields](#) on page C1-240.

<q> See [Standard assembler syntax fields](#) on page C1-240.

<option> Specifies an optional limitation on the barrier operation. Values are:

SY Full system barrier operation, encoded as option = 0b1111. Can be omitted.

All other encodings of option are reserved. The corresponding instructions execute as full system barrier operations, but must not be relied upon by software.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    InstructionSynchronizationBarrier(option);
```

Exceptions

None.

C2.4.41 IT


If Then makes up to four following instructions (the IT block) conditional. The conditions for the instructions in the IT block can be the same, or some of them can be the inverse of others.

IT does not affect the condition code flags. Branches to any instruction in the IT block are not permitted, apart from those performed by exception returns.

16-bit instructions in the IT block, other than CMP, CMN, and TST, do not set the condition code flags. The AL condition can be specified to get this changed behavior without conditional execution.

T1

ARMv8-M Main Extension only



T1 variant

IT{<x>{<y>{<z>}}}{<q>} <cond>

Decode for this encoding

```

if mask == '0000' then SEE "Related encodings";
if !HaveMainExt() then UNDEFINED;
if firstcond == '1111' || (firstcond == '1110' && BitCount(mask) != 1) then UNPREDICTABLE;
if InITBlock() then UNPREDICTABLE;
  
```

Notes for all encodings

Related encodings: [Hints on page C2-278](#).

Assembler symbols

- <x> The condition for the second instruction in the IT block. If omitted, the "mask" field is set to 0b1000. If present it is encoded in the "mask[3]" field:
 - T firstcond[0]
 - E NOT firstcond[0]

- <y> The condition for the third instruction in the IT block. If omitted and <x> is present, the "mask[2:0]" field is set to 0b100. If <y> is present it is encoded in the "mask[2]" field:
 - T firstcond[0]
 - E NOT firstcond[0]

- <z> The condition for the fourth instruction in the IT block. If omitted and <y> is present, the "mask[1:0]" field is set to 0b10. If <z> is present, the "mask[0]" field is set to 1, and it is encoded in the "mask[1]" field:
 - T firstcond[0]
 - E NOT firstcond[0]

- <q> See [Standard assembler syntax fields on page C1-240](#).

<cond> The condition for the first instruction in the IT block, encoded in the "firstcond" field. See [Conditional execution on page C1-241](#) for the range of conditions available, and the encodings.

Operation

EncodingSpecificOperations();
`ITSTATE.IT<7:0> = firstcond:mask;`

Exceptions


None.

C2.4.42 LDA

Load-Acquire Word loads a word from memory and writes it to a register. The instruction also has memory ordering semantics.

T1

ARMv8-M



T1 variant

LDA{<c>}{<q>} <Rt>, [<Rn>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn);
if t IN {13,15} || n == 15 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  address = R[n];
  R[t] = Mem0[address, 4];
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.

C2.4.43 LDAB

Load-Acquire Byte loads a byte from memory, zero-extends it to form a 32-bit word and writes it to a register. The instruction also has memory ordering semantics.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	0	0	0	1	1	0	1		Rn		Rt	(1)	(1)	(1)	(1)	1	0	0	0	(1)	(1)	(1)	(1)

T1 variant

LDAB{<c>}{<q>} <Rt>, [<Rn>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn);
if t IN {13,15} || n == 15 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    address = R[n];
    R[t] = ZeroExtend(MemO[address, 1], 32);
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.

C2.4.44 LDAEX

Load-Acquire Exclusive Word loads a word from memory, writes it to a register, and:

- If the address has the Shareable memory attribute, marks the physical address as exclusive access for the executing PE in a global monitor.
- Causes the executing PE to indicate an active exclusive access in the local monitor. The instruction also has memory ordering semantics.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	0	0	0	1	1	0	1		Rn		Rt	(1)	(1)	(1)	(1)	1	1	1	0	(1)	(1)	(1)	(1)

T1 variant

LDAEX{<c>}{<q>} <Rt>, [<Rn>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn);
if t IN {13,15} || n == 15 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  address = R[n];
  SetExclusiveMonitors(address, 4);
  R[t] = Mem0[address, 4];
```

Exceptions

MemManage, SecureFault, BusFault, and UsageFault.

C2.4.45 LDAEXB

Load-Acquire Exclusive Byte loads a byte from memory, zero-extends it to form a 32-bit word, writes it to a register, and:

- If the address has the Shareable memory attribute, marks the physical address as exclusive access for the executing PE in a global monitor.
- Causes the executing PE to indicate an active exclusive access in the local monitor. The instruction also has memory ordering semantics.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	0	0	0	1	1	0	1		Rn		Rt	(1)	(1)	(1)	(1)	1	1	0	0	(1)	(1)	(1)	(1)

T1 variant

LDAEXB{<c>}{<q>} <Rt>, [<Rn>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn);
if t IN {13,15} || n == 15 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    address = R[n];
    SetExclusiveMonitors(address, 1);
    R[t] = ZeroExtend(Mem0[address, 1], 32);
```

Exceptions

MemManage, SecureFault, BusFault, and UsageFault.

C2.4.46 LDAEXH

Load-Acquire Exclusive Halfword loads a halfword from memory, zero-extends it to form a 32-bit word, writes it to a register, and:

- If the address has the Shareable memory attribute, marks the physical address as exclusive access for the executing PE in a global monitor.
- Causes the executing PE to indicate an active exclusive access in the local monitor. The instruction also has memory ordering semantics.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	0	0	0	1	1	0	1		Rn		Rt	(1)	(1)	(1)	(1)	1	1	0	1	(1)	(1)	(1)	(1)

T1 variant

LDAEXH{<c>}{<q>} <Rt>, [<Rn>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn);
if t IN {13,15} || n == 15 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  address = R[n];
  SetExclusiveMonitors(address, 2);
  R[t] = ZeroExtend(Mem0[address, 2], 32);
```

Exceptions

MemManage, SecureFault, BusFault, and UsageFault.

C2.4.47 LDAH

Load-Acquire Halfword loads a halfword from memory, zero-extends it to form a 32-bit word and writes it to a register. The instruction also has memory ordering semantics.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	0	0	0	1	1	0	1		Rn		Rt	(1)	(1)	(1)	(1)	1	0	0	1	(1)	(1)	(1)	(1)

T1 variant

LDAH{<c>}{<q>} <Rt>, [<Rn>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn);
if t IN {13,15} || n == 15 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  address = R[n];
  R[t] = ZeroExtend(MemO[address, 2], 32);
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.


C2.4.48 LDC, LDC2 (immediate)

Load Coprocessor loads memory data from a sequence of consecutive memory addresses to a coprocessor. If no coprocessor can execute the instruction, an UsageFault exception is generated.

This is a generic coprocessor instruction. Some of the fields have no functionality defined by the architecture and are free for use by the coprocessor instruction set designer. These fields are the D bit, the CRd field, and in the Unindexed addressing mode only, the imm8 field.

T1

ARMv8-M Main Extension only



Offset variant

Applies when P == 1 && W == 0.

LDC{L}{<C>}{<Q>} <coproc>, <CRd>, [<Rn>{, #<+/-><imm>}]

Post-indexed variant

Applies when P == 0 && W == 1.

LDC{L}{<C>}{<Q>} <coproc>, <CRd>, [<Rn>], #<+/-><imm>

Pre-indexed variant

Applies when P == 1 && W == 1.

LDC{L}{<C>}{<Q>} <coproc>, <CRd>, [<Rn>, #<+/-><imm>]!

Unindexed variant

Applies when P == 0 && U == 1 && W == 0.

LDC{L}{<C>}{<Q>} <coproc>, <CRd>, [<Rn>], <option>


Decode for all variants of this encoding

```

if Rn == '1111' then SEE "LDC (literal)";
if P == '0' && U == '0' && D == '0' && W == '0' then UNDEFINED;
if P == '0' && U == '0' && D == '1' && W == '0' then SEE "MRRC, MRRC2";
if coproc IN '101x' then SEE "Floating-point";
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); cp = UInt(coproc); imm32 = ZeroExtend(imm8:'00', 32);
index = (P == '1'); add = (U == '1'); wback = (W == '1');
```

T2

ARMv8-M Main Extension only



Offset variant

Applies when P == 1 && W == 0.

LDC2{L}{<c>}{<q>} <coproc>, <CRd>, [<Rn>{, #+/-}<imm>}]

Post-indexed variant

Applies when P == 0 && W == 1.

LDC2{L}{<c>}{<q>} <coproc>, <CRd>, [<Rn>], #+/-<imm>

Pre-indexed variant

Applies when P == 1 && W == 1.

LDC2{L}{<c>}{<q>} <coproc>, <CRd>, [<Rn>, #+/-<imm>]!

Unindexed variant

Applies when P == 0 && U == 1 && W == 0.

LDC2{L}{<c>}{<q>} <coproc>, <CRd>, [<Rn>], <option>

Decode for all variants of this encoding

```
if Rn == '1111' then SEE "LDC (literal)";
if P == '0' && U == '0' && D == '0' && W == '0' then UNDEFINED;
if P == '0' && U == '0' && D == '1' && W == '0' then SEE "MRRC, MRRC2";
if coproc IN '101x' then SEE "Floating-point";
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); cp = UInt(coproc); imm32 = ZeroExtend(imm8:'00', 32);
index = (P == '1'); add = (U == '1'); wback = (W == '1');
```

Notes for all encodings

Floating-point: [Floating-point load/store on page C2-293](#).

Assembler symbols

- L If specified, selects the D == 1 form of the encoding. If omitted, selects the D == 0 form.
- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <coproc> Is the name of the coprocessor, encoded in the "coproc" field. The valid coprocessor names are p10, p11, p14, and p15.
- <CRd> Is the coprocessor register to be transferred, encoded in the "CRd" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field. If the PC is used, see [LDC, LDC2 \(literal\)](#).
- <option> Is a coprocessor option, in the range 0 to 255 enclosed in { }, encoded in the "imm8" field.
- +/- Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values:
 - when U = 0
 - + when U = 1
- <imm> Is the immediate offset used for forming the address, a multiple of 4 in the range 0-1020, defaulting to 0 and encoded in the "imm8" field, as <imm>/4.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteCPCheck(cp);
    if !Coprocc_Accepted(cp, ThisInstr()) then
        GenerateCoproccorException();
    else
        offset_addr = if add then (R[n] + imm32) else (R[n] - imm32);
        address = if index then offset_addr else R[n];

        // Determine if the stack pointer limit check should be performed
        if wback && n == 13 then
            (limit, applylimit) = LookUpSPLim(LookUpSP());
        else
            applylimit = FALSE;

        // Memory operation only performed if limit not violated
        if !applylimit || (UInt(offset_addr) >= UInt(limit)) then
            repeat
                Coproc_SendLoadedWord(MemA[address,4], cp, ThisInstr());
                address = address + 4;
            until Coproc_DoneLoading(cp, ThisInstr());

        // If the stack pointer is being updated update a fault will be raised
        // if the limit is violated
        if wback then RSPCheck[n] = offset_addr;
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


C2.4.49 LDC, LDC2 (literal)

Load Coprocessor loads memory data from a sequence of consecutive memory addresses to a coprocessor. If no coprocessor can execute the instruction, a UsageFault exception is generated.

This is a generic coprocessor instruction. The D bit and the CRd field have no functionality defined by the architecture and are free for use by the coprocessor instruction set designer.

T1

ARMv8-M Main Extension only



T1 variant

Applies when $!(P == 0 \ \&\& \ U == 0 \ \&\& \ W == 0)$.

LDC{L}{<c>}{<q>} <coproc>, <CRd>, <label>
LDC{L}{<c>}{<q>} <coproc>, <CRd>, [PC, #{+/-}<imm>]

Decode for this encoding


```

if P == '0' && U == '0' && D == '0' && W == '0' then UNDEFINED;
if P == '0' && U == '0' && D == '1' && W == '0' then SEE "MRRC, MRRC2";
if coproc IN '101x' then SEE "Floating-point";
if !HaveMainExt() then UNDEFINED;
index = (P == '1'); // Always TRUE in the T32 instruction set
add = (U == '1'); cp = UInt(coproc); imm32 = ZeroExtend(imm8:'00', 32);
if W == '1' || P == '0' then UNPREDICTABLE;

```

T2

ARMv8-M Main Extension only



T2 variant

Applies when $!(P == 0 \ \&\& \ U == 0 \ \&\& \ W == 0)$.

LDC2{L}{<c>}{<q>} <coproc>, <CRd>, <label>
LDC2{L}{<c>}{<q>} <coproc>, <CRd>, [PC, #{+/-}<imm>]

Decode for this encoding

```

if P == '0' && U == '0' && D == '0' && W == '0' then UNDEFINED;
if P == '0' && U == '0' && D == '1' && W == '0' then SEE "MRRC, MRRC2";
if coproc IN '101x' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
index = (P == '1'); // Always TRUE in the T32 instruction set
add = (U == '1'); cp = UInt(coproc); imm32 = ZeroExtend(imm8:'00', 32);
if W == '1' || P == '0' then UNPREDICTABLE;

```

Notes for all encodings

Floating-point: [Floating-point load/store on page C2-293](#).

Assembler symbols

L	If specified, selects the D == 1 form of the encoding. If omitted, selects the D == 0 form.
<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<coproc>	Is the name of the coprocessor, encoded in the "coproc" field. The valid coprocessor names are p10, p11, p14, and p15.
<CRd>	Is the coprocessor register to be transferred, encoded in the "CRd" field.
<label>	The label of the literal data item that is to be loaded into <Rt>. The assembler calculates the required value of the offset from the Align(PC, 4) value of the instruction to this label. Permitted values of the offset are multiples of 4 in the range -1020 to 1020. If the offset is zero or positive, imm32 is equal to the offset and add == TRUE (encoded as U == 1). If the offset is negative, imm32 is equal to minus the offset and add == FALSE (encoded as U == 0).
+/-	Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values: - when U = 0 + when U = 1
<imm>	Is the immediate offset used for forming the address, a multiple of 4 in the range 0-1020, defaulting to 0 and encoded in the "imm8" field, as <imm>/4.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteCPCheck(cp);
    if !Coprocc_Accepted(cp, ThisInstr()) then
        GenerateCoproccorException();
    else
        offset_addr = if add then (Align(PC,4) + imm32) else (Align(PC,4) - imm32);
        address = if index then offset_addr else Align(PC,4);
        repeat
            Coproc_SendLoadedWord(MemA[address,4], cp, ThisInstr()); address = address + 4;
        until Coproc_DoneLoading(cp, ThisInstr());
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.50 LDM, LDMIA, LDMFD

Load Multiple loads multiple registers from consecutive memory locations using an address from a base register. The sequential memory locations start at this address, and the address just above the last of those locations can optionally be written back to the base register.

The registers loaded can include the PC. If they do, the word loaded for the PC is treated as a branch address, a function return value, or an exception return value. Bit[0] of the address in the PC complies with the ARM architecture interworking rules for switching between the A32 and T32 instruction sets. However, ARMv8-M only supports the T32 instruction set, so bit[0] must be 1. If bit[0] of the target address is 0, and the target address is not `FNC_RETURN` or `EXC_RETURN`, the PE takes an `INVSTATE UsageFault` exception on the instruction at the target address.

This instruction is used by the alias `POP`. The alias is always the preferred disassembly.

T1

ARMv8-M

15	14	13	12	11	10	8	7				0
1	1	0	0	1	Rn	register_list					

T1 variant

`LDM{IA}{<c>}{<q>} <Rn>{!}, <registers>` // Preferred syntax
`LDMFD{<c>}{<q>} <Rn>{!}, <registers>` // Alternate syntax, Full Descending stack

Decode for this encoding

```
n = UInt(Rn); registers = '0000000':register_list; wback = (registers<n> == '0');
if BitCount(registers) < 1 then UNPREDICTABLE;
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12				0
1	1	1	0	1	0	0	0	1	0	W	1	Rn	P	M	(0)	register_list					

T2 variant


`LDM{IA}{<c>}.W <Rn>{!}, <registers>` // Preferred syntax, if <Rn>, '!' and <registers> can be represented in T1
`LDMFD{<c>}.W <Rn>{!}, <registers>` // Alternate syntax, Full Descending stack, if <Rn>, '!' and <registers> can be represented in T1
`LDM{IA}{<c>}{<q>} <Rn>{!}, <registers>` // Preferred syntax
`LDMFD{<c>}{<q>} <Rn>{!}, <registers>` // Alternate syntax, Full Descending stack

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); registers = P:M:'0':register_list; wback = (W == '1');
if n == 15 || BitCount(registers) < 2 || (P == '1' && M == '1') then UNPREDICTABLE;
if registers<15> == '1' && InITBlock() && !LastInITBlock() then UNPREDICTABLE;
if wback && registers<n> == '1' then UNPREDICTABLE;
```

T3

ARMv8-M



T3 variant

LDM{<c>}{<q>} SP!, <registers>

Decode for this encoding

```
n = 13; wback = TRUE;
registers = P:'0000000':register_list;
if BitCount(registers) < 1 then UNPREDICTABLE;
if registers<15> == '1' && InITBlock() && !LastInITBlock() then UNPREDICTABLE;
```

Assembler symbols

- IA Is an optional suffix for the Increment After form.
- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- ! For encoding T1: the address adjusted by the size of the data loaded is written back to the base register. It is omitted if <Rn> is included in <registers>, otherwise it must be present.
 For encoding T2: the address adjusted by the size of the data loaded is written back to the base register. If specified, it is encoded in the "W" field as 1, otherwise this field defaults to 0.
- <registers> For encoding T1: is a list of one or more registers to be loaded, separated by commas and surrounded by { and }. The registers in the list must be in the range R0-R7, encoded in the "register_list" field.
 For encoding T2: is a list of one or more registers to be loaded, separated by commas and surrounded by { and }. The registers in the list must be in the range R0-R12, encoded in the "register_list" field, and can optionally contain one of the LR or the PC. If the LR is in the list, the "M" field is set to 1, otherwise it defaults to 0. If the PC is in the list, the "P" field is set to 1, otherwise it defaults to 0. If the PC is in the list:
 - The LR must not be in the list.
 - The instruction must be either outside any IT block, or the last instruction in an IT block.
- For encoding T3: is a list of one or more registers to be loaded, separated by commas and surrounded by { and }. The registers in the list must be in the range R0-R7, encoded in the "register_list" field, and can optionally include the PC. If the PC is in the list, the "P" field is set to 1, otherwise this field defaults to 0. If the PC is in the list, the instruction must be either outside any IT block, or the last instruction in an IT block.

Operation for all encodings

```
if ConditionPassed() then
  EncodingSpecificOperations();
  address = R[n];
  if n == 13 then
    (limit, applylimit) = LookUpSPLim(LookUpSP());
  else
    applylimit = FALSE;
```



```

for i = 0 to 14
    // If R[n] is the SP, memory operation only performed if limit not violated
    if registers<i> == '1' && (!applylimit || (UInt(address) >= UInt(limit))) then
        if i != n then
            R[i] = MemA[address,4];
        else
            newBaseVal = MemA[address,4];
            address = address + 4;
    if registers<15> == '1' && (!applylimit || (UInt(address) >= UInt(limit))) then
        newPCVal = MemA[address,4];

    // If the register list contains the register that holds the base address it
    // must be updated after all memory reads have been performed. This prevents
    // the base address being overwritten if one of the memory reads generates a
    // fault.
    if registers<n> == '1' then
        wback = TRUE;
    else
        newBaseVal = R[n] + 4*BitCount(registers);
    // If the PC is in the register list update that now, which may raise a fault
    // Likewise if R[n] is the SP writing back may raise a fault due to SP limit violation
    if registers<15> == '1' then
        LoadWritePC(newPCVal, n, newBaseVal, wback, FALSE);
    elsif wback then
        RSPCheck[n] = newBaseVal;

```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.


C2.4.51 LDMDB, LDMEA

Load Multiple Decrement Before (Load Multiple Empty Ascending) loads multiple registers from sequential memory locations using an address from a base register. The sequential memory locations end just below this address, and the address of the first of those locations can optionally be written back to the base register.

The registers loaded can include the PC. If they do, the word loaded for the PC is treated as a branch address or an exception return value. Bit[0] complies with the ARM architecture interworking rules for switching between the A32 and T32 instruction sets. However, ARMv8-M only supports the T32 instruction set, so bit[0] must be 1. If bit[0] is 0 the PE takes an INVSTATE UsageFault exception on the instruction at the target address.

T1

ARMv8-M Main Extension only



T1 variant

```
LDMDB{<c>}{<q>} <Rn>{!}, <registers> // Preferred syntax
LDMEA{<c>}{<q>} <Rn>{!}, <registers> // Alternate syntax, Empty Ascending stack
```

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); registers = P:M:'0':register_list; wback = (W == '1');
if n == 15 || BitCount(registers) < 2 || (P == '1' && M == '1') then UNPREDICTABLE;
if registers<15> == '1' && InITBlock() && !LastInITBlock() then UNPREDICTABLE;
if wback && registers<n> == '1' then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- ! The address adjusted by the size of the data loaded is written back to the base register. If specified, it is encoded in the "W" field as 1, otherwise this field defaults to 0.
- <registers> Is a list of one or more registers to be loaded, separated by commas and surrounded by { and }. The registers in the list must be in the range R0-R12, encoded in the "register_list" field, and can optionally contain one of the LR or the PC. If the LR is in the list, the "M" field is set to 1, otherwise it defaults to 0. If the PC is in the list, the "P" field is set to 1, otherwise it defaults to 0. If the PC is in the list:
 - The LR must not be in the list.
 - The instruction must be either outside any IT block, or the last instruction in an IT block.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    address = R[n] - 4*BitCount(registers);

    // Determine if the stack pointer limit should be checked
    if n == 13 && wback && registers<n> == '0' then
```

```

        (limit, applylimit) = LookUpSPLim(LookUpSP());
        doOperation        = (!applylimit || (UInt(address) >= UInt(limit)));
    else
        doOperation        = TRUE;

    for i = 0 to 15
        // Memory operation only performed if limit not violated
        if registers<i> == '1' && doOperation then
            data = MemA[address,4];
            address = address + 4;
            if i == 15 then
                newPCVal = data;
            elseif i == n then
                newBaseVal = data;
            else
                R[i] = data;

        // If the register list contains the register that holds the base address it
        // must be updated after all memory reads have been performed. This prevents
        // the base address being overwritten if one of the memory reads generates a
        // fault.
        if registers<n> == '1' then
            wback = TRUE;
        else
            newBaseVal = R[n] - 4*BitCount(registers);
        // If the PC is in the register list update that now, which may raise a fault
        if registers<15> == '1' then
            LoadWritePC(newPCVal, n, newBaseVal, wback, TRUE);
        elseif wback then
            RSPCheck[n] = newBaseVal;

```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.

C2.4.52 LDR (immediate)


Load Register (immediate) calculates an address from a base register value and an immediate offset, loads a word from memory, and writes it to a register. It can use offset, post-indexed, or pre-indexed addressing.

The register loaded can be the PC. If it is, the word loaded for the PC is treated as a branch address or an exception return value. Bit[0] complies with the ARM architecture interworking rules for switching between the A32 and T32 instruction sets. However, ARMv8-M only supports the T32 instruction set, so bit[0] must be 1. If bit[0] is 0 the PE takes an INVSTATE UsageFault exception on the instruction at the target address.

This instruction is used by the alias POP. See *Alias conditions on page C2-389* for details of when each alias is preferred.

T1

ARMv8-M



T1 variant


LDR{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding

t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm5:'00', 32);
 index = TRUE; add = TRUE; wback = FALSE;

T2

ARMv8-M



T2 variant


LDR{<c>}{<q>} <Rt>, [SP{, #<+><imm>}]

Decode for this encoding

t = UInt(Rt); n = 13; imm32 = ZeroExtend(imm8:'00', 32);
 index = TRUE; add = TRUE; wback = FALSE;

T3

ARMv8-M Main Extension only



T3 variant

LDR{<c>}.W <Rt>, [<Rn> {, #<+><imm>}] // <Rt>, <Rn>, <imm> can be represented in T1 or T2
 LDR{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding


```

if Rn == '1111' then SEE "LDR (literal)";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm12, 32); index = TRUE; add = TRUE;
wback = FALSE; if t == 15 && InITBlock() && !LastInITBlock() then UNPREDICTABLE;

```

T4

ARMv8-M Main Extension only



Offset variant

Applies when P == 1 && U == 0 && W == 0.

LDR{<c>}{<q>} <Rt>, [<Rn> {, #-<imm>}]

Post-indexed variant

Applies when P == 0 && W == 1.

LDR{<c>}{<q>} <Rt>, [<Rn>], #{+/-}<imm>

Pre-indexed variant

Applies when P == 1 && W == 1.

LDR{<c>}{<q>} <Rt>, [<Rn>, #{+/-}<imm>]!

Decode for all variants of this encoding

```

if Rn == '1111' then SEE "LDR (literal)";
if P == '1' && U == '1' && W == '0' then SEE LDRT;
if P == '0' && W == '0' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn);
imm32 = ZeroExtend(imm8, 32); index = (P == '1'); add = (U == '1'); wback = (W == '1');
if (wback && n == t) || (t == 15 && InITBlock() && !LastInITBlock()) then UNPREDICTABLE;

```

Alias conditions

Alias	is preferred when
POP	Rn == '1101' && U == '1' && imm8 == '00000100'

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rt> For encoding T1 and T2: is the general-purpose register to be transferred, encoded in the "Rt" field.
For encoding T3: is the general-purpose register to be transferred, encoded in the "Rt" field. The SP can be used. The PC can be used, provided the instruction is either outside an IT block or the last instruction of an IT block. If the PC is used, the instruction branches to the address (data) loaded to the PC.

For encoding T4: is the general-purpose register to be transferred, encoded in the "Rt" field. The PC can be used, provided the instruction is either outside an IT block or the last instruction of an IT block. If the PC is used, the instruction branches to the address (data) loaded to the PC.

<Rn>	For encoding T1: is the general-purpose base register, encoded in the "Rn" field. For encoding T3 and T4: is the general-purpose base register, encoded in the "Rn" field. For PC use see LDR (literal) .
+/-	Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values: - when U = 0 + when U = 1
+	Specifies the offset is added to the base register.
<imm>	For the post-indexed or pre-indexed variant: is a 8-bit unsigned immediate byte offset, in the range 0 to 255, encoded in the "imm8" field. For encoding T1: is the optional positive unsigned immediate byte offset, a multiple of 4 in the range 0 to 124, defaulting to 0 and encoded in the "imm5" field as <imm>/4. For encoding T2: is the optional positive unsigned immediate byte offset, a multiple of 4, in the range 0 to 1020, defaulting to 0 and encoded in the "imm8" field as <imm>/4. For encoding T3: is an optional 12-bit unsigned immediate byte offset, in the range 0 to 4095, defaulting to 0 and encoded in the "imm12" field. For encoding T4: is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    offset_addr = if add then (R[n] + imm32) else (R[n] - imm32);
    address = if index then offset_addr else R[n];

    // Determine if the stack pointer limit should be checked
    if n == 13 && wback then
        (limit, applylimit) = LookUpSPLim(LookUpSP());
    else
        applylimit = FALSE;
    // Memory operation only performed if limit not violated
    if !applylimit || (UInt(offset_addr) >= UInt(limit)) then
        data = MemU[address,4];

    // If the stack pointer is being updated update a fault will be raised if
    // the limit is violated
    if t == 15 then
        if address<1:0> == '00' then
            LoadWritePC(data, n, offset_addr, wback, TRUE);
        else
            UNPREDICTABLE;
    else
        if wback then RSPCheck[n] = offset_addr;
        R[t] = data;
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.


C2.4.53 LDR (literal)

Load Register (literal) calculates an address from the PC value and an immediate offset, loads a word from memory, and writes it to a register.

The register loaded can be the PC. If it is, the word loaded for the PC is treated as a branch address or an exception return value. Bit[0] complies with the ARM architecture interworking rules for switching between the A32 and T32 instruction sets. However, ARMv8-M only supports the T32 instruction set, so bit[0] must be 1. If bit[0] is 0 the PE takes an INVSTATE UsageFault exception on the instruction at the target address.

T1

ARMv8-M



T1 variant


LDR{<c>}{<q>} <Rt>, <label> // Normal form

Decode for this encoding

```
t = UInt(Rt); imm32 = ZeroExtend(imm8:'00', 32); add = TRUE;
```

T2

ARMv8-M Main Extension only



T2 variant

LDR{<c>}.W <Rt>, <label> // Preferred syntax, and <Rt>, <label> can be represented in T1

LDR{<c>}{<q>} <Rt>, <label> // Preferred syntax

LDR{<c>}{<q>} <Rt>, [PC, #+/-<imm>] // Alternative syntax

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); imm32 = ZeroExtend(imm12, 32); add = (U == '1');
if t == 15 && InITBlock() && !LastInITBlock() then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rt> For encoding T1: is the general-purpose register to be transferred, encoded in the "Rt" field.

For encoding T2: is the general-purpose register to be transferred, encoded in the "Rt" field. The SP can be used. The PC can be used, provided the instruction is either outside an IT block or the last instruction of an IT block. If the PC is used, the instruction branches to the address (data) loaded to the PC.

- <label> For encoding T1: the label of the literal data item that is to be loaded into <Rt>. The assembler calculates the required value of the offset from the `Align(PC, 4)` value of the instruction to this label. Permitted values of the offset are Multiples of four in the range 0 to 1020.
- For encoding T2: the label of the literal data item that is to be loaded into <Rt>. The assembler calculates the required value of the offset from the `Align(PC, 4)` value of the instruction to this label. Permitted values of the offset are -4095 to 4095. If the offset is zero or positive, `imm32` is equal to the offset and `add == TRUE`, encoded as `U == 1`. If the offset is negative, `imm32` is equal to minus the offset and `add == FALSE`, encoded as `U == 0`.
- +/- Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values:
- when `U = 0`
 - + when `U = 1`
- <imm> Is a 12-bit unsigned immediate byte offset, in the range 0 to 4095, encoded in the "imm12" field.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    base = Align(PC,4);
    address = if add then (base + imm32) else (base - imm32);
    data = MemU[address,4];
    if t == 15 then
        if address<1:0> == '00' then
            LoadWritePC(data, 0, Zeros(32), FALSE, FALSE);
        else
            UNPREDICTABLE;
    else
        R[t] = data;
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.

C2.4.54 LDR (register)

Load Register (register) calculates an address from a base register value and an offset register value, loads a word from memory, and writes it to a register. The offset register value can be shifted left by 0, 1, 2, or 3 bits.

The register loaded can be the PC. If it is, the word loaded for the PC is treated as a branch address or an exception return value. Bit[0] complies with the ARM architecture interworking rules for switching between the A32 and T32 instruction sets. However, ARMv8-M only supports the T32 instruction set, so bit[0] must be 1. If bit[0] is 0 the PE takes an INVSTATE UsageFault exception on the instruction at the target address.

T1

ARMv8-M

15	14	13	12	11	10	9	8	6	5	3	2	0
0	1	0	1	1	0	0	Rm	Rn	Rt			

T1 variant

LDR{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, 0);
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	1	1	0	0	0	0	1	0	1	!=1111	Rt		0	0	0	0	0	0	0	imm2	Rm		

Rn

T2 variant

LDR{<c>}.W <Rt>, [<Rn>, {+}<Rm>] // <Rt>, <Rn>, <Rm> can be represented in T1
LDR{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>{, LSL #<imm>}]

Decode for this encoding

```
if Rn == '1111' then SEE "LDR (literal)";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, UInt(imm2));
if m IN {13,15} then UNPREDICTABLE;
if t == 15 && InITBlock() && !LastInITBlock() then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rt> For encoding T1: is the general-purpose register to be transferred, encoded in the "Rt" field.

For encoding T2: is the general-purpose register to be transferred, encoded in the "Rt" field. The SP can be used. The PC can be used, provided the instruction is either outside an IT block or the last instruction of an IT block. If the PC is used, the instruction branches to the address (data) loaded to the PC.

- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- +
- <Rm> Is the general-purpose index register, encoded in the "Rm" field.
- <imm> If present, the size of the left shift to apply to the value from <Rm>, in the range 1-3. <imm> is encoded in imm2. If absent, no shift is specified and imm2 is encoded as 0b00.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    offset = Shift(R[m], shift_t, shift_n, APSR.C);
    offset_addr = if add then (R[n] + offset) else (R[n] - offset);
    address = if index then offset_addr else R[n];

    // Determine if the stack pointer limit should be checked
    if n == 13 && wback then
        (limit, applylimit) = LookUpSPLim(LookUpSP());
    else
        applylimit = FALSE;
    // Memory operation only performed if limit not violated
    if !applylimit || (UInt(offset_addr) >= UInt(limit)) then
        data = MemU[address,4];

    // If the stack pointer is being updated update a fault will be raised if
    // the limit is violated
    if t == 15 then
        if address<1:0> == '00' then
            LoadWritePC(data, n, offset_addr, wback, TRUE);
        else
            UNPREDICTABLE;
    else
        if wback then RSPCheck[n] = offset_addr;
        R[t] = data;
```

Exceptions


BusFault, UsageFault, MemManage, and SecureFault.

C2.4.55 LDRB (immediate)

Load Register Byte (immediate) calculates an address from a base register value and an immediate offset, loads a byte from memory, zero-extends it to form a 32-bit word, and writes it to a register. It can use offset, post-indexed, or pre-indexed addressing.

T1

ARMv8-M



T1 variant


LDRB{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding

t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm5, 32);
index = TRUE; add = TRUE; wback = FALSE;

T2

ARMv8-M Main Extension only



T2 variant


LDRB{<c>}.W <Rt>, [<Rn> {, #<+><imm>}] // <Rt>, <Rn>, <imm> can be represented in T1
LDRB{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding

if Rt == '1111' then SEE PLD;
if Rn == '1111' then SEE "LDRB (literal)";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm12, 32);
index = TRUE; add = TRUE; wback = FALSE;
if t == 13 then UNPREDICTABLE;

T3

ARMv8-M Main Extension only



Offset variant

Applies when Rt != 1111 && P == 1 && U == 0 && W == 0.

LDRB{<c>}{<q>} <Rt>, [<Rn> {, #-<imm>}]

Post-indexed variant

Applies when P == 0 && W == 1.

LDRB{<c>}{<q>} <Rt>, [<Rn>], #{+/-}<imm>

Pre-indexed variant

Applies when P == 1 && W == 1.

LDRB{<c>}{<q>} <Rt>, [<Rn>, #{+/-}<imm>]!

Decode for all variants of this encoding

```

if Rt == '1111' && P == '1' && U == '0' && W == '0' then SEE "PLD (immediate)";
if Rn == '1111' then SEE "LDRB (literal)";
if P == '1' && U == '1' && W == '0' then SEE LDRBT;
if P == '0' && W == '0' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm8, 32);
index = (P == '1'); add = (U == '1'); wback = (W == '1');
if t == 13 || (wback && n == t) then UNPREDICTABLE;
if t == 15 && (P == '0' || U == '1' || W == '1') then UNPREDICTABLE;
  
```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<Rt>	Is the general-purpose register to be transferred, encoded in the "Rt" field.
<Rn>	For encoding T1: is the general-purpose base register, encoded in the "Rn" field. For encoding T2 and T3: is the general-purpose base register, encoded in the "Rn" field. For PC use see LDRB (literal) .
+/-	Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values: - when U = 0 + when U = 1
+	Specifies the offset is added to the base register.
<imm>	For the post-indexed or pre-indexed variant: is a 8-bit unsigned immediate byte offset, in the range 0 to 255, encoded in the "imm8" field. For encoding T1: is an optional 5-bit unsigned immediate byte offset, in the range 0 to 31, defaulting to 0 and encoded in the "imm5" field. For encoding T2: is an optional 12-bit unsigned immediate byte offset, in the range 0 to 4095, defaulting to 0 and encoded in the "imm12" field. For encoding T3: is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation for all encodings

```

if ConditionPassed() then
  EncodingSpecificOperations();
  offset_addr = if add then (R[n] + imm32) else (R[n] - imm32);
  address = if index then offset_addr else R[n];

  // Determine if the stack pointer limit should be checked
  if n == 13 && wback then
    (limit, applylimit) = LookUpSPLim(LookUpSP());
  
```

```
else
    applylimit = FALSE;
// Memory operation only performed if limit not violated
if !applylimit || (UInt(offset_addr) >= UInt(limit)) then
    R[t] = ZeroExtend(MemU[address,1], 32);

// If the stack pointer is being updated update a fault will be raised if
// the limit is violated
if wback then RSPCheck[n] = offset_addr;
```

Exceptions


BusFault, UsageFault, MemManage, and SecureFault.

C2.4.56 LDRB (literal)

Load Register Byte (literal) calculates an address from the PC value and an immediate offset, loads a byte from memory, zero-extends it to form a 32-bit word, and writes it to a register.

T1

ARMv8-M Main Extension only



T1 variant

LDRB{<c>}{<q>} <Rt>, <label> // Preferred syntax
 LDRB{<c>}{<q>} <Rt>, [PC, #{+/-}<imm>] // Alternative syntax

Decode for this encoding

```
if Rt == '1111' then SEE PLD;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); imm32 = ZeroExtend(imm12, 32); add = (U == '1');
if t == 13 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <label> The label of the literal data item that is to be loaded into <Rt>. The assembler calculates the required value of the offset from the Align(PC, 4) value of the instruction to this label. Permitted values of the offset are -4095 to 4095. If the offset is zero or positive, imm32 is equal to the offset and add == TRUE, encoded as U == 1. If the offset is negative, imm32 is equal to minus the offset and add == FALSE, encoded as U == 0.
- +/- Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values:
 - when U = 0
 - + when U = 1
- <imm> Is a 12-bit unsigned immediate byte offset, in the range 0 to 4095, encoded in the "imm12" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  base = Align(PC,4);
  address = if add then (base + imm32) else (base - imm32);
  R[t] = ZeroExtend(MemU[address,1], 32);
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.

C2.4.57 LDRB (register)

Load Register Byte (register) calculates an address from a base register value and an offset register value, loads a byte from memory, zero-extends it to form a 32-bit word, and writes it to a register. The offset register value can be shifted left by 0, 1, 2, or 3 bits.

T1

ARMv8-M

15	14	13	12	11	10	9	8	6	5	3	2	0
0	1	0	1	1	1	0	Rm	Rn	Rt			

T1 variant

LDRB{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, 0);
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	1	1	0	0	0	0	0	0	1	!=1111	!=1111	0	0	0	0	0	0	0	imm2	Rm			
													Rn		Rt										

T2 variant

LDRB{<c>}.W <Rt>, [<Rn>, {+}<Rm>] // <Rt>, <Rn>, <Rm> can be represented in T1
LDRB{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>{, LSL #<imm>}]

Decode for this encoding

```
if Rt == '1111' then SEE PLD;
if Rn == '1111' then SEE "LDRB (literal)";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, UInt(imm2));
if t == 13 || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<Rt>	Is the general-purpose register to be transferred, encoded in the "Rt" field.
<Rn>	Is the general-purpose base register, encoded in the "Rn" field.
+	Specifies the index register is added to the base register.
<Rm>	Is the general-purpose index register, encoded in the "Rm" field.

<imm> If present, the size of the left shift to apply to the value from <Rm>, in the range 1-3. <imm> is encoded in imm2. If absent, no shift is specified and imm2 is encoded as 0b00.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    offset = Shift(R[m], shift_t, shift_n, APSR.C);
    offset_addr = if add then (R[n] + offset) else (R[n] - offset);
    address = if index then offset_addr else R[n];
    R[t] = ZeroExtend(MemU[address,1],32);
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.


C2.4.58 LDRBT

Load Register Byte Unprivileged calculates an address from a base register value and an immediate offset, loads a byte from memory, zero-extends it to form a 32-bit word, and writes it to a register.

When privileged software uses an LDRBT instruction, the memory access is restricted as if the software was unprivileged.

T1

ARMv8-M Main Extension only



T1 variant

LDRBT{<c>}{<q>} <Rt>, [<Rn> {, #+}<imm>]

Decode for this encoding

```

if Rn == '1111' then SEE "LDRB (literal)";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); postindex = FALSE; add = TRUE;
register_form = FALSE; imm32 = ZeroExtend(imm8, 32);
if t IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- + Specifies the offset is added to the base register.
- <imm> Is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    address = R[n] + imm32;
    R[t] = ZeroExtend(MemU_unpriv[address,1], 32);

```

Exceptions


UsageFault, BusFault, MemManage, and SecureFault.

C2.4.59 LDRD (immediate)

Load Register Dual (immediate) calculates an address from a base register value and an immediate offset, loads two words from memory, and writes them to two registers. It can use offset, post-indexed, or pre-indexed addressing.

T1

ARMv8-M Main Extension only



Offset variant

Applies when P == 1 && W == 0.

LDRD{<c>}{<q>} <Rt>, <Rt2>, [<Rn> {, #<+/-><imm>}]

Post-indexed variant

Applies when P == 0 && W == 1.

LDRD{<c>}{<q>} <Rt>, <Rt2>, [<Rn>], #<+/-><imm>

Pre-indexed variant

Applies when P == 1 && W == 1.

LDRD{<c>}{<q>} <Rt>, <Rt2>, [<Rn>, #<+/-><imm>]!

Decode for all variants of this encoding

```

if P == '0' && W == '0' then SEE "Related encodings";
if Rn == '1111' then SEE "LDRD (literal)";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); t2 = UInt(Rt2); n = UInt(Rn); imm32 = ZeroExtend(imm8:'00', 32);
index = (P == '1'); add = (U == '1'); wback = (W == '1');
if wback && (n == t || n == t2) then UNPREDICTABLE;
if t IN {13,15} || t2 IN {13,15} || t == t2 then UNPREDICTABLE;
  
```

Notes for all encodings

Related encodings: [Load/store \(multiple, dual, exclusive, acquire-release\), table branch](#) on page C2-266.

Assembler symbols

- <c> See [Standard assembler syntax fields](#) on page C1-240.
- <q> See [Standard assembler syntax fields](#) on page C1-240.
- <Rt> Is the first general-purpose register to be transferred, encoded in the "Rt" field.
- <Rt2> Is the second general-purpose register to be transferred, encoded in the "Rt2" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field. For PC use see [LDRD \(literal\)](#).
- +/- Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values:
 - when U = 0
 - + when U = 1

<imm> For the offset variant: is the optional unsigned immediate byte offset, a multiple of 4, in the range 0 to 1020, defaulting to 0 and encoded in the "imm8" field as <imm>/4.
 For the post-indexed and pre-indexed variant: is the unsigned immediate byte offset, a multiple of 4, in the range 0 to 1020, encoded in the "imm8" field as <imm>/4.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  offset_addr = if add then (R[n] + imm32) else (R[n] - imm32);
  address = if index then offset_addr else R[n];

  // Determine if the stack pointer limit should be checked
  if n == 13 && wback then
    (limit, applylimit) = LookUpSPLim(LookUpSP());
  else
    applylimit = FALSE;
  // Memory operation only performed if limit not violated
  if !applylimit || (UInt(offset_addr) >= UInt(limit)) then
    R[t] = MemA[address,4];
    R[t2] = MemA[address+4,4];

  // If the stack pointer is being updated update a fault will be raised if
  // the limit is violated
  if wback then RSPCheck[n] = offset_addr;
  
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.

C2.4.60 LDRD (literal)


Load Register Dual (literal) calculates an address from the PC value and an immediate offset, loads two words from memory, and writes them to two registers.

———— **Note** —————

For the M profile, the PC value must be word-aligned, otherwise the behavior of the instruction is UNPREDICTABLE.

T1

ARMv8-M Main Extension only



T1 variant

LDRD{<c>}{<q>} <Rt>, <Rt2>, <label> // Normal form
 LDRD{<c>}{<q>} <Rt>, <Rt2>, [PC, #+/-<imm>] // Alternative form

Decode for this encoding

```

if P == '0' && W == '0'           then SEE "Related encodings";
if P == '1' && W == '1' && U == '0' then SEE SG;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); t2 = UInt(Rt2);
imm32 = ZeroExtend(imm8:'00', 32); add = (U == '1');
if t IN {13,15} || t2 IN {13,15} || t == t2 then UNPREDICTABLE;
if W == '1' then UNPREDICTABLE;
  
```

Notes for all encodings

Related encodings: [Load/store \(multiple, dual, exclusive, acquire-release\), table branch on page C2-266.](#)

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240.](#)
- <q> See [Standard assembler syntax fields on page C1-240.](#)
- <Rt> Is the first general-purpose register to be transferred, encoded in the "Rt" field.
- <Rt2> Is the second general-purpose register to be transferred, encoded in the "Rt2" field.
- <label> The label of the literal data item that is to be loaded into <Rt>. The assembler calculates the required value of the offset from the Align(PC, 4) value of the instruction to this label. Permitted values of the offset are multiples of 4 in the range -1020 to 1020. If the offset is zero or positive, imm32 is equal to the offset and add == TRUE, encoded as U == 1. If the offset is negative, imm32 is equal to minus the offset and add == FALSE, encoded as U == 0.
- +/- Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values:
 - when U = 0
 - + when U = 1
- <imm> Is the optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  if PC<1:0> != '00' then UNPREDICTABLE;
  address = if add then (PC + imm32) else (PC - imm32);
  R[t] = MemA[address,4];
  R[t2] = MemA[address+4,4];
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.

C2.4.61 LDREX

Load Register Exclusive calculates an address from a base register value and an immediate offset, loads a word from memory, writes it to a register, and:

- If the address has the Shareable memory attribute, marks the physical address as exclusive access for the executing PE in a global monitor.
- Causes the executing PE to indicate an active exclusive access in the local monitor.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	0
1	1	1	0	1	0	0	0	0	1	0	1	Rn	Rt	(1)	(1)	(1)	(1)	imm8			

T1 variant

LDREX{<c>}{<q>} <Rt>, [<Rn> {, #<imm>}]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm8:'00', 32);
if t IN {13,15} || n == 15 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- <imm> The immediate offset added to the value of <Rn> to calculate the address. <imm> can be omitted, meaning an offset of 0. Values are multiples of 4 in the range 0-1020.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  address = R[n] + imm32;
  SetExclusiveMonitors(address,4);
  R[t] = MemA[address,4];
```

Exceptions

MemManage, SecureFault, BusFault, and UsageFault.

C2.4.62 LDREXB

Load Register Exclusive Byte derives an address from a base register value, loads a byte from memory, zero-extends it to form a 32-bit word, writes it to a register, and:

- If the address has the Shareable memory attribute, marks the physical address as exclusive access for the executing PE in a global monitor.
- Causes the executing PE to indicate an active exclusive access in the local monitor.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	0	0	0	1	1	0	1	Rn	Rt	(1)	(1)	(1)	(1)	0	1	0	0	(1)	(1)	(1)	(1)		

T1 variant

LDREXB{<c>}{<q>} <Rt>, [<Rn>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn);
if t IN {13,15} || n == 15 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  address = R[n];
  SetExclusiveMonitors(address,1);
  R[t] = ZeroExtend(MemA[address,1], 32);
```

Exceptions

MemManage, SecureFault, BusFault, and UsageFault.

C2.4.63 LDREXH

Load Register Exclusive Halfword derives an address from a base register value, loads a halfword from memory, zero-extends it to form a 32-bit word, writes it to a register, and:

- If the address has the Shareable memory attribute, marks the physical address as exclusive access for the executing PE in a global monitor.
- Causes the executing PE to indicate an active exclusive access in the local monitor.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	0	0	0	1	1	0	1	Rn	Rt	(1)	(1)	(1)	(1)	0	1	0	1	(1)	(1)	(1)	(1)		

T1 variant

LDREXH{<c>}{<q>} <Rt>, [<Rn>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn);
if t IN {13,15} || n == 15 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  address = R[n];
  SetExclusiveMonitors(address,2);
  R[t] = ZeroExtend(MemA[address,2], 32);
```

Exceptions


MemManage, SecureFault, BusFault, and UsageFault.

C2.4.64 LDRH (immediate)

Load Register Halfword (immediate) calculates an address from a base register value and an immediate offset, loads a halfword from memory, zero-extends it to form a 32-bit word, and writes it to a register. It can use offset, post-indexed, or pre-indexed addressing.

T1

ARMv8-M



T1 variant


LDRH{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding

t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm5:'0', 32);
index = TRUE; add = TRUE; wback = FALSE;

T2

ARMv8-M Main Extension only



T2 variant


LDRH{<c>}.W <Rt>, [<Rn> {, #<+><imm>}] // <Rt>, <Rn>, <imm> can be represented in T1
LDRH{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding

if Rt == '1111' then SEE "PLD (immediate)";
if Rn == '1111' then SEE "LDRH (literal)";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm12, 32);
index = TRUE; add = TRUE; wback = FALSE;
if t == 13 then UNPREDICTABLE;

T3

ARMv8-M Main Extension only



Offset variant

Applies when Rt != 1111 && P == 1 && U == 0 && W == 0.

LDRH{<c>}{<q>} <Rt>, [<Rn> {, #-<imm>}]

Post-indexed variant

Applies when P == 0 && W == 1.

LDRH{<c>}{<q>} <Rt>, [<Rn>], #{+/-}<imm>

Pre-indexed variant

Applies when P == 1 && W == 1.

LDRH{<c>}{<q>} <Rt>, [<Rn>, #{+/-}<imm>]!

Decode for all variants of this encoding

```

if Rn == '1111' then SEE "LDRH (literal)";
if Rt == '1111' && P == '1' && U == '0' && W == '0' then SEE PLD;
if P == '1' && U == '1' && W == '0' then SEE LDRHT;
if P == '0' && W == '0' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm8, 32);
index = (P == '1'); add = (U == '1'); wback = (W == '1');
if t == 13 || (t == 15 && W == '1') || (wback && n == t) then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> For encoding T1: is the general-purpose base register, encoded in the "Rn" field.
 For encoding T2 and T3: is the general-purpose base register, encoded in the "Rn" field. For PC use see [LDRH \(literal\)](#).
- +/- Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values:
 - when U = 0
 - + when U = 1
- + Specifies the offset is added to the base register.
- <imm> For the post-indexed or pre-indexed variant: is a 8-bit unsigned immediate byte offset, in the range 0 to 255, encoded in the "imm8" field.
 For encoding T1: is the optional positive unsigned immediate byte offset, a multiple of 2 in the range 0 to 62, defaulting to 0 and encoded in the "imm5" field as <imm>/2.
 For encoding T2: is an optional 12-bit unsigned immediate byte offset, in the range 0 to 4095, defaulting to 0 and encoded in the "imm12" field.
 For encoding T3: is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation for all encodings

```

if ConditionPassed() then
  EncodingSpecificOperations();
  offset_addr = if add then (R[n] + imm32) else (R[n] - imm32);
  address = if index then offset_addr else R[n];

  // Determine if the stack pointer limit should be checked
  if n == 13 && wback then
    (limit, applylimit) = LookUpSPLim(LookUpSP());
  else
  
```

```
    applylimit = FALSE;  
    // Memory operation only performed if limit not violated  
    if !applylimit || (UInt(offset_addr) >= UInt(limit)) then  
        R[t] = ZeroExtend(MemU[address,2], 32);  
  
    // If the stack pointer is being updated update a fault will be raised if  
    // the limit is violated  
    if wback then RSPCheck[n] = offset_addr;
```

Exceptions


BusFault, UsageFault, MemManage, and SecureFault.

C2.4.65 LDRH (literal)

Load Register Halfword (literal) calculates an address from the PC value and an immediate offset, loads a halfword from memory, zero-extends it to form a 32-bit word, and writes it to a register.

T1

ARMv8-M Main Extension only



T1 variant

LDRH{<c>}{<q>} <Rt>, <label> // Preferred syntax
 LDRH{<c>}{<q>} <Rt>, [PC, #{+/-}<imm>] // Alternative syntax

Decode for this encoding

```
if Rt == '1111' then SEE "PLD (literal)";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); imm32 = ZeroExtend(imm12, 32); add = (U == '1');
if t == 13 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <label> The label of the literal data item that is to be loaded into <Rt>. The assembler calculates the required value of the offset from the Align(PC, 4) value of the instruction to this label. Permitted values of the offset are -4095 to 4095. If the offset is zero or positive, imm32 is equal to the offset and add == TRUE, encoded as U == 1. If the offset is negative, imm32 is equal to minus the offset and add == FALSE, encoded as U == 0.
- +/- Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values:
 - when U = 0
 - + when U = 1
- <imm> Is a 12-bit unsigned immediate byte offset, in the range 0 to 4095, encoded in the "imm12" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  base = Align(PC,4);
  address = if add then (base + imm32) else (base - imm32);
  data = MemU[address,2];
  R[t] = ZeroExtend(data, 32);
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.

C2.4.66 LDRH (register)

Load Register Halfword (register) calculates an address from a base register value and an offset register value, loads a halfword from memory, zero-extends it to form a 32-bit word, and writes it to a register. The offset register value can be shifted left by 0, 1, 2, or 3 bits.

T1

ARMv8-M

15	14	13	12	11	10	9	8	6	5	3	2	0
0	1	0	1	1	0	1	Rm	Rn	Rt			

T1 variant

LDRH{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, 0);
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	1	1	0	0	0	0	0	1	1	!=1111	!=1111	0	0	0	0	0	0	0	imm2	Rm			
													Rn		Rt										

T2 variant

LDRH{<c>}.W <Rt>, [<Rn>, {+}<Rm>] // <Rt>, <Rn>, <Rm> can be represented in T1
LDRH{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>{, LSL #<imm>}]

Decode for this encoding

```
if Rn == '1111' then SEE "LDRH (literal)";
if Rt == '1111' then SEE "PLDW (register)";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, UInt(imm2));
if t == 13 || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- +
- <Rm> Is the general-purpose index register, encoded in the "Rm" field.

<imm> If present, the size of the left shift to apply to the value from <Rm>, in the range 1-3. <imm> is encoded in imm2. If absent, no shift is specified and imm2 is encoded as 0b00.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    offset = Shift(R[m], shift_t, shift_n, APSR.C);
    offset_addr = if add then (R[n] + offset) else (R[n] - offset);
    address = if index then offset_addr else R[n];
    data = MemU[address,2];
    if wback then R[n] = offset_addr;
    R[t] = ZeroExtend(data, 32);
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.


C2.4.67 LDRHT

Load Register Halfword Unprivileged calculates an address from a base register value and an immediate offset, loads a halfword from memory, zero-extends it to form a 32-bit word, and writes it to a register.

When privileged software uses an LDRHT instruction, the memory access is restricted as if the software was unprivileged.

T1

ARMv8-M Main Extension only



T1 variant

LDRHT{<c>}{<q>} <Rt>, [<Rn> {, #+}<imm>]}

Decode for this encoding

```

if Rn == '1111' then SEE "LDRH (literal)";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); postindex = FALSE; add = TRUE;
register_form = FALSE; imm32 = ZeroExtend(imm8, 32);
if t IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- + Specifies the offset is added to the base register.
- <imm> Is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    address = R[n] + imm32;
    data = MemU_unpriv[address,2];
    R[t] = ZeroExtend(data, 32);

```

Exceptions


UsageFault, BusFault, MemManage, and SecureFault.

C2.4.68 LDRSB (immediate)

Load Register Signed Byte (immediate) calculates an address from a base register value and an immediate offset, loads a byte from memory, sign-extends it to form a 32-bit word, and writes it to a register. It can use offset, post-indexed, or pre-indexed addressing.

T1

ARMv8-M Main Extension only



T1 variant

LDRSB{<c>}{<q>} <Rt>, [<Rn> {, #+<imm>}]


Decode for this encoding

```

if Rt == '1111' then SEE PLI;
if Rn == '1111' then SEE "LDRSB (literal)";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm12, 32);
index = TRUE; add = TRUE; wback = FALSE;
if t == 13 then UNPREDICTABLE;
  
```

T2

ARMv8-M Main Extension only



Offset variant

Applies when P == 1 && U == 0 && W == 0.

LDRSB{<c>}{<q>} <Rt>, [<Rn> {, #-<imm>}]

Post-indexed variant

Applies when P == 0 && W == 1.

LDRSB{<c>}{<q>} <Rt>, [<Rn>], #+/-<imm>

Pre-indexed variant

Applies when P == 1 && W == 1.

LDRSB{<c>}{<q>} <Rt>, [<Rn>, #+/-<imm>]!

Decode for all variants of this encoding

```

if Rt == '1111' && P == '1' && U == '0' && W == '0' then SEE PLI;
if Rn == '1111' then SEE "LDRSB (literal)";
if P == '1' && U == '1' && W == '0' then SEE LDRSBT;
if P == '0' && W == '0' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
  
```



```
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm8, 32);
index = (P == '1'); add = (U == '1'); wback = (W == '1');
if t == 13 || (t == 15 && W == '1') || (wback && n == t) then UNPREDICTABLE;
```

Assembler symbols

<c>	See <i>Standard assembler syntax fields</i> on page C1-240.
<q>	See <i>Standard assembler syntax fields</i> on page C1-240.
<Rt>	Is the general-purpose register to be transferred, encoded in the "Rt" field.
<Rn>	Is the general-purpose base register, encoded in the "Rn" field. For PC use see LDRSB (literal) .
+/-	Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values: - when U = 0 + when U = 1
+	Specifies the offset is added to the base register.
<imm>	For the post-indexed or pre-indexed variant: is a 8-bit unsigned immediate byte offset, in the range 0 to 255, encoded in the "imm8" field. For encoding T1: is an optional 12-bit unsigned immediate byte offset, in the range 0 to 4095, defaulting to 0 and encoded in the "imm12" field. For encoding T2: is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    offset_addr = if add then (R[n] + imm32) else (R[n] - imm32);
    address = if index then offset_addr else R[n];

    // Determine if the stack pointer limit should be checked
    if n == 13 && wback then
        (limit, applylimit) = LookUpSPLim(LookUpSP());
    else
        applylimit = FALSE;
    // Memory operation only performed if limit not violated
    if !applylimit || (UInt(offset_addr) >= UInt(limit)) then
        R[t] = SignExtend(MemU[address,1], 32);

    // If the stack pointer is being updated update a fault will be raised if
    // the limit is violated
    if wback then RSPCheck[n] = offset_addr;
```

Exceptions


BusFault, UsageFault, MemManage, and SecureFault.

C2.4.69 LDRSB (literal)

Load Register Signed Byte (literal) calculates an address from the PC value and an immediate offset, loads a byte from memory, sign-extends it to form a 32-bit word, and writes it to a register.

T1

ARMv8-M Main Extension only



T1 variant

```
LDRSB{<c>}{<q>} <Rt>, <label> // Preferred syntax
LDRSB{<c>}{<q>} <Rt>, [PC, #{+/-}<imm>] // Alternative syntax
```

Decode for this encoding

```
if Rt == '1111' then SEE PLI;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); imm32 = ZeroExtend(imm12, 32); add = (U == '1');
if t == 13 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <label> The label of the literal data item that is to be loaded into <Rt>. The assembler calculates the required value of the offset from the Align(PC, 4) value of the instruction to this label. Permitted values of the offset are -4095 to 4095. If the offset is zero or positive, imm32 is equal to the offset and add == TRUE, encoded as U == 1. If the offset is negative, imm32 is equal to minus the offset and add == FALSE, encoded as U == 0.
- +/- Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values:
 - when U = 0
 - + when U = 1
- <imm> Is a 12-bit unsigned immediate byte offset, in the range 0 to 4095, encoded in the "imm12" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  base = Align(PC,4);
  address = if add then (base + imm32) else (base - imm32);
  R[t] = SignExtend(MemU[address,1], 32);
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.

C2.4.70 LDRSB (register)

Load Register Signed Byte (register) calculates an address from a base register value and an offset register value, loads a byte from memory, sign-extends it to form a 32-bit word, and writes it to a register. The offset register value can be shifted left by 0, 1, 2, or 3 bits.

T1

ARMv8-M

15	14	13	12	11	10	9	8	6	5	3	2	0
0	1	0	1	0	1	1	Rm	Rn	Rt			

T1 variant

LDRSB{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, 0);
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	1	1	0	0	1	0	0	0	1	!=1111	!=1111	0	0	0	0	0	0	0	imm2	Rm			
													Rn		Rt										

T2 variant

LDRSB{<c>}.W <Rt>, [<Rn>, {+}<Rm>] // <Rt>, <Rn>, <Rm> can be represented in T1
LDRSB{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>{, LSL #<imm>}]

Decode for this encoding

```
if Rt == '1111' then SEE PLI;
if Rn == '1111' then SEE "LDRSB (literal)";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, UInt(imm2));
if t == 13 || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<Rt>	Is the general-purpose register to be transferred, encoded in the "Rt" field.
<Rn>	Is the general-purpose base register, encoded in the "Rn" field.
+	Specifies the index register is added to the base register.
<Rm>	Is the general-purpose index register, encoded in the "Rm" field.

<imm> If present, the size of the left shift to apply to the value from <Rm>, in the range 1-3. <imm> is encoded in imm2. If absent, no shift is specified and imm2 is encoded as 0b00.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    offset = Shift(R[m], shift_t, shift_n, APSR.C);
    offset_addr = if add then (R[n] + offset) else (R[n] - offset);
    address = if index then offset_addr else R[n];
    R[t] = SignExtend(MemU[address,1], 32);
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.


C2.4.71 LDRSBT

Load Register Signed Byte Unprivileged calculates an address from a base register value and an immediate offset, loads a byte from memory, sign-extends it to form a 32-bit word, and writes it to a register.

When privileged software uses an LDRSBT instruction, the memory access is restricted as if the software was unprivileged.

T1

ARMv8-M Main Extension only



T1 variant

LDRSBT{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding

```

if Rn == '1111' then SEE "LDRSB (literal)";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); postindex = FALSE; add = TRUE;
register_form = FALSE; imm32 = ZeroExtend(imm8, 32);
if t IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- + Specifies the offset is added to the base register.
- <imm> Is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    address = R[n] + imm32;
    R[t] = SignExtend(MemU_unpriv[address,1], 32);

```

Exceptions


UsageFault, BusFault, MemManage, and SecureFault.

C2.4.72 LDRSH (immediate)

Load Register Signed Halfword (immediate) calculates an address from a base register value and an immediate offset, loads a halfword from memory, sign-extends it to form a 32-bit word, and writes it to a register. It can use offset, post-indexed, or pre-indexed addressing.

T1

ARMv8-M Main Extension only



T1 variant

LDRSH{<c>}{<q>} <Rt>, [<Rn> {, #<+>}<imm>]


Decode for this encoding

```

if Rn == '1111' then SEE "LDRSH (literal)";
if Rt == '1111' then SEE "Related instructions";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm12, 32);
index = TRUE; add = TRUE; wback = FALSE;
if t == 13 then UNPREDICTABLE;
  
```

T2

ARMv8-M Main Extension only



Offset variant

Applies when Rt != 1111 && P == 1 && U == 0 && W == 0.

LDRSH{<c>}{<q>} <Rt>, [<Rn> {, #-}<imm>]

Post-indexed variant

Applies when P == 0 && W == 1.

LDRSH{<c>}{<q>} <Rt>, [<Rn>], #<+/-><imm>

Pre-indexed variant

Applies when P == 1 && W == 1.

LDRSH{<c>}{<q>} <Rt>, [<Rn>, #<+/-><imm>]!

Decode for all variants of this encoding

```

if Rn == '1111' then SEE "LDRSH (literal)";
if Rt == '1111' && P == '1' && U == '0' && W == '0' then SEE "Related instructions";
if P == '1' && U == '1' && W == '0' then SEE LDRSHT;
if P == '0' && W == '0' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
  
```

```
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm8, 32);
index = (P == '1'); add = (U == '1'); wback = (W == '1');
if t == 13 || (t == 15 && W == '1') || (wback && n == t) then UNPREDICTABLE;
```

Assembler symbols

<c>	See <i>Standard assembler syntax fields</i> on page C1-240.
<q>	See <i>Standard assembler syntax fields</i> on page C1-240.
<Rt>	Is the general-purpose register to be transferred, encoded in the "Rt" field.
<Rn>	Is the general-purpose base register, encoded in the "Rn" field. For PC use see LDRSH (literal) .
+/-	Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values: - when U = 0 + when U = 1
+	Specifies the offset is added to the base register.
<imm>	For the post-indexed or pre-indexed variant: is a 8-bit unsigned immediate byte offset, in the range 0 to 255, encoded in the "imm8" field. For encoding T1: is an optional 12-bit unsigned immediate byte offset, in the range 0 to 4095, defaulting to 0 and encoded in the "imm12" field. For encoding T2: is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    offset_addr = if add then (R[n] + imm32) else (R[n] - imm32);
    address = if index then offset_addr else R[n];
    // Determine if the stack pointer limit should be checked
    if n == 13 && wback then
        (limit, applylimit) = LookUpSPLim(LookUpSP());
    else
        applylimit = FALSE;
    // Memory operation only performed if limit not violated
    if !applylimit || (UInt(offset_addr) >= UInt(limit)) then
        R[t] = SignExtend(MemU[address,2], 32);

    // If the stack pointer is being updated update a fault will be raised if
    // the limit is violated
    if wback then RSPCheck[n] = offset_addr;
```

Exceptions


BusFault, UsageFault, MemManage, and SecureFault.

C2.4.73 LDRSH (literal)

Load Register Signed Halfword (literal) calculates an address from the PC value and an immediate offset, loads a halfword from memory, sign-extends it to form a 32-bit word, and writes it to a register.

T1

ARMv8-M Main Extension only



T1 variant

```
LDRSH{<c>}{<q>} <Rt>, <label> // Preferred syntax
LDRSH{<c>}{<q>} <Rt>, [PC, #+/-<imm>] // Alternative syntax
```

Decode for this encoding

```
if Rt == '1111' then SEE "Related instructions";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); imm32 = ZeroExtend(imm12, 32); add = (U == '1');
if t == 13 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <label> The label of the literal data item that is to be loaded into <Rt>. The assembler calculates the required value of the offset from the Align(PC, 4) value of the instruction to this label. Permitted values of the offset are -4095 to 4095. If the offset is zero or positive, imm32 is equal to the offset and add == TRUE, encoded as U == 1. If the offset is negative, imm32 is equal to minus the offset and add == FALSE, encoded as U == 0.
- +/- Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values:
 - when U = 0
 - + when U = 1
- <imm> Is a 12-bit unsigned immediate byte offset, in the range 0 to 4095, encoded in the "imm12" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  base = Align(PC,4);
  address = if add then (base + imm32) else (base - imm32);
  data = MemU[address,2];
  R[t] = SignExtend(data, 32);
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.

C2.4.74 LDRSH (register)

Load Register Signed Halfword (register) calculates an address from a base register value and an offset register value, loads a halfword from memory, sign-extends it to form a 32-bit word, and writes it to a register. The offset register value can be shifted left by 0, 1, 2, or 3 bits.

T1

ARMv8-M

15	14	13	12	11	10	9	8	6	5	3	2	0
0	1	0	1	1	1	1	Rm	Rn	Rt			

T1 variant

LDRSH{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, 0);
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	1	1	0	0	1	0	0	1	1	!=1111	!=1111	0	0	0	0	0	0	0	imm2	Rm			
													Rn		Rt										

T2 variant

LDRSH{<c>}.W <Rt>, [<Rn>, {+}<Rm>] // <Rt>, <Rn>, <Rm> can be represented in T1
LDRSH{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>{, LSL #<imm>}]

Decode for this encoding

```
if Rn == '1111' then SEE "LDRSH (literal)";
if Rt == '1111' then SEE "Related instructions";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, UInt(imm2));
if t == 13 || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- +
- Specifies the index register is added to the base register.
- <Rm> Is the general-purpose index register, encoded in the "Rm" field.

<imm> If present, the size of the left shift to apply to the value from <Rm>, in the range 1-3. <imm> is encoded in imm2. If absent, no shift is specified and imm2 is encoded as 0b00.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    offset = Shift(R[m], shift_t, shift_n, APSR.C);
    offset_addr = if add then (R[n] + offset) else (R[n] - offset);
    address = if index then offset_addr else R[n];
    data = MemU[address,2];
    if wback then R[n] = offset_addr;
    R[t] = SignExtend(data, 32);
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.


C2.4.75 LDRSHT

Load Register Signed Halfword Unprivileged calculates an address from a base register value and an immediate offset, loads a halfword from memory, sign-extends it to form a 32-bit word, and writes it to a register.

When privileged software uses an LDRSHT instruction, the memory access is restricted as if the software was unprivileged.

T1

ARMv8-M Main Extension only



T1 variant

LDRSHT{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding

```

if Rn == '1111' then SEE "LDRSH (literal)";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); postindex = FALSE; add = TRUE;
register_form = FALSE; imm32 = ZeroExtend(imm8, 32);
if t IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- + Specifies the offset is added to the base register.
- <imm> Is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    address = R[n] + imm32;
    data = MemU_unpriv[address,2];
    R[t] = SignExtend(data, 32);

```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


C2.4.76 LDRT

Load Register Unprivileged calculates an address from a base register value and an immediate offset, loads a word from memory, and writes it to a register.

When privileged software uses an LDRT instruction, the memory access is restricted as if the software was unprivileged.

T1

ARMv8-M Main Extension only



T1 variant

LDRT{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding

```

if Rn == '1111' then SEE "LDR (literal)";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); postindex = FALSE; add = TRUE;
register_form = FALSE; imm32 = ZeroExtend(imm8, 32);
if t IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- + Specifies the offset is added to the base register.
- <imm> Is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  address = R[n] + imm32;
  data = MemU_unpriv[address,4];
  R[t] = data;
  
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.77 LSL (immediate)

Logical Shift Left (immediate) shifts a register value left by an immediate number of bits, shifting in zeros, and writes the result to the destination register.

This instruction is an alias of the [MOV \(register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV \(register\)](#).
- The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

T2

ARMv8-M Main Extension only

15	14	13	12	11	10		6	5		3	2	0
0	0	0	0	0	0	!	Rm					Rd
imm5												

T2 variant

LSL<c>{<q>} {<Rd>}, <Rm>, #<imm> // Inside IT block

is equivalent to

MOV<c>{<q>} <Rd>, <Rm>, LSL #<imm>

and is the preferred disassembly when InITBlock().

T3

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	0	0	1	1	1	1	(0)	imm3		Rd		imm2	0	0					Rm	
S																										

MOV, shift or rotate by value variant

LSL<c>.W {<Rd>}, <Rm>, #<imm> // Inside IT block, and <Rd>, <Rm>, <imm> can be represented in T2

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, LSL #<imm>

and is always the preferred disassembly.

LSL{<c>}{<q>} {<Rd>}, <Rm>, #<imm>

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, LSL #<imm>

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the general-purpose destination register, encoded in the "Rd" field.

- <Rm> Is the general-purpose source register, encoded in the "Rm" field.
- <imm> For encoding T2: is the shift amount, in the range 1 to 31, encoded in the "imm5" field.
For encoding T3: is the shift amount, in the range 1 to 31, encoded in the "imm3:imm2" field.

Operation for all encodings

The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

C2.4.78 LSL (register)

Logical Shift Left (register) shifts a register value left by a variable number of bits, shifting in zeros, and writes the result to the destination register. The variable number of bits is read from the bottom byte of a register.

This instruction is an alias of the [MOV, MOVS \(register-shifted register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV, MOVS \(register-shifted register\)](#).
- The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	6	5	3	2	0
0	1	0	0	0	0	0	0	1	0	Rs	Rdm

op

Logical shift left variant

LSL<c>{<q>} {<Rdm>}, <Rdm>, <Rs> // Inside IT block

is equivalent to

MOV<c>{<q>} <Rdm>, <Rdm>, LSL <Rs>

and is the preferred disassembly when InITBlock().

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	0	0	0	0	Rm		1	1	1	1	Rd		0	0	0	0	Rs	

type S

Not flag setting variant

LSL<c>.W {<Rd>}, <Rm>, <Rs> // Inside IT block, and <Rd>, <Rm>, <type>, <Rs> can be represented in T1

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, LSL <Rs>

and is always the preferred disassembly.

LSL{<c>}{<q>} {<Rd>}, <Rm>, <Rs>

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, LSL <Rs>

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

- <Rdm> Is the first general-purpose source register and the destination register, encoded in the "Rdm" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the first general-purpose source register, encoded in the "Rm" field.
- <Rs> Is the second general-purpose source register holding a shift amount in its bottom 8 bits, encoded in the "Rs" field.

Operation for all encodings

The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

C2.4.79 LSLS (immediate)

Logical Shift Left, Setting flags (immediate) shifts a register value left by an immediate number of bits, shifting in zeros, writes the result to the destination register, and updates the condition flags based on the result.

This instruction is an alias of the [MOV \(register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV \(register\)](#).
- The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

T2

ARMv8-M

15	14	13	12	11	10		6	5		3	2	0
0	0	0	0	0	0	!	Rm					Rd
imm5												

T2 variant

LSLS{<q>} {<Rd>}, <Rm>, #<imm> // Outside IT block

is equivalent to

MOVS{<q>} <Rd>, <Rm>, LSL #<imm>

and is the preferred disassembly when !InITBlock().

T3

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	0	0	0	1	0	1	1	1	1	(0)	imm3		Rd	imm2	0	0			Rm	
S																										

MOVS, shift or rotate by value variant

LSLS.W {<Rd>}, <Rm>, #<imm> // Outside IT block, and <Rd>, <Rm>, <imm> can be represented in T2

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, LSL #<imm>

and is always the preferred disassembly.

LSLS{<c>}{<q>} {<Rd>}, <Rm>, #<imm>

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, LSL #<imm>

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the general-purpose destination register, encoded in the "Rd" field.

- <Rm> Is the general-purpose source register, encoded in the "Rm" field.
- <imm> For encoding T2: is the shift amount, in the range 1 to 31, encoded in the "imm5" field.
For encoding T3: is the shift amount, in the range 1 to 31, encoded in the "imm3:imm2" field.

Operation for all encodings

The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

C2.4.80 LSLS (register)


Logical Shift Left, Setting flags (register) shifts a register value left by a variable number of bits, shifting in zeros, writes the result to the destination register, and updates the condition flags based on the result. The variable number of bits is read from the bottom byte of a register.

This instruction is an alias of the [MOV, MOVS \(register-shifted register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV, MOVS \(register-shifted register\)](#).
- The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

T1

ARMv8-M



Logical shift left variant

LSLS{<q>} {<Rdm>}, <Rdm>, <Rs> // Outside IT block


is equivalent to

MOVS{<q>} <Rdm>, <Rdm>, LSL <Rs>

and is the preferred disassembly when !InITBlock().

T2

ARMv8-M Main Extension only



Flag setting variant

LSLS.W {<Rd>}, <Rm>, <Rs> // Outside IT block, and <Rd>, <Rm>, <type>, <Rs> can be represented in T1

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, LSL <Rs>

and is always the preferred disassembly.

LSLS{<c>}{<q>} {<Rd>}, <Rm>, <Rs>

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, LSL <Rs>

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

- <q> See [Standard assembler syntax fields](#) on page C1-240.
- <Rdm> Is the first general-purpose source register and the destination register, encoded in the "Rdm" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the first general-purpose source register, encoded in the "Rm" field.
- <Rs> Is the second general-purpose source register holding a shift amount in its bottom 8 bits, encoded in the "Rs" field.

Operation for all encodings

The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

C2.4.81 LSR (immediate)

Logical Shift Right (immediate) shifts a register value right by an immediate number of bits, shifting in zeros, and writes the result to the destination register.

This instruction is an alias of the [MOV \(register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV \(register\)](#).
- The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	6	5	3	2	0
0	0	0	0	1	imm5	Rm	Rd			

T2 variant

LSR<c>{<q>} {<Rd>}, <Rm>, #<imm> // Inside IT block

is equivalent to

MOV<c>{<q>} <Rd>, <Rm>, LSR #<imm>

and is the preferred disassembly when InITBlock().

T3

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	0	0	0	1	0	0	1	1	1	1	(0)	imm3	Rd	imm2	0	1	Rm			

S

MOV, shift or rotate by value variant

LSR<c>.W {<Rd>}, <Rm>, #<imm> // Inside IT block, and <Rd>, <Rm>, <imm> can be represented in T2

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, LSR #<imm>

and is always the preferred disassembly.

LSR{<c>}{<q>} {<Rd>}, <Rm>, #<imm>

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, LSR #<imm>

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the general-purpose destination register, encoded in the "Rd" field.

- <Rm> Is the general-purpose source register, encoded in the "Rm" field.
- <imm> For encoding T2: is the shift amount, in the range 1 to 32, encoded in the "imm5" field as <imm> modulo 32.
For encoding T3: is the shift amount, in the range 1 to 32, encoded in the "imm3:imm2" field as <imm> modulo 32.

Operation for all encodings

The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

C2.4.82 LSR (register)

Logical Shift Right (register) shifts a register value right by a variable number of bits, shifting in zeros, and writes the result to the destination register. The variable number of bits is read from the bottom byte of a register.

This instruction is an alias of the [MOV, MOVS \(register-shifted register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV, MOVS \(register-shifted register\)](#).
- The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	6	5	3	2	0
0	1	0	0	0	0	0	0	1	1	Rs	Rdm

op

Logical shift right variant

LSR<c>{<q>} {<Rdm>}, <Rdm>, <Rs> // Inside IT block

is equivalent to

MOV<c>{<q>} <Rdm>, <Rdm>, LSR <Rs>

and is the preferred disassembly when InITBlock().

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	0	0	1	0	Rm		1	1	1	1	Rd		0	0	0	0	Rs	

type S

Not flag setting variant

LSR<c>.W {<Rd>}, <Rm>, <Rs> // Inside IT block, and <Rd>, <Rm>, <type>, <Rs> can be represented in T1

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, LSR <Rs>

and is always the preferred disassembly.

LSR{<c>}{<q>} {<Rd>}, <Rm>, <Rs>

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, LSR <Rs>

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

- <Rdm> Is the first general-purpose source register and the destination register, encoded in the "Rdm" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the first general-purpose source register, encoded in the "Rm" field.
- <Rs> Is the second general-purpose source register holding a shift amount in its bottom 8 bits, encoded in the "Rs" field.

Operation for all encodings

The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

C2.4.83 LSRS (immediate)

Logical Shift Right, Setting flags (immediate) shifts a register value right by an immediate number of bits, shifting in zeros, writes the result to the destination register, and updates the condition flags based on the result.

This instruction is an alias of the [MOV \(register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV \(register\)](#).
- The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

T2

ARMv8-M

15	14	13	12	11	10					6	5		3	2		0
0	0	0	0	0	1	imm5				Rm		Rd				

T2 variant

LSRS{<q>} {<Rd>}, <Rm>, #<imm> // Outside IT block

is equivalent to

MOVS{<q>} <Rd>, <Rm>, LSR #<imm>

and is the preferred disassembly when !InITBlock().

T3

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11		8	7	6	5	4	3		0
1	1	1	0	1	0	1	0	0	0	1	0	1	1	1	1	1	(0)	imm3		Rd		imm2		0	1	Rm		

S

MOVS, shift or rotate by value variant

LSRS.W {<Rd>}, <Rm>, #<imm> // Outside IT block, and <Rd>, <Rm>, <imm> can be represented in T2

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, LSR #<imm>

and is always the preferred disassembly.

LSRS{<c>}{<q>} {<Rd>}, <Rm>, #<imm>

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, LSR #<imm>

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the general-purpose destination register, encoded in the "Rd" field.

- <Rm> Is the general-purpose source register, encoded in the "Rm" field.
- <imm> For encoding T2: is the shift amount, in the range 1 to 32, encoded in the "imm5" field as <imm> modulo 32.
For encoding T3: is the shift amount, in the range 1 to 32, encoded in the "imm3:imm2" field as <imm> modulo 32.

Operation for all encodings

The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

C2.4.84 LSRS (register)


Logical Shift Right, Setting flags (register) shifts a register value right by an immediate number of bits, shifting in zeros, writes the result to the destination register, and updates the condition flags based on the result. The variable number of bits is read from the bottom byte of a register.

This instruction is an alias of the [MOV, MOVS \(register-shifted register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV, MOVS \(register-shifted register\)](#).
- The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

T1

ARMv8-M



Logical shift right variant

LSRS{<q>} {<Rdm>}, <Rdm>, <Rs> // Outside IT block


is equivalent to

MOVS{<q>} <Rdm>, <Rdm>, LSR <Rs>

and is the preferred disassembly when !InITBlock().

T2

ARMv8-M Main Extension only



Flag setting variant

LSRS.W {<Rd>}, <Rm>, <Rs> // Outside IT block, and <Rd>, <Rm>, <type>, <Rs> can be represented in T1

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, LSR <Rs>

and is always the preferred disassembly.

LSRS{<c>}{<q>} {<Rd>}, <Rm>, <Rs>

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, LSR <Rs>

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

- <q> See [Standard assembler syntax fields](#) on page C1-240.
- <Rdm> Is the first general-purpose source register and the destination register, encoded in the "Rdm" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the first general-purpose source register, encoded in the "Rm" field.
- <Rs> Is the second general-purpose source register holding a shift amount in its bottom 8 bits, encoded in the "Rs" field.

Operation for all encodings

The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

C2.4.85 MCR, MCR2

Move to Coprocessor from Register passes the value of a general-purpose register to a coprocessor.

If no coprocessor can execute the instruction, a UsageFault exception is generated.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	5	4	3	0	15	12	11	8	7	5	4	3	0
1	1	1	0	1	1	1	0	opc1	0	CRn	Rt	!=101x	opc2	1	CRm						

coproc

T1 variant

MCR{<c>}{<q>} <coproc>, {#}<opc1>, <Rt>, <CRn>, <CRm>{, {#}<opc2>}

Decode for this encoding

```
if coproc IN '101x' then SEE "Floating-point";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); cp = UInt(coproc);
if t == 15 || t == 13 then UNPREDICTABLE;
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	5	4	3	0	15	12	11	8	7	5	4	3	0
1	1	1	1	1	1	0	opc1	0	CRn	Rt	!=101x	opc2	1	CRm							

coproc

T2 variant

MCR2{<c>}{<q>} <coproc>, {#}<opc1>, <Rt>, <CRn>, <CRm>{, {#}<opc2>}

Decode for this encoding

```
if coproc IN '101x' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); cp = UInt(coproc);
if t == 15 || t == 13 then UNPREDICTABLE;
```

Notes for all encodings

Floating-point: [Floating-point 32-bit move on page C2-298](#).

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <coproc> Is the name of the coprocessor, encoded in the "coproc" field. The valid coprocessor names are p10, p11, p14, and p15.
- <opc1> Is a coprocessor-specific opcode in the range 0 to 7, encoded in the "opc1" field.
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.

- <CRn> Is the first coprocessor register, encoded in the "CRn" field.
- <CRm> Is the second coprocessor register, encoded in the "CRm" field.
- <opc2> Is a coprocessor-specific opcode in the range 0 to 7, defaulting to 0 and encoded in the "opc2" field.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteCPCheck(cp);
    if !Cproc_Accepted(cp, ThisInstr()) then
        GenerateCoproprocessorException();
    else
        Coproc_SendOneWord(R[t], cp, ThisInstr());
```

Exceptions

UsageFault.

C2.4.86 MCRR, MCRR2

Move to Coprocessor from two Registers passes the values of two general-purpose registers to a coprocessor.

If no coprocessor can execute the instruction, a UsageFault exception is generated.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	4	3	0
1	1	1	0	1	1	0	0	0	1	0	0	Rt2	Rt	!=101x	opc1	CRm					

coproc

T1 variant

MCRR{<c>}{<q>} <coproc>, {#}<opc1>, <Rt>, <Rt2>, <CRm>

Decode for this encoding

```
if coproc IN '101x' then SEE "Floating-point";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); t2 = UInt(Rt2); cp = UInt(coproc);
if t == 15 || t2 == 15 then UNPREDICTABLE;
if t == 13 || t2 == 13 then UNPREDICTABLE;
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	4	3	0
1	1	1	1	1	1	0	0	0	1	0	0	Rt2	Rt	!=101x	opc1	CRm					

coproc

T2 variant

MCRR2{<c>}{<q>} <coproc>, {#}<opc1>, <Rt>, <Rt2>, <CRm>

Decode for this encoding

```
if coproc IN '101x' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); t2 = UInt(Rt2); cp = UInt(coproc);
if t == 15 || t2 == 15 then UNPREDICTABLE;
if t == 13 || t2 == 13 then UNPREDICTABLE;
```

Notes for all encodings

Floating-point: [Floating-point 64-bit move on page C2-293](#).

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <coproc> Is the name of the coprocessor, encoded in the "coproc" field. The valid coprocessor names are p10, p11, p14, and p15.
- <opc1> Is a coprocessor-specific opcode in the range 0 to 15, encoded in the "opc1" field.

- <Rt> Is the first general-purpose register to be transferred, encoded in the "Rt" field.
- <Rt2> Is the second general-purpose register to be transferred, encoded in the "Rt2" field.
- <CRm> Is a coprocessor register, encoded in the "CRm" field.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteCPCheck(cp);
    if !Coprocc_Accepted(cp, ThisInstr()) then
        GenerateCoproccorException();
    else
        Coproc_SendTwoWords(R[t2], R[t], cp, ThisInstr());
```

Exceptions


UsageFault.

C2.4.87 MLA

Multiply Accumulate multiplies two register values, and adds a third register value. The least significant 32 bits of the result are written to the destination register. These 32 bits do not depend on whether signed or unsigned calculations are performed.

T1

ARMv8-M Main Extension only



T1 variant

MLA{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

Decode for this encoding

```

if Ra == '1111' then SEE MUL;
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); a = UInt(Ra); setflags = FALSE;
if d IN {13,15} || n IN {13,15} || m IN {13,15} || a == 13 then UNPREDICTABLE;

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register holding the multiplicand, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register holding the multiplier, encoded in the "Rm" field.
- <Ra> Is the third general-purpose source register holding the addend, encoded in the "Ra" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    operand1 = SInt(R[n]); // operand1 = UInt(R[n]) produces the same final results
    operand2 = SInt(R[m]); // operand2 = UInt(R[m]) produces the same final results
    addend = SInt(R[a]); // addend = UInt(R[a]) produces the same final results
    result = operand1 * operand2 + addend;
    R[d] = result<31:0>;
    if setflags then
        APSR.N = result<31>;
        APSR.Z = IsZeroBit(result<31:0>);
        // APSR.C unchanged
        // APSR.V unchanged

```

Exceptions

None.

C2.4.88 MLS

Multiply and Subtract multiplies two register values, and subtracts the least significant 32 bits of the result from a third register value. These 32 bits do not depend on whether signed or unsigned calculations are performed. The result is written to the destination register.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	0	0	0	0	Rn	Ra	Rd	0	0	0	1	Rm				

T1 variant

MLS{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); a = UInt(Ra);
if d IN {13,15} || n IN {13,15} || m IN {13,15} || a IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register holding the multiplicand, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register holding the multiplier, encoded in the "Rm" field.
- <Ra> Is the third general-purpose source register holding the minuend, encoded in the "Ra" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
operand1 = SInt(R[n]); // operand1 = UInt(R[n]) produces the same final results
operand2 = SInt(R[m]); // operand2 = UInt(R[m]) produces the same final results
addend = SInt(R[a]); // addend = UInt(R[a]) produces the same final results
result = addend - operand1 * operand2;
R[d] = result<31:0>;
```

Exceptions

None.

C2.4.89 MOV (immediate)

Move (immediate) writes an immediate value to the destination register. It can optionally update the condition flags based on the value.

T1

ARMv8-M

15	14	13	12	11	10	8	7									0	
0	0	1	0	0		Rd		imm8									

T1 variant

MOV<c>{<q>} <Rd>, #<imm8> // Inside IT block
MOVS{<q>} <Rd>, #<imm8> // Outside IT block

Decode for this encoding

d = UInt(Rd); setflags = !InITBlock(); imm32 = ZeroExtend(imm8, 32); carry = APSR.C;

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7							0
1	1	1	1	0	i	0	0	0	1	0	S	1	1	1	1	0	imm3		Rd		imm8							

MOV variant

Applies when S == 0.

MOV<c>.W <Rd>, #<const> // Inside IT block, and <Rd>, <const> can be represented in T1
MOV{<c>}{<q>} <Rd>, #<const>

MOVS variant

Applies when S == 1.

MOVS.W <Rd>, #<const> // Outside IT block, and <Rd>, <const> can be represented in T1
MOVS{<c>}{<q>} <Rd>, #<const>

Decode for all variants of this encoding

```
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); setflags = (S == '1'); (imm32, carry) = T32ExpandImm_C(i:imm3:imm8, APSR.C);
if d IN {13,15} then UNPREDICTABLE;
```

T3

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3			0	15	14	12	11	8	7							0
1	1	1	1	0	i	1	0	0	1	0	0		imm4		0	imm3		Rd		imm8								

T3 variant

```
MOV{<c>}{<q>} <Rd>, #<imm16> // <imm16> cannot be represented in T1 or T2  
MOVW{<c>}{<q>} <Rd>, #<imm16> // <imm16> can be represented in T1 or T2
```

Decode for this encoding

```
d = UInt(Rd); setflags = FALSE; imm32 = ZeroExtend(imm4:i:imm3:imm8, 32);  
if d IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the general-purpose destination register, encoded in the "Rd" field.

<imm8> Is a 8-bit unsigned immediate, in the range 0 to 255, encoded in the "imm8" field.

<imm16> Is a 16-bit unsigned immediate, in the range 0 to 65535, encoded in the "imm4:i:imm3:imm8" field.

<const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation for all encodings

```
if ConditionPassed() then  
  EncodingSpecificOperations();  
  result = imm32;  
  R[d] = result;  
  if setflags then  
    APSR.N = result<31>;  
    APSR.Z = IsZeroBit(result);  
    APSR.C = carry;  
    // APSR.V unchanged
```

Exceptions

None.

C2.4.90 MOV (register)

Move (register) copies a value from a register to the destination register. It can optionally update the condition flags based on the value.

This instruction is used by the aliases [ASRS \(immediate\)](#), [ASR \(immediate\)](#), [LSLS \(immediate\)](#), [LSL \(immediate\)](#), [LSRS \(immediate\)](#), [LSR \(immediate\)](#), [RORS \(immediate\)](#), [ROR \(immediate\)](#), [RRXS](#), and [RRX](#). See *Alias conditions* on page C2-454 for details of when each alias is preferred.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	3	2	0
0	1	0	0	0	1	1	0	D	Rm	Rd		

T1 variant

MOV{<c>}{<q>} <Rd>, <Rm>

Decode for this encoding

```
d = UInt(D:Rd); m = UInt(Rm); setflags = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, 0);
if HaveMainExt() then
    if d == 15 && InITBlock() && !LastInITBlock() then UNPREDICTABLE;
```

T2

ARMv8-M

15	14	13	12	11	10	6	5	3	2	0
0	0	0	!	11	imm5	Rm	Rd			

op

T2 variant

MOV<c>{<q>} <Rd>, <Rm> {, <shift> #<amount>} // Inside IT block
MOV{<q>} <Rd>, <Rm> {, <shift> #<amount>} // Outside IT block

Decode for this encoding

```
if op == '11' then SEE "Related encodings";
d = UInt(Rd); m = UInt(Rm); setflags = !InITBlock();
(shift_t, shift_n) = DecodeImmShift(op, imm5);
if op == '00' && imm5 == '00000' && InITBlock() then UNPREDICTABLE;
```

T3

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	0	0	0	1	0	S	1	1	1	1	(0)	imm3	Rd	imm2	type	Rm				

MOV, rotate right with extend variant

Applies when S == 0 && imm3 == 000 && imm2 == 00 && type == 11.

MOV{<c>}{<q>} <Rd>, <Rm>, RRX

MOV, shift or rotate by value variant

Applies when S == 0 && !(imm3 == 000 && imm2 == 00 && type == 11).

MOV<c>.W <Rd>, <Rm> {, <shift> #<amount>} // Inside IT block, and <Rd>, <Rm>, <shift>, <amount> can be represented in T1 or T2

MOV{<c>}{<q>} <Rd>, <Rm> {, <shift> #<amount>}

MOVS, rotate right with extend variant

Applies when S == 1 && imm3 == 000 && imm2 == 00 && type == 11.

MOVS{<c>}{<q>} <Rd>, <Rm>, RRX

MOVS, shift or rotate by value variant

Applies when S == 1 && !(imm3 == 000 && imm2 == 00 && type == 11).

MOVS.W <Rd>, <Rm> {, <shift> #<amount>} // Outside IT block, and <Rd>, <Rm>, <shift>, <amount> can be represented in T1 or T2

MOVS{<c>}{<q>} <Rd>, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); m = UInt(Rm); setflags = (S == '1');
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if setflags && (d IN {13,15} || m IN {13,15}) then UNPREDICTABLE;
if !setflags && (d == 15 || m == 15 || (d == 13 && m == 13)) then UNPREDICTABLE;
```

Notes for all encodings

Related encodings: In encoding T2, for op == 11, see [Add, subtract \(three low registers\)](#) on page C2-256 and [Add, subtract \(two low registers and immediate\)](#) on page C2-256

Alias conditions

Alias	of variant	is preferred when
ASRS (immediate)	T3 (MOVS, shift or rotate by value)	S == '1' && type == '10'
ASRS (immediate)	T2	op == '10' && !InITBlock()
ASR (immediate)	T3 (MOV, shift or rotate by value)	S == '0' && type == '10'
ASR (immediate)	T2	op == '10' && InITBlock()
LSLS (immediate)	T3 (MOVS, shift or rotate by value)	S == '1' && imm3:Rd:imm2 != '000xxxx00' && type == '00'
LSLS (immediate)	T2	op == '00' && imm5 != '00000' && !InITBlock()
LSL (immediate)	T3 (MOV, shift or rotate by value)	S == '0' && imm3:Rd:imm2 != '000xxxx00' && type == '00'
LSL (immediate)	T2	op == '00' && imm5 != '00000' && InITBlock()
LSRS (immediate)	T3 (MOVS, shift or rotate by value)	S == '1' && type == '01'
LSRS (immediate)	T2	op == '01' && !InITBlock()

Alias	of variant	is preferred when
LSR (immediate)	T3 (MOV, shift or rotate by value)	S == '0' && type == '01'
LSR (immediate)	T2	op == '01' && InITBlock()
RORS (immediate)	-	S == '1' && imm3:Rd:imm2 != '000xxx00' && type == '11'
ROR (immediate)	-	S == '0' && imm3:Rd:imm2 != '000xxx00' && type == '11'
RRXS	-	S == '1' && imm3 == '000' && imm2 == '00' && type == '11'
RRX	-	S == '0' && imm3 == '000' && imm2 == '00' && type == '11'

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> For encoding T1: is the general-purpose destination register, encoded in the "D:Rd" field. If the PC is used:

- The instruction causes a simple branch to the address moved to the PC.
- The instruction must either be outside an IT block or the last instruction of an IT block.

For encoding T2 and T3: is the general-purpose destination register, encoded in the "Rd" field.

<Rm> For encoding T1: is the general-purpose source register, encoded in the "Rm" field. The PC can be used.

For encoding T2 and T3: is the general-purpose source register, encoded in the "Rm" field.

<shift> For encoding T2: is the type of shift to be applied to the source register, encoded in the "op" field. It can have the following values:

LSL when op = 00

LSR when op = 01

ASR when op = 10

For encoding T3: is the type of shift to be applied to the source register, encoded in the "type" field. It can have the following values:

LSL when type = 00

LSR when type = 01

ASR when type = 10

ROR when type = 11

<amount> For encoding T2: is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm5" field as <amount> modulo 32.

For encoding T3: is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation for all encodings

```

if ConditionPassed() then
    EncodingSpecificOperations();
    (result, carry) = Shift_C(R[m], shift_t, shift_n, APSR.C);
    if d == 15 then
        ALUWritePC(result); // setflags is always FALSE here
    else

```

```
RSPCheck[d] = result;  
if setflags then  
    APSR.N = result<31>;  
    APSR.Z = IsZeroBit(result);  
    APSR.C = carry;  
    // APSR.V unchanged
```

Exceptions

UsageFault.

C2.4.91 MOV, MOVS (register-shifted register)

Move (register-shifted register) copies a register-shifted register value to the destination register. It can optionally update the condition flags based on the value.

This instruction is used by the aliases [ASRS \(register\)](#), [ASR \(register\)](#), [LSLS \(register\)](#), [LSL \(register\)](#), [LSRS \(register\)](#), [LSR \(register\)](#), [RORS \(register\)](#), and [ROR \(register\)](#). See *Alias conditions* on page C2-458 for details of when each alias is preferred.

T1

ARMv8-M

15	14	13	12	11	10	9	6	5	3	2	0	
0	1	0	0	0	0	0	0	x	x	x	Rs	Rdm

op

Arithmetic shift right variant

Applies when op == 0100.

MOV<c>{<q>} <Rdm>, <Rdm>, ASR <Rs> // Inside IT block
MOVS{<q>} <Rdm>, <Rdm>, ASR <Rs> // Outside IT block

Logical shift left variant

Applies when op == 0010.

MOV<c>{<q>} <Rdm>, <Rdm>, LSL <Rs> // Inside IT block
MOVS{<q>} <Rdm>, <Rdm>, LSL <Rs> // Outside IT block

Logical shift right variant

Applies when op == 0011.

MOV<c>{<q>} <Rdm>, <Rdm>, LSR <Rs> // Inside IT block
MOVS{<q>} <Rdm>, <Rdm>, LSR <Rs> // Outside IT block

Rotate right variant

Applies when op == 0111.

MOV<c>{<q>} <Rdm>, <Rdm>, ROR <Rs> // Inside IT block
MOVS{<q>} <Rdm>, <Rdm>, ROR <Rs> // Outside IT block

Decode for all variants of this encoding

```
if !(op IN {'0010', '0011', '0100', '0111'}) then SEE "Related encodings";
d = UInt(Rdm); m = UInt(Rdm); s = UInt(Rs);
setflags = !InITBlock(); shift_t = DecodeRegShift(op<2>:op<0>);
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	0	type	S	Rm	1	1	1	1	Rd	0	0	0	0	Rs				

Flag setting variant

Applies when S == 1.

MOVS.W <Rd>, <Rm>, <type> <Rs> // Outside IT block, and <Rd>, <Rm>, <type>, <Rs> can be represented in T1
 MOV<c>{<q>} <Rd>, <Rm>, <type> <Rs>

Not flag setting variant

Applies when S == 0.

MOV<c>.W <Rd>, <Rm>, <type> <Rs> // Inside IT block, and <Rd>, <Rm>, <type>, <Rs> can be represented in T1
 MOV<c>{<q>} <Rd>, <Rm>, <type> <Rs>

Decode for all variants of this encoding

```
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); m = UInt(Rm); s = UInt(Rs);
setflags = (S == '1'); shift_t = DecodeRegShift(type);
if d IN {13,15} || m IN {13,15} || s IN {13,15} then UNPREDICTABLE;
```

Notes for all encodings

Related encodings: In encoding T1, for an op field value that is not listed, see [Data-processing \(two low registers\)](#) on page C2-257.

Alias conditions

Alias	of variant	is preferred when
ASRS (register)	T1 (arithmetic shift right)	op == '0100' && !InITBlock()
ASRS (register)	T2 (flag setting)	type == '10' && S == '1'
ASR (register)	T1 (arithmetic shift right)	op == '0100' && InITBlock()
ASR (register)	T2 (not flag setting)	type == '10' && S == '0'
LSSL (register)	T1 (logical shift left)	op == '0010' && !InITBlock()
LSSL (register)	T2 (flag setting)	type == '00' && S == '1'
LSL (register)	T1 (logical shift left)	op == '0010' && InITBlock()
LSL (register)	T2 (not flag setting)	type == '00' && S == '0'
LSRS (register)	T1 (logical shift right)	op == '0011' && !InITBlock()
LSRS (register)	T2 (flag setting)	type == '01' && S == '1'
LSR (register)	T1 (logical shift right)	op == '0011' && InITBlock()
LSR (register)	T2 (not flag setting)	type == '01' && S == '0'
RORS (register)	T1 (rotate right)	op == '0111' && !InITBlock()
RORS (register)	T2 (flag setting)	type == '11' && S == '1'
ROR (register)	T1 (rotate right)	op == '0111' && InITBlock()
ROR (register)	T2 (not flag setting)	type == '11' && S == '0'

Assembler symbols

- <c> See [Standard assembler syntax fields](#) on page C1-240.
- <q> See [Standard assembler syntax fields](#) on page C1-240.

- <Rdm> Is the general-purpose source register and the destination register, encoded in the "Rdm" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the general-purpose source register, encoded in the "Rm" field.
- <type> Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values:
- | | |
|-----|----------------|
| LSL | when type = 00 |
| LSR | when type = 01 |
| ASR | when type = 10 |
| ROR | when type = 11 |
- <Rs> Is the general-purpose source register holding a shift amount in its bottom 8 bits, encoded in the "Rs" field.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    shift_n = UInt(R[s]<7:0>);
    (result, carry) = Shift_C(R[m], shift_t, shift_n, APSR.C);
    R[d] = result;
    if setflags then
        APSR.N = result<31>;
        APSR.Z = IsZeroBit(result);
        APSR.C = carry;
        // APSR.V unchanged
```

Exceptions


None.

C2.4.92 MOV_T

Move Top writes an immediate value to the top halfword of the destination register. It does not affect the contents of the bottom halfword.

T1

ARMv8-M



T1 variant

MOV_T{<c>}{<q>} <Rd>, #<imm16>

Decode for this encoding

```
d = UInt(Rd); imm16 = imm4:i:imm3:imm8;
if d IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c> See *Standard assembler syntax fields* on page C1-240.

<q> See *Standard assembler syntax fields* on page C1-240.

<Rd> Is the general-purpose destination register, encoded in the "Rd" field.

<imm16> Is a 16-bit unsigned immediate, in the range 0 to 65535, encoded in the "imm4:i:imm3:imm8" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  R[d]<31:16> = imm16;
  // R[d]<15:0> unchanged
```

Exceptions

None.

C2.4.93 MRC, MRC2

Move to Register from Coprocessor causes a coprocessor to transfer a value to a general-purpose register or to the condition flags.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	5	4	3	0	15	12	11	8	7	5	4	3	0
1	1	1	0	1	1	1	0	opc1	1	CRn	Rt	!=101x	opc2	1	CRm	coproc					

T1 variant

MRC{<c>}{<q>} <coproc>, {#}<opc1>, <Rt>, <CRn>, <CRm>{, {#}<opc2>}

Decode for this encoding

```
if coproc IN '101x' then SEE "Floating-point";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); cp = UInt(coproc);
if t == 13 then UNPREDICTABLE;
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	5	4	3	0	15	12	11	8	7	5	4	3	0
1	1	1	1	1	1	1	0	opc1	1	CRn	Rt	!=101x	opc2	1	CRm	coproc					

T2 variant

MRC2{<c>}{<q>} <coproc>, {#}<opc1>, <Rt>, <CRn>, <CRm>{, {#}<opc2>}

Decode for this encoding

```
if coproc IN '101x' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); cp = UInt(coproc);
if t == 13 then UNPREDICTABLE;
```

Notes for all encodings

Floating-point: [Floating-point 32-bit move on page C2-298](#).

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <coproc> Is the name of the coprocessor, encoded in the "coproc" field. The valid coprocessor names are p10, p11, p14, and p15.
- <opc1> Is a coprocessor-specific opcode in the range 0 to 7, encoded in the "opc1" field.

- <Rt> Is the general-purpose register to be transferred or APSR_nzcv (encoded as 0b1111), encoded in the "Rt" field. If APSR_nzcv is used, bits [31:28] of the transferred value are written to the APSR condition flags.
- <CRn> Is the first coprocessor register, encoded in the "CRn" field.
- <CRm> Is the second coprocessor register, encoded in the "CRm" field.
- <opc2> Is a coprocessor-specific opcode in the range 0 to 7, defaulting to 0 and encoded in the "opc2" field.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteCPCheck(cp);
    if !Cproc_Accepted(cp, ThisInstr()) then
        GenerateCoproprocessorException();
    else
        value = Coproc_GetOneWord(cp, ThisInstr());
        if t != 15 then
            R[t] = value;
        else
            APSR.N = value<31>;
            APSR.Z = value<30>;
            APSR.C = value<29>;
            APSR.V = value<28>;
            // value<27:0> are not used.
```

Exceptions

UsageFault.

C2.4.94 MRRc, MRRc2

Move to two Registers from Coprocessor causes a coprocessor to transfer values to two general-purpose registers.

If no coprocessor can execute the instruction, a UsageFault exception is generated.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	4	3	0
1	1	1	0	1	1	0	0	0	1	0	1	Rt2	Rt	!=101x	opc1	CRm					

coproc

T1 variant

MRRc{<c>}{<q>} <coproc>, {#}<opc1>, <Rt>, <Rt2>, <CRm>

Decode for this encoding

```
if coproc IN '101x' then SEE "Floating-point";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); t2 = UInt(Rt2); cp = UInt(coproc);
if t == 15 || t2 == 15 || t == t2 then UNPREDICTABLE;
if t == 13 || t2 == 13 then UNPREDICTABLE;
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	4	3	0
1	1	1	1	1	1	0	0	0	1	0	1	Rt2	Rt	!=101x	opc1	CRm					

coproc

T2 variant

MRRc2{<c>}{<q>} <coproc>, {#}<opc1>, <Rt>, <Rt2>, <CRm>

Decode for this encoding

```
if coproc IN '101x' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); t2 = UInt(Rt2); cp = UInt(coproc);
if t == 15 || t2 == 15 || t == t2 then UNPREDICTABLE;
if t == 13 || t2 == 13 then UNPREDICTABLE;
```

Notes for all encodings

Floating-point: [Floating-point 64-bit move on page C2-293](#).

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <coproc> Is the name of the coprocessor, encoded in the "coproc" field. The valid coprocessor names are p10, p11, p14, and p15.
- <opc1> Is a coprocessor-specific opcode in the range 0 to 15, encoded in the "opc1" field.

- <Rt> Is the first general-purpose register to be transferred, encoded in the "Rt" field.
- <Rt2> Is the second general-purpose register to be transferred, encoded in the "Rt2" field.
- <CRm> Is a coprocessor register, encoded in the "CRm" field.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteCPCheck(cp);
    if !Coprocc_Accepted(cp, ThisInstr()) then
        GenerateCoproccorException();
    else
        (R[t2], R[t]) = Coproc_GetTwoWords(cp, ThisInstr());
```

Exceptions

UsageFault.

C2.4.95 MRS

Move to Register from Special register moves the value from the selected special-purpose register into a general-purpose register.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	8	7	0
1	1	1	1	0	0	1	1	1	1	1	(0)	(1)	(1)	(1)	(1)	1	0	(0)	0	Rd	SYSm	0	

T1 variant

MRS{<c>}{<q>} <Rd>, <spec_reg>

Decode for this encoding

```
d = UInt(Rd);
if d IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the general-purpose destination register, encoded in the "Rd" field.

<spec_reg> Is the special register to be accessed, encoded in the "SYSm" field. It can have the following values:

APSR	when SYSm = 00000000
IAPSR	when SYSm = 00000001
EAPSR	when SYSm = 00000010
XPSR	when SYSm = 00000011
IPSR	when SYSm = 00000101
EPSR	when SYSm = 00000110
IEPSR	when SYSm = 00000111
MSP	when SYSm = 00001000
PSP	when SYSm = 00001001
MSPLIM	when SYSm = 00001010
PSPLIM	when SYSm = 00001011
PRIMASK	when SYSm = 00010000
BASEPRI	when SYSm = 00010001
BASEPRI_MAX	when SYSm = 00010010
FAULTMASK	when SYSm = 00010011
CONTROL	when SYSm = 00010100
MSP_NS	when SYSm = 10001000
PSP_NS	when SYSm = 10001001
MSPLIM_NS	when SYSm = 10001010
PSPLIM_NS	when SYSm = 10001011
PRIMASK_NS	when SYSm = 10010000

BASEPRI_NS when SYSm = 10010001
 FAULTMASK_NS when SYSm = 10010011
 CONTROL_NS when SYSm = 10010100
 SP_NS when SYSm = 10011000

The following encodings are UNPREDICTABLE:

- SYSm = 00000100.
- SYSm = 000011xx.
- SYSm = 00010101.
- SYSm = 0001011x.
- SYSm = 00011xxx.
- SYSm = 001xxxxx.
- SYSm = 01xxxxxx.
- SYSm = 10000xxx.
- SYSm = 100011xx.
- SYSm = 10010010.
- SYSm = 10010101.
- SYSm = 1001011x.
- SYSm = 10011001.
- SYSm = 1001101x.
- SYSm = 100111xx.
- SYSm = 101xxxxx.
- SYSm = 11xxxxxx.

An access to a register not ending in _NS returns the register associated with the current Security state. Access to a register ending in _NS in Secure state returns the Non-secure register. Access to a register ending in _NS in Non-secure state is RAZ/WI. Access to BASEPRI_MAX returns the contents of BASEPRI.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  R[d] = Zeros(32);

  // NOTE: the MSB of SYSm is used to select between either the current
  // domains view of the registers and other domains view of the register.
  // This is required to that the Secure state can access the Non-secure
  // versions of banked registers. For security reasons the Secure versions of
  // the registers are not accessible from the Non-secure state.
  case SYSm<7:3> of
    when '00000'
      /* xPSR accesses */
      if UInt(SYSm) == 4 then UNPREDICTABLE;
      if CurrentModeIsPrivileged() && SYSm<0> == '1' then
        R[d]<8:0> = IPSR.Exception;
      if SYSm<1> == '1' then
        R[d]<26:24> = '000'; /* EPSR reads as zero */
        R[d]<15:10> = '000000';
      if SYSm<2> == '0' then
        R[d]<31:27> = APSR<31:27>;
        if HaveDSPExt() then
          R[d]<19:16> = APSR<19:16>;
    when '00001'
      /* SP access */
      if CurrentModeIsPrivileged() then
        case SYSm<2:0> of
          when '000'
  
```

```

        R[d] = SP_Main;
    when '001'
        R[d] = SP_Process;
    when '010'
        if IsSecure() then
            R[d] = MSPLIM_S.LIMIT:'000';
        else
            if HaveMainExt() then
                R[d] = MSPLIM_NS.LIMIT:'000';
            else
                UNPREDICTABLE;
    when '011'
        if IsSecure() then
            R[d] = PSPLIM_S.LIMIT:'000';
        else
            if HaveMainExt() then
                R[d] = PSPLIM_NS.LIMIT:'000';
            else
                UNPREDICTABLE;
    otherwise
        UNPREDICTABLE;
when '10001'
    /* SP access - alt domain */
    if !HaveSecurityExt() then UNPREDICTABLE;
    if CurrentModeIsPrivileged() && CurrentState == SecurityState_Secure then
        case SYSm<2:0> of
            when '000'
                R[d] = SP_Main_NonSecure;
            when '001'
                R[d] = SP_Process_NonSecure;
            when '010'
                if HaveMainExt() then
                    R[d] = MSPLIM_NS.LIMIT:'000';
                else
                    UNPREDICTABLE;
            when '011'
                if HaveMainExt() then
                    R[d] = PSPLIM_NS.LIMIT:'000';
                else
                    UNPREDICTABLE;
            otherwise
                UNPREDICTABLE;
when '00010'
    /* Priority mask or CONTROL access */
    case SYSm<2:0> of
        when '000'
            if CurrentModeIsPrivileged() then
                R[d]<0> = PRIMASK.PM;
        when '001'
            if HaveMainExt() then
                if CurrentModeIsPrivileged() then
                    R[d]<7:0> = BASEPRI<7:0>;
                else
                    UNPREDICTABLE;
        when '010'
            if HaveMainExt() then
                if CurrentModeIsPrivileged() then
                    R[d]<7:0> = BASEPRI<7:0>;
                else
                    UNPREDICTABLE;
        when '011'
            if HaveMainExt() then
                if CurrentModeIsPrivileged() then
                    R[d]<0> = FAULTMASK.FM;
                else
                    UNPREDICTABLE;
        when '100'
            if HaveFPEExt() && IsSecure() then
                R[d]<3:0> = CONTROL<3:0>;
            elsif HaveFPEExt() then

```

```
        R[d]<2:0> = CONTROL<2:0>;
    else
        R[d]<1:0> = CONTROL<1:0>;
    otherwise
        UNPREDICTABLE;
when '10010' /* Priority mask or CONTROL access - alt domain */
    if !HaveSecurityExt() then UNPREDICTABLE;
    if CurrentState == SecurityState_Secure then
        case SYSm<2:0> of
            when '000'
                if CurrentModeIsPrivileged() then
                    R[d]<0> = PRIMASK_NS.PM;
            when '001'
                if HaveMainExt() then
                    if CurrentModeIsPrivileged() then
                        R[d]<7:0> = BASEPRI_NS<7:0>;
                    else
                        UNPREDICTABLE;
            when '011'
                if HaveMainExt() then
                    if CurrentModeIsPrivileged() then
                        R[d]<0> = FAULTMASK_NS.FM;
                    else
                        UNPREDICTABLE;
            when '100'
                if HaveFPEExt() then
                    R[d]<2:0> = CONTROL_NS<2:0>;
                else
                    R[d]<1:0> = CONTROL_NS<1:0>;
            otherwise
                UNPREDICTABLE;
when '10011' /* SP_NS - Non-secure stack pointer */
    if !HaveSecurityExt() then UNPREDICTABLE;
    if CurrentState == SecurityState_Secure then
        case SYSm<2:0> of
            when '000'
                R[d] = _SP(LookUpSP_with_security_mode(FALSE, CurrentMode()));
            otherwise
                UNPREDICTABLE;
otherwise
    UNPREDICTABLE;
```

Exceptions

None.

C2.4.96 MSR (register)

Move to Special register from Register moves the value of a general-purpose register to the specified special-purpose register.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	10	9	8	7	0
1	1	1	1	0	0	1	1	1	0	0	(0)	Rn	1	0	(0)	0	mask	(0)	(0)				SYSm

T1 variant

MSR{<c>}{<q>} <spec_reg>, <Rn>

Decode for this encoding

```
n = UInt(Rn);
if HaveMainExt() then
    if mask == '00' || (mask != '10' && !(UInt(SYSm) IN {0..3})) then UNPREDICTABLE;
if n IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<spec_reg> Is the special register to be accessed, encoded in the "SYSm" field. It can have the following values:

APSR	when SYSm = 00000000
IAPSR	when SYSm = 00000001
EAPSR	when SYSm = 00000010
XPSR	when SYSm = 00000011
IPSR	when SYSm = 00000101
EPSR	when SYSm = 00000110
IEPSR	when SYSm = 00000111
MSP	when SYSm = 00001000
PSP	when SYSm = 00001001
MSPLIM	when SYSm = 00001010
PSPLIM	when SYSm = 00001011
PRIMASK	when SYSm = 00010000
BASEPRI	when SYSm = 00010001
BASEPRI_MAX	when SYSm = 00010010
FAULTMASK	when SYSm = 00010011
CONTROL	when SYSm = 00010100
MSP_NS	when SYSm = 10001000
PSP_NS	when SYSm = 10001001
MSPLIM_NS	when SYSm = 10001010
PSPLIM_NS	when SYSm = 10001011
PRIMASK_NS	when SYSm = 10010000

```

BASEPRI_NS      when SYSm = 10010001
FAULTMASK_NS   when SYSm = 10010011
CONTROL_NS     when SYSm = 10010100
SP_NS          when SYSm = 10011000
  
```

The following encodings are UNPREDICTABLE:

- SYSm = 00000100.
- SYSm = 000011xx.
- SYSm = 00010101.
- SYSm = 0001011x.
- SYSm = 00011xxx.
- SYSm = 001xxxxx.
- SYSm = 01xxxxxx.
- SYSm = 10000xxx.
- SYSm = 100011xx.
- SYSm = 10010010.
- SYSm = 10010101.
- SYSm = 1001011x.
- SYSm = 10011001.
- SYSm = 1001101x.
- SYSm = 100111xx.
- SYSm = 101xxxxx.
- SYSm = 11xxxxxx.

An access to a register not ending in `_NS` returns the register associated with the current Security state. Access to a register ending in `_NS` in Secure state returns the Non-secure register. Access to a register ending in `_NS` in Non-secure state is RAZ/WI. Access to `BASEPRI_MAX` writes to `BASEPRI` if the priority that is written is higher than the existing priority in `BASEPRI`. Otherwise, the access is ignored.

<Rn> Is the general-purpose source register, encoded in the "Rn" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();

    // NOTE: the MSB of SYSm is used to select between either the current
    // domains view of the registers and other domains view of the register.
    // This is required to that the Secure state can access the Non-secure
    // versions of banked registers. For security reasons the Secure versions of
    // the registers are not accessible from the Non-secure state.
    case SYSm<7:3> of
        when '00000'
            if UInt(SYSm) == 4 then UNPREDICTABLE;
            if SYSm<2> == '0' then
                if mask<0> == '1' then
                    if !HaveDSPExt() then
                        UNPREDICTABLE;
                    else
                        APSR<19:16> = R[n]<19:16>;
                        if mask<1> == '1' then
                            APSR<31:27> = R[n]<31:27>;
            when '00001'
                if CurrentModeIsPrivileged() then
                    case SYSm<2:0> of
  
```

```

when '000'
    // MSR not subject to SP limit, write directly to register.
    if IsSecure() then
        _R[RNameSP_Main_Secure] = R[n]<31:2>:'00';
    else
        _R[RNameSP_Main_NonSecure] = R[n]<31:2>:'00';
when '001'
    // MSR not subject to SP limit, write directly to register.
    if IsSecure() then
        _R[RNameSP_Process_Secure] = R[n]<31:2>:'00';
    else
        _R[RNameSP_Process_NonSecure] = R[n]<31:2>:'00';
when '010'
    if IsSecure() then
        MSPLIM_S.LIMIT = R[n]<31:3>;
    else
        if HaveMainExt() then
            MSPLIM_NS.LIMIT = R[n]<31:3>;
        else
            UNPREDICTABLE;
when '011'
    if IsSecure() then
        PSPLIM_S.LIMIT = R[n]<31:3>;
    else
        if HaveMainExt() then
            PSPLIM_NS.LIMIT = R[n]<31:3>;
        else
            UNPREDICTABLE;
otherwise
    UNPREDICTABLE;
when '10001'
    /* SP access - alt domain */
    if !HaveSecurityExt() then UNPREDICTABLE;
    if CurrentModeIsPrivileged() && CurrentState == SecurityState_Secure then
        case SYSm<2:0> of
            when '000'
                // MSR not subject to SP limit, write directly to register.
                _R[RNameSP_Main_NonSecure] = R[n]<31:2>:'00';
            when '001'
                // MSR not subject to SP limit, write directly to register.
                _R[RNameSP_Process_NonSecure] = R[n]<31:2>:'00';
            when '010'
                if HaveMainExt() then
                    MSPLIM_NS.LIMIT = R[n]<31:3>;
                else
                    UNPREDICTABLE;
            when '011'
                if HaveMainExt() then
                    PSPLIM_NS.LIMIT = R[n]<31:3>;
                else
                    UNPREDICTABLE;
            otherwise
                UNPREDICTABLE;
when '00010'
    /* Priority mask or CONTROL access */
    case SYSm<2:0> of
        when '000'
            if CurrentModeIsPrivileged() then
                PRIMASK.PM = R[n]<0>;
        when '001'
            if CurrentModeIsPrivileged() then
                if HaveMainExt() then
                    BASEPRI<7:0> = R[n]<7:0>;
                else
                    UNPREDICTABLE;
        when '010'
            if CurrentModeIsPrivileged() then
                if HaveMainExt() then
                    if (R[n]<7:0> != '0000000') &&
                        (UInt(R[n]<7:0>) < UInt(BASEPRI<7:0>)) || BASEPRI<7:0> == '0000000' then

```

```

        BASEPRI<7:0> = R[n]<7:0>;
    else
        UNPREDICTABLE;
when '011'
    if CurrentModeIsPrivileged() then
        if HaveMainExt() then
            if ExecutionPriority() > -1 || R[n]<0> == '0' then
                FAULTMASK.FM = R[n]<0>;
            else
                UNPREDICTABLE;
when '100'
    if CurrentModeIsPrivileged() then
        CONTROL.nPRIV = R[n]<0>;
        CONTROL.SPSEL = R[n]<1>;
        if HaveFPEExt() && (IsSecure() || NSACR.CP10 == '1') then
            CONTROL.FPCA = R[n]<2>;
        if HaveFPEExt() && IsSecure() then
            CONTROL_S.SFPA = R[n]<3>;
    otherwise
        UNPREDICTABLE;
when '10010'
    /* Priority mask or CONTROL access - alt domain */
    if !HaveSecurityExt() then UNPREDICTABLE;
    if CurrentModeIsPrivileged() && CurrentState == SecurityState_Secure then
        case SYSm<2:0> of
            when '000'
                PRIMASK_NS.PM = R[n]<0>;
            when '001'
                if HaveMainExt() then
                    BASEPRI_NS<7:0> = R[n]<7:0>;
                else
                    UNPREDICTABLE;
            when '011'
                if HaveMainExt() then
                    if ExecutionPriority() > -1 || R[n]<0> == '0' then
                        FAULTMASK_NS.FM = R[n]<0>;
                    else
                        UNPREDICTABLE;
            when '100'
                CONTROL_NS.nPRIV = R[n]<0>;
                CONTROL_NS.SPSEL = R[n]<1>;
                if HaveFPEExt() then CONTROL_NS.FPCA = R[n]<2>;
            otherwise
                UNPREDICTABLE;
when '10011'
    /* SP_NS - Non-secure stack pointer */
    if !HaveSecurityExt() then UNPREDICTABLE;
    if CurrentState == SecurityState_Secure then
        case SYSm<2:0> of
            when '000'
                spName = LookUpSP_with_security_mode(FALSE, CurrentMode());
                // MSR SP_NS is subject to SP limit check.
                - = _SP(spName, FALSE, R[n]);
            otherwise
                UNPREDICTABLE;
    otherwise
        UNPREDICTABLE;

```

Exceptions

UsageFault.

C2.4.97 MUL

Multiply multiplies two register values. The least significant 32 bits of the result are written to the destination register. These 32 bits do not depend on whether signed or unsigned calculations are performed.

It can optionally update the condition flags based on the result. In the T32 instruction set, this option is limited to only a few forms of the instruction. Use of this option adversely affects performance on many implementations.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	3	2	0
0	1	0	0	0	0	1	1	0	1	Rn	Rdm		

T1 variant

MUL<c>{<q>} <Rdm>, <Rn>{, <Rdm>} // Inside IT block
MULS{<q>} <Rdm>, <Rn>{, <Rdm>} // Outside IT block

Decode for this encoding

d = UInt(Rdm); n = UInt(Rn); m = UInt(Rdm); setFlags = !InITBlock();

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	0	0	0	0	Rn		1	1	1	1	Rd	0	0	0	0	Rm		

T2 variant

MUL<c>.W <Rd>, <Rn>{, <Rm>} // Inside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1
MUL{<c>}{<q>} <Rd>, <Rn>{, <Rm>}

Decode for this encoding

if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); setFlags = FALSE;
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;

Assembler symbols

- <c> See *Standard assembler syntax fields* on page C1-240.
- <q> See *Standard assembler syntax fields* on page C1-240.
- <Rdm> Is the second general-purpose source register holding the multiplier and the destination register, encoded in the "Rdm" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register holding the multiplicand, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register holding the multiplier, encoded in the "Rm" field. If omitted, <Rd> is used.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
operand1 = SInt(R[n]); // operand1 = UInt(R[n]) produces the same final results
operand2 = SInt(R[m]); // operand2 = UInt(R[m]) produces the same final results
result = operand1 * operand2;
R[d] = result<31:0>;
if setflags then
    APSR.N = result<31>;
    APSR.Z = IsZeroBit(result<31:0>);
    // APSR.C unchanged
    // APSR.V unchanged
```

Exceptions

None.

C2.4.98 MVN (immediate)

Bitwise NOT (immediate) writes the bitwise inverse of an immediate value to the destination register. It can optionally update the condition flags based on the value.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7	0
1	1	1	1	0	i	0	0	0	1	1	S	1	1	1	1	0	imm3	Rd	imm8			

MVN variant

Applies when S == 0.

MVN{<c>}{<q>} <Rd>, #<const>

MVNS variant

Applies when S == 1.

MVNS{<c>}{<q>} <Rd>, #<const>

Decode for all variants of this encoding

```

if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); setflags = (S == '1');
(imm32, carry) = T32ExpandImm_C(i:imm3:imm8, APSR.C);
if d IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the general-purpose destination register, encoded in the "Rd" field.

<const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    result = NOT(imm32);
    R[d] = result;
    if setflags then
        APSR.N = result<31>;
        APSR.Z = IsZeroBit(result);
        APSR.C = carry;
        // APSR.V unchanged

```

Exceptions

None.

C2.4.99 MVN (register)

Bitwise NOT (register) writes the bitwise inverse of a register value to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	3	2	0
0	1	0	0	0	0	1	1	1	1	Rm	Rd		

T1 variant

MVN<c>{<q>} <Rd>, <Rm> // Inside IT block
 MVNS{<q>} <Rd>, <Rm> // Outside IT block

Decode for this encoding

d = UInt(Rd); m = UInt(Rm); setflags = !InITBlock();
 (shift_t, shift_n) = (SRTYPE_LSL, 0);

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	0	0	1	1	S	1	1	1	1	(0)	imm3	Rd	imm2	type	Rm					

MVN, rotate right with extend variant

Applies when S == 0 && imm3 == 000 && imm2 == 00 && type == 11.

MVN{<c>}{<q>} <Rd>, <Rm>, RRX

MVN, shift or rotate by value variant

Applies when S == 0 && !(imm3 == 000 && imm2 == 00 && type == 11).

MVN<c>.W <Rd>, <Rm> // Inside IT block, and <Rd>, <Rm> can be represented in T1
 MVN{<c>}{<q>} <Rd>, <Rm> {, <shift> #<amount>}

MVNS, rotate right with extend variant

Applies when S == 1 && imm3 == 000 && imm2 == 00 && type == 11.

MVNS{<c>}{<q>} <Rd>, <Rm>, RRX

MVNS, shift or rotate by value variant

Applies when S == 1 && !(imm3 == 000 && imm2 == 00 && type == 11).

MVNS.W <Rd>, <Rm> // Outside IT block, and <Rd>, <Rm> can be represented in T1
 MVNS{<c>}{<q>} <Rd>, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```

if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); m = UInt(Rm); setflags = (S == '1');
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if d IN {13,15} || m IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the general-purpose source register, encoded in the "Rm" field.
- <shift> Is the type of shift to be applied to the source register, encoded in the "type" field. It can have the following values:
 - LSL when type = 00
 - LSR when type = 01
 - ASR when type = 10
 - ROR when type = 11
- <amount> Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation for all encodings

```

if ConditionPassed() then
  EncodingSpecificOperations();
  (shifted, carry) = Shift_C(R[m], shift_t, shift_n, APSR.C);
  result = NOT(shifted);
  R[d] = result;
  if setflags then
    APSR.N = result<31>;
    APSR.Z = IsZeroBit(result);
    APSR.C = carry;
    // APSR.V unchanged
  
```

Exceptions

None.

C2.4.100 NOP

No Operation does nothing.

The architecture makes no guarantees about any timing effects of including a NOP instruction.

This is a NOP-compatible hint. For more information about NOP-compatible hints, see [NOP-compatible hint instructions](#) on page C1-251.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0

T1 variant

NOP{<c>}{<q>}

Decode for this encoding

// No additional decoding required

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
1	1	1	1	0	0	1	1	1	0	1	0	(1)	(1)	(1)	(1)	1	0	(0)	0	(0)	0	0	0	0	0	0	0	0	0	0	0	0

T2 variant

NOP{<c>}.W

Decode for this encoding

if !HaveMainExt() then UNDEFINED;
// No additional decoding required

Assembler symbols

<c> See [Standard assembler syntax fields](#) on page C1-240.

<q> See [Standard assembler syntax fields](#) on page C1-240.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
// Do nothing
```

Exceptions


None.

C2.4.101 ORN (immediate)

Logical OR NOT (immediate) performs a bitwise (inclusive) OR of a register value and the complement of an immediate value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M Main Extension only



Flag setting variant

Applies when S == 1.

ORNS{<c>}{<q>} {<Rd>}, <Rn>, #<const>

Not flag setting variant

Applies when S == 0.

ORN{<c>}{<q>} {<Rd>}, <Rn>, #<const>

Decode for all variants of this encoding

```

if Rn == '1111' then SEE "MVN (immediate)";
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); setflags = (S == '1');
(imm32, carry) = T32ExpandImm_C(i:imm3:imm8, APSR.C);
if d IN {13,15} || n == 13 then UNPREDICTABLE;

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.
- <const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    result = R[n] OR NOT(imm32);
    R[d] = result;
    if setflags then
        APSR.N = result<31>;
        APSR.Z = IsZeroBit(result);
        APSR.C = carry;
        // APSR.V unchanged

```

Exceptions


None.

C2.4.102 ORN (register)

Logical OR NOT (register) performs a bitwise (inclusive) OR of a register value and the complement of an optionally-shifted register value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M Main Extension only



ORN, rotate right with extend variant

Applies when $S == 0 \ \&\& \ imm3 == 000 \ \&\& \ imm2 == 00 \ \&\& \ type == 11$.

ORN{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

ORN, shift or rotate by value variant

Applies when $S == 0 \ \&\& \ !(imm3 == 000 \ \&\& \ imm2 == 00 \ \&\& \ type == 11)$.

ORN{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

ORNS, rotate right with extend variant

Applies when $S == 1 \ \&\& \ imm3 == 000 \ \&\& \ imm2 == 00 \ \&\& \ type == 11$.

ORNS{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

ORNS, shift or rotate by value variant

Applies when $S == 1 \ \&\& \ !(imm3 == 000 \ \&\& \ imm2 == 00 \ \&\& \ type == 11)$.

ORNS{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```

if Rn == '1111' then SEE "MVN (register)";
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); setflags = (S == '1');
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if d IN {13,15} || n == 13 || m IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.
- <shift> Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values:
 - LSL when type = 00
 - LSR when type = 01

ASR when type = 10

ROR when type = 11

<amount> Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    (shifted, carry) = Shift_C(R[m], shift_t, shift_n, APSR.C);
    result = R[n] OR NOT(shifted);
    R[d] = result;
    if setflags then
        APSR.N = result<31>;
        APSR.Z = IsZeroBit(result);
        APSR.C = carry;
        // APSR.V unchanged
```

Exceptions


None.

C2.4.103 ORR (immediate)

Logical OR (immediate) performs a bitwise (inclusive) OR of a register value and an immediate value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M Main Extension only



ORR variant

Applies when S == 0.

ORR{<c>}{<q>} {<Rd>}, {<Rn>, #<const>

ORRS variant

Applies when S == 1.

ORRS{<c>}{<q>} {<Rd>}, {<Rn>, #<const>

Decode for all variants of this encoding

```

if Rn == '1111' then SEE "MOV (immediate)";
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); setflags = (S == '1');
(imm32, carry) = T32ExpandImm_C(i:imm3:imm8, APSR.C);
if d IN {13,15} || n == 13 then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.
- <const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  result = R[n] OR imm32;
  R[d] = result;
  if setflags then
    APSR.N = result<31>;
    APSR.Z = IsZeroBit(result);
    APSR.C = carry;
    // APSR.V unchanged
  
```

Exceptions

None.

C2.4.104 ORR (register)

Logical OR (register) performs a bitwise (inclusive) OR of a register value and an optionally-shifted register value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	1	0	0	0	0	1	1	0	0	Rm	Rdn				

T1 variant

ORR<c>{<q>} {<Rdn>}, <Rdn>, <Rm> // Inside IT block
ORRS{<q>} {<Rdn>}, <Rdn>, <Rm> // Outside IT block

Decode for this encoding

d = UInt(Rdn); n = UInt(Rdn); m = UInt(Rm); setflags = !InITBlock();
(shift_t, shift_n) = (SRTYPE_LSL, 0);

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7	6	5	4	3	2	1	0
1	1	1	0	1	0	1	0	0	0	1	0	S	!=1111	(0)	imm3	Rd	imm2	type	Rm									

Rn

ORR, rotate right with extend variant

Applies when S == 0 && imm3 == 000 && imm2 == 00 && type == 11.

ORR{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

ORR, shift or rotate by value variant

Applies when S == 0 && !(imm3 == 000 && imm2 == 00 && type == 11).

ORR<c>.W {<Rd>}, <Rn>, <Rm> // Inside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1
ORR{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

ORRS, rotate right with extend variant

Applies when S == 1 && imm3 == 000 && imm2 == 00 && type == 11.

ORRS{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

ORRS, shift or rotate by value variant

Applies when S == 1 && !(imm3 == 000 && imm2 == 00 && type == 11).

ORRS.W {<Rd>}, <Rn>, <Rm> // Outside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1
ORRS{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```
if Rn == '1111' then SEE "MOV (register)";  
if !HaveMainExt() then UNDEFINED;  
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); setflags = (S == '1');  
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);  
if d IN {13,15} || n == 13 || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .								
<q>	See Standard assembler syntax fields on page C1-240 .								
<Rdn>	Is the first general-purpose source register and the destination register, encoded in the "Rdn" field.								
<Rd>	Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.								
<Rn>	Is the first general-purpose source register, encoded in the "Rn" field.								
<Rm>	Is the second general-purpose source register, encoded in the "Rm" field.								
<shift>	Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values: <table><tr><td>LSL</td><td>when type = 00</td></tr><tr><td>LSR</td><td>when type = 01</td></tr><tr><td>ASR</td><td>when type = 10</td></tr><tr><td>ROR</td><td>when type = 11</td></tr></table>	LSL	when type = 00	LSR	when type = 01	ASR	when type = 10	ROR	when type = 11
LSL	when type = 00								
LSR	when type = 01								
ASR	when type = 10								
ROR	when type = 11								
<amount>	Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.								

Operation for all encodings

```
if ConditionPassed() then  
  EncodingSpecificOperations();  
  (shifted, carry) = Shift_C(R[m], shift_t, shift_n, APSR.C);  
  result = R[n] OR shifted;  
  R[d] = result;  
  if setflags then  
    APSR.N = result<31>;  
    APSR.Z = IsZeroBit(result);  
    APSR.C = carry;  
    // APSR.V unchanged
```

Exceptions


None.

C2.4.105 PKHBT, PKHTB

Pack Halfword combines one halfword of its first operand with the other halfword of its shifted second operand.

T1

ARMv8-M DSP Extension only



PKHBT variant

Applies when `tb == 0`.

```
PKHBT{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, LSL #<imm>} // tbform == FALSE
```

PKHTB variant

Applies when `tb == 1`.

```
PKHTB{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, ASR #<imm>} // tbform == TRUE
```

Decode for all variants of this encoding

```
if S == '1' || T == '1' then UNDEFINED;
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); tbform = (tb == '1');
(shift_t, shift_n) = DecodeImmShift(tb:'0', imm3:imm2);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.
- <imm> The shift to apply to the value read from <Rm>, encoded in `imm3:imm2`. For PKHBT, it is one of:
 - omitted No shift, encoded as `0b00000`.
 - 1-31 Left shift by specified number of bits, encoded as a binary number.
For PKHTB, it is one of:
 - omitted Instruction is a pseudo-instruction and is assembled as though PKHBT{<c>}{<q>} <Rd>, <Rm>, <Rn> had been written.
 - 1-32 Arithmetic right shift by specified number of bits. A shift by 32 bits is encoded as `0b00000`. Other shift amounts are encoded as binary numbers.

Note

An assembler can permit `<imm> = 0` to mean the same thing as omitting the shift, but this is not standard UAL and must not be used for disassembly.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
operand2 = Shift(R[m], shift_t, shift_n, APSR.C); // APSR.C ignored
bits(32) result;
result<15:0> = if tbform then operand2<15:0> else R[n]<15:0>;
result<31:16> = if tbform then R[n]<31:16> else operand2<31:16>;
R[d] = result;
```

Exceptions


None.

C2.4.106 PLD (immediate)

Preload Data signals the memory system that data memory accesses from a specified address are likely in the near future. The memory system can respond by taking actions that are expected to speed up the memory accesses when they do occur, such as pre-loading the cache line containing the specified address into the data cache.

T1

ARMv8-M Main Extension only



T1 variant


PLD{<c>}{<q>} [<Rn> {, #<+><imm>}]

Decode for this encoding

```
if Rn == '1111' then SEE "PLD (literal)";
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); imm32 = ZeroExtend(imm12, 32); add = TRUE;
```

T2

ARMv8-M Main Extension only



T2 variant

PLD{<c>}{<q>} [<Rn> {, #-<imm>}]

Decode for this encoding

```
if Rn == '1111' then SEE "PLD (literal)";
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); imm32 = ZeroExtend(imm8, 32); add = FALSE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rn> Is the general-purpose base register, encoded in the "Rn" field. If the PC is used, see [PLD \(literal\)](#).
- + Specifies the offset is added to the base register.
- <imm> For encoding T1: is an optional 12-bit unsigned immediate byte offset, in the range 0 to 4095, defaulting to 0 and encoded in the "imm12" field.
For encoding T2: is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    address = if add then (R[n] + imm32) else (R[n] - imm32);
    Hint_PreloadData(address);
```

Exceptions


None.

C2.4.107 PLD (literal)

Preload Data signals the memory system that data memory accesses from a specified address are likely in the near future. The memory system can respond by taking actions that are expected to speed up the memory accesses when they do occur, such as pre-loading the cache line containing the specified address into the data cache.

T1

ARMv8-M Main Extension only



T1 variant

PLD{<c>}{<q>} <label> // Preferred syntax
PLD{<c>}{<q>} [PC, #{+/-}<imm>] // Alternative syntax

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
imm32 = ZeroExtend(imm12, 32); add = (U == '1');
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <label> The label of the literal data item that is likely to be accessed in the near future. The assembler calculates the required value of the offset from the `Align(PC, 4)` value of the instruction to this label. The offset must be in the range `-4095` to `4095`. If the offset is zero or positive, `imm32` is equal to the offset and `add == TRUE`. If the offset is negative, `imm32` is equal to minus the offset and `add == FALSE`.
- +/- Specifies the offset is added to or subtracted from the base register, defaulting to `+` if omitted and encoded in the "U" field. It can have the following values:
 - when U = 0
 - + when U = 1
- <imm> Is a 12-bit unsigned immediate byte offset, in the range 0 to 4095, encoded in the "imm12" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    address = if add then (Align(PC,4) + imm32) else (Align(PC,4) - imm32);
    Hint_PreloadData(address);
```

Exceptions


None.

C2.4.108 PLD (register)

Preload Data is a memory hint instruction that can signal the memory system that data memory accesses from a specified address are likely in the near future. The memory system can respond by taking actions that are expected to speed up the memory accesses when they do occur, such as pre-loading the cache line containing the specified address into the data cache.

T1

ARMv8-M Main Extension only



T1 variant

PLD{<c>}{<q>} [<Rn>, {+}<Rm> {, LSL #<amount>}]

Decode for this encoding

```

if Rn == '1111' then SEE "PLD (literal)";
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); m = UInt(Rm); add = TRUE;
(shift_t, shift_n) = (SRTYPE_LSL, UInt(shift));
if m IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- +
- <Rm> Is the general-purpose index register, encoded in the "Rm" field.
- <amount> Is the shift amount, in the range 0 to 3, defaulting to 0 and encoded in the "imm2" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  offset = Shift(R[m], shift_t, shift_n, APSR.C);
  address = if add then (R[n] + offset) else (R[n] - offset);
  Hint_PreloadData(address);
  
```

Exceptions


None.

C2.4.109 PLI (immediate, literal)

Preload Instruction is a memory hint instruction that can signal the memory system that instruction memory accesses from a specified address are likely in the near future. The memory system can respond by taking actions that are expected to speed up the memory accesses when they do occur, such as pre-loading the cache line containing the specified address into the instruction cache.

T1

ARMv8-M Main Extension only



T1 variant


PLI{<c>}{<q>} [<Rn> {, #<+><imm>}]

Decode for this encoding

```
if Rn == '1111' then SEE "encoding T3";
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); imm32 = ZeroExtend(imm12, 32); add = TRUE;
```

T2

ARMv8-M Main Extension only



T2 variant


PLI{<c>}{<q>} [<Rn> {, #-<imm>}]

Decode for this encoding

```
if Rn == '1111' then SEE "encoding T3";
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); imm32 = ZeroExtend(imm8, 32); add = FALSE;
```

T3

ARMv8-M Main Extension only



T3 variant

```
PLI{<c>}{<q>} <label> // Preferred syntax
PLI{<c>}{<q>} [PC, #<+/-><imm>] // Alternative syntax
```

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;  
n = 15; imm32 = ZeroExtend(imm12, 32); add = (U == '1');
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <label> The label of the instruction that is likely to be accessed in the near future. The assembler calculates the required value of the offset from the `Align(PC, 4)` value of the instruction to this label. The offset must be in the range -4095 to 4095 . If the offset is zero or positive, `imm32` is equal to the offset and `add == TRUE`. If the offset is negative, `imm32` is equal to minus the offset and `add == FALSE`.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- + Specifies the offset is added to the base register.
- +/- Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values:
- when U = 0
 - + when U = 1
- <imm> For encoding T1: is an optional 12-bit unsigned immediate byte offset, in the range 0 to 4095, defaulting to 0 and encoded in the "imm12" field.
- For encoding T2: is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.
- For encoding T3: is a 12-bit unsigned immediate byte offset, in the range 0 to 4095, encoded in the "imm12" field.

Operation for all encodings

```
if ConditionPassed() then  
  EncodingSpecificOperations();  
  base = if n == 15 then Align(PC,4) else R[n];  
  address = if add then (base + imm32) else (base - imm32);  
  Hint_PreloadInstr(address);
```

Exceptions


None.

C2.4.110 PLI (register)

Preload Instruction is a memory hint instruction that can signal the memory system that instruction memory accesses from a specified address are likely in the near future. The memory system can respond by taking actions that are expected to speed up the memory accesses when they do occur, such as pre-loading the cache line containing the specified address into the instruction cache.

T1

ARMv8-M Main Extension only



T1 variant

PLI{<c>}{<q>} [<Rn>, {+}<Rm> {, LSL #<amount>}]

Decode for this encoding

```

if Rn == '1111' then SEE "PLI (immediate, literal)";
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); m = UInt(Rm); add = TRUE;
(shift_t, shift_n) = (SRTYPE_LSL, UInt(imm2));
if m IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- +
- Specifies the index register is added to the base register.
- <Rm> Is the general-purpose index register, encoded in the "Rm" field.
- <amount> Is the shift amount, in the range 0 to 3, defaulting to 0 and encoded in the "imm2" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
offset = Shift(R[m], shift_t, shift_n, APSR.C);
address = if add then (R[n] + offset) else (R[n] - offset);
Hint_PreloadInstr(address);

```

Exceptions

None.

C2.4.111 POP

Pop registers from stack loads one or more general-purpose registers from the stack, loading from consecutive memory locations starting at the address in **SP**, and updates **SP** to point above the loaded data.


If the registers loaded include the **PC**, the word loaded for the **PC** is treated as a branch address or an exception return value. Bit[0] complies with the ARM architecture interworking rules for switching between the A32 and T32 instruction sets. However, ARMv8-M only supports the T32 instruction set, so bit[0] must be 1. If bit[0] is 0 the PE takes an INVSTATE UsageFault exception on the instruction at the target address.

This instruction is an alias of **LDM**, **LDMIA**, **LDMFD** and **LDR (immediate)**. This means that:

- The encodings in this description are named to match the encodings of **LDM**, **LDMIA**, **LDMFD** and **LDR (immediate)**.
- The descriptions of **LDM**, **LDMIA**, **LDMFD** and **LDR (immediate)** give the operational pseudocode for this instruction.

T2 - alias of LDM

ARMv8-M Main Extension only



T2 variant

POP{<c>}{<q>} <registers>


is equivalent to

LDM{<c>}{<q>} SP!, <registers>

and is the preferred disassembly when BitCount(register_list) > 1.

T3 - alias of LDM

ARMv8-M



T3 variant

POP{<c>}{<q>} <registers>


is equivalent to

LDM{<c>}{<q>} SP!, <registers>

and is always the preferred disassembly.

T4 - alias of LDR (immediate)

ARMv8-M Main Extension only



Post-indexed variant

POP{<c>}{<q>} <single_register_list>

is equivalent to

LDR{<c>}{<q>} <Rt>, [SP], #4

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<registers> For encoding T2: is a list of two or more registers to be loaded, separated by commas and surrounded by { and }. The lowest-numbered register is loaded from the lowest memory address, through to the highest-numbered register from the highest memory address. The registers in the list must be in the range R0-R12, encoded in the "register_list" field, and can optionally contain one of the LR or the PC. If the LR is in the list, the "M" field is set to 1, otherwise it defaults to 0. If the PC is in the list, the "P" field is set to 1, otherwise it defaults to 0. The PC can be in the list. If it is, the instruction branches to the address loaded to the PC, and:

If the PC is in the list:

- The LR must not be in the list.
- The instruction must be either outside any IT block, or the last instruction in an IT block.

For encoding T3: is a list of one or more registers to be loaded, separated by commas and surrounded by { and }. The registers in the list must be in the range R0-R7, encoded in the "register_list" field, and can optionally include the PC. If the PC is in the list, the "P" field is set to 1, otherwise this field defaults to 0. If the PC is in the list, the instruction must be either outside any IT block, or the last instruction in an IT block.

<single_register_list>

Is the general-purpose register <Rt> to be loaded surrounded by { and }.

<Rt>

Is the general-purpose register to be transferred, encoded in the "Rt" field. The PC can be used, provided the instruction is either outside an IT block or the last instruction of an IT block. If the PC is used, the instruction branches to the address (data) loaded to the PC.

Operation for all encodings

The descriptions of [LDM](#), [LDMIA](#), [LDMFD](#) and [LDR \(immediate\)](#) give the operational pseudocode for this instruction.

C2.4.112 PUSH


Push registers to stack stores one or more general-purpose registers to the stack, storing to consecutive memory locations ending below the address in *SP*, and updates *SP* to point to the start of the stored data.

This instruction is an alias of the [STMDB](#), [STMFD](#) and [STR \(immediate\)](#). This means:

- The encodings in this description are named to match the encodings of [STMDB](#), [STMFD](#) and [STR \(immediate\)](#).
- The descriptions of [STMDB](#), [STMFD](#) and [STR \(immediate\)](#) give the operational pseudocode for this instruction.

T1 - alias of STMDB

ARMv8-M Main Extension only



T1 variant

PUSH{<c>}{<q>} <registers>


is equivalent to

STMDB{<c>}{<q>} SP!, <registers>

and is the preferred disassembly when BitCount(register_list) > 1.

T2 - alias of STMDB

ARMv8-M



T2 variant

PUSH{<c>}{<q>} <registers>


is equivalent to

STMDB{<c>}{<q>} SP!, <registers>

and is always the preferred disassembly.

T4 - alias of STR (immediate)

ARMv8-M Main Extension only



Pre-indexed variant

PUSH{<c>}{<q>} <single_register_list> // Standard syntax

is equivalent to

STR{<c>}{<q>} <Rt>, [SP, #-4]!

and is always the preferred disassembly.

Assembler symbols

<c> See *Standard assembler syntax fields* on page C1-240.

<q> See *Standard assembler syntax fields* on page C1-240.

<registers> For encoding T1: is a list of one or more registers to be stored, separated by commas and surrounded by { and }. The lowest-numbered register is stored to the lowest memory address, through to the highest-numbered register to the highest memory address. The registers in the list must be in the range R0-R12, encoded in the "register_list" field, and can optionally contain the LR. If the LR is in the list, the "M" field is set to 1, otherwise it defaults to 0.

For encoding T2: is a list of one or more registers to be stored, separated by commas and surrounded by { and }. The registers in the list must be in the range R0-R7, encoded in the "register_list" field, and can optionally include the LR. If the LR is in the list, the "M" field is set to 1, otherwise this field defaults to 0.

<single_register_list>

Is the general-purpose register <Rt> to be stored surrounded by { and }.

<Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.

Operation for all encodings

The descriptions of [STMDB](#), [STMTD](#) and [STR \(immediate\)](#) give the operational pseudocode for this instruction.

C2.4.113 QADD

Saturating Add adds two register values, saturates the result to the 32-bit signed integer range -2^{31} to $2^{31}-1$, and writes the result to the destination register. If saturation occurs, it sets the Q flag in the APSR.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	0	Rn	1	1	1	1	Rd	1	0	0	0	Rm			

T1 variant

QADD{<c>}{<q>} {<Rd>}, {<Rm>, <Rn>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the first general-purpose source register, encoded in the "Rm" field.
- <Rn> Is the second general-purpose source register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  (R[d], sat) = SignedSatQ(SInt(R[m]) + SInt(R[n]), 32);
  if sat then
    APSR.Q = '1';
```

Exceptions

None.

C2.4.114 QADD16

Saturating Add 16 performs two 16-bit integer additions, saturates the results to the 16-bit signed integer range -2^{15} to $2^{15}-1$, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	1	Rn	1	1	1	1	Rd	0	0	0	1	Rm			

T1 variant

QADD16{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    sum1 = SInt(R[n]<15:0>) + SInt(R[m]<15:0>);
    sum2 = SInt(R[n]<31:16>) + SInt(R[m]<31:16>);
    bits(32) result;
    result<15:0> = SignedSat(sum1, 16);
    result<31:16> = SignedSat(sum2, 16);
    R[d] = result;
```

Exceptions

None.

C2.4.115 QADD8

Saturating Add 8 performs four 8-bit integer additions, saturates the results to the 8-bit signed integer range -2^7 to 2^7-1 , and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	0	Rn	1	1	1	1	Rd	0	0	0	1	Rm			

T1 variant

QADD8{<c>}{<q>} {<Rd>}, {<Rn>}, {<Rm>}

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  sum1 = SInt(R[n]<7:0>) + SInt(R[m]<7:0>);
  sum2 = SInt(R[n]<15:8>) + SInt(R[m]<15:8>);
  sum3 = SInt(R[n]<23:16>) + SInt(R[m]<23:16>);
  sum4 = SInt(R[n]<31:24>) + SInt(R[m]<31:24>);
  bits(32) result;
  result<7:0> = SignedSat(sum1, 8);
  result<15:8> = SignedSat(sum2, 8);
  result<23:16> = SignedSat(sum3, 8);
  result<31:24> = SignedSat(sum4, 8);
  R[d] = result;
```

Exceptions

None.

C2.4.116 QASX

Saturating Add and Subtract with Exchange exchanges the two halfwords of the second operand, performs one 16-bit integer addition and one 16-bit subtraction, saturates the results to the 16-bit signed integer range -2^{15} to $2^{15}-1$, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	1	0	Rn	1	1	1	1	Rd	0	0	0	1	Rm			

T1 variant

QASX{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
diff = SInt(R[n]<15:0>) - SInt(R[m]<31:16>);
sum = SInt(R[n]<31:16>) + SInt(R[m]<15:0>);
bits(32) result;
result<15:0> = SignedSat(diff, 16);
result<31:16> = SignedSat(sum, 16);
R[d] = result;
```

Exceptions

None.

C2.4.117 QDADD

Saturating Double and Add adds a doubled register value to another register value, and writes the result to the destination register. Both the doubling and the addition have their results saturated to the 32-bit signed integer range -2^{31} to $2^{31}-1$. If saturation occurs in either operation, it sets the Q flag in the [APSR](#).

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	0	Rn	1	1	1	1	Rd	1	0	0	1	Rm			

T1 variant

QDADD{<c>}{<q>} {<Rd>}, {<Rm>}, <Rn>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the first general-purpose source register, encoded in the "Rm" field.
- <Rn> Is the second general-purpose source register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  (doubled, sat1) = SignedSatQ(2 * SInt(R[n]), 32);
  (R[d], sat2) = SignedSatQ(SInt(R[m]) + SInt(doubled), 32);
  if sat1 || sat2 then
    APSR.Q = '1';
```

Exceptions

None.

C2.4.118 QDSUB

Saturating Double and Subtract subtracts a doubled register value from another register value, and writes the result to the destination register. Both the doubling and the subtraction have their results saturated to the 32-bit signed integer range -2^{31} to $2^{31}-1$. If saturation occurs in either operation, it sets the Q flag in the [APSR](#).

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	0	Rn	1	1	1	1	Rd	1	0	1	1	Rm			

T1 variant

QDSUB{<c>}{<q>} {<Rd>}, <Rm>, <Rn>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the first general-purpose source register, encoded in the "Rm" field.
- <Rn> Is the second general-purpose source register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    (doubled, sat1) = SignedSatQ(2 * SInt(R[n]), 32);
    (R[d], sat2) = SignedSatQ(SInt(R[m]) - SInt(doubled), 32);
    if sat1 || sat2 then
        APSR.Q = '1';
```

Exceptions

None.

C2.4.119 QSAX

Saturating Subtract and Add with Exchange exchanges the two halfwords of the second operand, performs one 16-bit integer subtraction and one 16-bit addition, saturates the results to the 16-bit signed integer range -2^{15} to $2^{15}-1$, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	1	0	Rn	1	1	1	1	Rd	0	0	0	1	Rm			

T1 variant

QSAX{<c>}{<q>} {<Rd>}, {<Rn>}, {<Rm>}

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  sum = SInt(R[n]<15:0>) + SInt(R[m]<31:16>);
  diff = SInt(R[n]<31:16>) - SInt(R[m]<15:0>);
  bits(32) result;
  result<15:0> = SignedSat(sum, 16);
  result<31:16> = SignedSat(diff, 16);
  R[d] = result;
```

Exceptions

None.

C2.4.120 QSUB

Saturating Subtract subtracts one register value from another register value, saturates the result to the 32-bit signed integer range -2^{31} to $2^{31}-1$, and writes the result to the destination register. If saturation occurs, it sets the Q flag in the [APSR](#).

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	0	Rn	1	1	1	1	Rd	1	0	1	0	Rm			

T1 variant

QSUB{<c>}{<q>} {<Rd>}, <Rm>, <Rn>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the first general-purpose source register, encoded in the "Rm" field.
- <Rn> Is the second general-purpose source register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    (R[d], sat) = SignedSatQ(SInt(R[m]) - SInt(R[n]), 32);
    if sat then
        APSR.Q = '1';
```

Exceptions

None.

C2.4.121 QSUB16

Saturating Subtract 16 performs two 16-bit integer subtractions, saturates the results to the 16-bit signed integer range -2^{15} to $2^{15}-1$, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	0	1	Rn	1	1	1	1	Rd	0	0	0	1	Rm			

T1 variant

QSUB16{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  diff1 = SInt(R[n]<15:0>) - SInt(R[m]<15:0>);
  diff2 = SInt(R[n]<31:16>) - SInt(R[m]<31:16>);
  bits(32) result;
  result<15:0> = SignedSat(diff1, 16);
  result<31:16> = SignedSat(diff2, 16);
  R[d] = result;
```

Exceptions

None.

C2.4.122 QSUB8

Saturating Subtract 8 performs four 8-bit integer subtractions, saturates the results to the 8-bit signed integer range -2^7 to 2^7-1 , and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	0	0	Rn	1	1	1	1	Rd	0	0	0	1	Rm			

T1 variant

QSUB8{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    diff1 = SInt(R[n]<7:0>) - SInt(R[m]<7:0>);
    diff2 = SInt(R[n]<15:8>) - SInt(R[m]<15:8>);
    diff3 = SInt(R[n]<23:16>) - SInt(R[m]<23:16>);
    diff4 = SInt(R[n]<31:24>) - SInt(R[m]<31:24>);
    R[d]<7:0> = SignedSat(diff1, 8);
    R[d]<15:8> = SignedSat(diff2, 8);
    R[d]<23:16> = SignedSat(diff3, 8);
    R[d]<31:24> = SignedSat(diff4, 8);
```

Exceptions

None.

C2.4.123 RBIT

Reverse Bits reverses the bit order in a 32-bit register.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	1	Rm	1	1	1	1	Rd	1	0	1	0	Rm			

T1 variant

RBIT{<c>}{<q>} <Rd>, <Rm>

Decode for this encoding

```

if !HaveMainExt() then UNDEFINED;
if !Consistent(Rm) then UNPREDICTABLE;
d = UInt(Rd); m = UInt(Rm);
if d IN {13,15} || m IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the general-purpose source register, encoded in the "Rm" field. Its number must be encoded twice.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  bits(32) result;
  for i = 0 to 31
    result<31-i> = R[m]<i>;
  R[d] = result;
  
```

Exceptions

None.

C2.4.124 REV

Byte-Reverse Word reverses the byte order in a 32-bit register.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	1	1	1	0	1	0	0	0	Rm	Rd				

T1 variant

REV{<c>}{<q>} <Rd>, <Rm>

Decode for this encoding

d = UInt(Rd); m = UInt(Rm);

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	1	0	1	0	1	0	0	1	Rm	1	1	1	1	Rd	1	0	0	0	Rm									

T2 variant

REV{<c>}.W <Rd>, <Rm> // <Rd>, <Rm> can be represented in T1
REV{<c>}{<q>} <Rd>, <Rm>

Decode for this encoding

```

if !HaveMainExt() then UNDEFINED;
if !Consistent(Rm) then UNPREDICTABLE;
d = UInt(Rd); m = UInt(Rm);
if d IN {13,15} || m IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> For encoding T1: is the general-purpose source register, encoded in the "Rm" field.
For encoding T2: is the general-purpose source register, encoded in the "Rm" field. Its number must be encoded twice.

Operation for all encodings

```

if ConditionPassed() then
    EncodingSpecificOperations();
    bits(32) result;
    result<31:24> = R[m]<7:0>;
    result<23:16> = R[m]<15:8>;

```

```
result<15:8> = R[m]<23:16>;  
result<7:0>  = R[m]<31:24>;  
R[d] = result;
```

Exceptions

None.

C2.4.125 REV16

Byte-Reverse Packed Halfword reverses the byte order in each 16-bit halfword of a 32-bit register.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	1	1	1	0	1	0	0	1	Rm		Rd			

T1 variant

REV16{<c>}{<q>} <Rd>, <Rm>

Decode for this encoding

d = UInt(Rd); m = UInt(Rm);

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	1	0	1	0	1	0	0	1	Rm				1	1	1	1	Rd										Rm	

T2 variant

REV16{<c>}.W <Rd>, <Rm> // <Rd>, <Rm> can be represented in T1
REV16{<c>}{<q>} <Rd>, <Rm>

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
if !Consistent(Rm) then UNPREDICTABLE;
d = UInt(Rd); m = UInt(Rm);
if d IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> For encoding T1: is the general-purpose source register, encoded in the "Rm" field.
For encoding T2: is the general-purpose source register, encoded in the "Rm" field. Its number must be encoded twice.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    bits(32) result;
    result<31:24> = R[m]<23:16>;
    result<23:16> = R[m]<31:24>;
```

```
result<15:8> = R[m]<7:0>;  
result<7:0>  = R[m]<15:8>;  
R[d] = result;
```

Exceptions

None.

C2.4.126 REVSH

Byte-Reverse Signed Halfword reverses the byte order in the lower 16-bit halfword of a 32-bit register, and sign extends the result to 32 bits.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	3	2	0
1	0	1	1	1	0	1	0	1	1	Rm	Rd		

T1 variant

REVSH{<c>}{<q>} <Rd>, <Rm>

Decode for this encoding

d = UInt(Rd); m = UInt(Rm);

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	1	Rm		1	1	1	1	Rd		1	0	1	1	Rm	

T2 variant

REVSH{<c>}.W <Rd>, <Rm> // <Rd>, <Rm> can be represented in T1
REVSH{<c>}{<q>} <Rd>, <Rm>

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
if !Consistent(Rm) then UNPREDICTABLE;
d = UInt(Rd); m = UInt(Rm);
if d IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> For encoding T1: is the general-purpose source register, encoded in the "Rm" field.
For encoding T2: is the general-purpose source register, encoded in the "Rm" field. Its number must be encoded twice.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    bits(32) result;
```

```
result<31:8> = SignExtend(R[m]<7:0>, 24);  
result<7:0>  = R[m]<15:8>;  
R[d] = result;
```

Exceptions

None.

C2.4.127 ROR (immediate)

Rotate Right (immediate) rotates a register value by a constant number of bits, inserting the bits that are rotated off the right end into the vacated bit positions on the left, and writes the result to the destination register.

This instruction is an alias of the [MOV \(register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV \(register\)](#).
- The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

T3

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	0	0	0	1	0	0	1	1	1	1	(0)	imm3	Rd	imm2	1	1	Rm			

S

MOV, shift or rotate by value variant

Applies when $!(imm3 == 000 \ \&\& \ imm2 == 00)$.

ROR{<c>}{<q>} {<Rd>}, <Rm>, #<imm>

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, ROR #<imm>

and is always the preferred disassembly.

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the general-purpose source register, encoded in the "Rm" field.
- <imm> Is the shift amount, in the range 1 to 31, encoded in the "imm3:imm2" field.

Operation

The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

C2.4.128 ROR (register)


Rotate Right (register) rotates a register value by a variable number of bits, inserting the bits that are rotated off the right end into the vacated bit positions on the left, and writes the result to the destination register. The variable number of bits is read from the bottom byte of a register.

This instruction is an alias of the [MOV, MOVS \(register-shifted register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV, MOVS \(register-shifted register\)](#).
- The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

T1

ARMv8-M Main Extension only



Rotate right variant

ROR<c>{<q>} {<Rdm>}, <Rdm>, <Rs> // Inside IT block


is equivalent to

MOV<c>{<q>} <Rdm>, <Rdm>, ROR <Rs>

and is the preferred disassembly when InITBlock().

T2

ARMv8-M Main Extension only



Not flag setting variant

ROR<c>.W {<Rd>}, <Rm>, <Rs> // Inside IT block, and <Rd>, <Rm>, <type>, <Rs> can be represented in T1

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, ROR <Rs>

and is always the preferred disassembly.

ROR{<c>}{<q>} {<Rd>}, <Rm>, <Rs>

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, ROR <Rs>

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rdm> Is the first general-purpose source register and the destination register, encoded in the "Rdm" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the first general-purpose source register, encoded in the "Rm" field.
- <Rs> Is the second general-purpose source register holding a rotate amount in its bottom 8 bits, encoded in the "Rs" field.

Operation for all encodings

The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

C2.4.129 RORS (immediate)


Rotate Right, Setting flags (immediate) rotates a register value by a constant number of bits, inserting the bits that are rotated off the right end into the vacated bit positions on the left, writes the result to the destination register, and updates the condition flags based on the result.

This instruction is an alias of the [MOV \(register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV \(register\)](#).
- The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

T3

ARMv8-M Main Extension only



MOVS, shift or rotate by value variant

Applies when $!(imm3 == 000 \ \&\& \ imm2 == 00)$.

RORS{<c>}{<q>} {<Rd>}, <Rm>, #<imm>

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, ROR #<imm>

and is always the preferred disassembly.

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the general-purpose source register, encoded in the "Rm" field.
- <imm> Is the shift amount, in the range 1 to 31, encoded in the "imm3:imm2" field.

Operation

The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

C2.4.130 RORS (register)


Rotate Right, Setting flags (register) rotates a register value by a variable number of bits, inserting the bits that are rotated off the right end into the vacated bit positions on the left, writes the result to the destination register, and updates the condition flags based on the result. The variable number of bits is read from the bottom byte of a register.

This instruction is an alias of the [MOV, MOVS \(register-shifted register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV, MOVS \(register-shifted register\)](#).
- The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

T1

ARMv8-M



Rotate right variant

RORS{<q>} {<Rdm>}, <Rdm>, <Rs> // Outside IT block


is equivalent to

MOVS{<q>} <Rdm>, <Rdm>, ROR <Rs>

and is the preferred disassembly when !InITBlock().

T2

ARMv8-M Main Extension only



Flag setting variant

RORS.W {<Rd>}, <Rm>, <Rs> // Outside IT block, and <Rd>, <Rm>, <type>, <Rs> can be represented in T1

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, ROR <Rs>

and is always the preferred disassembly.

RORS{<c>}{<q>} {<Rd>}, <Rm>, <Rs>

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, ROR <Rs>

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

- <q> See [Standard assembler syntax fields](#) on page C1-240.
- <Rdm> Is the first general-purpose source register and the destination register, encoded in the "Rdm" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the first general-purpose source register, encoded in the "Rm" field.
- <Rs> Is the second general-purpose source register holding a rotate amount in its bottom 8 bits, encoded in the "Rs" field.

Operation for all encodings

The description of [MOV, MOVS \(register-shifted register\)](#) gives the operational pseudocode for this instruction.

C2.4.131 RRX

Rotate Right with Extend shifts a register value right by one bit, shifting the Carry flag into bit[31], and writes the result to the destination register.

This instruction is an alias of the [MOV \(register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV \(register\)](#).
- The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

T3

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	0	0	0	1	0	0	1	1	1	1	(0)	0	0	0	Rd	0	0	1	1	Rm	
S																											

MOV, rotate right with extend variant

RRX{<c>}{<q>} {<Rd>}, {<Rm>}

is equivalent to

MOV{<c>}{<q>} <Rd>, <Rm>, RRX

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the general-purpose destination register, encoded in the "Rd" field.

<Rm> Is the general-purpose source register, encoded in the "Rm" field.

Operation

The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

C2.4.132 RRXS

Rotate Right with Extend, Setting flags shifts a register value right by one bit, shifting the Carry flag into bit[31] and bit[0] into the Carry flag, writes the result to the destination register and updates the condition flags (other than Carry) based on the result.

This instruction is an alias of the [MOV \(register\)](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [MOV \(register\)](#).
- The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

T3

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	0	0	0	1	0	1	1	1	1	(0)	0	0	0	Rd	0	0	1	1	Rm		

S

MOVS, rotate right with extend variant

RRXS{<c>}{<q>} {<Rd>}, {<Rm>}

is equivalent to

MOVS{<c>}{<q>} <Rd>, <Rm>, RRX

and is always the preferred disassembly.

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the general-purpose source register, encoded in the "Rm" field.

Operation

The description of [MOV \(register\)](#) gives the operational pseudocode for this instruction.

C2.4.133 RSB (immediate)

Reverse Subtract (immediate) subtracts a register value from an immediate value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	1	0	0	0	0	1	0	0	1	Rn	Rd				

T1 variant

RSB<c>{<q>} {<Rd>, }<Rn>, #0 // Inside IT block
RSBS{<q>} {<Rd>, }<Rn>, #0 // Outside IT block

Decode for this encoding

d = UInt(Rd); n = UInt(Rn); setflags = !InITBlock(); imm32 = Zeros(32); // immediate = #0

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	0	i	0	1	1	1	0	S	Rn	0	imm3	Rd	imm8															

RSB variant

Applies when S == 0.

RSB<c>.W {<Rd>, }<Rn>, #0 // Inside IT block
RSB{<c>}{<q>} {<Rd>, }<Rn>, #<const>

RSBS variant

Applies when S == 1.

RSBS.W {<Rd>, }<Rn>, #0 // Outside IT block
RSBS{<c>}{<q>} {<Rd>, }<Rn>, #<const>

Decode for all variants of this encoding

```
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); setflags = (S == '1'); imm32 = T32ExpandImm(i:imm3:imm8);
if d IN {13,15} || n IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.

<const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    (result, carry, overflow) = AddWithCarry(NOT(R[n]), imm32, '1');
    R[d] = result;
    if setflags then
        APSR.N = result<31>;
        APSR.Z = IsZeroBit(result);
        APSR.C = carry;
        APSR.V = overflow;
```

Exceptions

None.

C2.4.134 RSB (register)

Reverse Subtract (register) subtracts a register value from an optionally-shifted register value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	1	1	1	0	S	Rn	(0)	imm3	Rd	imm2	type	Rm						

RSB, rotate right with extend variant

Applies when $S == 0$ && $imm3 == 000$ && $imm2 == 00$ && $type == 11$.

RSB{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

RSB, shift or rotate by value variant

Applies when $S == 0$ && $!(imm3 == 000 \&\& imm2 == 00 \&\& type == 11)$.

RSB{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

RSBS, rotate right with extend variant

Applies when $S == 1$ && $imm3 == 000$ && $imm2 == 00$ && $type == 11$.

RSBS{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

RSBS, shift or rotate by value variant

Applies when $S == 1$ && $!(imm3 == 000 \&\& imm2 == 00 \&\& type == 11)$.

RSBS{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); setflags = (S == '1');
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .						
<q>	See Standard assembler syntax fields on page C1-240 .						
<Rd>	Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.						
<Rn>	Is the first general-purpose source register, encoded in the "Rn" field.						
<Rm>	Is the second general-purpose source register, encoded in the "Rm" field.						
<shift>	Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values: <table> <tr> <td>LSL</td> <td>when type = 00</td> </tr> <tr> <td>LSR</td> <td>when type = 01</td> </tr> <tr> <td>ASR</td> <td>when type = 10</td> </tr> </table>	LSL	when type = 00	LSR	when type = 01	ASR	when type = 10
LSL	when type = 00						
LSR	when type = 01						
ASR	when type = 10						

ROR when type = 11

<amount> Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    shifted = Shift(R[m], shift_t, shift_n, APSR.C);
    (result, carry, overflow) = AddWithCarry(NOT(R[n]), shifted, '1');
    R[d] = result;
    if setflags then
        APSR.Z = IsZeroBit(result);
        APSR.N = result<31>;
        APSR.C = carry;
        APSR.V = overflow;
```

Exceptions

None.

C2.4.135 SADD16

Signed Add 16 performs two 16-bit signed integer additions, and writes the results to the destination register. It sets the `APSR.GE` bits according to the results of the additions.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	1	Rn	1	1	1	1	Rd	0	0	0	0	Rm			

T1 variant

SADD16{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    sum1 = SInt(R[n]<15:0>) + SInt(R[m]<15:0>);
    sum2 = SInt(R[n]<31:16>) + SInt(R[m]<31:16>);
    R[d] = sum2<15:0> : sum1<15:0>;
    APSR.GE<1:0> = if sum1 >= 0 then '11' else '00';
    APSR.GE<3:2> = if sum2 >= 0 then '11' else '00';
```

Exceptions

None.

C2.4.136 SADD8

Signed Add 8 performs four 8-bit signed integer additions, and writes the results to the destination register. It sets the [APSR.GE](#) bits according to the results of the additions.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	0	Rn	1	1	1	1	Rd	0	0	0	0	Rm			

T1 variant

SADD8{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  sum1 = SInt(R[n]<7:0>) + SInt(R[m]<7:0>);
  sum2 = SInt(R[n]<15:8>) + SInt(R[m]<15:8>);
  sum3 = SInt(R[n]<23:16>) + SInt(R[m]<23:16>);
  sum4 = SInt(R[n]<31:24>) + SInt(R[m]<31:24>);
  R[d] = sum4<7:0> : sum3<7:0> : sum2<7:0> : sum1<7:0>;
  APSR.GE<0> = if sum1 >= 0 then '1' else '0';
  APSR.GE<1> = if sum2 >= 0 then '1' else '0';
  APSR.GE<2> = if sum3 >= 0 then '1' else '0';
  APSR.GE<3> = if sum4 >= 0 then '1' else '0';
```

Exceptions

None.

C2.4.137 SASX

Signed Add and Subtract with Exchange exchanges the two halfwords of the second operand, performs one 16-bit integer addition and one 16-bit subtraction, and writes the results to the destination register. It sets the `APSR.GE` bits according to the results.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	1	0	Rn	1	1	1	1	Rd	0	0	0	0	Rm			

T1 variant

SASX{<c>}{<q>} {<Rd>}, {<Rn>, <Rm>}

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
diff = SInt(R[n]<15:0>) - SInt(R[m]<31:16>);
sum = SInt(R[n]<31:16>) + SInt(R[m]<15:0>);
R[d] = sum<15:0> : diff<15:0>;
APSR.GE<1:0> = if diff >= 0 then '11' else '00';
APSR.GE<3:2> = if sum >= 0 then '11' else '00';
```

Exceptions


None.

C2.4.138 SBC (immediate)

Subtract with Carry (immediate) subtracts an immediate value and the value of NOT(Carry flag) from a register value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M Main Extension only



SBC variant

Applies when S == 0.

SBC{<c>}{<q>} {<Rd>}, {<Rn>, #<const>}

SBCS variant

Applies when S == 1.

SBCS{<c>}{<q>} {<Rd>}, {<Rn>, #<const>}

Decode for all variants of this encoding

```

if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); setflags = (S == '1'); imm32 = T32ExpandImm(i:imm3:imm8);
if d IN {13,15} || n IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.
- <const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  (result, carry, overflow) = AddWithCarry(R[n], NOT(imm32), APSR.C);
  R[d] = result;
  if setflags then
    APSR.N = result<31>;
    APSR.Z = IsZeroBit(result);
    APSR.C = carry;
    APSR.V = overflow;
  
```

Exceptions

None.

C2.4.139 SBC (register)

Subtract with Carry (register) subtracts an optionally-shifted register value and the value of NOT(Carry flag) from a register value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	3	2	0
0	1	0	0	0	0	0	1	1	0	Rm	Rdn		

T1 variant

SBC<c>{<q>} {<Rdn>}, <Rdn>, <Rm> // Inside IT block
SBCS{<q>} {<Rdn>}, <Rdn>, <Rm> // Outside IT block

Decode for this encoding

d = UInt(Rdn); n = UInt(Rdn); m = UInt(Rm); setflags = !InITBlock();
(shift_t, shift_n) = (SRTYPE_LSL, 0);

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	1	S	Rn		(0)	imm3	Rd	imm2	type	Rm								

SBC, rotate right with extend variant

Applies when S == 0 && imm3 == 000 && imm2 == 00 && type == 11.

SBC{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

SBC, shift or rotate by value variant

Applies when S == 0 && !(imm3 == 000 && imm2 == 00 && type == 11).

SBC<c>.W {<Rd>}, <Rn>, <Rm> // Inside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1
SBC{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

SBCS, rotate right with extend variant

Applies when S == 1 && imm3 == 000 && imm2 == 00 && type == 11.

SBCS{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

SBCS, shift or rotate by value variant

Applies when S == 1 && !(imm3 == 000 && imm2 == 00 && type == 11).

SBCS.W {<Rd>}, <Rn>, <Rm> // Outside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1
SBCS{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```
if !HaveMainExt() then UNDEFINED;  
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); setFlags = (S == '1');  
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);  
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rdn> Is the first general-purpose source register and the destination register, encoded in the "Rdn" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.
- <shift> Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values:
- | | |
|-----|----------------|
| LSL | when type = 00 |
| LSR | when type = 01 |
| ASR | when type = 10 |
| ROR | when type = 11 |
- <amount> Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation for all encodings

```
if ConditionPassed() then  
  EncodingSpecificOperations();  
  shifted = Shift(R[m], shift_t, shift_n, APSR.C);  
  (result, carry, overflow) = AddWithCarry(R[n], NOT(shifted), APSR.C);  
  R[d] = result;  
  if setFlags then  
    APSR.N = result<31>;  
    APSR.Z = IsZeroBit(result);  
    APSR.C = carry;  
    APSR.V = overflow;
```

Exceptions


None.

C2.4.140 SBFX

Signed Bit Field Extract extracts any number of adjacent bits at any position from one register, sign extends them to 32 bits, and writes the result to the destination register.

T1

ARMv8-M Main Extension only



T1 variant

SBFX{<c>}{<q>} <Rd>, <Rn>, #<lsb>, #<width>

Decode for this encoding

```

if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn);
lsbit = UInt(imm3:imm2); widthminus1 = UInt(widthm1);
msbit = lsbit + widthminus1;
if msbit > 31 then UNPREDICTABLE;
if d IN {13,15} || n IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.
- <lsb> Is the bit number of the least significant bit in the field, in the range 0 to 31, encoded in the "imm3:imm2" field.
- <width> Is the width of the field, in the range 1 to 32-<lsb>, encoded in the "widthm1" field as <width>-1.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    if msbit <= 31 then
        R[d] = SignExtend(R[n]<msbit:lsbit>, 32);
    else
        R[d] = bits(32) UNKNOWN;

```

Exceptions

None.

C2.4.141 SDIV

Signed Divide divides a 32-bit signed integer register value by a 32-bit signed integer register value, and writes the result to the destination register. The condition code flags are not affected.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	1	0	0	1	Rn	(1)(1)(1)(1)	Rd	1	1	1	1	Rm						

T1 variant

SDIV{<c>}{<q>} {<Rd>,<Rn>,<Rm>

Decode for this encoding

```
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register holding the dividend, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register holding the divisor, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  if SInt(R[m]) == 0 then
    if IntegerZeroDivideTrappingEnabled() then
      GenerateIntegerZeroDivide();
    else
      result = 0;
  else
    result = RoundTowardsZero(Real(SInt(R[n])) / Real(SInt(R[m])));
  R[d] = result<31:0>;
```

Exceptions

UsageFault.

C2.4.142 SEL

Select Bytes selects each byte of its result from either its first operand or its second operand, according to the values of the GE flags.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	1	0	Rn		1	1	1	1	Rd		1	0	0	0	Rm	

T1 variant

SEL{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    bits(32) result;
    result<7:0> = if APSR.GE<0> == '1' then R[n]<7:0> else R[m]<7:0>;
    result<15:8> = if APSR.GE<1> == '1' then R[n]<15:8> else R[m]<15:8>;
    result<23:16> = if APSR.GE<2> == '1' then R[n]<23:16> else R[m]<23:16>;
    result<31:24> = if APSR.GE<3> == '1' then R[n]<31:24> else R[m]<31:24>;
    R[d] = result;
```

Exceptions

None.

C2.4.143 SEV

Send Event is a hint instruction. It causes an event to be signaled to all PEs within the multiprocessor system.

This is a [NOP-compatible](#) hint. For more information about [NOP-compatible](#) hints, see [NOP-compatible hint instructions](#) on page C1-251.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0

T1 variant

SEV{<c>}{<q>}

Decode for this encoding

// No additional decoding required

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	0	0	1	1	1	0	1	0	(1)	(1)	(1)	(1)	1	0	(0)	0	(0)	0	0	0	0	0	0	0	1	0	0	

T2 variant

SEV{<c>}.W

Decode for this encoding

if !HaveMainExt() then UNDEFINED;
 // No additional decoding required

Assembler symbols

<c> See [Standard assembler syntax fields](#) on page C1-240.

<q> See [Standard assembler syntax fields](#) on page C1-240.

Operation for all encodings

```
if ConditionPassed() then
  EncodingSpecificOperations();
  SendEvent();
```

Exceptions

None.

C2.4.144 SG

Secure Gateway marks a valid branch target for branches from Non-secure code that call Secure code.

This instruction sets the Security state to Secure if its address is in Secure memory. If the address of this instruction is in Non-secure memory, it behaves as a **NOP**.

If the PE was previously in Non-secure state:

- This instruction sets bit[0] of **LR** to 0, to indicate that the return address will cause a transition from Secure to Non-secure state.
- If the Floating-point Extension is implemented, this instruction marks Secure floating-point state as inactive, by setting **CONTROL_S.SFPA** to 0. This indicates that the floating-point registers do not contain active state that belongs to the Secure state.

If the Security Extension is not implemented, this instruction behaves as a **NOP**.

———— **Note** —————

SG is an unconditional instruction and executes as such both inside and outside an IT instruction block.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	0	0	1	0	1	1	1	1	1	1	1	1	1	1	0	1	0	0	1	0	1	1	1	1	1	1	

T1 variant

SG{<q>}

Decode for this encoding

// No encoding specific operations

Assembler symbols

<q> See *Standard assembler syntax fields* on page C1-240.

Operation

EncodingSpecificOperations();

```

if HaveSecurityExt() then
    sAttributes = SecurityCheck(ThisInstrAddr(), TRUE, IsSecure());
    if !sAttributes.ns then
        if !IsSecure() then
            LR<0> = '0';
            if HaveFPEExt() then
                CONTROL_S.SFPA = '0';
            CurrentState = SecurityState_Secure;
            // IT/ICI bits cleared to prevent Non-secure code interfering with
            // Secure execution
            if HaveMainExt() then
                ITSTATE.IT = Zeros(8);
    
```

Exceptions

None.

C2.4.145 SHADD16

Signed Halving Add 16 performs two signed 16-bit integer additions, halves the results, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	1	Rn	1	1	1	1	Rd	0	0	1	0	Rm			

T1 variant

SHADD16{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  sum1 = SInt(R[n]<15:0>) + SInt(R[m]<15:0>);
  sum2 = SInt(R[n]<31:16>) + SInt(R[m]<31:16>);
  R[d] = sum2<16:1> : sum1<16:1>;
```

Exceptions

None.

C2.4.146 SHADD8

Signed Halving Add 8 performs four signed 8-bit integer additions, halves the results, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	0	Rn	1	1	1	1	Rd	0	0	1	0	Rm			

T1 variant

SHADD8{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    sum1 = SInt(R[n]<7:0>) + SInt(R[m]<7:0>);
    sum2 = SInt(R[n]<15:8>) + SInt(R[m]<15:8>);
    sum3 = SInt(R[n]<23:16>) + SInt(R[m]<23:16>);
    sum4 = SInt(R[n]<31:24>) + SInt(R[m]<31:24>);
    R[d] = sum4<8:1> : sum3<8:1> : sum2<8:1> : sum1<8:1>;
```

Exceptions

None.

C2.4.147 SHASX

Signed Halving Add and Subtract with Exchange exchanges the two halfwords of the second operand, performs one signed 16-bit integer addition and one signed 16-bit subtraction, halves the results, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	1	0	Rn	1	1	1	1	Rd	0	0	1	0	Rm			

T1 variant

SHASX{<c>}{<q>} {<Rd>}, {<Rn>}, {<Rm>}

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  diff = SInt(R[n]<15:0>) - SInt(R[m]<31:16>);
  sum = SInt(R[n]<31:16>) + SInt(R[m]<15:0>);
  R[d] = sum<16:1> : diff<16:1>;
```

Exceptions

None.

C2.4.148 SHSAX

Signed Halving Subtract and Add with Exchange exchanges the two halfwords of the second operand, performs one signed 16-bit integer subtraction and one signed 16-bit addition, halves the results, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	1	0	Rn	1	1	1	1	Rd	0	0	1	0	Rm			

T1 variant

SHSAX{<c>}{<q>} {<Rd>}, {<Rn>}, {<Rm>}

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    sum = SInt(R[n]<15:0>) + SInt(R[m]<31:16>);
    diff = SInt(R[n]<31:16>) - SInt(R[m]<15:0>);
    R[d] = diff<16:1> : sum<16:1>;
```

Exceptions

None.

C2.4.149 SHSUB16

Signed Halving Subtract 16 performs two signed 16-bit integer subtractions, halves the results, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	0	1	Rn	1	1	1	1	Rd	0	0	1	0	Rm			

T1 variant

SHSUB16{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  diff1 = SInt(R[n]<15:0>) - SInt(R[m]<15:0>);
  diff2 = SInt(R[n]<31:16>) - SInt(R[m]<31:16>);
  R[d] = diff2<16:1> : diff1<16:1>;
```

Exceptions

None.

C2.4.150 SHSUB8

Signed Halving Subtract 8 performs four signed 8-bit integer subtractions, halves the results, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	0	0	Rn	1	1	1	1	Rd	0	0	1	0	Rm			

T1 variant

SHSUB8{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    diff1 = SInt(R[n]<7:0>) - SInt(R[m]<7:0>);
    diff2 = SInt(R[n]<15:8>) - SInt(R[m]<15:8>);
    diff3 = SInt(R[n]<23:16>) - SInt(R[m]<23:16>);
    diff4 = SInt(R[n]<31:24>) - SInt(R[m]<31:24>);
    R[d] = diff4<8:1> : diff3<8:1> : diff2<8:1> : diff1<8:1>;
```

Exceptions

None.


C2.4.151 SMLABB, SMLABT, SMLATB, SMLATT

Signed Multiply Accumulate (halfwords) performs a signed multiply accumulate operation. The multiply acts on two signed 16-bit quantities, taken from either the bottom or the top half of their respective source registers. The other halves of these source registers are ignored. The 32-bit product is added to a 32-bit accumulate value and the result is written to the destination register.

If overflow occurs during the addition of the accumulate value, the instruction sets the Q flag in the APSR. It is not possible for overflow to occur during the multiplication.

T1

ARMv8-M DSP Extension only



SMLABB variant

Applies when N == 0 && M == 0.

SMLABB{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

SMLABT variant

Applies when N == 0 && M == 1.

SMLABT{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

SMLATB variant

Applies when N == 1 && M == 0.

SMLATB{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

SMLATT variant

Applies when N == 1 && M == 1.

SMLATT{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

Decode for all variants of this encoding

```
if Ra == '1111' then SEE "SMULBB, SMULBT, SMULTB, SMULTT";
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); a = UInt(Ra);
n_high = (N == '1'); m_high = (M == '1');
if d IN {13,15} || n IN {13,15} || m IN {13,15} || a == 13 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register holding the multiplicand in the bottom or top half (selected by <x>), encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register holding the multiplier in the bottom or top half (selected by <y>), encoded in the "Rm" field.

<Ra> Is the third general-purpose source register holding the addend, encoded in the "Ra" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
operand1 = if n_high then R[n]<31:16> else R[n]<15:0>;
operand2 = if m_high then R[m]<31:16> else R[m]<15:0>;
result = SInt(operand1) * SInt(operand2) + SInt(R[a]);
R[d] = result<31:0>;
if result != SInt(result<31:0>) then // Signed overflow
    APSR.Q = '1';
```

Exceptions

None.

C2.4.152 SMLAD, SMLADX


Signed Multiply Accumulate Dual performs two signed 16-bit by 16-bit multiplications. It adds the products to a 32-bit accumulate operand.

Optionally, the instruction can exchange the halfwords of the second operand before performing the arithmetic.

This instruction sets the Q flag if the accumulate operation overflows. Overflow cannot occur during the multiplications.

T1

ARMv8-M DSP Extension only



SMLAD variant

Applies when M == 0.

SMLAD{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

SMLADX variant

Applies when M == 1.

SMLADX{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

Decode for all variants of this encoding

```

if Ra == '1111' then SEE SMUAD;
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); a = UInt(Ra);
m_swap = (M == '1');
if d IN {13,15} || n IN {13,15} || m IN {13,15} || a == 13 then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.
- <Ra> Is the third general-purpose source register holding the addend, encoded in the "Ra" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  operand2 = if m_swap then ROR(R[m],16) else R[m];
  product1 = SInt(R[n]<15:0>) * SInt(operand2<15:0>);
  product2 = SInt(R[n]<31:16>) * SInt(operand2<31:16>);
  result = product1 + product2 + SInt(R[a]);
  R[d] = result<31:0>;
  if result != SInt(result<31:0>) then // Signed overflow
    APSR.Q = '1';
  
```

Exceptions


None.

C2.4.153 SMLAL

Signed Multiply Accumulate Long multiplies two signed 32-bit values to produce a 64-bit value, and accumulates this with a 64-bit value.

T1

ARMv8-M Main Extension only



T1 variant

SMLAL{<c>}{<q>} <RdLo>, <RdHi>, <Rn>, <Rm>

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
dLo = UInt(RdLo); dHi = UInt(RdHi); n = UInt(Rn); m = UInt(Rm); setflags = FALSE;
if dLo IN {13,15} || dHi IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
if dHi == dLo then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <RdLo> Is the general-purpose source register holding the lower 32 bits of the addend, and the destination register for the lower 32 bits of the result, encoded in the "RdLo" field.
- <RdHi> Is the general-purpose source register holding the upper 32 bits of the addend, and the destination register for the upper 32 bits of the result, encoded in the "RdHi" field.
- <Rn> Is the first general-purpose source register holding the multiplicand, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register holding the multiplier, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  result = SInt(R[n]) * SInt(R[m]) + SInt(R[dHi]:R[dLo]);
  R[dHi] = result<63:32>;
  R[dLo] = result<31:0>;
```

Exceptions

None.

C2.4.154 SMLALBB, SMLALBT, SMLALTB, SMLALTT

Signed Multiply Accumulate Long (halfwords) multiplies two signed 16-bit values to produce a 32-bit value, and accumulates this with a 64-bit value. The multiply acts on two signed 16-bit quantities, taken from either the bottom or the top half of their respective source registers. The other halves of these source registers are ignored. The 32-bit product is sign-extended and accumulated with a 64-bit accumulate value.

Overflow is possible during this instruction, but only as a result of the 64-bit addition. This overflow is not detected if it occurs. Instead, the result wraps around modulo 2^{64} .

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	1	1	0	0	Rn	RdLo	RdHi	1	0	N	M	Rm				

SMLALBB variant

Applies when $N == 0 \ \&\& \ M == 0$.

SMLALBB{<c>}{<q>} <RdLo>, <RdHi>, <Rn>, <Rm>

SMLALBT variant

Applies when $N == 0 \ \&\& \ M == 1$.

SMLALBT{<c>}{<q>} <RdLo>, <RdHi>, <Rn>, <Rm>

SMLALTB variant

Applies when $N == 1 \ \&\& \ M == 0$.

SMLALTB{<c>}{<q>} <RdLo>, <RdHi>, <Rn>, <Rm>

SMLALTT variant

Applies when $N == 1 \ \&\& \ M == 1$.

SMLALTT{<c>}{<q>} <RdLo>, <RdHi>, <Rn>, <Rm>

Decode for all variants of this encoding

```
if !HaveDSPExt() then UNDEFINED;
dLo = UInt(RdLo); dHi = UInt(RdHi); n = UInt(Rn); m = UInt(Rm);
n_high = (N == '1'); m_high = (M == '1');
if dLo IN {13,15} || dHi IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
if dHi == dLo then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<RdLo> Is the general-purpose source register holding the lower 32 bits of the addend, and the destination register for the lower 32 bits of the result, encoded in the "RdLo" field.

<RdHi> Is the general-purpose source register holding the upper 32 bits of the addend, and the destination register for the upper 32 bits of the result, encoded in the "RdHi" field.

- <Rn> Is the first general-purpose source register holding the multiplicand in the bottom or top half (selected by <x>), encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register holding the multiplier in the bottom or top half (selected by <x>), encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    operand1 = if n_high then R[n]<31:16> else R[n]<15:0>;
    operand2 = if m_high then R[m]<31:16> else R[m]<15:0>;
    result = SInt(operand1) * SInt(operand2) + SInt(R[dHi]:R[dLo]);
    R[dHi] = result<63:32>;
    R[dLo] = result<31:0>;
```

Exceptions

None.

C2.4.155 SMLALD, SMLALDX

Signed Multiply Accumulate Long Dual performs two signed 16-bit by 16-bit multiplications. It adds the products to a 64-bit accumulate operand.

Optionally, the instruction can exchange the halfwords of the second operand before performing the arithmetic.

Overflow is possible during this instruction, but only as a result of the 64-bit addition. This overflow is not detected if it occurs. Instead, the result wraps around modulo 2^{64} .

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	1	1	0	0	Rn	RdLo	RdHi	1	1	0	M	Rm				

SMLALD variant

Applies when M == 0.

SMLALD{<c>}{<q>} <RdLo>, <RdHi>, <Rn>, <Rm>

SMLALDX variant

Applies when M == 1.

SMLALDX{<c>}{<q>} <RdLo>, <RdHi>, <Rn>, <Rm>

Decode for all variants of this encoding

```

if !HaveDSPExt() then UNDEFINED;
dLo = UInt(RdLo); dHi = UInt(RdHi); n = UInt(Rn); m = UInt(Rm); m_swap = (M == '1');
if dLo IN {13,15} || dHi IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
if dHi == dLo then UNPREDICTABLE;

```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<RdLo> Is the general-purpose source register holding the lower 32 bits of the addend, and the destination register for the lower 32 bits of the result, encoded in the "RdLo" field.

<RdHi> Is the general-purpose source register holding the upper 32 bits of the addend, and the destination register for the upper 32 bits of the result, encoded in the "RdHi" field.

<Rn> Is the first general-purpose source register, encoded in the "Rn" field.

<Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
operand2 = if m_swap then ROR(R[m],16) else R[m];
product1 = SInt(R[n]<15:0>) * SInt(operand2<15:0>);
product2 = SInt(R[n]<31:16>) * SInt(operand2<31:16>);
result = product1 + product2 + SInt(R[dHi]:R[dLo]);
R[dHi] = result<63:32>;
R[dLo] = result<31:0>;

```

Exceptions

None.


C2.4.156 SMLAWB, SMLAWT

Signed Multiply Accumulate (word by halfword) performs a signed multiply accumulate operation. The multiply acts on a signed 32-bit quantity and a signed 16-bit quantity. The signed 16-bit quantity is taken from either the bottom or the top half of its source register. The other half of the second source register is ignored. The top 32 bits of the 48-bit product are added to a 32-bit accumulate value and the result is written to the destination register. The bottom 16 bits of the 48-bit product are ignored.

If overflow occurs during the addition of the accumulate value, the instruction sets the Q flag in the [APSR](#). No overflow can occur during the multiplication.

T1

ARMv8-M DSP Extension only



SMLAWB variant

Applies when M == 0.

SMLAWB{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

SMLAWT variant

Applies when M == 1.

SMLAWT{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

Decode for all variants of this encoding

```
if Ra == '1111' then SEE "SMULWB, SMULWT";
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); a = UInt(Ra); m_high = (M == '1');
if d IN {13,15} || n IN {13,15} || m IN {13,15} || a == 13 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register holding the multiplicand, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register holding the multiplier in the bottom or top half (selected by <y>), encoded in the "Rm" field.
- <Ra> Is the third general-purpose source register holding the addend, encoded in the "Ra" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    operand2 = if m_high then R[m]<31:16> else R[m]<15:0>;
    result = SInt(R[n]) * SInt(operand2) + (SInt(R[a]) << 16);
    R[d] = result<47:16>;
    if (result >> 16) != SInt(R[d]) then // Signed overflow
        APSR.Q = '1';
```

Exceptions

None.

C2.4.157 SMLSD, SMLSDX


Signed Multiply Subtract Dual performs two signed 16-bit by 16-bit multiplications. It adds the difference of the products to a 32-bit accumulate operand.

Optionally, the instruction can exchange the halfwords of the second operand before performing the arithmetic.

This instruction sets the Q flag if the accumulate operation overflows. Overflow cannot occur during the multiplications or subtraction.

T1

ARMv8-M DSP Extension only



SMLSD variant

Applies when M == 0.

SMLSD{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

SMLSDX variant

Applies when M == 1.

SMLSDX{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

Decode for all variants of this encoding

```

if Ra == '1111' then SEE SMUSD;
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); a = UInt(Ra); m_swap = (M == '1');
if d IN {13,15} || n IN {13,15} || m IN {13,15} || a == 13 then UNPREDICTABLE;

```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the general-purpose destination register, encoded in the "Rd" field.

<Rn> Is the first general-purpose source register, encoded in the "Rn" field.

<Rm> Is the second general-purpose source register, encoded in the "Rm" field.

<Ra> Is the third general-purpose source register holding the addend, encoded in the "Ra" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    operand2 = if m_swap then ROR(R[m],16) else R[m];
    product1 = SInt(R[n]<15:0>) * SInt(operand2<15:0>);
    product2 = SInt(R[n]<31:16>) * SInt(operand2<31:16>);
    result = product1 - product2 + SInt(R[a]);
    R[d] = result<31:0>;
    if result != SInt(result<31:0>) then // Signed overflow
        APSR.Q = '1';

```

Exceptions

None.

C2.4.158 SMLS LD, SMLS LD X

Signed Multiply Subtract Long Dual performs two signed 16-bit by 16-bit multiplications. It adds the difference of the products to a 64-bit accumulate operand.

Optionally, the instruction can exchange the halfwords of the second operand before performing the arithmetic.

Overflow is possible during this instruction, but only as a result of the 64-bit addition. This overflow is not detected if it occurs. Instead, the result wraps around modulo 2^{64} .

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	1	1	0	1	Rn	RdLo	RdHi	1	1	0	M	Rm				

SMLS LD variant

Applies when M == 0.

SMLS LD{<c>}{<q>} <RdLo>, <RdHi>, <Rn>, <Rm>

SMLS LD X variant

Applies when M == 1.

SMLS LD X{<c>}{<q>} <RdLo>, <RdHi>, <Rn>, <Rm>

Decode for all variants of this encoding

```

if !HaveDSPExt() then UNDEFINED;
dLo = UInt(RdLo); dHi = UInt(RdHi); n = UInt(Rn); m = UInt(Rm); m_swap = (M == '1');
if dLo IN {13,15} || dHi IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
if dHi == dLo then UNPREDICTABLE;

```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<RdLo> Is the general-purpose source register holding the lower 32 bits of the addend, and the destination register for the lower 32 bits of the result, encoded in the "RdLo" field.

<RdHi> Is the general-purpose source register holding the upper 32 bits of the addend, and the destination register for the upper 32 bits of the result, encoded in the "RdHi" field.

<Rn> Is the first general-purpose source register, encoded in the "Rn" field.

<Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
operand2 = if m_swap then ROR(R[m],16) else R[m];
product1 = SInt(R[n]<15:0>) * SInt(operand2<15:0>);
product2 = SInt(R[n]<31:16>) * SInt(operand2<31:16>);
result = product1 - product2 + SInt(R[dHi]:R[dLo]);
R[dHi] = result<63:32>;
R[dLo] = result<31:0>;

```

Exceptions

None.


C2.4.159 SMMLA, SMMLAR

Signed Most Significant Word Multiply Accumulate multiplies two signed 32-bit values, extracts the most significant 32 bits of the result, and adds an accumulate value.

Optionally, the instruction can specify that the result is rounded instead of being truncated. In this case, the constant 0x80000000 is added to the product before the high word is extracted.

T1

ARMv8-M DSP Extension only



SMMLA variant

Applies when R == 0.

SMMLA{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

SMMLAR variant

Applies when R == 1.

SMMLAR{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

Decode for all variants of this encoding

```
if Ra == '1111' then SEE SMMUL;
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); a = UInt(Ra); round = (R == '1');
if d IN {13,15} || n IN {13,15} || m IN {13,15} || a == 13 then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the general-purpose destination register, encoded in the "Rd" field.

<Rn> Is the first general-purpose source register holding the multiplicand, encoded in the "Rn" field.

<Rm> Is the second general-purpose source register holding the multiplier, encoded in the "Rm" field.

<Ra> Is the third general-purpose source register holding the addend, encoded in the "Ra" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    result = (SInt(R[a]) << 32) + SInt(R[n]) * SInt(R[m]);
    if round then result = result + 0x80000000;
    R[d] = result<63:32>;
```

Exceptions

None.

C2.4.160 SMMLS, SMMLSR

Signed Most Significant Word Multiply Subtract multiplies two signed 32-bit values, subtracts the result from a 32-bit accumulate value that is shifted left by 32 bits, and extracts the most significant 32 bits of the result of that subtraction.

Optionally, the instruction can specify that the result of the instruction is rounded instead of being truncated. In this case, the constant 0x80000000 is added to the result of the subtraction before the high word is extracted.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	0	1	1	0	Rn	Ra	Rd	0	0	0	R	Rm				

SMMLS variant

Applies when R == 0.

SMMLS{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

SMMLSR variant

Applies when R == 1.

SMMLSR{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

Decode for all variants of this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); a = UInt(Ra); round = (R == '1');
if d IN {13,15} || n IN {13,15} || m IN {13,15} || a IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the general-purpose destination register, encoded in the "Rd" field.

<Rn> Is the first general-purpose source register holding the multiplicand, encoded in the "Rn" field.

<Rm> Is the second general-purpose source register holding the multiplier, encoded in the "Rm" field.

<Ra> Is the third general-purpose source register holding the addend, encoded in the "Ra" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  result = (SInt(R[a]) << 32) - SInt(R[n]) * SInt(R[m]);
  if round then result = result + 0x80000000;
  R[d] = result<63:32>;
```

Exceptions

None.

C2.4.161 SMMUL, SMMULR

Signed Most Significant Word Multiply multiplies two signed 32-bit values, extracts the most significant 32 bits of the result, and writes those bits to the destination register.

Optionally, the instruction can specify that the result is rounded instead of being truncated. In this case, the constant `0x80000000` is added to the product before the high word is extracted.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	0	1	0	1	Rn	1	1	1	1	Rd	0	0	0	R	Rm			

SMMUL variant

Applies when `R == 0`.

`SMMUL{<c>}{<q>} {<Rd>}, <Rn>, <Rm>`

SMMULR variant

Applies when `R == 1`.

`SMMULR{<c>}{<q>} {<Rd>}, <Rn>, <Rm>`

Decode for all variants of this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); round = (R == '1');
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    result = SInt(R[n]) * SInt(R[m]);
    if round then result = result + 0x80000000;
    R[d] = result<63:32>;
```

Exceptions

None.

C2.4.162 SMUAD, SMUADX

Signed Dual Multiply Add performs two signed 16-bit by 16-bit multiplications. It adds the products together, and writes the result to the destination register.

Optionally, the instruction can exchange the halfwords of the second operand before performing the arithmetic.

This instruction sets the Q flag if the addition overflows. The multiplications cannot overflow.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	0	0	1	0	Rn		1	1	1	1	Rd		0	0	0	M	Rm	

SMUAD variant

Applies when M == 0.

SMUAD{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

SMUADX variant

Applies when M == 1.

SMUADX{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for all variants of this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); m_swap = (M == '1');
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  operand2 = if m_swap then ROR(R[m],16) else R[m];
  product1 = SInt(R[n]<15:0>) * SInt(operand2<15:0>);
  product2 = SInt(R[n]<31:16>) * SInt(operand2<31:16>);
  result = product1 + product2;
  R[d] = result<31:0>;
  if result != SInt(result<31:0>) then // Signed overflow
    APSR.Q = '1';
```

Exceptions

None.

C2.4.163 SMULBB, SMULBT, SMULTB, SMULTT

Signed Multiply (halfwords) multiplies two signed 16-bit quantities, taken from either the bottom or the top half of their respective source registers. The other halves of these source registers are ignored. The 32-bit product is written to the destination register. No overflow is possible during this instruction.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	0	0	0	1	Rn	1	1	1	1	Rd	0	0	N	M	Rm			

SMULBB variant

Applies when N == 0 && M == 0.

SMULBB{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

SMULBT variant

Applies when N == 0 && M == 1.

SMULBT{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

SMULTB variant

Applies when N == 1 && M == 0.

SMULTB{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

SMULTT variant

Applies when N == 1 && M == 1.

SMULTT{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for all variants of this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
n_high = (N == '1'); m_high = (M == '1');
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<Rd>	Is the general-purpose destination register, encoded in the "Rd" field.
<Rn>	Is the first general-purpose source register holding the multiplicand in the bottom or top half (selected by <x>), encoded in the "Rn" field.
<Rm>	Is the second general-purpose source register holding the multiplier in the bottom or top half (selected by <y>), encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    operand1 = if n_high then R[n]<31:16> else R[n]<15:0>;
    operand2 = if m_high then R[m]<31:16> else R[m]<15:0>;
    result = SInt(operand1) * SInt(operand2);
    R[d] = result<31:0>;
    // Signed overflow cannot occur
```

Exceptions

None.

C2.4.164 SMULL

Signed Multiply Long multiplies two 32-bit signed values to produce a 64-bit result.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	1	0	0	0	Rn	RdLo	RdHi	0	0	0	0	Rm				

T1 variant

SMULL{<c>}{<q>} <RdLo>, <RdHi>, <Rn>, <Rm>

Decode for this encoding

```

if !HaveMainExt() then UNDEFINED;
dLo = UInt(RdLo); dHi = UInt(RdHi); n = UInt(Rn); m = UInt(Rm); setflags = FALSE;
if dLo IN {13,15} || dHi IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
if dHi == dLo then UNPREDICTABLE;

```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<RdLo>	Is the general-purpose destination register for the lower 32 bits of the result, encoded in the "RdLo" field.
<RdHi>	Is the general-purpose destination register for the upper 32 bits of the result, encoded in the "RdHi" field.
<Rn>	Is the first general-purpose source register holding the multiplicand, encoded in the "Rn" field.
<Rm>	Is the second general-purpose source register holding the multiplier, encoded in the "Rm" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    result = SInt(R[n]) * SInt(R[m]);
    R[dHi] = result<63:32>;
    R[dLo] = result<31:0>;

```

Exceptions

None.

C2.4.165 SMULWB, SMULWT

Signed Multiply (word by halfword) multiplies a signed 32-bit quantity and a signed 16-bit quantity. The signed 16-bit quantity is taken from either the bottom or the top half of its source register. The other half of the second source register is ignored. The top 32 bits of the 48-bit product are written to the destination register. The bottom 16 bits of the 48-bit product are ignored. No overflow is possible during this instruction.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	0	0	1	1	Rn	1	1	1	1	Rd	0	0	0	M	Rm			

SMULWB variant

Applies when M == 0.

SMULWB{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

SMULWT variant

Applies when M == 1.

SMULWT{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for all variants of this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); m_high = (M == '1');
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register holding the multiplicand, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register holding the multiplier in the bottom or top half (selected by <y>), encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  operand2 = if m_high then R[m]<31:16> else R[m]<15:0>;
  product = SInt(R[n]) * SInt(operand2);
  R[d] = product<47:16>;
  // Signed overflow cannot occur
```

Exceptions

None.

C2.4.166 SMUSD, SMUSDX

Signed Dual Multiply Subtract performs two signed 16-bit by 16-bit multiplications. It subtracts one of the products from the other, and writes the result to the destination register.

Optionally, the instruction can exchange the halfwords of the second operand before performing the arithmetic.

Overflow cannot occur.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	0	1	0	0	Rn	1	1	1	1	Rd	0	0	0	M	Rm			

SMUSD variant

Applies when M == 0.

SMUSD{<c>}{<q>} {<Rd>}, {<Rn>}, {<Rm>}

SMUSDX variant

Applies when M == 1.

SMUSDX{<c>}{<q>} {<Rd>}, {<Rn>}, {<Rm>}

Decode for all variants of this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); m_swap = (M == '1');
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    operand2 = if m_swap then ROR(R[m],16) else R[m];
    product1 = SInt(R[n]<15:0>) * SInt(operand2<15:0>);
    product2 = SInt(R[n]<31:16>) * SInt(operand2<31:16>);
    result = product1 - product2;
    R[d] = result<31:0>;
    // Signed overflow cannot occur
```

Exceptions

None.

C2.4.167 SSAT

Signed Saturate saturates an optionally-shifted signed value to a selectable signed range.

The Q flag is set to 1 if the operation saturates.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	12	11	8	7	6	5	4	0
1	1	1	1	0	(0)	1	1	0	0	sh	0	Rn	0	imm3	Rd	imm2	(0)	sat_imm					

Arithmetic shift right variant

Applies when `sh == 1 && !(imm3 == 000 && imm2 == 00)`.

SSAT{<c>}{<q>} <Rd>, #<imm>, <Rn>, ASR #<amount>

Logical shift left variant

Applies when `sh == 0`.

SSAT{<c>}{<q>} <Rd>, #<imm>, <Rn> {, LSL #<amount>}

Decode for all variants of this encoding

```

if sh == '1' && (imm3:imm2) == '0000' then
  if HaveDSPExt() then
    SEE SSAT16;
  else
    UNDEFINED;
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); saturate_to = UInt(sat_imm)+1;
(shift_t, shift_n) = DecodeImmShift(sh:'0', imm3:imm2);
if d IN {13,15} || n IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <imm> Is the bit position for saturation, in the range 1 to 32, encoded in the "sat_imm" field as <imm>-1.
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.
- <amount> For the arithmetic shift right variant: is the shift amount, in the range 1 to 31 encoded in the "imm3:imm2" field as <amount>.
 For the logical shift left variant: is the optional shift amount, in the range 0 to 31, defaulting to 0 and encoded in the "imm3:imm2" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  operand = Shift(R[n], shift_t, shift_n, APSR.C); // APSR.C ignored
  (result, sat) = SignedSatQ(SInt(operand), saturate_to);
  
```



```
R[d] = SignExtend(result, 32);  
if sat then  
    APSR.Q = '1';
```

Exceptions

None.

C2.4.168 SSAT16

Signed Saturate 16 saturates two signed 16-bit values to a selected signed range.

The Q flag is set to 1 if the operation saturates.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	0	(0)	1	1	0	0	1	0	Rn	0	0	0	0	0	Rd	0	0	(0)	(0)	sat_imm		

T1 variant

SSAT16{<c>}{<q>} <Rd>, #<imm>, <Rn>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); saturate_to = UInt(sat_imm)+1;
if d IN {13,15} || n IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <imm> Is the bit position for saturation, in the range 1 to 16, encoded in the "sat_imm" field as <imm>-1.
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  (result1, sat1) = SignedSatQ(SInt(R[n]<15:0>), saturate_to);
  (result2, sat2) = SignedSatQ(SInt(R[n]<31:16>), saturate_to);
  bits(32) result;
  result<15:0> = SignExtend(result1, 16);
  result<31:16> = SignExtend(result2, 16);
  R[d] = result;
  if sat1 || sat2 then
    APSR.Q = '1';
```

Exceptions

None.

C2.4.169 SSAX

Signed Subtract and Add with Exchange exchanges the two halfwords of the second operand, performs one 16-bit integer subtraction and one 16-bit addition, and writes the results to the destination register. It sets the `APSR.GE` bits according to the results.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	1	0	Rn	1	1	1	1	Rd	0	0	0	0	Rm			

T1 variant

SSAX{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
sum = SInt(R[n]<15:0>) + SInt(R[m]<31:16>);
diff = SInt(R[n]<31:16>) - SInt(R[m]<15:0>);
R[d] = diff<15:0> : sum<15:0>;
APSR.GE<1:0> = if sum >= 0 then '11' else '00';
APSR.GE<3:2> = if diff >= 0 then '11' else '00';
```

Exceptions

None.

C2.4.170 SSUB16

Signed Subtract 16 performs two 16-bit signed integer subtractions, and writes the results to the destination register. It sets the **APSR.GE** bits according to the results of the subtractions.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	0	1	Rn	1	1	1	1	Rd	0	0	0	0	Rm			

T1 variant

SSUB16{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
diff1 = SInt(R[n]<15:0>) - SInt(R[m]<15:0>);
diff2 = SInt(R[n]<31:16>) - SInt(R[m]<31:16>);
R[d] = diff2<15:0> : diff1<15:0>;
APSR.GE<1:0> = if diff1 >= 0 then '11' else '00';
APSR.GE<3:2> = if diff2 >= 0 then '11' else '00';
```

Exceptions

None.

C2.4.171 SSUB8

Signed Subtract 8 performs four 8-bit signed integer subtractions, and writes the results to the destination register. It sets the [APSR.GE](#) bits according to the results of the subtractions.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	0	0	Rn	1	1	1	1	Rd	0	0	0	0	Rm			

T1 variant

SSUB8{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    diff1 = SInt(R[n]<7:0>) - SInt(R[m]<7:0>);
    diff2 = SInt(R[n]<15:8>) - SInt(R[m]<15:8>);
    diff3 = SInt(R[n]<23:16>) - SInt(R[m]<23:16>);
    diff4 = SInt(R[n]<31:24>) - SInt(R[m]<31:24>);
    R[d] = diff4<7:0> : diff3<7:0> : diff2<7:0> : diff1<7:0>;
    APSR.GE<0> = if diff1 >= 0 then '1' else '0';
    APSR.GE<1> = if diff2 >= 0 then '1' else '0';
    APSR.GE<2> = if diff3 >= 0 then '1' else '0';
    APSR.GE<3> = if diff4 >= 0 then '1' else '0';
```

Exceptions

None.


C2.4.172 STC, STC2

Store Coprocessor stores data from a coprocessor to a sequence of consecutive memory addresses.

If no coprocessor can execute the instruction, a UsageFault exception is generated.

T1

ARMv8-M Main Extension only



Offset variant

Applies when P == 1 && W == 0.

STC{L}{<c>}{<q>} <coproc>, <CRd>, [<Rn>{, #+/-<imm>}]

Post-indexed variant

Applies when P == 0 && W == 1.

STC{L}{<c>}{<q>} <coproc>, <CRd>, [<Rn>], #+/-<imm>

Pre-indexed variant

Applies when P == 1 && W == 1.

STC{L}{<c>}{<q>} <coproc>, <CRd>, [<Rn>, #+/-<imm>]!

Unindexed variant

Applies when P == 0 && U == 1 && W == 0.

STC{L}{<c>}{<q>} <coproc>, <CRd>, [<Rn>], <option>


Decode for all variants of this encoding

```

if P == '0' && U == '0' && D == '0' && W == '0' then UNDEFINED;
if P == '0' && U == '0' && D == '1' && W == '0' then SEE "MCRR, MCRR2";
if coproc IN '101x' then SEE "Floating-point";
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); cp = UInt(coproc); imm32 = ZeroExtend(imm8:'00', 32);
index = (P == '1'); add = (U == '1'); wback = (W == '1');
if n == 15 then UNPREDICTABLE;
  
```

T2

ARMv8-M Main Extension only



Offset variant

Applies when P == 1 && W == 0.

STC2{L}{<c>}{<q>} <coproc>, <CRd>, [<Rn>{, #+/-<imm>}]

Post-indexed variant

Applies when P == 0 && W == 1.

STC2{L}{<c>}{<q>} <coproc>, <CRd>, [<Rn>], #{+/-}<imm>

Pre-indexed variant

Applies when P == 1 && W == 1.

STC2{L}{<c>}{<q>} <coproc>, <CRd>, [<Rn>, #{+/-}<imm>]!

Unindexed variant

Applies when P == 0 && U == 1 && W == 0.

STC2{L}{<c>}{<q>} <coproc>, <CRd>, [<Rn>], <option>

Decode for all variants of this encoding

```
if P == '0' && U == '0' && D == '0' && W == '0' then UNDEFINED;
if P == '0' && U == '0' && D == '1' && W == '0' then SEE "MCRR, MCRR2";
if coproc IN '101x' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); cp = UInt(coproc); imm32 = ZeroExtend(imm8:'00', 32);
index = (P == '1'); add = (U == '1'); wback = (W == '1');
if n == 15 then UNPREDICTABLE;
```

Notes for all encodings

Floating-point: *Floating-point load/store* on page C2-293.

Assembler symbols

L	If specified, selects the D == 1 form of the encoding. If omitted, selects the D == 0 form.
<c>	See <i>Standard assembler syntax fields</i> on page C1-240.
<q>	See <i>Standard assembler syntax fields</i> on page C1-240.
<coproc>	Is the name of the coprocessor, encoded in the "coproc" field. The valid coprocessor names are p10, p11, p14, and p15.
<CRd>	Is the coprocessor register to be transferred, encoded in the "CRd" field.
<Rn>	Is the general-purpose base register, encoded in the "Rn" field.
<option>	Is a coprocessor option, in the range 0 to 255 enclosed in { }, encoded in the "imm8" field.
+/-	Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values: - when U = 0 + when U = 1
<imm>	Is the immediate offset used for forming the address, a multiple of 4 in the range 0-1020, defaulting to 0 and encoded in the "imm8" field, as <imm>/4.

Operation for all encodings

```
if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteCPCheck(cp);
  if !Coproc_Accepted(cp, ThisInstr()) then
    GenerateCoproprocessorException();
```

```
else
  offset_addr = if add then (R[n] + imm32) else (R[n] - imm32);
  address = if index then offset_addr else R[n];

  // Determine if the stack pointer limit check should be performed
  if wback && n == 13 then
    (limit, applylimit) = LookUpSPLim(LookUpSP());
  else
    applylimit = FALSE;

  // Memory operation only performed if limit not violated
  if !applylimit || (UInt(offset_addr) >= UInt(limit)) then
    repeat
      MemA[address,4] = Coproc_GetWordToStore(cp, ThisInstr());
      address = address + 4;
    until Coproc_DoneStoring(cp, ThisInstr());

  // If the stack pointer is being updated update a fault will be raised
  // if the limit is violated
  if wback then RSPCheck[n] = offset_addr;
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.173 STL

Store Release Word stores a word from a register to memory. The instruction also has memory ordering semantics.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	0	0	0	1	1	0	0	Rn	Rt	(1)	(1)	(1)	(1)	1	0	1	0	(1)	(1)	(1)	(1)		

T1 variant

STL{<c>}{<q>} <Rt>, [<Rn>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn);
if t IN {13,15} || n == 15 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    address = R[n];
    Mem0[address, 4] = R[t];
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.

C2.4.174 STLB

Store Release Byte stores a byte from a register to memory. The instruction also has memory ordering semantics.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	0	0	0	1	1	0	0	Rn	Rt	(1)	(1)	(1)	(1)	1	0	0	0	(1)	(1)	(1)	(1)		

T1 variant

STLB{<c>}{<q>} <Rt>, [<Rn>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn);
if t IN {13,15} || n == 15 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  address = R[n];
  Mem0[address, 1] = R[t]<7:0>;
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.

C2.4.175 STLEX

Store Release Exclusive Word stores a word from a register to memory if the executing PE has exclusive access to the memory addressed. The instruction also has memory ordering semantics.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	0	0	0	1	1	0	0	Rn	Rt	(1)	(1)	(1)	(1)	1	1	1	0	Rd			

T1 variant

STLEX{<c>}{<q>} <Rd>, <Rt>, [<Rn>]

Decode for this encoding

```
d = UInt(Rd); t = UInt(Rt); n = UInt(Rn);
if d IN {13,15} || t IN {13,15} || n == 15 then UNPREDICTABLE;
if d == n || d == t then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the destination general-purpose register into which the status result of the store exclusive is written, encoded in the "Rd" field. The value returned is:

- 0 If the operation updates memory.
- 1 If the operation fails to update memory.

<Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.

<Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    address = R[n];
    if ExclusiveMonitorsPass(address,4) then
        Mem0[address, 4] = R[t];
        R[d] = ZeroExtend('0');
    else
        R[d] = ZeroExtend('1');
```

Exceptions

UsageFault, MemManage, SecureFault, and BusFault.

C2.4.176 STLEXB

Store Release Exclusive Byte stores a byte from a register to memory if the executing PE has exclusive access to the memory addressed. The instruction also has memory ordering semantics.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	0	0	0	1	1	0	0	Rn	Rt	(1)	(1)	(1)	(1)	1	1	0	0	Rd			

T1 variant

STLEXB{<c>}{<q>} <Rd>, <Rt>, [<Rn>]

Decode for this encoding

```
d = UInt(Rd); t = UInt(Rt); n = UInt(Rn);
if d IN {13,15} || t IN {13,15} || n == 15 then UNPREDICTABLE;
if d == n || d == t then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the destination general-purpose register into which the status result of the store exclusive is written, encoded in the "Rd" field. The value returned is:

- 0 If the operation updates memory.
- 1 If the operation fails to update memory.

<Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.

<Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  address = R[n];
  if ExclusiveMonitorsPass(address,1) then
    Mem0[address, 1] = R[t]<7:0>;
    R[d] = ZeroExtend('0');
  else
    R[d] = ZeroExtend('1');
```

Exceptions

UsageFault, MemManage, SecureFault, and BusFault.

C2.4.177 STLEXH

Store Release Exclusive Halfword stores a halfword from a register to memory if the executing PE has exclusive access to the memory addressed. The instruction also has memory ordering semantics.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	0	0	0	1	1	0	0	Rn	Rt	(1)	(1)	(1)	(1)	1	1	0	1	Rd			

T1 variant

STLEXH{<c>}{<q>} <Rd>, <Rt>, [<Rn>]

Decode for this encoding

```
d = UInt(Rd); t = UInt(Rt); n = UInt(Rn);
if d IN {13,15} || t IN {13,15} || n == 15 then UNPREDICTABLE;
if d == n || d == t then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the destination general-purpose register into which the status result of the store exclusive is written, encoded in the "Rd" field. The value returned is:

- 0 If the operation updates memory.
- 1 If the operation fails to update memory.

<Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.

<Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    address = R[n];
    if ExclusiveMonitorsPass(address,2) then
        Mem0[address, 2] = R[t]<15:0>;
        R[d] = ZeroExtend('0');
    else
        R[d] = ZeroExtend('1');
```

Exceptions


UsageFault, MemManage, SecureFault, and BusFault.

C2.4.178 STLH

Store Release Halfword stores a halfword from a register to memory. The instruction also has memory ordering semantics.

T1

ARMv8-M



T1 variant

STLH{<c>}{<q>} <Rt>, [<Rn>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn);
if t IN {13,15} || n == 15 then UNPREDICTABLE;
```

Assembler symbols

- <c> See *Standard assembler syntax fields* on page C1-240.
- <q> See *Standard assembler syntax fields* on page C1-240.
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  address = R[n];
  Mem0[address, 2] = R[t]<15:0>;
```

Exceptions


BusFault, UsageFault, MemManage, and SecureFault.

C2.4.179 STM, STMIA, STMEA

Store Multiple stores multiple registers to consecutive memory locations using an address from a base register. The consecutive memory locations start at this address, and the address just above the last of those locations can optionally be written back to the base register.

T1

ARMv8-M



T1 variant


STM{IA}{<c>}{<q>} <Rn>!, <registers> // Preferred syntax
STMIA{<c>}{<q>} <Rn>!, <registers> // Alternate syntax, Empty Ascending stack

Decode for this encoding

```
n = UInt(Rn); registers = '00000000':register_list; wback = TRUE;
if BitCount(registers) < 1 then UNPREDICTABLE;
```

T2

ARMv8-M Main Extension only



T2 variant

STM{IA}{<c>}.W <Rn>{!}, <registers> // Preferred syntax, if <Rn>, '!' and <registers> can be represented in T1
STMEA{<c>}.W <Rn>{!}, <registers> // Alternate syntax, Empty Ascending stack, if <Rn>, '!' and <registers> can be represented in T1
STM{IA}{<c>}{<q>} <Rn>{!}, <registers> // Preferred syntax
STMEA{<c>}{<q>} <Rn>{!}, <registers> // Alternate syntax, Empty Ascending stack

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); registers = '0':M:'0':register_list; wback = (W == '1');
if n == 15 || BitCount(registers) < 2 then UNPREDICTABLE;
if wback && registers<n> == '1' then UNPREDICTABLE;
```

Assembler symbols

- IA Is an optional suffix for the Increment After form.
- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- ! The address adjusted by the size of the data loaded is written back to the base register. If specified, it is encoded in the "W" field as 1, otherwise this field defaults to 0.

<registers> For encoding T1: is a list of one or more registers to be stored, separated by commas and surrounded by { and }. The registers in the list must be in the range R0-R7, encoded in the "register_list" field. If the base register is not the lowest-numbered register in the list, such an instruction stores an UNKNOWN value for the base register.

For encoding T2: is a list of one or more registers to be stored, separated by commas and surrounded by { and }. The registers in the list must be in the range R0-R12, encoded in the "register_list" field, and can optionally contain the LR. If the LR is in the list, the "M" field is set to 1, otherwise it defaults to 0.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    address    = R[n];
    endAddress = R[n] + 4*BitCount(registers);

    for i = 0 to 14
        // Memory operation only performed if limit not violated
        if registers<i> == '1' then
            if i == n && wback && i != LowestSetBit(registers) then
                MemA[address,4] = bits(32) UNKNOWN; // encoding T1 only
            else
                MemA[address,4] = R[i];
                address = address + 4;

    if wback then R[n] = endAddress;
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.


C2.4.180 STMDB, STMF

Store Multiple Decrement Before stores multiple registers to consecutive memory locations using an address from a base register. The consecutive memory locations end just below this address, and the address of the first of those locations can optionally be written back to the base register.

This instruction is used by the alias **PUSH**. The alias is always the preferred disassembly.

T1

ARMv8-M Main Extension only



T1 variant


STMDB{<c>}{<q>} <Rn>{!}, <registers> // Preferred syntax
STMF{<c>}{<q>} <Rn>{!}, <registers> // Alternate syntax, Full Descending stack

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); registers = '0':M:'0':register_list; wback = (W == '1');
if n == 15 || BitCount(registers) < 2 then UNPREDICTABLE;
if wback && registers<n> == '1' then UNPREDICTABLE;
```

T2

ARMv8-M



T2 variant

STMDB{<c>}{<q>} SP!, <registers>

Decode for this encoding

```
n = 13; wback = TRUE;
registers = '0':M:'000000':register_list;
if BitCount(registers) < 1 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- ! The address adjusted by the size of the data loaded is written back to the base register. If specified, it is encoded in the "W" field as 1, otherwise this field defaults to 0.

<registers> For encoding T1: is a list of one or more registers to be stored, separated by commas and surrounded by { and }. The registers in the list must be in the range R0-R12, encoded in the "register_list" field, and can optionally contain the LR. If the LR is in the list, the "M" field is set to 1, otherwise it defaults to 0.

For encoding T2: is a list of one or more registers to be stored, separated by commas and surrounded by { and }. The registers in the list must be in the range R0-R7, encoded in the "register_list" field, and can optionally include the LR. If the LR is in the list, the "M" field is set to 1, otherwise this field defaults to 0.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    address = R[n] - 4*BitCount(registers);
    if n == 13 then
        (limit, applylimit) = LookUpSPLim(LookUpSP());
    else
        applylimit = FALSE;

    for i = 0 to 14
        // If R[n] is the SP, memory operation only performed if limit not violated
        if registers<i> == '1' && (!applylimit || (UInt(address) >= UInt(limit))) then
            MemA[address,4] = R[i];
            address = address + 4;

    // If R[n] is the SP, stack pointer update will raise a fault if limit violated
    if wback then RSPCheck[n] = R[n] - 4*BitCount(registers);
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.


C2.4.181 STR (immediate)

Store Register (immediate) calculates an address from a base register value and an immediate offset, and stores a word from a register to memory. It can use offset, post-indexed, or pre-indexed addressing.

This instruction is used by the alias **PUSH**. See *Alias conditions* on page C2-588 for details of when each alias is preferred.

T1

ARMv8-M



T1 variant


STR{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding

t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm5:'00', 32);
index = TRUE; add = TRUE; wback = FALSE;

T2

ARMv8-M



T2 variant


STR{<c>}{<q>} <Rt>, [SP{, #<+><imm>}]

Decode for this encoding

t = UInt(Rt); n = 13; imm32 = ZeroExtend(imm8:'00', 32);
index = TRUE; add = TRUE; wback = FALSE;

T3

ARMv8-M Main Extension only



T3 variant

STR{<c>}.W <Rt>, [<Rn> {, #<+><imm>}] // <Rt>, <Rn>, <imm> can be represented in T1 or T2
STR{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]


Decode for this encoding

```

if Rn == '1111' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm12, 32);
index = TRUE; add = TRUE; wback = FALSE;
if t == 15 then UNPREDICTABLE;
  
```

T4

ARMv8-M Main Extension only



Offset variant

Applies when P == 1 && U == 0 && W == 0.

```
STR{<c>}{<q>} <Rt>, [<Rn> {, #-<imm>}]
```

Post-indexed variant

Applies when P == 0 && W == 1.

```
STR{<c>}{<q>} <Rt>, [<Rn>], #{+/-}<imm>
```

Pre-indexed variant

Applies when P == 1 && W == 1.

```
STR{<c>}{<q>} <Rt>, [<Rn>, #{+/-}<imm>]!
```

Decode for all variants of this encoding

```

if P == '1' && U == '1' && W == '0' then SEE STRT;
if Rn == '1111' || (P == '0' && W == '0') then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm8, 32);
index = (P == '1'); add = (U == '1'); wback = (W == '1');
if t == 15 || (wback && n == t) then UNPREDICTABLE;
  
```

Alias conditions

Alias	is preferred when
PUSH	Rn == '1101' && U == '0' && imm8 == '00000100'

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.

- +/- Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values:
 - when U = 0
 - + when U = 1
- + Specifies the offset is added to the base register.
- <imm> For the post-indexed or pre-indexed variant: is a 8-bit unsigned immediate byte offset, in the range 0 to 255, encoded in the "imm8" field.
 - For encoding T1: is the optional positive unsigned immediate byte offset, a multiple of 4 in the range 0 to 124, defaulting to 0 and encoded in the "imm5" field as <imm>/4.
 - For encoding T2: is the optional positive unsigned immediate byte offset, a multiple of 4, in the range 0 to 1020, defaulting to 0 and encoded in the "imm8" field as <imm>/4.
 - For encoding T3: is an optional 12-bit unsigned immediate byte offset, in the range 0 to 4095, defaulting to 0 and encoded in the "imm12" field.
 - For encoding T4: is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation for all encodings

```

if ConditionPassed() then
    EncodingSpecificOperations();
    offset_addr = if add then (R[n] + imm32) else (R[n] - imm32);
    address = if index then offset_addr else R[n];

    // Determine if the stack pointer limit should be checked
    if n == 13 && wback then
        (limit, applylimit) = LookUpSPLim(LookUpSP());
    else
        applylimit = FALSE;
    // Memory operation only performed if limit not violated
    if !applylimit || (UInt(offset_addr) >= UInt(limit)) then
        MemU[address,4] = R[t];

    // If the stack pointer is being updated update a fault will be raised if
    // the limit is violated
    if wback then RSPCheck[n] = offset_addr;
  
```

Exceptions


BusFault, UsageFault, MemManage, and SecureFault.

C2.4.182 STR (register)

Store Register (register) calculates an address from a base register value and an offset register value, stores a word from a register to memory. The offset register value can be shifted left by 0, 1, 2, or 3 bits.

T1

ARMv8-M



T1 variant


STR{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, 0);
```

T2

ARMv8-M Main Extension only



T2 variant

STR{<c>}.W <Rt>, [<Rn>, {+}<Rm>] // <Rt>, <Rn>, <Rm> can be represented in T1
 STR{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>{, LSL #<imm>}]

Decode for this encoding

```
if Rn == '1111' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, UInt(imm2));
if t == 15 || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- +
- Specifies the index register is added to the base register.
- <Rm> Is the general-purpose index register, encoded in the "Rm" field.
- <imm> If present, the size of the left shift to apply to the value from <Rm>, in the range 1-3. <imm> is encoded in imm2. If absent, no shift is specified and imm2 is encoded as 0b00.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    offset = Shift(R[m], shift_t, shift_n, APSR.C);
    address = R[n] + offset;
    MemU[address,4] = R[t];
```

Exceptions


BusFault, UsageFault, MemManage, and SecureFault.

C2.4.183 STRB (immediate)

Store Register Byte (immediate) calculates an address from a base register value and an immediate offset, and stores a byte from a register to memory. It can use offset, post-indexed, or pre-indexed addressing.

T1

ARMv8-M



T1 variant


STRB{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding

t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm5, 32);
 index = TRUE; add = TRUE; wback = FALSE;

T2

ARMv8-M Main Extension only



T2 variant


STRB{<c>}.W <Rt>, [<Rn> {, #<+><imm>}] // <Rt>, <Rn>, <imm> can be represented in T1
 STRB{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding

if Rn == '1111' then UNDEFINED;
 if !HaveMainExt() then UNDEFINED;
 t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm12, 32);
 index = TRUE; add = TRUE; wback = FALSE;
 if t IN {13,15} then UNPREDICTABLE;

T3

ARMv8-M Main Extension only



Offset variant

Applies when P == 1 && U == 0 && W == 0.

STRB{<c>}{<q>} <Rt>, [<Rn> {, #-<imm>}]

Post-indexed variant

Applies when P == 0 && W == 1.

STRB{<c>}{<q>} <Rt>, [<Rn>], #{+/-}<imm>

Pre-indexed variant

Applies when P == 1 && W == 1.

STRB{<c>}{<q>} <Rt>, [<Rn>, #{+/-}<imm>]!

Decode for all variants of this encoding

```
if P == '1' && U == '1' && W == '0' then SEE STRBT;
if Rn == '1111' || (P == '0' && W == '0') then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm8, 32);
index = (P == '1'); add = (U == '1'); wback = (W == '1');
if t IN {13,15} || (wback && n == t) then UNPREDICTABLE;
```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<Rt>	Is the general-purpose register to be transferred, encoded in the "Rt" field.
<Rn>	Is the general-purpose base register, encoded in the "Rn" field.
+/-	Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values: <ul style="list-style-type: none"> - when U = 0 + when U = 1
+	Specifies the offset is added to the base register.
<imm>	For the post-indexed or pre-indexed variant: is a 8-bit unsigned immediate byte offset, in the range 0 to 255, encoded in the "imm8" field. For encoding T1: is an optional 5-bit unsigned immediate byte offset, in the range 0 to 31, defaulting to 0 and encoded in the "imm5" field. For encoding T2: is an optional 12-bit unsigned immediate byte offset, in the range 0 to 4095, defaulting to 0 and encoded in the "imm12" field. For encoding T3: is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    offset_addr = if add then (R[n] + imm32) else (R[n] - imm32);
    address = if index then offset_addr else R[n];

    // Determine if the stack pointer limit should be checked
    if n == 13 && wback then
        (limit, applylimit) = LookUpSPLim(LookUpSP());
    else
        applylimit = FALSE;
    // Memory operation only performed if limit not violated
    if !applylimit || (UInt(offset_addr) >= UInt(limit)) then
        MemU[address,1] = R[t]<7:0>;
```

```
// If the stack pointer is being updated update a fault will be raised if  
// the limit is violated  
if wback then RSPCheck[n] = offset_addr;
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.

C2.4.184 STRB (register)

Store Register Byte (register) calculates an address from a base register value and an offset register value, and stores a byte from a register to memory. The offset register value can be shifted left by 0, 1, 2, or 3 bits.

T1

ARMv8-M

15	14	13	12	11	10	9	8	6	5	3	2	0
0	1	0	1	0	1	0	Rm	Rn	Rt			

T1 variant

STRB{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, 0);
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	1	1	0	0	0	0	0	0	0	0	!=1111	Rt	0	0	0	0	0	0	0	0	imm2	Rm	

Rn

T2 variant

STRB{<c>}.W <Rt>, [<Rn>, {+}<Rm>] // <Rt>, <Rn>, <Rm> can be represented in T1
STRB{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>{, LSL #<imm>}]

Decode for this encoding

```
if Rn == '1111' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, UInt(imm2));
if t IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- +
- <Rm> Specifies the index register is added to the base register.
- <Rm> Is the general-purpose index register, encoded in the "Rm" field.
- <imm> If present, the size of the left shift to apply to the value from <Rm>, in the range 1-3. <imm> is encoded in imm2. If absent, no shift is specified and imm2 is encoded as 0b00.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    offset = Shift(R[m], shift_t, shift_n, APSR.C);
    address = R[n] + offset;
    MemU[address,1] = R[t]<7:0>;
```

Exceptions


BusFault, UsageFault, MemManage, and SecureFault.

C2.4.185 STRBT

Store Register Byte Unprivileged calculates an address from a base register value and an immediate offset, and stores a byte from a register to memory. When privileged software uses an STRBT instruction, the memory access is restricted as if the software was unprivileged.

T1

ARMv8-M Main Extension only



T1 variant

STRBT{<c>}{<q>} <Rt>, [<Rn> {, #+}<imm>]}

Decode for this encoding

```

if Rn == '1111' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); postindex = FALSE; add = TRUE;
register_form = FALSE; imm32 = ZeroExtend(imm8, 32);
if t IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- +
- Specifies the offset is added to the base register.
- <imm> Is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    address = R[n] + imm32;
    MemU_unpriv[address,1] = R[t]<7:0>;

```

Exceptions


UsageFault, BusFault, MemManage, and SecureFault.

C2.4.186 STRD (immediate)

Store Register Dual (immediate) calculates an address from a base register value and an immediate offset, and stores two words from two registers to memory. It can use offset, post-indexed, or pre-indexed addressing.

T1

ARMv8-M Main Extension only



Offset variant

Applies when P == 1 && W == 0.

STRD{<c>}{<q>} <Rt>, <Rt2>, [<Rn> {, #+/-<imm>}]

Post-indexed variant

Applies when P == 0 && W == 1.

STRD{<c>}{<q>} <Rt>, <Rt2>, [<Rn>], #+/-<imm>

Pre-indexed variant

Applies when P == 1 && W == 1.

STRD{<c>}{<q>} <Rt>, <Rt2>, [<Rn>, #+/-<imm>]!

Decode for all variants of this encoding

```

if P == '0' && W == '0' then SEE "Related encodings";
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); t2 = UInt(Rt2); n = UInt(Rn); imm32 = ZeroExtend(imm8:'00', 32);
index = (P == '1'); add = (U == '1'); wback = (W == '1');
if wback && (n == t || n == t2) then UNPREDICTABLE;
if n == 15 || t IN {13,15} || t2 IN {13,15} then UNPREDICTABLE;
  
```

Notes for all encodings

Related encodings: [Load/store \(multiple, dual, exclusive, acquire-release\), table branch](#) on page C2-266.

Assembler symbols

- <c> See [Standard assembler syntax fields](#) on page C1-240.
- <q> See [Standard assembler syntax fields](#) on page C1-240.
- <Rt> Is the first general-purpose register to be transferred, encoded in the "Rt" field.
- <Rt2> Is the second general-purpose register to be transferred, encoded in the "Rt2" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- +/- Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values:
 - when U = 0
 - + when U = 1

<imm> For the offset variant: is the optional unsigned immediate byte offset, a multiple of 4, in the range 0 to 1020, defaulting to 0 and encoded in the "imm8" field as <imm>/4.
 For the post-indexed and pre-indexed variant: is the unsigned immediate byte offset, a multiple of 4, in the range 0 to 1020, encoded in the "imm8" field as <imm>/4.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  offset_addr = if add then (R[n] + imm32) else (R[n] - imm32);
  address = if index then offset_addr else R[n];

  // Determine if the stack pointer limit should be checked
  if n == 13 && wback then
    (limit, applylimit) = LookUpSPLim(LookUpSP());
  else
    applylimit = FALSE;
  // Memory operation only performed if limit not violated
  if !applylimit || (UInt(offset_addr) >= UInt(limit)) then
    MemA[address,4] = R[t];
    MemA[address+4,4] = R[t2];

  // If the stack pointer is being updated update a fault will be raised if
  // the limit is violated
  if wback then RSPCheck[n] = offset_addr;
  
```

Exceptions


BusFault, UsageFault, MemManage, and SecureFault.

C2.4.187 STREX

Store Register Exclusive calculates an address from a base register value and an immediate offset, and stores a word from a register to memory if the executing PE has exclusive access to the memory addressed.

T1

ARMv8-M



T1 variant

STREX{<c>}{<q>} <Rd>, <Rt>, [<Rn> {, #<imm>}]

Decode for this encoding

```
d = UInt(Rd); t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm8:'00', 32);
if t == 15 then SEE "TT";
if d IN {13,15} || t == 13 || n == 15 then UNPREDICTABLE;
if d == n || d == t then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the destination general-purpose register into which the status result of the store exclusive is written, encoded in the "Rd" field. The value returned is:

- 0 If the operation updates memory.
- 1 If the operation fails to update memory.

<Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.

<Rn> Is the general-purpose base register, encoded in the "Rn" field.

<imm> The immediate offset added to the value of <Rn> to calculate the address. <imm> can be omitted, meaning an offset of 0. Values are multiples of 4 in the range 0-1020.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  address = R[n] + imm32;
  if ExclusiveMonitorsPass(address,4) then
    MemA[address,4] = R[t];
    R[d] = ZeroExtend('0');
  else
    R[d] = ZeroExtend('1');
```

Exceptions

UsageFault, MemManage, SecureFault, and BusFault.

C2.4.188 STREXB

Store Register Exclusive Byte derives an address from a base register value, and stores a byte from a register to memory if the executing PE has exclusive access to the memory addressed.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	0	0	0	1	1	0	0	Rn	Rt	(1)	(1)	(1)	(1)	0	1	0	0	Rd			

T1 variant

STREXB{<c>}{<q>} <Rd>, <Rt>, [<Rn>]

Decode for this encoding

```
d = UInt(Rd); t = UInt(Rt); n = UInt(Rn);
if d IN {13,15} || t IN {13,15} || n == 15 then UNPREDICTABLE;
if d == n || d == t then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the destination general-purpose register into which the status result of the store exclusive is written, encoded in the "Rd" field. The value returned is:

- 0 If the operation updates memory.
- 1 If the operation fails to update memory.

<Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.

<Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    address = R[n];
    if ExclusiveMonitorsPass(address,1) then
        MemA[address,1] = R[t]<7:0>;
        R[d] = ZeroExtend('0');
    else
        R[d] = ZeroExtend('1');
```

Exceptions

UsageFault, MemManage, SecureFault, and BusFault.

C2.4.189 STREXH

Store Register Exclusive Halfword derives an address from a base register value, and stores a halfword from a register to memory if the executing PE has exclusive access to the memory addressed.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	0	0	0	1	1	0	0	Rn	Rt	(1)	(1)	(1)	(1)	0	1	0	1	Rd			

T1 variant

STREXH{<c>}{<q>} <Rd>, <Rt>, [<Rn>]

Decode for this encoding

```
d = UInt(Rd); t = UInt(Rt); n = UInt(Rn);
if d IN {13,15} || t IN {13,15} || n == 15 then UNPREDICTABLE;
if d == n || d == t then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the destination general-purpose register into which the status result of the store exclusive is written, encoded in the "Rd" field. The value returned is:
 - 0 If the operation updates memory.
 - 1 If the operation fails to update memory.
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  address = R[n];
  if ExclusiveMonitorsPass(address,2) then
    MemA[address,2] = R[t]<15:0>;
    R[d] = ZeroExtend('0');
  else
    R[d] = ZeroExtend('1');
```

Exceptions

UsageFault, MemManage, SecureFault, and BusFault.

C2.4.190 STRH (immediate)

Store Register Halfword (immediate) calculates an address from a base register value and an immediate offset, and stores a halfword from a register to memory. It can use offset, post-indexed, or pre-indexed addressing.

T1

ARMv8-M

15	14	13	12	11	10		6	5	3	2	0
1	0	0	0	0	imm5			Rn	Rt		

T1 variant

STRH{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm5:'0', 32);
index = TRUE; add = TRUE; wback = FALSE;
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11		0
1	1	1	1	1	0	0	0	1	0	1	0	!=1111	Rt	imm12				
Rn																		

T2 variant

STRH{<c>}.W <Rt>, [<Rn> {, #<+><imm>}] // <Rt>, <Rn>, <imm> can be represented in T1
STRH{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding

```
if Rn == '1111' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm12, 32);
index = TRUE; add = TRUE; wback = FALSE;
if t IN {13,15} then UNPREDICTABLE;
```

T3

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7		0
1	1	1	1	1	0	0	0	0	0	1	0	!=1111	Rt	1	P	U	W	imm8				
Rn																						

Offset variant

Applies when P == 1 && U == 0 && W == 0.

STRH{<c>}{<q>} <Rt>, [<Rn> {, #-<imm>}]

Post-indexed variant

Applies when P == 0 && W == 1.

STRH{<c>}{<q>} <Rt>, [<Rn>], #{+/-}<imm>

Pre-indexed variant

Applies when P == 1 && W == 1.

STRH{<c>}{<q>} <Rt>, [<Rn>, #{+/-}<imm>]!

Decode for all variants of this encoding

```
if P == '1' && U == '1' && W == '0' then SEE STRHT;
if Rn == '1111' || (P == '0' && W == '0') then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); imm32 = ZeroExtend(imm8, 32);
index = (P == '1'); add = (U == '1'); wback = (W == '1');
if t IN {13,15} || (wback && n == t) then UNPREDICTABLE;
```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<Rt>	Is the general-purpose register to be transferred, encoded in the "Rt" field.
<Rn>	Is the general-purpose base register, encoded in the "Rn" field.
+/-	Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values: - when U = 0 + when U = 1
+	Specifies the offset is added to the base register.
<imm>	For the post-indexed or pre-indexed variant: is a 8-bit unsigned immediate byte offset, in the range 0 to 255, encoded in the "imm8" field. For encoding T1: is the optional positive unsigned immediate byte offset, a multiple of 2 in the range 0 to 62, defaulting to 0 and encoded in the "imm5" field as <imm>/2. For encoding T2: is an optional 12-bit unsigned immediate byte offset, in the range 0 to 4095, defaulting to 0 and encoded in the "imm12" field. For encoding T3: is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    offset_addr = if add then (R[n] + imm32) else (R[n] - imm32);
    address = if index then offset_addr else R[n];

    // Determine if the stack pointer limit should be checked
    if n == 13 && wback then
        (limit, applylimit) = LookUpSPLim(LookUpSP());
    else
        applylimit = FALSE;
    // Memory operation only performed if limit not violated
    if !applylimit || (UInt(offset_addr) >= UInt(limit)) then
        MemU[address,2] = R[t]<15:0>;
```

```
// If the stack pointer is being updated update a fault will be raised if  
// the limit is violated  
if wback then RSPCheck[n] = offset_addr;
```

Exceptions


BusFault, UsageFault, MemManage, and SecureFault.

C2.4.191 STRH (register)

Store Register Halfword (register) calculates an address from a base register value and an offset register value, and stores a halfword from a register to memory. The offset register value can be shifted left by 0, 1, 2, or 3 bits.

T1

ARMv8-M



T1 variant


STRH{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>]

Decode for this encoding

```
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, 0);
```

T2

ARMv8-M Main Extension only



T2 variant

STRH{<c>}.W <Rt>, [<Rn>, {+}<Rm>] // <Rt>, <Rn>, <Rm> can be represented in T1
 STRH{<c>}{<q>} <Rt>, [<Rn>, {+}<Rm>{, LSL #<imm>}]

Decode for this encoding

```
if Rn == '1111' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); m = UInt(Rm);
index = TRUE; add = TRUE; wback = FALSE;
(shift_t, shift_n) = (SRTYPE_LSL, UInt(imm2));
if t IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- +
- Specifies the index register is added to the base register.
- <Rm> Is the general-purpose index register, encoded in the "Rm" field.
- <imm> If present, the size of the left shift to apply to the value from <Rm>, in the range 1-3. <imm> is encoded in imm2. If absent, no shift is specified and imm2 is encoded as 0b00.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    offset = Shift(R[m], shift_t, shift_n, APSR.C);
    address = R[n] + offset;
    MemU[address,2] = R[t]<15:0>;
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.


C2.4.192 STRHT

Store Register Halfword Unprivileged calculates an address from a base register value and an immediate offset, and stores a halfword from a register to memory.

When privileged software uses an STRHT instruction, the memory access is restricted as if the software was unprivileged.

T1

ARMv8-M Main Extension only



T1 variant

STRHT{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding

```

if Rn == '1111' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); postindex = FALSE; add = TRUE;
register_form = FALSE; imm32 = ZeroExtend(imm8, 32);
if t IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- + Specifies the offset is added to the base register.
- <imm> Is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  address = R[n] + imm32;
  MemU_unpriv[address,2] = R[t]<15:0>;
  
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


C2.4.193 STRT

Store Register Unprivileged calculates an address from a base register value and an immediate offset, and stores a word from a register to memory.

When privileged software uses an STRT instruction, the memory access is restricted as if the software was unprivileged.

T1

ARMv8-M Main Extension only



T1 variant

STRT{<c>}{<q>} <Rt>, [<Rn> {, #<+><imm>}]

Decode for this encoding

```

if Rn == '1111' then UNDEFINED;
if !HaveMainExt() then UNDEFINED;
t = UInt(Rt); n = UInt(Rn); postindex = FALSE; add = TRUE;
register_form = FALSE; imm32 = ZeroExtend(imm8, 32);
if t IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rt> Is the general-purpose register to be transferred, encoded in the "Rt" field.
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.
- + Specifies the offset is added to the base register.
- <imm> Is an optional 8-bit unsigned immediate byte offset, in the range 0 to 255, defaulting to 0 and encoded in the "imm8" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    address = R[n] + imm32;
    data = R[t];
    MemU_unpriv[address,4] = data;

```

Exceptions


UsageFault, BusFault, MemManage, and SecureFault.

C2.4.194 SUB (SP minus immediate)

Subtract (SP minus immediate) subtracts an immediate value from the SP value, and writes the result to the destination register.

T1

ARMv8-M



T1 variant


SUB{<c>}{<q>} {SP,} SP, #<imm7>

Decode for this encoding

d = 13; setflags = FALSE; imm32 = ZeroExtend(imm7:'00', 32);

T2

ARMv8-M Main Extension only



SUB variant

Applies when S == 0.

SUB{<c>}.W {<Rd>,} SP, #<const> // <Rd>, <const> can be represented in T1
 SUB{<c>}{<q>} {<Rd>,} SP, #<const>

SUBS variant

Applies when S == 1 && Rd != 1111.


SUBS{<c>}{<q>} {<Rd>,} SP, #<const>

Decode for all variants of this encoding

```
if Rd == '1111' && S == '1' then SEE "CMP (immediate)";
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); setflags = (S == '1'); imm32 = T32ExpandImm(i:imm3:imm8);
if d == 15 && S == '0' then UNPREDICTABLE;
```

T3

ARMv8-M Main Extension only



T3 variant

SUB{<c>}{<q>} {<Rd>}, SP, #<imm12> // <imm12> cannot be represented in T1, T2, or T3
SUBW{<c>}{<q>} {<Rd>}, SP, #<imm12> // <imm12> can be represented in T1, T2, or T3

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); setflags = FALSE; imm32 = ZeroExtend(i:imm3:imm8, 32);
if d == 15 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <imm7> Is an unsigned immediate, a multiple of 4 in the range 0 to 508, encoded in the "imm7" field as <imm7>/4.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the SP.
- <imm12> Is a 12-bit unsigned immediate, in the range 0 to 4095, encoded in the "i:imm3:imm8" field.
- <const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    (result, carry, overflow) = AddWithCarry(SP, NOT(imm32), '1');
    RSPCheck[d] = result;
    if setflags then
        APSR.N = result<31>;
        APSR.Z = IsZeroBit(result);
        APSR.C = carry;
        APSR.V = overflow;
```

Exceptions

UsageFault.

C2.4.195 SUB (SP minus register)

Subtract (SP minus register) subtracts an optionally-shifted register value from the SP value, and writes the result to the destination register.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	1	1	0	1	S	1	1	0	1	(0)	imm3	Rd	imm2	type	Rm					

SUB, rotate right with extend variant

Applies when $S == 0$ && $imm3 == 000$ && $imm2 == 00$ && $type == 11$.

SUB{<c>}{<q>} {<Rd>}, SP, <Rm>, RRX

SUB, shift or rotate by value variant

Applies when $S == 0$ && $!(imm3 == 000 \&\& imm2 == 00 \&\& type == 11)$.

SUB{<c>}.W {<Rd>}, SP, <Rm> // <Rd>, <Rm> can be represented in T1 or T2
 SUB{<c>}{<q>} {<Rd>}, SP, <Rm> {, <shift> #<amount>}

SUBS, rotate right with extend variant

Applies when $S == 1$ && $imm3 == 000$ && $Rd != 1111$ && $imm2 == 00$ && $type == 11$.

SUBS{<c>}{<q>} {<Rd>}, SP, <Rm>, RRX

SUBS, shift or rotate by value variant

Applies when $S == 1$ && $!(imm3 == 000 \&\& imm2 == 00 \&\& type == 11) \&\& Rd != 1111$.

SUBS{<c>}{<q>} {<Rd>}, SP, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```

if Rd == '1111' && S == '1' then SEE "CMP (register)";
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); m = UInt(Rm); setflags = (S == '1');
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if d == 13 && (shift_t != SRTYPE_LSL || shift_n > 3) then UNPREDICTABLE;
if (d == 15 && S == '0') || m IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the SP.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.
- <shift> Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values:
 - LSL when type = 00
 - LSR when type = 01

ASR when type = 10

ROR when type = 11

<amount> Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    shifted = Shift(R[m], shift_t, shift_n, APSR.C);
    (result, carry, overflow) = AddWithCarry(SP, NOT(shifted), '1');
    RSPCheck[d] = result;
    if setflags then
        APSR.N = result<31>;
        APSR.Z = IsZeroBit(result);
        APSR.C = carry;
        APSR.V = overflow;
```

Exceptions


UsageFault.

C2.4.196 SUB (immediate)

Subtract (immediate) subtracts an immediate value from a register value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M



T1 variant


SUB<c>{<q>} <Rd>, <Rn>, #<imm3> // Inside IT block
 SUBS{<q>} <Rd>, <Rn>, #<imm3> // Outside IT block

Decode for this encoding

d = UInt(Rd); n = UInt(Rn); setflags = !InITBlock(); imm32 = ZeroExtend(imm3, 32);

T2

ARMv8-M



T2 variant


SUB<c>{<q>} <Rdn>, #<imm8> // Inside IT block, and <Rdn>, <imm8> can be represented in T1
 SUB<c>{<q>} {<Rdn>}, <Rdn>, #<imm8> // Inside IT block, and <Rdn>, <imm8> cannot be represented in T1
 SUBS{<q>} <Rdn>, #<imm8> // Outside IT block, and <Rdn>, <imm8> can be represented in T1
 SUBS{<q>} {<Rdn>}, <Rdn>, #<imm8> // Outside IT block, and <Rdn>, <imm8> cannot be represented in T1

Decode for this encoding

d = UInt(Rdn); n = UInt(Rdn); setflags = !InITBlock(); imm32 = ZeroExtend(imm8, 32);

T3

ARMv8-M Main Extension only



SUB variant

Applies when S == 0.

SUB<c>.W {<Rd>}, <Rn>, #<const> // Inside IT block, and <Rd>, <Rn>, <const> can be represented in T1 or T2
 SUB{<c>}{<q>} {<Rd>}, <Rn>, #<const>

SUBS variant

Applies when S == 1 && Rd != 1111.


SUBS.W {<Rd>}, {<Rn>, #<const> // Outside IT block, and <Rd>, <Rn>, <const> can be represented in T1 or T2
SUBS{<c>}{<q>} {<Rd>}, {<Rn>, #<const>

Decode for all variants of this encoding

```
if Rd == '1111' && S == '1' then SEE "CMP (immediate)";
if Rn == '1101' then SEE "SUB (SP minus immediate)";
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); setflags = (S == '1'); imm32 = T32ExpandImm(i:imm3:imm8);
if d == 13 || (d == 15 && S == '0') || n == 15 then UNPREDICTABLE;
```

T4

ARMv8-M Main Extension only



T4 variant

SUB{<c>}{<q>} {<Rd>}, {<Rn>, #<imm12> // <imm12> cannot be represented in T1, T2, or T3
SUBW{<c>}{<q>} {<Rd>}, {<Rn>, #<imm12> // <imm12> can be represented in T1, T2, or T3

Decode for this encoding

```
if Rn == '1111' then SEE ADR;
if Rn == '1101' then SEE "SUB (SP minus immediate)";
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); setflags = FALSE; imm32 = ZeroExtend(i:imm3:imm8, 32);
if d IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rdn> Is the general-purpose source and destination register, encoded in the "Rdn" field.
- <imm8> Is a 8-bit unsigned immediate, in the range 0 to 255, encoded in the "imm8" field.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.
- <Rn> For encoding T1: is the general-purpose source register, encoded in the "Rn" field.
For encoding T3: is the general-purpose source register, encoded in the "Rn" field. If the SP is used, see [SUB \(SP minus immediate\)](#).
For encoding T4: is the general-purpose source register, encoded in the "Rn" field. If the SP is used, see [SUB \(SP minus immediate\)](#). If the PC is used, see [ADR](#).
- <imm3> Is a 3-bit unsigned immediate, in the range 0 to 7, encoded in the "imm3" field.
- <imm12> Is a 12-bit unsigned immediate, in the range 0 to 4095, encoded in the "i:imm3:imm8" field.
- <const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    (result, carry, overflow) = AddWithCarry(R[n], NOT(imm32), '1');
    R[d] = result;
    if setflags then
        APSR.N = result<31>;
        APSR.Z = IsZeroBit(result);
        APSR.C = carry;
        APSR.V = overflow;
```

Exceptions

None.

C2.4.197 SUB (immediate, from PC)

Subtract from PC subtracts an immediate value from the `Align(PC, 4)` value to form a PC-relative address, and writes the result to the destination register. ARM recommends that, where possible, software avoids using this alias.

This instruction is an alias of the [ADR](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [ADR](#).
- The description of [ADR](#) gives the operational pseudocode for this instruction.

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	12	11	8	7	0
1	1	1	1	0	i	1	0	1	0	1	0	1	1	1	1	0	imm3	Rd	imm8			

T2 variant

`SUB{<c>}{<q>} <Rd>, PC, #<imm12>`

is equivalent to

`ADR{<c>}{<q>} <Rd>, <label>`

and is the preferred disassembly when `i:imm3:imm8 == '000000000000'`.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the general-purpose destination register, encoded in the "Rd" field.

<label> For encoding T1: the label of an instruction or literal data item whose address is to be loaded into <Rd>. The assembler calculates the required value of the offset from the `Align(PC, 4)` value of the ADR instruction to this label. Permitted values of the size of the offset are multiples of 4 in the range 0 to 1020.

For encoding T2 and T3: the label of an instruction or literal data item whose address is to be loaded into <Rd>. The assembler calculates the required value of the offset from the `Align(PC, 4)` value of the ADR instruction to this label. If the offset is zero or positive, encoding T3 is used, with `imm32` equal to the offset. If the offset is negative, encoding T2 is used, with `imm32` equal to the size of the offset. That is, the use of encoding T2 indicates that the required offset is minus the value of `imm32`. Permitted values of the size of the offset are 0-4095.

<imm12> Is a 12-bit unsigned immediate, in the range 0 to 4095, encoded in the "i:imm3:imm8" field.

Operation

The description of [ADR](#) gives the operational pseudocode for this instruction.

C2.4.198 SUB (register)

Subtract (register) subtracts an optionally-shifted register value from a register value, and writes the result to the destination register. It can optionally update the condition flags based on the result.

T1

ARMv8-M

15	14	13	12	11	10	9	8	6	5	3	2	0
0	0	0	1	1	0	1	Rm	Rn	Rd			

T1 variant

SUB<c>{<q>} <Rd>, <Rn>, <Rm> // Inside IT block
 SUBS{<q>} {<Rd>}, <Rn>, <Rm> // Outside IT block

Decode for this encoding

d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); setflags = !InITBlock();
 (shift_t, shift_n) = (SRTYPE_LSL, 0);

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	12	11	8	7	6	5	4	3	0
1	1	1	0	1	0	1	1	1	0	1	S	!=1101	(0)	imm3	Rd	imm2	type	Rm						

Rn

SUB, rotate right with extend variant

Applies when S == 0 && imm3 == 000 && imm2 == 00 && type == 11.

SUB{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

SUB, shift or rotate by value variant

Applies when S == 0 && !(imm3 == 000 && imm2 == 00 && type == 11).

SUB<c>.W {<Rd>}, <Rn>, <Rm> // Inside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1
 SUBS{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

SUBS, rotate right with extend variant

Applies when S == 1 && imm3 == 000 && Rd != 1111 && imm2 == 00 && type == 11.

SUBS{<c>}{<q>} {<Rd>}, <Rn>, <Rm>, RRX

SUBS, shift or rotate by value variant

Applies when S == 1 && !(imm3 == 000 && imm2 == 00 && type == 11) && Rd != 1111.

SUBS.W {<Rd>}, <Rn>, <Rm> // Outside IT block, and <Rd>, <Rn>, <Rm> can be represented in T1
 SUBS{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```
if Rd == '1111' && S == '1' then SEE "CMP (register)";
if Rn == '1101' then SEE "SUB (SP minus register)";
if !HaveMainExt() then UNDEFINED;
```

```
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); setFlags = (S == '1');
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if d == 13 || (d == 15 && S == '0') || n == 15 || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field. If omitted, this register is the same as <Rn>.
- <Rn> For encoding T1: is the first general-purpose source register, encoded in the "Rn" field.
For encoding T2: is the first general-purpose source register, encoded in the "Rn" field. If the SP is used, see [SUB \(SP minus register\)](#).
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.
- <shift> Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values:
 - LSL when type = 00
 - LSR when type = 01
 - ASR when type = 10
 - ROR when type = 11
- <amount> Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    shifted = Shift(R[m], shift_t, shift_n, APSR.C);
    (result, carry, overflow) = AddWithCarry(R[n], NOT(shifted), '1');
    R[d] = result;
    if setFlags then
        APSR.N = result<31>;
        APSR.Z = IsZeroBit(result);
        APSR.C = carry;
        APSR.V = overflow;
```

Exceptions

None.

C2.4.199 SVC

The Supervisor Call instruction generates a call to a system supervisor.


Use it as a call to an operating system to provide a service.

———— **Note** —————

In older versions of the ARM architecture, SVC was called SWI, Software Interrupt.

T1

ARMv8-M



T1 variant

SVC{<c>}{<q>} {#}<imm>

Decode for this encoding

```
imm32 = ZeroExtend(imm8, 32);  
// imm32 is for assembly/disassembly. SVC handlers in some  
// systems interpret imm8 in software, for example to determine the required service.
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <imm> Is a 8-bit unsigned immediate, in the range 0 to 255, encoded in the "imm8" field.

Operation

```
if ConditionPassed() then  
    EncodingSpecificOperations();  
    CallSupervisor();
```

Exceptions


SVCall.

C2.4.200 SXTAB

Signed Extend and Add Byte extracts an 8-bit value from a register, sign-extends it to 32 bits, adds the result to the value in another register, and writes the final result to the destination register. The instruction can specify a rotation by 0, 8, 16, or 24 bits before extracting the 8-bit value.

T1

ARMv8-M DSP Extension only



T1 variant

SXTAB{<c>}{<q>} {<Rd>}, {<Rn>, <Rm> {, ROR #<amount>}}

Decode for this encoding

```

if Rn == '1111' then SEE SXTB;
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); rotation = UInt(rotate:'000');
if d IN {13,15} || n == 13 || m IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<Rd>	Is the general-purpose destination register, encoded in the "Rd" field.
<Rn>	Is the first general-purpose source register, encoded in the "Rn" field.
<Rm>	Is the second general-purpose source register, encoded in the "Rm" field.
<amount>	Is the rotate amount, encoded in the "rotate" field. It can have the following values:
	(omitted) when rotate = 00
	8 when rotate = 01
	16 when rotate = 10
	24 when rotate = 11

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    rotated = ROR(R[m], rotation);
    R[d] = R[n] + SignExtend(rotated<7:0>, 32);

```

Exceptions


None.

C2.4.201 SXTAB16

Signed Extend and Add Byte 16 extracts two 8-bit values from a register, sign-extends them to 16 bits each, adds the results to two 16-bit values from another register, and writes the final results to the destination register. The instruction can specify a rotation by 0, 8, 16, or 24 bits before extracting the 8-bit values.

T1

ARMv8-M DSP Extension only



T1 variant

SXTAB16{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, ROR #<amount>}

Decode for this encoding

```

if Rn == '1111' then SEE SXTB16;
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); rotation = UInt(rotate:'000');
if d IN {13,15} || n == 13 || m IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.
- <amount> Is the rotate amount, encoded in the "rotate" field. It can have the following values:

(omitted)	when rotate = 00
8	when rotate = 01
16	when rotate = 10
24	when rotate = 11

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  rotated = ROR(R[m], rotation);
  bits(32) result;
  result<15:0> = R[n]<15:0> + SignExtend(rotated<7:0>, 16);
  result<31:16> = R[n]<31:16> + SignExtend(rotated<23:16>, 16);
  R[d] = result;
  
```

Exceptions


None.

C2.4.202 SXTAH

Signed Extend and Add Halfword extracts a 16-bit value from a register, sign-extends it to 32 bits, adds the result to a value from another register, and writes the final result to the destination register. The instruction can specify a rotation by 0, 8, 16, or 24 bits before extracting the 16-bit value.

T1

ARMv8-M DSP Extension only



T1 variant

SXTAH{<c>}{<q>} {<Rd>}, {<Rn>, <Rm> {, ROR #<amount>}}

Decode for this encoding

```

if Rn == '1111' then SEE SXTB;
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); rotation = UInt(rotate:'000');
if d IN {13,15} || n == 13 || m IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<Rd>	Is the general-purpose destination register, encoded in the "Rd" field.
<Rn>	Is the first general-purpose source register, encoded in the "Rn" field.
<Rm>	Is the second general-purpose source register, encoded in the "Rm" field.
<amount>	Is the rotate amount, encoded in the "rotate" field. It can have the following values:
	(omitted) when rotate = 00
	8 when rotate = 01
	16 when rotate = 10
	24 when rotate = 11

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    rotated = ROR(R[m], rotation);
    R[d] = R[n] + SignExtend(rotated<15:0>, 32);

```

Exceptions


None.

C2.4.203 SXTB

Signed Extend Byte extracts an 8-bit value from a register, sign extends it to 32 bits, and writes the result to the destination register. The instruction can specify a rotation by 0, 8, 16, or 24 bits before extracting the 8-bit value.

T1

ARMv8-M



T1 variant


SXTB{<c>}{<q>} {<Rd>}, <Rm>

Decode for this encoding

d = UInt(Rd); m = UInt(Rm); rotation = 0;

T2

ARMv8-M Main Extension only



T2 variant

SXTB{<c>}.W {<Rd>}, <Rm> // <Rd>, <Rm> can be represented in T1
 SXTB{<c>}{<q>} {<Rd>}, <Rm> {, ROR #<amount>}

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); m = UInt(Rm); rotation = UInt(rotate:'000');
if d IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the general-purpose source register, encoded in the "Rm" field.
- <amount> Is the rotate amount, encoded in the "rotate" field. It can have the following values:

(omitted)	when rotate = 00
8	when rotate = 01
16	when rotate = 10
24	when rotate = 11

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    rotated = ROR(R[m], rotation);
    R[d] = SignExtend(rotated<7:0>, 32);
```

Exceptions

None.

C2.4.204 SXTB16

Signed Extend Byte 16 extracts two 8-bit values from a register, sign-extends them to 16 bits each, and writes the results to the destination register. The instruction can specify a rotation by 0, 8, 16, or 24 bits before extracting the 8-bit values.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	0	0	1	0	1	1	1	1	1	1	1	1	Rd	1	(0)	rotate	Rm			

T1 variant

SXTB16{<c>}{<q>} {<Rd>}, {<Rm> {, ROR #<amount>}}

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); m = UInt(Rm); rotation = UInt(rotate:'000');
if d IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the general-purpose source register, encoded in the "Rm" field.
- <amount> Is the rotate amount, encoded in the "rotate" field. It can have the following values:

(omitted)	when rotate = 00
8	when rotate = 01
16	when rotate = 10
24	when rotate = 11

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  rotated = ROR(R[m], rotation);
  bits(32) result;
  result<15:0> = SignExtend(rotated<7:0>, 16);
  result<31:16> = SignExtend(rotated<23:16>, 16);
  R[d] = result;
```

Exceptions

None.

C2.4.205 SXTB

Signed Extend Halfword extracts a 16-bit value from a register, sign extends it to 32 bits, and writes the result to the destination register. The instruction can specify a rotation by 0, 8, 16, or 24 bits before extracting the 16-bit value.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	1	1	0	0	1	0	0	0	Rm	Rd				

T1 variant

SXTB{<c>}{<q>} {<Rd>}, <Rm>

Decode for this encoding

d = UInt(Rd); m = UInt(Rm); rotation = 0;

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	0	0	0	0	1	1	1	1	1	1	1	1	Rd	1	(0)	rotate	Rm			

T2 variant

SXTB{<c>}.W {<Rd>}, <Rm> // <Rd>, <Rm> can be represented in T1
SXTB{<c>}{<q>} {<Rd>}, <Rm> {, ROR #<amount>}

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); m = UInt(Rm); rotation = UInt(rotate:'000');
if d IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the general-purpose source register, encoded in the "Rm" field.
- <amount> Is the rotate amount, encoded in the "rotate" field. It can have the following values:
 - (omitted) when rotate = 00
 - 8 when rotate = 01
 - 16 when rotate = 10
 - 24 when rotate = 11

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    rotated = ROR(R[m], rotation);
    R[d] = SignExtend(rotated<15:0>, 32);
```

Exceptions

None.

C2.4.206 TBB, TBH

Table Branch Byte causes a PC-relative forward branch using a table of single byte offsets. A base register provides a pointer to the table, and a second register supplies an index into the table. The branch length is twice the value of the byte returned from the table.

Table Branch Halfword causes a PC-relative forward branch using a table of single halfword offsets. A base register provides a pointer to the table, and a second register supplies an index into the table. The branch length is twice the value of the halfword returned from the table.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	0	0	0	1	1	0	1	Rn	(1)	(1)	(1)	(1)	(0)	(0)	(0)	(0)	0	0	0	H	Rm		

Byte variant

Applies when H == 0.

TBB{<c>}{<q>} [<Rn>, <Rm>] // Outside or last in IT block

Halfword variant

Applies when H == 1.

TBH{<c>}{<q>} [<Rn>, <Rm>, LSL #1] // Outside or last in IT block

Decode for all variants of this encoding

```
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); m = UInt(Rm); is_tbh = (H == '1');
if n == 13 || m IN {13,15} then UNPREDICTABLE;
if InITBlock() && !LastInITBlock() then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rn> Is the general-purpose base register holding the address of the table of branch lengths, encoded in the "Rn" field. The PC can be used. If it is, the table immediately follows this instruction.
- <Rm> For the byte variant: is the general-purpose index register, encoded in the "Rm" field. This register contains an integer pointing to a single byte in the table. The offset in the table is the value of the index.
For the halfword variant: is the general-purpose index register, encoded in the "Rm" field. This register contains an integer pointing to a halfword in the table. The offset in the table is twice the value of the index.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    if is_tbh then
        halfwords = UInt(MemU[R[n]+LSL(R[m],1), 2]);
    else
        halfwords = UInt(MemU[R[n]+R[m], 1]);
    BranchWritePC(PC + 2*halfwords);
```

Exceptions

BusFault, UsageFault, MemManage, and SecureFault.

C2.4.207 TEQ (immediate)

Test Equivalence (immediate) performs an exclusive OR operation on a register value and an immediate value. It updates the condition flags based on the result, and discards the result.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	12	11	10	9	8	7	0
1	1	1	1	0	i	0	0	1	0	0	1	Rn	0	imm3	1	1	1	1	imm8			

T1 variant

TEQ{<c>}{<q>} <Rn>, #<const>

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn);
(imm32, carry) = T32ExpandImm_C(i:imm3:imm8, APSR.C);
if n IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rn> Is the general-purpose source register, encoded in the "Rn" field.

<const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    result = R[n] EOR imm32;
    APSR.N = result<31>;
    APSR.Z = IsZeroBit(result);
    APSR.C = carry;
    // APSR.V unchanged
```

Exceptions

None.

C2.4.208 TEQ (register)

Test Equivalence (register) performs an exclusive OR operation on a register value and an optionally-shifted register value. It updates the condition flags based on the result, and discards the result.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	0	1	0	1	0	0	0	1	Rn	(0)	imm3	1	1	1	1	imm2	type		Rm			

Rotate right with extend variant

Applies when imm3 == 000 && imm2 == 00 && type == 11.

TEQ{<c>}{<q>} <Rn>, <Rm>, RRX

Shift or rotate by value variant

Applies when !(imm3 == 000 && imm2 == 00 && type == 11).

TEQ{<c>}{<q>} <Rn>, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); m = UInt(Rm);
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c> See *Standard assembler syntax fields* on page C1-240.

<q> See *Standard assembler syntax fields* on page C1-240.

<Rn> Is the first general-purpose source register, encoded in the "Rn" field.

<Rm> Is the second general-purpose source register, encoded in the "Rm" field.

<shift> Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values:

LSL	when type = 00
LSR	when type = 01
ASR	when type = 10
ROR	when type = 11

<amount> Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  (shifted, carry) = Shift_C(R[m], shift_t, shift_n, APSR.C);
  result = R[n] EOR shifted;
  APSR.N = result<31>;
```



```
APSR.Z = IsZeroBit(result);  
APSR.C = carry;  
// APSR.V unchanged
```

Exceptions


None.

C2.4.209 TST (immediate)

Test (immediate) performs a logical AND operation on a register value and an immediate value. It updates the condition flags based on the result, and discards the result.

T1

ARMv8-M Main Extension only



T1 variant

TST{<c>}{<q>} <Rn>, #<const>

Decode for this encoding

```

if !HaveMainExt() then UNDEFINED;
n = UInt(Rn);
(imm32, carry) = T32ExpandImm_C(i:imm3:imm8, APSR.C);
if n IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.
- <const> An immediate value. See [Modified immediate constants on page C1-249](#) for the range of values.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  result = R[n] AND imm32;
  APSR.N = result<31>;
  APSR.Z = IsZeroBit(result);
  APSR.C = carry;
  // APSR.V unchanged
  
```

Exceptions

None.

C2.4.210 TST (register)

Test (register) performs a logical AND operation on a register value and an optionally-shifted register value. It updates the condition flags based on the result, and discards the result.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	1	0	0	0	0	1	0	0	0	Rm	Rn				

T1 variant

TST{<c>}{<q>} <Rn>, <Rm>

Decode for this encoding

```
n = UInt(Rn); m = UInt(Rm);
(shift_t, shift_n) = (SRTYPE_LSL, 0);
```

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	0	1	0	0	0	0	1	Rn	(0)	imm3	1	1	1	1	imm2	type	Rm										

Rotate right with extend variant

Applies when imm3 == 000 && imm2 == 00 && type == 11.

TST{<c>}{<q>} <Rn>, <Rm>, RRX

Shift or rotate by value variant

Applies when !(imm3 == 000 && imm2 == 00 && type == 11).

TST{<c>}.W <Rn>, <Rm> // <Rn>, <Rm> can be represented in T1
TST{<c>}{<q>} <Rn>, <Rm> {, <shift> #<amount>}

Decode for all variants of this encoding

```
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn); m = UInt(Rm);
(shift_t, shift_n) = DecodeImmShift(type, imm3:imm2);
if n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rn> Is the first general-purpose source register, encoded in the "Rn" field.

<Rm> Is the second general-purpose source register, encoded in the "Rm" field.

- <shift> Is the type of shift to be applied to the second source register, encoded in the "type" field. It can have the following values:
- LSL when type = 00
 - LSR when type = 01
 - ASR when type = 10
 - ROR when type = 11
- <amount> Is the shift amount, in the range 1 to 31 (when <shift> = LSL or ROR) or 1 to 32 (when <shift> = LSR or ASR) encoded in the "imm3:imm2" field as <amount> modulo 32.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    (shifted, carry) = Shift_C(R[m], shift_t, shift_n, APSR.C);
    result = R[n] AND shifted;
    APSR.N = result<31>;
    APSR.Z = IsZeroBit(result);
    APSR.C = carry;
    // APSR.V unchanged
```

Exceptions

None.

C2.4.211 TT, TTT, TTA, TTAT

Test Target (TT) queries the Security state and access permissions of a memory location.

Test Target Unprivileged (TTT) queries the Security state and access permissions of a memory location for an unprivileged access to that location.

Test Target Alternate Domain (TTA) and Test Target Alternate Domain Unprivileged (TTAT) query the Security state and access permissions of a memory location for a Non-secure access to that location. These instructions are only valid when executing in Secure state, and are UNDEFINED if used from Non-secure state.

These instructions return the Security state and access permissions in the destination register. See [TT_RESP](#) for the format of the destination register.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	2	1	0
1	1	1	0	1	0	0	0	0	1	0	0	Rn		1	1	1	1	Rd	A	T	(0)	(0)	(0)	(0)	(0)	(0)	(0)

TT variant

Applies when $A == 0 \ \&\& \ T == 0$.

TT{<c>}{<q>} <Rd>, <Rn>

TTA variant

Applies when $A == 1 \ \&\& \ T == 0$.

TTA{<c>}{<q>} <Rd>, <Rn>

TTAT variant

Applies when $A == 1 \ \&\& \ T == 1$.

TTAT{<c>}{<q>} <Rd>, <Rn>

TTT variant

Applies when $A == 0 \ \&\& \ T == 1$.

TTT{<c>}{<q>} <Rd>, <Rn>

Decode for all variants of this encoding

```
d = UInt(Rd); n = UInt(Rn); alt = (A == '1'); forceunpriv = (T == '1');
if d IN {13,15} || n == 15 then UNPREDICTABLE;
if alt && !IsSecure() then UNDEFINED;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rd> Is the destination general-purpose register into which the status result of the target test is written, encoded in the "Rd" field.

<Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    addr = R[n];
    R[d] = TTResp(addr, alt, forceunpriv);
```

Exceptions

None.

C2.4.212 UADD16

Unsigned Add 16 performs two 16-bit unsigned integer additions, and writes the results to the destination register. It sets the [APSR.GE](#) bits according to the results of the additions.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	1	Rn	1	1	1	1	Rd	0	1	0	0	Rm			

T1 variant

UADD16{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    sum1 = UInt(R[n]<15:0>) + UInt(R[m]<15:0>);
    sum2 = UInt(R[n]<31:16>) + UInt(R[m]<31:16>);
    R[d] = sum2<15:0> : sum1<15:0>;
    APSR.GE<1:0> = if sum1 >= 0x10000 then '11' else '00';
    APSR.GE<3:2> = if sum2 >= 0x10000 then '11' else '00';
```

Exceptions

None.

C2.4.213 UADD8

Unsigned Add 8 performs four unsigned 8-bit integer additions, and writes the results to the destination register. It sets the **APSR.GE** bits according to the results of the additions.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	0	Rn	1	1	1	1	Rd	0	1	0	0	Rm			

T1 variant

UADD8{<c>}{<q>} {<Rd>}, {<Rn>}, {<Rm>}

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  sum1 = UInt(R[n]<7:0>) + UInt(R[m]<7:0>);
  sum2 = UInt(R[n]<15:8>) + UInt(R[m]<15:8>);
  sum3 = UInt(R[n]<23:16>) + UInt(R[m]<23:16>);
  sum4 = UInt(R[n]<31:24>) + UInt(R[m]<31:24>);
  R[d] = sum4<7:0> : sum3<7:0> : sum2<7:0> : sum1<7:0>;
  APSR.GE<0> = if sum1 >= 0x100 then '1' else '0';
  APSR.GE<1> = if sum2 >= 0x100 then '1' else '0';
  APSR.GE<2> = if sum3 >= 0x100 then '1' else '0';
  APSR.GE<3> = if sum4 >= 0x100 then '1' else '0';
```

Exceptions

None.

C2.4.214 UASX

Unsigned Add and Subtract with Exchange exchanges the two halfwords of the second operand, performs one unsigned 16-bit integer addition and one unsigned 16-bit subtraction, and writes the results to the destination register. It sets the [APSR.GE](#) bits according to the results.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	1	0	Rn	1	1	1	1	Rd	0	1	0	0	Rm			

T1 variant

UASX{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
diff = UInt(R[n]<15:0>) - UInt(R[m]<31:16>);
sum = UInt(R[n]<31:16>) + UInt(R[m]<15:0>);
R[d] = sum<15:0> : diff<15:0>;
APSR.GE<1:0> = if diff >= 0 then '11' else '00';
APSR.GE<3:2> = if sum >= 0x10000 then '11' else '00';
```

Exceptions


None.

C2.4.215 UBFX

Unsigned Bit Field Extract extracts any number of adjacent bits at any position from one register, zero extends them to 32 bits, and writes the result to the destination register.

T1

ARMv8-M Main Extension only



T1 variant

UBFX{<c>}{<q>} <Rd>, <Rn>, #<lsb>, #<width>

Decode for this encoding

```

if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn);
lsbit = UInt(imm3:imm2); widthminus1 = UInt(widthm1);
msbit = lsbit + widthminus1;
if msbit > 31 then UNPREDICTABLE;
if d IN {13,15} || n IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.
- <lsb> Is the bit number of the least significant bit in the field, in the range 0 to 31, encoded in the "imm3:imm2" field.
- <width> Is the width of the field, in the range 1 to 32-<lsb>, encoded in the "widthm1" field as <width>-1.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  if msbit <= 31 then
    R[d] = ZeroExtend(R[n]<msbit:lsbit>, 32);
  else
    R[d] = bits(32) UNKNOWN;
  
```

Exceptions

None.

Exceptions

None.

C2.4.217 UDIV

Unsigned Divide divides a 32-bit unsigned integer register value by a 32-bit unsigned integer register value, and writes the result to the destination register. The condition flags are not affected.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	1	0	1	1	Rn	(1)	(1)	(1)	(1)	Rd	1	1	1	1	Rm			

T1 variant

UDIV{<c>}{<q>} {<Rd>,<Rn>,<Rm>}

Decode for this encoding

```
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register holding the dividend, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register holding the divisor, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    if UInt(R[m]) == 0 then
        if IntegerZeroDivideTrappingEnabled() then
            GenerateIntegerZeroDivide();
        else
            result = 0;
    else
        result = RoundTowardsZero(Real(UInt(R[n])) / Real(UInt(R[m])));
    R[d] = result<31:0>;
```

Exceptions

UsageFault.

C2.4.218 UHADD16

Unsigned Halving Add 16 performs two unsigned 16-bit integer additions, halves the results, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	1	Rn	1	1	1	1	Rd	0	1	1	0	Rm			

T1 variant

UHADD16{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  sum1 = UInt(R[n]<15:0>) + UInt(R[m]<15:0>);
  sum2 = UInt(R[n]<31:16>) + UInt(R[m]<31:16>);
  R[d] = sum2<16:1> : sum1<16:1>;
```

Exceptions

None.

C2.4.219 UHADD8

Unsigned Halving Add 8 performs four unsigned 8-bit integer additions, halves the results, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	0	Rn		1	1	1	1	Rd		0	1	1	0	Rm	

T1 variant

UHADD8{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    sum1 = UInt(R[n]<7:0>) + UInt(R[m]<7:0>);
    sum2 = UInt(R[n]<15:8>) + UInt(R[m]<15:8>);
    sum3 = UInt(R[n]<23:16>) + UInt(R[m]<23:16>);
    sum4 = UInt(R[n]<31:24>) + UInt(R[m]<31:24>);
    R[d] = sum4<8:1> : sum3<8:1> : sum2<8:1> : sum1<8:1>;
```

Exceptions

None.

C2.4.220 UHASX

Unsigned Halving Add and Subtract with Exchange exchanges the two halfwords of the second operand, performs one unsigned 16-bit integer addition and one unsigned 16-bit subtraction, halves the results, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	1	0	Rn	1	1	1	1	Rd	0	1	1	0	Rm			

T1 variant

UHASX{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  diff = UInt(R[n]<15:0>) - UInt(R[m]<31:16>);
  sum = UInt(R[n]<31:16>) + UInt(R[m]<15:0>);
  R[d] = sum<16:1> : diff<16:1>;
```

Exceptions

None.

C2.4.221 UHSAX

Unsigned Halving Subtract and Add with Exchange exchanges the two halfwords of the second operand, performs one unsigned 16-bit integer subtraction and one unsigned 16-bit addition, halves the results, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	1	0	Rn	1	1	1	1	Rd	0	1	1	0	Rm			

T1 variant

UHSAX{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    sum = UInt(R[n]<15:0>) + UInt(R[m]<31:16>);
    diff = UInt(R[n]<31:16>) - UInt(R[m]<15:0>);
    R[d] = diff<16:1> : sum<16:1>;
```

Exceptions

None.

C2.4.222 UHSUB16

Unsigned Halving Subtract 16 performs two unsigned 16-bit integer subtractions, halves the results, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	0	1	Rn	1	1	1	1	Rd	0	1	1	0	Rm			

T1 variant

UHSUB16{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  diff1 = UInt(R[n]<15:0>) - UInt(R[m]<15:0>);
  diff2 = UInt(R[n]<31:16>) - UInt(R[m]<31:16>);
  R[d] = diff2<16:1> : diff1<16:1>;
```

Exceptions

None.

C2.4.223 UHSUB8

Unsigned Halving Subtract 8 performs four unsigned 8-bit integer subtractions, halves the results, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	0	0	Rn	1	1	1	1	Rd	0	1	1	0	Rm			

T1 variant

UHSUB8{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    diff1 = UInt(R[n]<7:0>) - UInt(R[m]<7:0>);
    diff2 = UInt(R[n]<15:8>) - UInt(R[m]<15:8>);
    diff3 = UInt(R[n]<23:16>) - UInt(R[m]<23:16>);
    diff4 = UInt(R[n]<31:24>) - UInt(R[m]<31:24>);
    R[d] = diff4<8:1> : diff3<8:1> : diff2<8:1> : diff1<8:1>;
```

Exceptions

None.

C2.4.224 UMAAL

Unsigned Multiply Accumulate Accumulate Long multiplies two unsigned 32-bit values to produce a 64-bit value, adds two unsigned 32-bit values, and writes the 64-bit result to two registers.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	1	1	0			Rn		RdLo		RdHi		0	1	1	0	Rm

T1 variant

UMAAL{<c>}{<q>} <RdLo>, <RdHi>, <Rn>, <Rm>

Decode for this encoding

```

if !HaveDSPExt() then UNDEFINED;
dLo = UInt(RdLo); dHi = UInt(RdHi); n = UInt(Rn); m = UInt(Rm);
if dLo IN {13,15} || dHi IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
if dHi == dLo then UNPREDICTABLE;
  
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<RdLo> Is the general-purpose source register holding the first addend and the destination register for the lower 32 bits of the result, encoded in the "RdLo" field.

<RdHi> Is the general-purpose source register holding the second addend and the destination register for the upper 32 bits of the result, encoded in the "RdHi" field.

<Rn> Is the first general-purpose source register holding the multiplicand, encoded in the "Rn" field.

<Rm> Is the second general-purpose source register holding the multiplier, encoded in the "Rm" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  result = UInt(R[n]) * UInt(R[m]) + UInt(R[dHi]) + UInt(R[dLo]);
  R[dHi] = result<63:32>;
  R[dLo] = result<31:0>;
  
```

Exceptions

None.

C2.4.225 UMLAL

Unsigned Multiply Accumulate Long multiplies two unsigned 32-bit values to produce a 64-bit value, and accumulates this with a 64-bit value.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	1	1	0		Rn		RdLo		RdHi		0	0	0	0		Rm

T1 variant

UMLAL{<c>}{<q>} <RdLo>, <RdHi>, <Rn>, <Rm>

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
dLo = UInt(RdLo); dHi = UInt(RdHi); n = UInt(Rn); m = UInt(Rm); setflags = FALSE;
if dLo IN {13,15} || dHi IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
if dHi == dLo then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<RdLo> Is the general-purpose source register holding the lower 32 bits of the addend, and the destination register for the lower 32 bits of the result, encoded in the "RdLo" field.

<RdHi> Is the general-purpose source register holding the upper 32 bits of the addend, and the destination register for the upper 32 bits of the result, encoded in the "RdHi" field.

<Rn> Is the first general-purpose source register holding the multiplicand, encoded in the "Rn" field.

<Rm> Is the second general-purpose source register holding the multiplier, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    result = UInt(R[n]) * UInt(R[m]) + UInt(R[dHi]:R[dLo]);
    R[dHi] = result<63:32>;
    R[dLo] = result<31:0>;
```

Exceptions

None.

C2.4.226 UMULL

Unsigned Multiply Long multiplies two 32-bit unsigned values to produce a 64-bit result.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	1	0	1	0	Rn	RdLo	RdHi	0	0	0	0	Rm				

T1 variant

UMULL{<c>}{<q>} <RdLo>, <RdHi>, <Rn>, <Rm>

Decode for this encoding

```

if !HaveMainExt() then UNDEFINED;
dLo = UInt(RdLo); dHi = UInt(RdHi); n = UInt(Rn); m = UInt(Rm); setflags = FALSE;
if dLo IN {13,15} || dHi IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
if dHi == dLo then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <RdLo> Is the general-purpose destination register for the lower 32 bits of the result, encoded in the "RdLo" field.
- <RdHi> Is the general-purpose destination register for the upper 32 bits of the result, encoded in the "RdHi" field.
- <Rn> Is the first general-purpose source register holding the multiplicand, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register holding the multiplier, encoded in the "Rm" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  result = UInt(R[n]) * UInt(R[m]);
  R[dHi] = result<63:32>;
  R[dLo] = result<31:0>;
  
```

Exceptions

None.

C2.4.227 UQADD16

Unsigned Saturating Add 16 performs two unsigned 16-bit integer additions, saturates the results to the 16-bit unsigned integer range 0 to $2^{16}-1$, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	1	Rn	1	1	1	1	Rd	0	1	0	1	Rm			

T1 variant

UQADD16{<c>}{<q>} {<Rd>}, {<Rn>}, {<Rm>}

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    sum1 = UInt(R[n]<15:0>) + UInt(R[m]<15:0>);
    sum2 = UInt(R[n]<31:16>) + UInt(R[m]<31:16>);
    bits(32) result;
    result<15:0> = UnsignedSat(sum1, 16);
    result<31:16> = UnsignedSat(sum2, 16);
    R[d] = result;
```

Exceptions

None.

C2.4.228 UQADD8

Unsigned Saturating Add 8 performs four unsigned 8-bit integer additions, saturates the results to the 8-bit unsigned integer range 0 to 2^8-1 , and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	0	0	Rn	1	1	1	1	Rd	0	1	0	1	Rm			

T1 variant

UQADD8{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  sum1 = UInt(R[n]<7:0>) + UInt(R[m]<7:0>);
  sum2 = UInt(R[n]<15:8>) + UInt(R[m]<15:8>);
  sum3 = UInt(R[n]<23:16>) + UInt(R[m]<23:16>);
  sum4 = UInt(R[n]<31:24>) + UInt(R[m]<31:24>);
  bits(32) result;
  result<7:0> = UnsignedSat(sum1, 8);
  result<15:8> = UnsignedSat(sum2, 8);
  result<23:16> = UnsignedSat(sum3, 8);
  result<31:24> = UnsignedSat(sum4, 8);
  R[d] = result;
```

Exceptions

None.

C2.4.229 UQASX

Unsigned Saturating Add and Subtract with Exchange exchanges the two halfwords of the second operand, performs one unsigned 16-bit integer addition and one unsigned 16-bit subtraction, saturates the results to the 16-bit unsigned integer range 0 to $2^{16}-1$, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	0	1	0	Rn	1	1	1	1	Rd	0	1	0	1	Rm			

T1 variant

UQASX{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
diff = UInt(R[n]<15:0>) - UInt(R[m]<31:16>);
sum = UInt(R[n]<31:16>) + UInt(R[m]<15:0>);
bits(32) result;
result<15:0> = UnsignedSat(diff, 16);
result<31:16> = UnsignedSat(sum, 16);
R[d] = result;
```

Exceptions


None.

C2.4.230 UQSAX

Unsigned Saturating Subtract and Add with Exchange exchanges the two halfwords of the second operand, performs one unsigned 16-bit integer subtraction and one unsigned 16-bit addition, saturates the results to the 16-bit unsigned integer range 0 to $2^{16}-1$, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only



T1 variant

UQSAX{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  sum = UInt(R[n]<15:0>) + UInt(R[m]<31:16>);
  diff = UInt(R[n]<31:16>) - UInt(R[m]<15:0>);
  bits(32) result;
  result<15:0> = UnsignedSat(sum, 16);
  result<31:16> = UnsignedSat(diff, 16);
  R[d] = result;
```

Exceptions

None.

C2.4.231 UQSUB16

Unsigned Saturating Subtract 16 performs two unsigned 16-bit integer subtractions, saturates the results to the 16-bit unsigned integer range 0 to $2^{16}-1$, and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	0	1	Rn	1	1	1	1	Rd	0	1	0	1	Rm			

T1 variant

UQSUB16{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    diff1 = UInt(R[n]<15:0>) - UInt(R[m]<15:0>);
    diff2 = UInt(R[n]<31:16>) - UInt(R[m]<31:16>);
    bits(32) result;
    result<15:0> = UnsignedSat(diff1, 16);
    result<31:16> = UnsignedSat(diff2, 16);
    R[d] = result;
```

Exceptions

None.

C2.4.232 UQSUB8

Unsigned Saturating Subtract 8 performs four unsigned 8-bit integer subtractions, saturates the results to the 8-bit unsigned integer range 0 to 2^8-1 , and writes the results to the destination register.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	0	0	Rn	1	1	1	1	Rd	0	1	0	1	Rm			

T1 variant

UQSUB8{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  diff1 = UInt(R[n]<7:0>) - UInt(R[m]<7:0>);
  diff2 = UInt(R[n]<15:8>) - UInt(R[m]<15:8>);
  diff3 = UInt(R[n]<23:16>) - UInt(R[m]<23:16>);
  diff4 = UInt(R[n]<31:24>) - UInt(R[m]<31:24>);
  bits(32) result;
  result<7:0> = UnsignedSat(diff1, 8);
  result<15:8> = UnsignedSat(diff2, 8);
  result<23:16> = UnsignedSat(diff3, 8);
  result<31:24> = UnsignedSat(diff4, 8);
  R[d] = result;
```

Exceptions

None.

C2.4.233 USAD8

Unsigned Sum of Absolute Differences performs four unsigned 8-bit subtractions, and adds the absolute values of the differences together.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	1	0	1	1	1	Rn		1	1	1	1	Rd		0	0	0	0	Rm	

T1 variant

USAD8{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    absdiff1 = Abs(UInt(R[n]<7:0>) - UInt(R[m]<7:0>));
    absdiff2 = Abs(UInt(R[n]<15:8>) - UInt(R[m]<15:8>));
    absdiff3 = Abs(UInt(R[n]<23:16>) - UInt(R[m]<23:16>));
    absdiff4 = Abs(UInt(R[n]<31:24>) - UInt(R[m]<31:24>));
    result = absdiff1 + absdiff2 + absdiff3 + absdiff4;
    R[d] = result<31:0>;
```

Exceptions


None.

C2.4.234 USADA8

Unsigned Sum of Absolute Differences and Accumulate performs four unsigned 8-bit subtractions, and adds the absolute values of the differences to a 32-bit accumulate operand.

T1

ARMv8-M DSP Extension only



T1 variant

USADA8{<c>}{<q>} <Rd>, <Rn>, <Rm>, <Ra>

Decode for this encoding

```

if Ra == '1111' then SEE USAD8;
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); a = UInt(Ra);
if d IN {13,15} || n IN {13,15} || m IN {13,15} || a == 13 then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.
- <Ra> Is the third general-purpose source register holding the addend, encoded in the "Ra" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  absdiff1 = Abs(UInt(R[n]<7:0>) - UInt(R[m]<7:0>));
  absdiff2 = Abs(UInt(R[n]<15:8>) - UInt(R[m]<15:8>));
  absdiff3 = Abs(UInt(R[n]<23:16>) - UInt(R[m]<23:16>));
  absdiff4 = Abs(UInt(R[n]<31:24>) - UInt(R[m]<31:24>));
  result = UInt(R[a]) + absdiff1 + absdiff2 + absdiff3 + absdiff4;
  R[d] = result<31:0>;
  
```

Exceptions

None.

C2.4.235 USAT

Unsigned Saturate saturates an optionally-shifted signed value to a selected unsigned range.

The Q flag is set to 1 if the operation saturates.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	12	11	8	7	6	5	4	0
1	1	1	1	0	(0)	1	1	1	0	sh	0	Rn	0	imm3	Rd	imm2	(0)	sat_imm					

Arithmetic shift right variant

Applies when `sh == 1 && !(imm3 == 000 && imm2 == 00)`.

USAT{<c>}{<q>} <Rd>, #<imm>, <Rn>, ASR #<amount>

Logical shift left variant

Applies when `sh == 0`.

USAT{<c>}{<q>} <Rd>, #<imm>, <Rn> {, LSL #<amount>}

Decode for all variants of this encoding

```

if sh == '1' && (imm3:imm2) == '00000' then
    if HaveDSPExt() then
        SEE USAT16;
    else
        UNDEFINED;
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); saturate_to = UInt(sat_imm);
(shift_t, shift_n) = DecodeImmShift(sh:'0', imm3:imm2);
if d IN {13,15} || n IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

- <c> See *Standard assembler syntax fields* on page C1-240.
- <q> See *Standard assembler syntax fields* on page C1-240.
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <imm> Is the bit position for saturation, in the range 0 to 31, encoded in the "sat_imm" field.
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.
- <amount> For the arithmetic shift right variant: is the shift amount, in the range 1 to 31 encoded in the "imm3:imm2" field as <amount>.
For the logical shift left variant: is the optional shift amount, in the range 0 to 31, defaulting to 0 and encoded in the "imm3:imm2" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
operand = Shift(R[n], shift_t, shift_n, APSR.C); // APSR.C ignored
(result, sat) = UnsignedSatQ(SInt(operand), saturate_to);

```

```
R[d] = ZeroExtend(result, 32);  
if sat then  
    APSR.Q = '1';
```

Exceptions

None.

C2.4.236 USAT16

Unsigned Saturate 16 saturates two signed 16-bit values to a selected unsigned range.

The Q flag is set to 1 if the operation saturates.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	0	(0)	1	1	1	0	1	0	Rn	0	0	0	0	0	Rd	0	0	(0)	(0)	sat_imm		

T1 variant

USAT16{<c>}{<q>} <Rd>, #<imm>, <Rn>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); saturate_to = UInt(sat_imm);
if d IN {13,15} || n IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <imm> Is the bit position for saturation, in the range 0 to 15, encoded in the "sat_imm" field.
- <Rn> Is the general-purpose source register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    (result1, sat1) = UnsignedSatQ(SInt(R[n]<15:0>), saturate_to);
    (result2, sat2) = UnsignedSatQ(SInt(R[n]<31:16>), saturate_to);
    bits(32) result;
    result<15:0> = ZeroExtend(result1, 16);
    result<31:16> = ZeroExtend(result2, 16);
    R[d] = result;
    if sat1 || sat2 then
        APSR.Q = '1';
```

Exceptions

None.

C2.4.237 USAX

Unsigned Subtract and Add with Exchange exchanges the two halfwords of the second operand, performs one unsigned 16-bit integer subtraction and one unsigned 16-bit addition, and writes the results to the destination register. It sets the [APSR.GE](#) bits according to the results.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	1	0	Rn	1	1	1	1	Rd	0	1	0	0	Rm			

T1 variant

USAX{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  sum = UInt(R[n]<15:0>) + UInt(R[m]<31:16>);
  diff = UInt(R[n]<31:16>) - UInt(R[m]<15:0>);
  R[d] = diff<15:0> : sum<15:0>;
  APSR.GE<1:0> = if sum >= 0x10000 then '11' else '00';
  APSR.GE<3:2> = if diff >= 0 then '11' else '00';
```

Exceptions

None.

C2.4.238 USUB16

Unsigned Subtract 16 performs two 16-bit unsigned integer subtractions, and writes the results to the destination register. It sets the [APSR.GE](#) bits according to the results of the subtractions.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	0	1	Rn		1	1	1	1	Rd		0	1	0	0	Rm	

T1 variant

USUB16{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    diff1 = UInt(R[n]<15:0>) - UInt(R[m]<15:0>);
    diff2 = UInt(R[n]<31:16>) - UInt(R[m]<31:16>);
    R[d] = diff2<15:0> : diff1<15:0>;
    APSR.GE<1:0> = if diff1 >= 0 then '11' else '00';
    APSR.GE<3:2> = if diff2 >= 0 then '11' else '00';
```

Exceptions

None.

C2.4.239 USUB8

Unsigned Subtract 8 performs four 8-bit unsigned integer subtractions, and writes the results to the destination register. It sets the [APSR.GE](#) bits according to the results of the subtractions.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	1	1	0	0	Rn	1	1	1	1	Rd	0	1	0	0	Rm			

T1 variant

USUB8{<c>}{<q>} {<Rd>}, <Rn>, <Rm>

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm);
if d IN {13,15} || n IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  diff1 = UInt(R[n]<7:0>) - UInt(R[m]<7:0>);
  diff2 = UInt(R[n]<15:8>) - UInt(R[m]<15:8>);
  diff3 = UInt(R[n]<23:16>) - UInt(R[m]<23:16>);
  diff4 = UInt(R[n]<31:24>) - UInt(R[m]<31:24>);
  R[d] = diff4<7:0> : diff3<7:0> : diff2<7:0> : diff1<7:0>;
  APSR.GE<0> = if diff1 >= 0 then '1' else '0';
  APSR.GE<1> = if diff2 >= 0 then '1' else '0';
  APSR.GE<2> = if diff3 >= 0 then '1' else '0';
  APSR.GE<3> = if diff4 >= 0 then '1' else '0';
```

Exceptions


None.

C2.4.240 UXTAB

Unsigned Extend and Add Byte extracts an 8-bit value from a register, zero-extends it to 32 bits, adds the result to the value in another register, and writes the final result to the destination register. The instruction can specify a rotation by 0, 8, 16, or 24 bits before extracting the 8-bit value.

T1

ARMv8-M DSP Extension only



T1 variant

UXTAB{<c>}{<q>} {<Rd>}, {<Rn>, <Rm> {, ROR #<amount>}}

Decode for this encoding

```

if Rn == '1111' then SEE UXTB;
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); rotation = UInt(rotate:'000');
if d IN {13,15} || n == 13 || m IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<Rd>	Is the general-purpose destination register, encoded in the "Rd" field.
<Rn>	Is the first general-purpose source register, encoded in the "Rn" field.
<Rm>	Is the second general-purpose source register, encoded in the "Rm" field.
<amount>	Is the rotate amount, encoded in the "rotate" field. It can have the following values:
	(omitted) when rotate = 00
	8 when rotate = 01
	16 when rotate = 10
	24 when rotate = 11

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    rotated = ROR(R[m], rotation);
    R[d] = R[n] + ZeroExtend(rotated<7:0>, 32);
  
```

Exceptions


None.

C2.4.241 UXTAB16

Unsigned Extend and Add Byte 16 extracts two 8-bit values from a register, zero-extends them to 16 bits each, adds the results to two 16-bit values from another register, and writes the final results to the destination register. The instruction can specify a rotation by 0, 8, 16, or 24 bits before extracting the 8-bit values.

T1

ARMv8-M DSP Extension only



T1 variant

UXTAB16{<c>}{<q>} {<Rd>}, <Rn>, <Rm> {, ROR #<amount>}

Decode for this encoding

```

if Rn == '1111' then SEE UXTB16;
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); rotation = UInt(rotate:'000');
if d IN {13,15} || n == 13 || m IN {13,15} then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rn> Is the first general-purpose source register, encoded in the "Rn" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.
- <amount> Is the rotate amount, encoded in the "rotate" field. It can have the following values:

(omitted)	when rotate = 00
8	when rotate = 01
16	when rotate = 10
24	when rotate = 11

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  rotated = ROR(R[m], rotation);
  bits(32) result;
  result<15:0> = R[n]<15:0> + ZeroExtend(rotated<7:0>, 16);
  result<31:16> = R[n]<31:16> + ZeroExtend(rotated<23:16>, 16);
  R[d] = result;
  
```

Exceptions


None.

C2.4.242 UXTAH

Unsigned Extend and Add Halfword extracts a 16-bit value from a register, zero-extends it to 32 bits, adds the result to a value from another register, and writes the final result to the destination register. The instruction can specify a rotation by 0, 8, 16, or 24 bits before extracting the 16-bit value.

T1

ARMv8-M DSP Extension only



T1 variant

UXTAH{<c>}{<q>} {<Rd>}, {<Rn>}, <Rm> {, ROR #<amount>}

Decode for this encoding

```

if Rn == '1111' then SEE UXTH;
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); n = UInt(Rn); m = UInt(Rm); rotation = UInt(rotate:'000');
if d IN {13,15} || n == 13 || m IN {13,15} then UNPREDICTABLE;

```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<Rd>	Is the general-purpose destination register, encoded in the "Rd" field.
<Rn>	Is the first general-purpose source register, encoded in the "Rn" field.
<Rm>	Is the second general-purpose source register, encoded in the "Rm" field.
<amount>	Is the rotate amount, encoded in the "rotate" field. It can have the following values:
	(omitted) when rotate = 00
	8 when rotate = 01
	16 when rotate = 10
	24 when rotate = 11

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    rotated = ROR(R[m], rotation);
    R[d] = R[n] + ZeroExtend(rotated<15:0>, 32);

```

Exceptions


None.

C2.4.243 UXTB

Unsigned Extend Byte extracts an 8-bit value from a register, zero extends it to 32 bits, and writes the result to the destination register. The instruction can specify a rotation by 0, 8, 16, or 24 bits before extracting the 8-bit value.

T1

ARMv8-M



T1 variant


UXTB{<c>}{<q>} {<Rd>}, <Rm>

Decode for this encoding

d = UInt(Rd); m = UInt(Rm); rotation = 0;

T2

ARMv8-M Main Extension only



T2 variant

UXTB{<c>}.W {<Rd>}, <Rm> // <Rd>, <Rm> can be represented in T1
 UXTB{<c>}{<q>} {<Rd>}, <Rm> {, ROR #<amount>}

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); m = UInt(Rm); rotation = UInt(rotate:'000');
if d IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the general-purpose source register, encoded in the "Rm" field.
- <amount> Is the rotate amount, encoded in the "rotate" field. It can have the following values:

(omitted)	when rotate = 00
8	when rotate = 01
16	when rotate = 10
24	when rotate = 11

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    rotated = ROR(R[m], rotation);
    R[d] = ZeroExtend(rotated<7:0>, 32);
```

Exceptions

None.

C2.4.244 UXTB16

Unsigned Extend Byte 16 extracts two 8-bit values from a register, zero-extends them to 16 bits each, and writes the results to the destination register. The instruction can specify a rotation by 0, 8, 16, or 24 bits before extracting the 8-bit values.

T1

ARMv8-M DSP Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	0	0	1	1	1	1	1	1	1	1	1	1	Rd	1	(0)	rotate	Rm			

T1 variant

UXTB16{<c>}{<q>} {<Rd>}, {<Rm> {, ROR #<amount>}}

Decode for this encoding

```
if !HaveDSPExt() then UNDEFINED;
d = UInt(Rd); m = UInt(Rm); rotation = UInt(rotate:'000');
if d IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the second general-purpose source register, encoded in the "Rm" field.
- <amount> Is the rotate amount, encoded in the "rotate" field. It can have the following values:

(omitted)	when rotate = 00
8	when rotate = 01
16	when rotate = 10
24	when rotate = 11

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  rotated = ROR(R[m], rotation);
  bits(32) result;
  result<15:0> = ZeroExtend(rotated<7:0>, 16);
  result<31:16> = ZeroExtend(rotated<23:16>, 16);
  R[d] = result;
```

Exceptions

None.

C2.4.245 UXTH

Unsigned Extend Halfword extracts a 16-bit value from a register, zero extends it to 32 bits, and writes the result to the destination register. The instruction can specify a rotation by 0, 8, 16, or 24 bits before extracting the 16-bit value.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	1	1	0	0	1	0	1	0	Rm	Rd				

T1 variant

UXTH{<c>}{<q>} {<Rd>}, <Rm>

Decode for this encoding

d = UInt(Rd); m = UInt(Rm); rotation = 0;

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	8	7	6	5	4	3	0
1	1	1	1	1	0	1	0	0	0	0	1	1	1	1	1	1	1	1	1	Rd	1	(0)rotate	Rm				

T2 variant

UXTH{<c>}.W {<Rd>}, <Rm> // <Rd>, <Rm> can be represented in T1
UXTH{<c>}{<q>} {<Rd>}, <Rm> {, ROR #<amount>}

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
d = UInt(Rd); m = UInt(Rm); rotation = UInt(rotate:'000');
if d IN {13,15} || m IN {13,15} then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rd> Is the general-purpose destination register, encoded in the "Rd" field.
- <Rm> Is the general-purpose source register, encoded in the "Rm" field.
- <amount> Is the rotate amount, encoded in the "rotate" field. It can have the following values:
 - (omitted) when rotate = 00
 - 8 when rotate = 01
 - 16 when rotate = 10
 - 24 when rotate = 11

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    rotated = ROR(R[m], rotation);
    R[d] = ZeroExtend(rotated<15:0>, 32);
```

Exceptions

None.

C2.4.246 VABS

Floating-point Absolute takes the absolute value of a single-precision or double-precision register, and places the result in the destination register.

T2

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	1	0	1	D	1	1	0	0	0	0	Vd	1	0	1	sz	1	1	M	0	Vm		

Single-precision scalar variant

Applies when $sz == 0$.

VABS{<c>}{<q>}.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VABS{<c>}{<q>}.F64 <Dd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<Sd>	Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
<Sm>	Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
<Dd>	Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
<Dm>	Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if dp_operation then
        D[d] = FPAbs(D[m]);
    else
        S[d] = FPAbs(S[m]);

```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.247 VADD

Floating-point Add adds two single-precision or double-precision registers, and places the results in the destination register.

T2

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	1	0	0	D	1	1	Vn	Vd	1	0	1	sz	N	0	M	0	Vm			

Single-precision scalar variant

Applies when $sz == 0$.

VADD{<c>}{<q>}.F32 {<Sd>}, {<Sn>}, {<Sm>}

Double-precision scalar variant

Applies when $sz == 1$.

VADD{<c>}{<q>}.F64 {<Dd>}, {<Dn>}, {<Dm>}

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sn> Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.
- <Sm> Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dn> Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.
- <Dm> Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();
  if dp_operation then
    D[d] = FAdd(D[n], D[m], TRUE);
  else
    S[d] = FAdd(S[n], S[m], TRUE);
  
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.


C2.4.248 VCMF

Floating-point Compare compares two registers, or one register and zero. It writes the result to the **FPSCR** condition flags. These are normally transferred to the **APSR** condition flags by a subsequent **VMRS** instruction.

It raises an Invalid Operation exception only if either operand is a signaling NaN.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

`VCMF{<c>}{<q>}.F32 <Sd>, <Sm>`

Double-precision scalar variant

Applies when $sz == 1$.

`VCMF{<c>}{<q>}.F64 <Dd>, <Dm>`


Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
quiet_nan_exc = (E == '1'); with_zero = FALSE;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
    
```

T2

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

`VCMF{<c>}{<q>}.F32 <Sd>, #0.0`

Double-precision scalar variant

Applies when $sz == 1$.

`VCMF{<c>}{<q>}.F64 <Dd>, #0.0`

Decode for all variants of this encoding

```

if !HaveFPExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
quiet_nan_exc = (E == '1'); with_zero = TRUE;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation for all encodings

```

if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if dp_operation then
        op64 = if with_zero then FPZero('0',64) else D[m];
        (FPSCR.N, FPSCR.Z, FPSCR.C, FPSCR.V) = FPCompare(D[d], op64, quiet_nan_exc, TRUE);
    else
        op32 = if with_zero then FPZero('0',32) else S[m];
        (FPSCR.N, FPSCR.Z, FPSCR.C, FPSCR.V) = FPCompare(S[d], op32, quiet_nan_exc, TRUE);

```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Invalid Operation and Input Denormal.


C2.4.249 VCMPE

Floating-point Compare, raising Invalid Operation on NaN compares two registers, or one register and zero. It writes the result to the **FPSCR** condition flags. These are normally transferred to the **APSR** condition flags by a subsequent VMRS instruction.

It raises an Invalid Operation exception if either operand is any type of NaN.

T1

ARMv8-M Floating-point Extension only, sz == 1 UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when sz == 0.

VCMPE{<c>}{<q>}.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when sz == 1.

VCMPE{<c>}{<q>}.F64 <Dd>, <Dm>


Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
quiet_nan_exc = (E == '1'); with_zero = FALSE;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
    
```

T2

ARMv8-M Floating-point Extension only, sz == 1 UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when sz == 0.

VCMPE{<c>}{<q>}.F32 <Sd>, #0.0

Double-precision scalar variant

Applies when sz == 1.

VCMPE{<c>}{<q>}.F64 <Dd>, #0.0

Decode for all variants of this encoding

```

if !HaveFPExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
quiet_nan_exc = (E == '1'); with_zero = TRUE;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation for all encodings

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();
  if dp_operation then
    op64 = if with_zero then FPZero('0',64) else D[m];
    (FPSCR.N, FPSCR.Z, FPSCR.C, FPSCR.V) = FPCompare(D[d], op64, quiet_nan_exc, TRUE);
  else
    op32 = if with_zero then FPZero('0',32) else S[m];
    (FPSCR.N, FPSCR.Z, FPSCR.C, FPSCR.V) = FPCompare(S[d], op32, quiet_nan_exc, TRUE);
  
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Invalid Operation and Input Denormal.

C2.4.250 VCVT (between double-precision and single-precision)

This instruction does one of the following:

- Converts the value in a double-precision register to single-precision and writes the result to a single-precision register.
- Converts the value in a single-precision register to double-precision and writes the result to a double-precision register.

T1

ARMv8-M Floating-point Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	1	0	1	D	1	1	0	1	1	1	Vd	1	0	1	sz	1	1	M	0	Vm		

Encoding

Applies when `sz == 0`.

VCVT{<c>}{<q>}.F64.F32 <Dd>, <Sm>

Encoding

Applies when `sz == 1`.

VCVT{<c>}{<q>}.F32.F64 <Sd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
double_to_single = (sz == '1');
d = if double_to_single then UInt(Vd:D) else UInt(D:Vd);
m = if double_to_single then UInt(M:Vm) else UInt(Vm:M);
  
```

Assembler symbols

- <c> See *Standard assembler syntax fields on page C1-240*.
- <q> See *Standard assembler syntax fields on page C1-240*.
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations(); ExecuteFPCheck();
  if double_to_single then
    S[d] = FPDoubleToSingle(D[m], TRUE);
  else
    D[d] = FPSingleToDouble(S[m], TRUE);
  
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.251 VCVT (between floating-point and fixed-point)

Floating-point Convert (between floating-point and fixed-point) converts a value in a register from floating-point to fixed-point, or from fixed-point to floating-point, and places the result in the destination register. You can specify the fixed-point value as either signed or unsigned.

The fixed-point value can be 16-bit or 32-bit. Conversions from fixed-point values take their operand from the low-order bits of the source register and ignore any remaining bits. Signed conversions to fixed-point values sign-extend the result value to the destination register width. Unsigned conversions to fixed-point values zero-extend the result value to the destination register width.

The floating-point to fixed-point operation uses the Round towards Zero rounding mode. The fixed-point to floating-point operation uses the Round to Nearest rounding mode.

T1

ARMv8-M Floating-point Extension only, sf == 1 UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	1	0	1	D	1	1	1	op	1	U	Vd	1	0	1	sf	sx	1	i	0	imm4		

Single-precision scalar variant

Applies when op == 0 && sf == 0.

VCVT{<c>}{<q>}.F32.<dt> <Sdm>, <Sdm>, #<fbits>

Single-precision scalar variant

Applies when op == 1 && sf == 0.

VCVT{<c>}{<q>}.<dt>.F32 <Sdm>, <Sdm>, #<fbits>

Double-precision scalar variant

Applies when op == 0 && sf == 1.

VCVT{<c>}{<q>}.F64.<dt> <Ddm>, <Ddm>, #<fbits>

Double-precision scalar variant

Applies when op == 1 && sf == 1.

VCVT{<c>}{<q>}.<dt>.F64 <Ddm>, <Ddm>, #<fbits>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sf == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
to_fixed = (op == '1'); unsigned = (U == '1');
size = if sx == '0' then 16 else 32;
frac_bits = size - UInt(imm4:i);
if to_fixed then
  round_zero = TRUE;
else
  round_nearest = TRUE;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
if frac_bits < 0 then UNPREDICTABLE;
  
```

Assembler symbols

<c> See *Standard assembler syntax fields* on page C1-240.

- <q> See *Standard assembler syntax fields* on page C1-240.
- <dt> Is the data type for the fixed-point number, encoded in the "U:sx" field. It can have the following values:
- | | |
|-----|--------------------|
| S16 | when U = 0, sx = 0 |
| S32 | when U = 0, sx = 1 |
| U16 | when U = 1, sx = 0 |
| U32 | when U = 1, sx = 1 |
- <Sdm> Is the 32-bit name of the floating-point destination and source register, encoded in the "Vd:D" field.
- <Ddm> Is the 64-bit name of the floating-point destination and source register, encoded in the "D:Vd" field.
- <fbits> The number of fraction bits in the fixed-point number:
- If <dt> is S16 or U16, <fbits> must be in the range 0-16. (16 - <fbits>) is encoded in [imm4, i]
 - If <dt> is S32 or U32, <fbits> must be in the range 1-32. (32 - <fbits>) is encoded in [imm4, i].

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if to_fixed then
        if dp_operation then
            result = FPToFixed(D[d], size, frac_bits, unsigned, round_zero, TRUE);
            D[d] = if unsigned then ZeroExtend(result, 64) else SignExtend(result, 64);
        else
            result = FPToFixed(S[d], size, frac_bits, unsigned, round_zero, TRUE);
            S[d] = if unsigned then ZeroExtend(result, 32) else SignExtend(result, 32);
    else
        if dp_operation then
            D[d] = FixedToFP(D[d]<size-1:0>, 64, frac_bits, unsigned, round_nearest, TRUE);
        else
            S[d] = FixedToFP(S[d]<size-1:0>, 32, frac_bits, unsigned, round_nearest, TRUE);

```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Inexact, Invalid Operation, Input Denormal, Overflow, and Underflow.

C2.4.252 VCVT (floating-point to integer)

Convert floating-point to integer with Round towards Zero converts a value in a register from floating-point to a 32-bit integer, using the Round towards Zero rounding mode, and places the result in the destination register.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $opc2 == 100$ && $sz == 0$.

VCVT{<c>}{<q>}.U32.F32 <Sd>, <Sm>

Single-precision scalar variant

Applies when $opc2 == 101$ && $sz == 0$.

VCVT{<c>}{<q>}.S32.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $opc2 == 100$ && $sz == 1$.

VCVT{<c>}{<q>}.U32.F64 <Sd>, <Dm>

Double-precision scalar variant

Applies when $opc2 == 101$ && $sz == 1$.

VCVT{<c>}{<q>}.S32.F64 <Sd>, <Dm>

Decode for all variants of this encoding

```

if opc2 != '000' && !(opc2 IN '10x') then SEE "Related encodings";
if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
to_integer = (opc2<2> == '1');
if to_integer then
  unsigned = (opc2<0> == '0'); round_zero = (op == '1');
  d = UInt(Vd:D); m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
else
  unsigned = (op == '0'); round_nearest = FALSE; // FALSE selects FPSCR rounding
  m = UInt(Vm:M); d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
  
```

Notes for all encodings

Related encodings: [VCVT \(between floating-point and fixed-point\)](#).

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.

<Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.

<Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if to_integer then
        if dp_operation then
            if dp_operation then
                S[d] = FPToFixed(D[m], 32, 0, unsigned, round_zero, TRUE);
            else
                S[d] = FPToFixed(S[m], 32, 0, unsigned, round_zero, TRUE);
        else
            if dp_operation then
                D[d] = FixedToFP(S[m], 64, 0, unsigned, round_nearest, TRUE);
            else
                S[d] = FixedToFP(S[m], 32, 0, unsigned, round_nearest, TRUE);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Inexact, Invalid Operation, Input Denormal, Overflow, and Underflow.

C2.4.253 VCVT (integer to floating-point)

Convert integer to floating-point converts a value in a register from a 32-bit integer to floating-point, using the rounding mode specified by the [FPSCR](#), and places the result in the destination register.

T1

ARMv8-M Floating-point Extension only, sz == 1 UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when sz == 0.

VCVT{<c>}{<q>}.F32.<dt> <Sd>, <Sm>

Double-precision scalar variant

Applies when sz == 1.

VCVT{<c>}{<q>}.F64.<dt> <Dd>, <Sm>

Decode for all variants of this encoding

```

if opc2 != '000' && !(opc2 IN '10x') then SEE "Related encodings";
if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
to_integer = (opc2<2> == '1');
if to_integer then
    unsigned = (opc2<0> == '0'); round_zero = (op == '1');
    d = UInt(Vd:D); m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
else
    unsigned = (op == '0'); round_nearest = FALSE; // FALSE selects FPSCR rounding
    m = UInt(Vm:M); d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
  
```

Notes for all encodings

Related encodings: [VCVT \(between floating-point and fixed-point\)](#).

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <dt> Is the data type for the operand, encoded in the "op" field. It can have the following values:
 - U32 when op = 0
 - S32 when op = 1
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if to_integer then
        if dp_operation then
            S[d] = FPToFixed(D[m], 32, 0, unsigned, round_zero, TRUE);
        else
            S[d] = FPToFixed(S[m], 32, 0, unsigned, round_zero, TRUE);
    else
        if dp_operation then
            D[d] = FixedToFP(S[m], 64, 0, unsigned, round_nearest, TRUE);
        else
            S[d] = FixedToFP(S[m], 32, 0, unsigned, round_nearest, TRUE);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Inexact, Invalid Operation, Input Denormal, Overflow, and Underflow.

C2.4.254 VCVTA

Convert floating-point to integer with Round to Nearest with Ties to Away converts a value in a register from floating-point to a 32-bit integer using the Round to Nearest with Ties to Away rounding mode, and places the result in the destination register.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

VCVTA{<q>}.<dt>.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VCVTA{<q>}.<dt>.F64 <Sd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
if InITBlock() then UNPREDICTABLE;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
unsigned = (op == '0');
round_mode = RM;
d = UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
  
```

Assembler symbols

- <q> See [Standard assembler syntax fields on page C1-240](#).
- <dt> Is the data type for the elements of the destination, encoded in the "op" field. It can have the following values:
 - S32 when op = 0
 - U32 when op = 1
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```

EncodingSpecificOperations();
ExecuteFPCheck();

if dp_operation then
  S[d] = FPToFixedDirected(D[m], 0, unsigned, round_mode, TRUE);
else
  S[d] = FPToFixedDirected(S[m], 0, unsigned, round_mode, TRUE);
  
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Inexact, Invalid Operation, and Input Denormal.


C2.4.255 VCVTB

Floating-point Convert Bottom does one of the following:

- Converts the half-precision value in the bottom half of a single-precision register to single-precision and writes the result to a single-precision register.
- Converts the value in a single-precision register to half-precision and writes the result into the bottom half of a single-precision register, preserving the other half of the target register.
- Converts the half-precision value in the bottom half of a single-precision register to double-precision and writes the result to a double-precision register, without intermediate rounding.
- Converts the value in the double-precision register to half-precision and writes the result into the bottom half of a single-precision register, preserving the other half of the target register, without intermediate rounding.

T1

ARMv8-M Floating-point Extension only, sz == 1 UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when op == 0 && sz == 0.

VCVTB{<c>}{<q>}.F32.F16 <Sd>, <Sm>

Single-precision scalar variant

Applies when op == 1 && sz == 0.

VCVTB{<c>}{<q>}.F16.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when op == 0 && sz == 1.

VCVTB{<c>}{<q>}.F64.F16 <Dd>, <Sm>

Double-precision scalar variant

Applies when op == 1 && sz == 1.

VCVTB{<c>}{<q>}.F16.F64 <Sd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
convert_from_half = (op == '0');
lowbit = if T == '1' then 16 else 0;
if dp_operation then
    if convert_from_half then
        d = UInt(D:Vd); m = UInt(Vm:M);
    else
        d = UInt(Vd:D); m = UInt(M:Vm);
else
    d = UInt(Vd:D); m = UInt(Vm:M);

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();

    if convert_from_half then
        if dp_operation then
            D[d] = FPHalfToDouble(S[m]<lowbit+15:lowbit>, TRUE);
        else
            S[d] = FPHalfToSingle(S[m]<lowbit+15:lowbit>, TRUE);
    else
        if dp_operation then
            S[d]<lowbit+15:lowbit> = FPDoubleToHalf(D[m], TRUE);
        else
            S[d]<lowbit+15:lowbit> = FPSingleToHalf(S[m], TRUE);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.256 VCVTM

Convert floating-point to integer with Round towards -Infinity converts a value in a register from floating-point to a 32-bit integer using the Round towards -Infinity rounding mode, and places the result in the destination register.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

VCVTM{<q>}.<dt>.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VCVTM{<q>}.<dt>.F64 <Sd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
if InITBlock() then UNPREDICTABLE;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
unsigned = (op == '0');
round_mode = RM;
d = UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
  
```

Assembler symbols

- <q> See [Standard assembler syntax fields on page C1-240](#).
- <dt> Is the data type for the elements of the destination, encoded in the "op" field. It can have the following values:
 - S32 when op = 0
 - U32 when op = 1
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```

EncodingSpecificOperations();
ExecuteFPCheck();

if dp_operation then
  S[d] = FPToFixedDirected(D[m], 0, unsigned, round_mode, TRUE);
else
  S[d] = FPToFixedDirected(S[m], 0, unsigned, round_mode, TRUE);
  
```


Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Inexact, Invalid Operation, and Input Denormal.

C2.4.257 VCVTN

Convert floating-point to integer with Round to Nearest converts a value in a register from floating-point to a 32-bit integer using the Round to Nearest rounding mode, and places the result in the destination register.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

VCVTN{<q>}.<dt>.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VCVTN{<q>}.<dt>.F64 <Sd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
if InITBlock() then UNPREDICTABLE;
dp_operation = (sz == '1');
if dp_operation && HaveSPFOnly() then UNDEFINED;
unsigned = (op == '0');
round_mode = RM;
d = UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
  
```

Assembler symbols

- <q> See [Standard assembler syntax fields on page C1-240](#).
- <dt> Is the data type for the elements of the destination, encoded in the "op" field. It can have the following values:
 - S32 when op = 0
 - U32 when op = 1
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```

EncodingSpecificOperations();
ExecuteFPCheck();

if dp_operation then
  S[d] = FPToFixedDirected(D[m], 0, unsigned, round_mode, TRUE);
else
  S[d] = FPToFixedDirected(S[m], 0, unsigned, round_mode, TRUE);
  
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Inexact, Invalid Operation, and Input Denormal.

C2.4.258 VCVTP

Convert floating-point to integer with Round towards +Infinity converts a value in a register from floating-point to a 32-bit integer using the Round towards +Infinity rounding mode, and places the result in the destination register.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

VCVTP{<q>}.<dt>.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VCVTP{<q>}.<dt>.F64 <Sd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
if InITBlock() then UNPREDICTABLE;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
unsigned = (op == '0');
round_mode = RM;
d = UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
  
```

Assembler symbols

- <q> See [Standard assembler syntax fields on page C1-240](#).
- <dt> Is the data type for the elements of the destination, encoded in the "op" field. It can have the following values:
 - S32 when op = 0
 - U32 when op = 1
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```

EncodingSpecificOperations();
ExecuteFPCheck();

if dp_operation then
  S[d] = FPToFixedDirected(D[m], 0, unsigned, round_mode, TRUE);
else
  S[d] = FPToFixedDirected(S[m], 0, unsigned, round_mode, TRUE);
  
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Inexact, Invalid Operation, and Input Denormal.

C2.4.259 VCVTR

Convert floating-point to integer converts a value in a register from floating-point to a 32-bit integer, using the rounding mode specified by the [FPSCR](#), and places the result in the destination register.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $opc2 == 100$ && $sz == 0$.

VCVTR{<c>}{<q>}.U32.F32 <Sd>, <Sm>

Single-precision scalar variant

Applies when $opc2 == 101$ && $sz == 0$.

VCVTR{<c>}{<q>}.S32.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $opc2 == 100$ && $sz == 1$.

VCVTR{<c>}{<q>}.U32.F64 <Sd>, <Dm>

Double-precision scalar variant

Applies when $opc2 == 101$ && $sz == 1$.

VCVTR{<c>}{<q>}.S32.F64 <Sd>, <Dm>

Decode for all variants of this encoding

```

if opc2 != '000' && !(opc2 IN '10x') then SEE "Related encodings";
if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
to_integer = (opc2<2> == '1');
if to_integer then
  unsigned = (opc2<0> == '0'); round_zero = (op == '1');
  d = UInt(Vd:D); m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
else
  unsigned = (op == '0'); round_nearest = FALSE; // FALSE selects FPSCR rounding
  m = UInt(Vm:M); d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
  
```

Notes for all encodings

Related encodings: [VCVT \(between floating-point and fixed-point\)](#).

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.

<Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.

<Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if to_integer then
        if dp_operation then
            if dp_operation then
                S[d] = FPToFixed(D[m], 32, 0, unsigned, round_zero, TRUE);
            else
                S[d] = FPToFixed(S[m], 32, 0, unsigned, round_zero, TRUE);
        else
            if dp_operation then
                D[d] = FixedToFP(S[m], 64, 0, unsigned, round_nearest, TRUE);
            else
                S[d] = FixedToFP(S[m], 32, 0, unsigned, round_nearest, TRUE);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Inexact, Invalid Operation, Input Denormal, Overflow, and Underflow.


C2.4.260 VCVTT

Floating-point Convert Top does one of the following:

- Converts the half-precision value in the top half of a single-precision register to single-precision and writes the result to a single-precision register.
- Converts the value in a single-precision register to half-precision and writes the result into the top half of a single-precision register, preserving the other half of the target register.
- Converts the half-precision value in the top half of a single-precision register to double-precision and writes the result to a double-precision register, without intermediate rounding.
- Converts the value in the double-precision register to half-precision and writes the result into the top half of a double-precision register, preserving the other half of the target register, without intermediate rounding.

T1

ARMv8-M Floating-point Extension only, sz == 1 UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when op == 0 && sz == 0.

VCVTT{<c>}{<q>}.F32.F16 <Sd>, <Sm>

Single-precision scalar variant

Applies when op == 1 && sz == 0.

VCVTT{<c>}{<q>}.F16.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when op == 0 && sz == 1.

VCVTT{<c>}{<q>}.F64.F16 <Dd>, <Sm>

Double-precision scalar variant

Applies when op == 1 && sz == 1.

VCVTT{<c>}{<q>}.F16.F64 <Sd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
convert_from_half = (op == '0');
lowbit = if T == '1' then 16 else 0;
if dp_operation then
  if convert_from_half then
    d = UInt(D:Vd); m = UInt(Vm:M);
  else
    d = UInt(Vd:D); m = UInt(M:Vm);
else
  d = UInt(Vd:D); m = UInt(Vm:M);

```


Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();

    if convert_from_half then
        if dp_operation then
            D[d] = FPHalfToDouble(S[m]<lowbit+15:lowbit>, TRUE);
        else
            S[d] = FPHalfToSingle(S[m]<lowbit+15:lowbit>, TRUE);
    else
        if dp_operation then
            S[d]<lowbit+15:lowbit> = FPDoubleToHalf(D[m], TRUE);
        else
            S[d]<lowbit+15:lowbit> = FPSingleToHalf(S[m], TRUE);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.261 VDIV

Floating-point Divide divides one floating-point value by another floating-point value and writes the result to a third floating-point register.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	1	0	1	D	0	0	Vn	Vd	1	0	1	sz	N	0	M	0	Vm			

Single-precision scalar variant

Applies when $sz == 0$.

VDIV{<c>}{<q>}.F32 {<Sd>}, {<Sn>}, {<Sm>}

Double-precision scalar variant

Applies when $sz == 1$.

VDIV{<c>}{<q>}.F64 {<Dd>}, {<Dn>}, {<Dm>}

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sn> Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.
- <Sm> Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dn> Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.
- <Dm> Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if dp_operation then
        D[d] = FPDiv(D[n], D[m], TRUE);
    else
        S[d] = FPDiv(S[n], S[m], TRUE);

```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Divide by Zero, Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.262 VFMA

Floating-point Fused Multiply Accumulate multiplies two registers, adds the product to the destination register, and places the result in the destination register. The result of the multiply is not rounded before the addition.

T2

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

VFMA{<c>}{<q>}.F32 <Sd>, <Sn>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VFMA{<c>}{<q>}.F64 <Dd>, <Dn>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
op1_neg = (op == '1');
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sn> Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.
- <Sm> Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dn> Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.
- <Dm> Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();
  if dp_operation then
    op64 = if op1_neg then FPNeg(D[n]) else D[n];
    D[d] = FPMu1Add(D[d], op64, D[m], TRUE);
  
```

```
else  
  op32 = if op1_neg then FPNeg(S[n]) else S[n];  
  S[d] = FPMu1Add(S[d], op32, S[m], TRUE);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.263 VFMS

Floating-point Fused Multiply Subtract negates one register and multiplies it with another register, adds the product to the destination register, and places the result in the destination register. The result of the multiply is not rounded before the addition.

T2

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

VFMS{<c>}{<q>}.F32 <Sd>, <Sn>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VFMS{<c>}{<q>}.F64 <Dd>, <Dn>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
op1_neg = (op == '1');
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sn> Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.
- <Sm> Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dn> Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.
- <Dm> Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();
  if dp_operation then
    op64 = if op1_neg then FPNeg(D[n]) else D[n];
    D[d] = FPMu1Add(D[d], op64, D[m], TRUE);
  
```

```
else  
  op32 = if op1_neg then FPNeg(S[n]) else S[n];  
  S[d] = FPMu1Add(S[d], op32, S[m], TRUE);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.264 VFNMA

Floating-point Fused Negate Multiply Accumulate negates one floating-point register value and multiplies it by another floating-point register value, adds the negation of the floating-point value in the destination register to the product, and writes the result back to the destination register. The result of the multiply is not rounded before the addition.

T1

ARMv8-M Floating-point Extension only, sz == 1 UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when sz == 0.

VFNMA{<c>}{<q>}.F32 <Sd>, <Sn>, <Sm>

Double-precision scalar variant

Applies when sz == 1.

VFNMA{<c>}{<q>}.F64 <Dd>, <Dn>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
op1_neg = (op == '1');
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sn> Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.
- <Sm> Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dn> Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.
- <Dm> Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();
  if dp_operation then
    op64 = if op1_neg then FPNeg(D[n]) else D[n];
    D[d] = FPMu1Add(FPNeg(D[d]), op64, D[m], TRUE);
  
```



```
else  
  op32 = if op1_neg then FPNeg(S[n]) else S[n];  
  S[d] = FPMu1Add(FPNeg(S[d]), op32, S[m], TRUE);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.265 VFNMS

Floating-point Fused Negate Multiply Subtract multiplies together two floating-point register values, adds the negation of the floating-point value in the destination register to the product, and writes the result back to the destination register. The result of the multiply is not rounded before the addition.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

VFNMS{<c>}{<q>}.F32 <Sd>, <Sn>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VFNMS{<c>}{<q>}.F64 <Dd>, <Dn>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
op1_neg = (op == '1');
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sn> Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.
- <Sm> Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dn> Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.
- <Dm> Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();
  if dp_operation then
    op64 = if op1_neg then FPNeg(D[n]) else D[n];
    D[d] = FPMu1Add(FPNeg(D[d]), op64, D[m], TRUE);
  
```

```
else  
  op32 = if op1_neg then FPNeg(S[n]) else S[n];  
  S[d] = FPMu1Add(FPNeg(S[d]), op32, S[m], TRUE);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.


C2.4.266 VLDM

Floating-point Load Multiple loads multiple extension registers from consecutive memory locations using an address from a general-purpose register.

This instruction is used by the alias **VPOP**. See *Alias conditions* on page C2-717 for details of when each alias is preferred.

T1

ARMv8-M Floating-point Extension only



Decrement Before variant

Applies when P == 1 && U == 0 && W == 1.

VLDMDB{<c>}{<q>}{.<size>} <Rn>!, <dreglist>

Increment After variant

Applies when P == 0 && U == 1.

VLDM{<c>}{<q>}{.<size>} <Rn>{!}, <dreglist>
 VLDMIA{<c>}{<q>}{.<size>} <Rn>{!}, <dreglist>


Decode for all variants of this encoding

```

if P == '0' && U == '0' && W == '0' then SEE "Related encodings";
if P == '1' && W == '0' then SEE VLDR;
if P == U && W == '1' then UNDEFINED;
if !HaveFPEExt() then UNDEFINED;
// Remaining combinations are PUW = 010 (IA without !), 011 (IA with !), 101 (DB with !)
single_regs = FALSE; add = (U == '1'); wback = (W == '1');
d = UInt(D:Vd); n = UInt(Rn); imm32 = ZeroExtend(imm8:'00', 32);
regs = UInt(imm8) DIV 2;
if n == 15 then UNPREDICTABLE;
if regs == 0 || regs > 16 || (d+regs) > 32 then UNPREDICTABLE;
if VFPSmallRegisterBank() && (d+regs) > 16 then UNPREDICTABLE;
    
```

T2

ARMv8-M Floating-point Extension only



Decrement Before variant

Applies when P == 1 && U == 0 && W == 1.

VLDMDB{<c>}{<q>}{.<size>} <Rn>!, <sreglist>

Increment After variant

Applies when P == 0 && U == 1.

VLDM{<c>}{<q>}{.<size>} <Rn>{!}, <sreglist>

VLDmia{<c>}{<q>}{.<size>} <Rn>{!}, <sreglist>

Decode for all variants of this encoding

```

if P == '0' && U == '0' then SEE "Related encodings";
if P == '1' && W == '0' then SEE VLDR;
if P == '1' && U == '1' && W == '1' then UNDEFINED;
if !HaveFPEExt() then UNDEFINED;
// Remaining combinations are PUW = 010 (IA without !), 011 (IA with !), 101 (DB with !)
single_regs = TRUE; add = (U == '1'); wback = (W == '1');
d = UInt(Vd:D); n = UInt(Rn); imm32 = ZeroExtend(imm8:'00', 32);
regs = UInt(imm8);
if n == 15 then UNPREDICTABLE;
if regs == 0 || (d+regs) > 32 then UNPREDICTABLE;

```

Notes for all encodings

Related encodings: [Floating-point load/store and 64-bit register moves on page C2-292](#).

Alias conditions

Alias	is preferred when
VPOP	P == '0' && U == '1' && W == '1' && Rn == '1101'

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<size>	An optional data size specifier. If present, it must be equal to the size in bits, 32 or 64, of the registers being transferred.
<Rn>	Is the general-purpose base register, encoded in the "Rn" field.
!	Specifies base register writeback. Encoded in the "W" field as 1 if present, otherwise 0.
<sreglist>	Is the list of consecutively numbered 32-bit floating-point registers to be transferred. The first register in the list is encoded in "Vd:D", and "imm8" is set to the number of registers in the list. The list must contain at least one register.
<dreglist>	Is the list of consecutively numbered 64-bit floating-point registers to be transferred. The first register in the list is encoded in "D:Vd", and "imm8" is set to twice the number of registers in the list. The list must contain at least one register, and must not contain more than 16 registers.

Operation for all encodings

```

if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    address = if add then R[n]           else R[n]-imm32;
    regval  = if add then R[n]+imm32    else R[n]-imm32;

    // Determine if the stack pointer limit should be checked
    if n == 13 && wback then
        (limit, applylimit) = LookUpSPLim(LookUpSP());
    else
        applylimit = FALSE;

    // Memory operation only performed if limit not violated
    if !applylimit || (UInt(regval) >= UInt(limit)) then

```

```
for r = 0 to regs-1
  if single_regs then
    S[d+r] = MemA[address,4];
    address = address+4;
  else
    word1 = MemA[address,4]; word2 = MemA[address+4,4];
    address = address+8;
    // Combine the word-aligned words in the correct order for
    // current endianness.
    D[d+r] = if BigEndian() then word1:word2 else word2:word1;

// If the stack pointer is being updated update a fault will be raised if
// the limit is violated
if wback then RSPCheck[n] = regval;
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.267 VLDR

Floating-point Load Register loads an extension register from memory, using an address from a general-purpose register, with an optional offset.

T1

ARMv8-M Floating-point Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	0	
1	1	1	0	1	1	0	1	U	D	0	1	Rn	Vd	1	0	1	1	imm8				0

Literal variant

Applies when Rn == 1111.

```
VLDR{<c>}{<q>}{.64} <Dd>, <label>
VLDR{<c>}{<q>}{.64} <Dd>, [PC, #{+/-}<imm>]
```

Offset variant

Applies when Rn != 1111.

```
VLDR{<c>}{<q>}{.64} <Dd>, [<Rn> {, #{+/-}<imm>}]
```

Decode for all variants of this encoding

```
if !HaveFPEExt() then UNDEFINED;
single_reg = FALSE; add = (U == '1'); imm32 = ZeroExtend(imm8:'00', 32);
d = UInt(D:Vd); n = UInt(Rn);
```

T2

ARMv8-M Floating-point Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	0	
1	1	1	0	1	1	0	1	U	D	0	1	Rn	Vd	1	0	1	0	imm8				0

Literal variant

Applies when Rn == 1111.

```
VLDR{<c>}{<q>}{.32} <Sd>, <label>
VLDR{<c>}{<q>}{.32} <Sd>, [PC, #{+/-}<imm>]
```

Offset variant

Applies when Rn != 1111.

```
VLDR{<c>}{<q>}{.32} <Sd>, [<Rn> {, #{+/-}<imm>}]
```

Decode for all variants of this encoding

```
if !HaveFPEExt() then UNDEFINED;
single_reg = TRUE; add = (U == '1'); imm32 = ZeroExtend(imm8:'00', 32);
d = UInt(Vd:D); n = UInt(Rn);
```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
.64	Optional data size specifiers.
<Dd>	The destination register for a doubleword load.
.32	Optional data size specifiers.
<Sd>	The destination register for a singleword load.
<label>	The label of the literal data item to be loaded. The assembler calculates the required value of the offset from the <code>Align(PC, 4)</code> value of the instruction to this label. Permitted values are multiples of 4 in the range -1020 to 1020. If the offset is zero or positive, <code>imm32</code> is equal to the offset and <code>add == TRUE</code> . If the offset is negative, <code>imm32</code> is equal to minus the offset and <code>add == FALSE</code> .
<Rn>	Is the general-purpose base register, encoded in the "Rn" field.
+/-	Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values: - when U = 0 + when U = 1
<imm>	The immediate offset used for forming the address. For the immediate forms of the syntax, <imm> can be omitted, in which case the #0 form of the instruction is assembled. Permitted values are multiples of 4 in the range 0 to 1020.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    base = if n == 15 then Align(PC,4) else R[n];
    address = if add then (base + imm32) else (base - imm32);
    if single_reg then
        S[d] = MemA[address,4];
    else
        word1 = MemA[address,4]; word2 = MemA[address+4,4];
        // Combine the word-aligned words in the correct order for current endianness.
        D[d] = if BigEndian() then word1:word2 else word2:word1;
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.268 VLLDM

Floating-point Lazy Load Multiple restores the contents of the Secure floating-point registers that were protected by a [VLSTM](#) instruction, and marks the floating-point context as active.

If the lazy state preservation set up by a previous [VLSTM](#) instruction is active ([FPCCR.LSPACT](#) == 1), this instruction deactivates lazy state preservation and enables access to the Secure floating-point registers.

If lazy state preservation is inactive ([FPCCR.LSPACT](#) == 0), either because lazy state preservation was not enabled ([FPCCR.LSPEN](#) == 0) or because a floating-point instruction caused the Secure floating-point register contents to be stored to memory, this instruction loads the stored Secure floating-point register contents back into the floating-point registers.

If Secure floating-point is not in use ([CONTROL_S.SFPA](#) == 0), this instruction behaves as a [NOP](#).

This instruction is only available in Secure state, and is UNDEFINED in Non-secure state.

If the Floating-point Extension is not implemented, this instruction is available in Secure state, but behaves as a [NOP](#).

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	1	0	0	0	(0)	1	1	Rn	(0)	(0)	(0)	(0)	1	0	1	0	(0)	(0)	(0)	(0)	(0)	(0)	(0)	(0)	(0)

T1 variant

VLLDM{<c>}{<q>} <Rn>

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn);
if !IsSecure() then UNDEFINED;
if n == 15 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();

    if CONTROL_S.SFPA == '1' then
        // Check access to the co-processor is permitted
        exc = CheckCPEEnabled(10);
        HandleException(exc);

    if FPCCR_S.LSPACT == '1' then // state in FP is still valid
        FPCCR_S.LSPACT = '0';
    else
        if !IsAligned(R[n],8) then
            UFSR.UNALIGNED = '1';
            exc = CreateException(UsageFault, FALSE, boolean UNKNOWN);
```

```
HandleException(exc);  
  
for i = 0 to 15  
    S[i] = MemA[R[n] + (4*i), 4];  
    FPSCR = MemA[R[n] + 0x40, 4];  
    if FPCCR_S.TS == '1' then  
        for i = 0 to 15  
            S[i+16] = MemA[R[n] + 0x48 + (4*i), 4];  
        CONTROL.FPCA = '1';
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.269 VLSTM

Floating-point Lazy Store Multiple stores the contents of Secure floating-point registers to a prepared stack frame, and clears the Secure floating-point registers.

If floating-point lazy preservation is enabled (`FPCCR.LSPEN == 1`), then the next time a floating-point instruction other than VLSTM or `VLLDM` is executed:

- The contents of Secure floating-point registers are stored to memory.
- The Secure floating-point registers are cleared.

If Secure floating-point is not in use (`CONTROL_S.SFPA == 0`), this instruction behaves as a `NOP`.

This instruction is only available in Secure state, and is UNDEFINED in Non-secure state.

If the Floating-point Extension is not implemented, this instruction is available in Secure state, but behaves as a `NOP`.

T1

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	1	0	0	0	(0)	1	0	Rn	(0)	(0)	(0)	(0)	1	0	1	0	(0)	(0)	(0)	(0)	(0)	(0)	(0)	(0)	(0)

T1 variant

VLSTM{<c>}{<q>} <Rn>

Decode for this encoding

```
if !HaveMainExt() then UNDEFINED;
n = UInt(Rn);
if !IsSecure() then UNDEFINED;
if n == 15 then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rn> Is the general-purpose base register, encoded in the "Rn" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();

if CONTROL_S.SFPA == '1' then
    // Check access to the co-processor is permitted
    exc = CheckCPEnabled(10);
    HandleException(exc);

    // LSPACT should not be active at the same time as there is active FP
    // state. This is a possible attack scenario so raise a SecureFault.
    lspact = if FPCCR_S.S == '1' then FPCCR_S.LSPACT else FPCCR_NS.LSPACT;
    if lspact == '1' then
        SFSR.LSERR = '1';
        exc = CreateException(SecureFault, TRUE, TRUE);
        HandleException(exc);
```

```
else
  if !IsAligned(R[n],8) then
    UFSR.UNALIGNED = '1';
    exc = CreateException(UsageFault, FALSE, boolean UNKNOWN);
    HandleException(exc);

  if FPCCR.LSPEN == '0' then
    for i = 0 to 15
      MemA[R[n] + (4*i), 4] = S[i];
      MemA[R[n] + 0x40, 4] = FPSCR;
    if FPCCR.TS == '1' then
      for i = 0 to 15
        MemA[R[n] + 0x48 + (4*i), 4] = S[i+16];
        S[i+16] = Zeros(32);
        S[i] = Zeros(32);
        FPSCR = Zeros(32);
      else
        for i = 0 to 15
          S[i] = bits(32) UNKNOWN;
          FPSCR = bits(32) UNKNOWN;
    else
      UpdateFPCCR(R[n], FALSE);
CONTROL.FPCA = '0';
```

Exceptions

UsageFault, SecureFault, BusFault, and MemManage.

C2.4.270 VMAXNM

Floating-point Maximum Number determines the floating-point maximum number.

NaN handling is specified by IEEE754-2008.

T2

ARMv8-M Floating-point Extension only, sz == 1 UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0		
1	1	1	1	1	1	1	0	1	D	0	0	Vn	Vd	1	0	1	sz	N	0	M	0	Vm					
													op														

Single-precision scalar variant

Applies when sz == 0.

VMAXNM{<q>}.F32 <Sd>, <Sn>, <Sm> // Not permitted in IT block

Double-precision scalar variant

Applies when sz == 1.

VMAXNM{<q>}.F64 <Dd>, <Dn>, <Dm> // Not permitted in IT block

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
if InITBlock() then UNPREDICTABLE;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
maximum = (op == '0');
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

<q>	See Standard assembler syntax fields on page C1-240 .
<Sd>	Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
<Sn>	Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.
<Sm>	Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.
<Dd>	Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
<Dn>	Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.
<Dm>	Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

Operation

```

EncodingSpecificOperations();
ExecuteFPCheck();
if dp_operation then
    if maximum then
        D[d] = FPMaXNum(D[n], D[m]);
    else
        D[d] = FPMiNNum(D[n], D[m]);
else
    if maximum then

```

```
S[d] = FPMaxNum(S[n], S[m]);  
else  
S[d] = FPMinNum(S[n], S[m]);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.271 VMINNM

Floating-point Minimum Number determines the floating-point minimum number.

NaN handling is specified by IEEE754-2008.

T2

ARMv8-M Floating-point Extension only, sz == 1 UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	1	1	1	1	0	1	D	0	0	Vn	Vd	1	0	1	sz	N	1	M	0	Vm			

op

Single-precision scalar variant

Applies when sz == 0.

VMINNM{<q>}.F32 <Sd>, <Sn>, <Sm> // Not permitted in IT block

Double-precision scalar variant

Applies when sz == 1.

VMINNM{<q>}.F64 <Dd>, <Dn>, <Dm> // Not permitted in IT block

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
if InITBlock() then UNPREDICTABLE;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
maximum = (op == '0');
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

<q>	See Standard assembler syntax fields on page C1-240 .
<Sd>	Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
<Sn>	Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.
<Sm>	Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.
<Dd>	Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
<Dn>	Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.
<Dm>	Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

Operation

```

EncodingSpecificOperations();
ExecuteFPCheck();
if dp_operation then
    if maximum then
        D[d] = FPMaXNum(D[n], D[m]);
    else
        D[d] = FPMiNNum(D[n], D[m]);
else
    if maximum then

```

```
S[d] = FPMaxNum(S[n], S[m]);  
else  
S[d] = FPMinNum(S[n], S[m]);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.272 VMLA

Floating-point Multiply Accumulate multiplies two floating-point registers, adds the product to the destination register, and places the result in the destination register.

T2

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	1	0	0	D	0	0	Vn	Vd	1	0	1	sz	N	0	M	0	Vm			

Single-precision scalar variant

Applies when $sz == 0$.

VMLA{<c>}{<q>}.F32 <Sd>, <Sn>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VMLA{<c>}{<q>}.F64 <Dd>, <Dn>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
add = (op == '0');
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<Sd>	Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
<Sn>	Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.
<Sm>	Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.
<Dd>	Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
<Dn>	Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.
<Dm>	Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if dp_operation then
        addend64 = if add then FPMu1(D[n], D[m], TRUE) else FPNeg(FPMu1(D[n], D[m], TRUE));
        D[d] = FPAdd(D[d], addend64, TRUE);

```

```
else  
  addend32 = if add then FPMu1(S[n], S[m], TRUE) else FPNeg(FPMu1(S[n], S[m], TRUE));  
  S[d] = FPAdd(S[d], addend32, TRUE);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.273 VMLS

Floating-point Multiply Subtract multiplies two floating-point registers, subtracts the product from the destination floating-point register, and places the result in the destination floating-point register.

———— Note ————

ARM recommends that software does not use the VMLS instruction in the Round towards +Infinity and Round towards -Infinity rounding modes, because the rounding of the product and of the sum can change the result of the instruction in opposite directions, defeating the purpose of these rounding modes.

T2

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	1	0	0	D	0	0	Vn	Vd	1	0	1	sz	N	1	M	0	Vm			

Single-precision scalar variant

Applies when $sz == 0$.

VMLS{<c>}{<q>}.F32 <Sd>, <Sn>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VMLS{<c>}{<q>}.F64 <Dd>, <Dn>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
add = (op == '0');
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sn> Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.
- <Sm> Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dn> Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.
- <Dm> Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if dp_operation then
        addend64 = if add then FPMu1(D[n], D[m], TRUE) else FPNeg(FPMu1(D[n], D[m], TRUE));
        D[d] = FPAdd(D[d], addend64, TRUE);
    else
        addend32 = if add then FPMu1(S[n], S[m], TRUE) else FPNeg(FPMu1(S[n], S[m], TRUE));
        S[d] = FPAdd(S[d], addend32, TRUE);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.274 VMOV (between general-purpose register and single-precision register)

Floating-point Move (between general-purpose register and single-precision register) transfers the contents of a single-precision register to a general-purpose register, or the contents of a general-purpose register to a single-precision register.

T1

ARMv8-M Floating-point Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	1	1	0	0	0	0	op	Vn	Rt	1	0	1	0	N	(0)	(0)	1	(0)	(0)	(0)	(0)	(0)	

Encoding

Applies when `op == 0`.

VMOV{<c>}{<q>} <Sn>, <Rt>

Encoding

Applies when `op == 1`.

VMOV{<c>}{<q>} <Rt>, <Sn>

Decode for all variants of this encoding

```
if !HaveFPEExt() then UNDEFINED;
to_arm_register = (op == '1'); t = UInt(Rt); n = UInt(Vn:N);
if t == 15 || t == 13 then UNPREDICTABLE;
```

Assembler symbols

- <Rt> Is the general-purpose register that <Sn> will be transferred to or from, encoded in the "Rt" field.
- <Sn> Is the 32-bit name of the floating-point register to be transferred, encoded in the "Vn:N" field.
- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if to_arm_register then
        R[t] = S[n];
    else
        S[n] = R[t];
```

Exceptions


UsageFault, BusFault, MemManage, and SecureFault.

C2.4.275 VMOV (between two general-purpose registers and a doubleword register)

Floating-point Move (between two general-purpose registers and a doubleword register) transfers two words from two general-purpose registers to a doubleword register, or from a doubleword register to two general-purpose registers.

T1

ARMv8-M Floating-point Extension only



Encoding

Applies when `op == 1`.

VMOV{<c>}{<q>} <Rt>, <Rt2>, <Dm>

Encoding

Applies when `op == 0`.

VMOV{<c>}{<q>} <Dm>, <Rt>, <Rt2>

Decode for all variants of this encoding

```

if !HaveFPExt() then UNDEFINED;
to_arm_registers = (op == '1'); t = UInt(Rt); t2 = UInt(Rt2); m = UInt(M:Vm);
if t == 15 || t2 == 15 then UNPREDICTABLE;
if t == 13 || t2 == 13 then UNPREDICTABLE;
if to_arm_registers && t == t2 then UNPREDICTABLE;
  
```

Assembler symbols

- <Dm> Is the 64-bit name of the floating-point register to be transferred, encoded in the "M:Vm" field.
- <Rt2> Is the first general-purpose register that <Dm>[63:32] will be transferred to or from, encoded in the "Rt" field.
- <Rt> Is the first general-purpose register that <Dm>[31:0] will be transferred to or from, encoded in the "Rt" field.
- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();
  if to_arm_registers then
    R[t] = D[m]<31:0>;
    R[t2] = D[m]<63:32>;
  else
    D[m]<31:0> = R[t];
    D[m]<63:32> = R[t2];
  
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.276 VMOV (between two general-purpose registers and two single-precision registers)

Floating-point Move (between two general-purpose registers and two single-precision registers) transfers the contents of two consecutively numbered single-precision registers to two general-purpose registers, or the contents of two general-purpose registers to a pair of single-precision registers. The general-purpose registers do not have to be contiguous.

T1

ARMv8-M Floating-point Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	0	0	0	1	0	op	Rt2	Rt	1	0	1	0	0	0	M	1	Vm			

Encoding

Applies when `op == 1`.

VMOV{<c>}{<q>} <Rt>, <Rt2>, <Sm>, <Sm1>

Encoding

Applies when `op == 0`.

VMOV{<c>}{<q>} <Sm>, <Sm1>, <Rt>, <Rt2>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
to_arm_registers = (op == '1'); t = UInt(Rt); t2 = UInt(Rt2); m = UInt(Vm:M);
if t == 15 || t2 == 15 || m == 31 then UNPREDICTABLE;
if t == 13 || t2 == 13 then UNPREDICTABLE;
if to_arm_registers && t == t2 then UNPREDICTABLE;
  
```

Assembler symbols

- <Rt2> Is the second general-purpose register that <Sm1> will be transferred to or from, encoded in the "Rt" field.
- <Rt> Is the first general-purpose register that <Sm> will be transferred to or from, encoded in the "Rt" field.
- <Sm1> Is the 32-bit name of the second floating-point register to be transferred. This is the next floating-point register after <Sm>.
- <Sm> Is the 32-bit name of the first floating-point register to be transferred, encoded in the "Vm:M" field.
- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();
  if to_arm_registers then
    R[t] = S[m];
    R[t2] = S[m+1];
  else
    S[m] = R[t];
    S[m+1] = R[t2];
  
```


Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.277 VMOV (half of doubleword register to single general-purpose register)


Floating-point Move (half of doubleword register to single general-purpose register) transfers one word from the upper or lower half of a doubleword register to a general-purpose register.

———— **Note** —————

The pseudocode descriptions of the instruction operation convert the doubleword register description into the corresponding single-precision register. For example, D3[1], indicating the upper word of D3, becomes S7.

T1

ARMv8-M Floating-point Extension only



T1 variant

VMOV{<c>}{<q>}{.<dt>} <Rt>, <Dn[x]>

Decode for this encoding

```

if !HaveFPExt() then UNDEFINED;
t = UInt(Rt); n = UInt(N:Vn);
upper = (H == '1');
if t == 15 || t == 13 then UNPREDICTABLE;
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <dt> The data size. It must be either 32 or omitted.
- <Rt> The destination general-purpose register, encoded in the "Rt" field.
- <Dn[x]> The source doubleword register and required word. The register <Dd> is encoded in N:Vn. x is 1 for the top half of the register, or 0 for the bottom half of the register, and is encoded in H.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();
  if upper then
    R[t] = D[n]<63:32>;
  else
    R[t] = D[n]<31:0>;
  
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.278 VMOV (immediate)

Floating-point Move (immediate) places an immediate constant into the destination floating-point register.

T2

ARMv8-M Floating-point Extension only, sz == 1 UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	1	0	1	D	1	1	imm4H	Vd	1	0	1	sz	(0)	0	(0)	0	imm4L			

Single-precision scalar variant

Applies when sz == 0.

VMOV{<c>}{<q>}.F32 <Sd>, #<imm>

Double-precision scalar variant

Applies when sz == 1.

VMOV{<c>}{<q>}.F64 <Dd>, #<imm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
if dp_operation then
    d = UInt(D:Vd); imm64 = VFPEExpandImm(imm4H:imm4L, 64);
else
    d = UInt(Vd:D); imm32 = VFPEExpandImm(imm4H:imm4L, 32);

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <imm> Is a floating-point constant. For details of the range of constants available and the encoding of <imm>, see the definition of VFPEExpandImm().

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if dp_operation then
        D[d] = imm64;
    else
        S[d] = imm32;

```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.279 VMOV (register)

Floating-point Move (immediate) copies the contents of one register to another.

T2

ARMv8-M Floating-point Extension only, sz == 1 UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	1	0	1	D	1	1	0	0	0	0	Vd	1	0	1	sz	0	1	M	0	Vm		

Single-precision scalar variant

Applies when sz == 0.

VMOV{<c>}{<q>}.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when sz == 1.

VMOV{<c>}{<q>}.F64 <Dd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();
  if dp_operation then
    D[d] = D[m];
  else
    S[d] = S[m];
  
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.280 VMOV (single general-purpose register to half of doubleword register)

Floating-point Move (single general-purpose register to half of doubleword register) transfers one word from a general-purpose register to the upper or lower half of a doubleword register.

———— Note —————

The pseudocode descriptions of the instruction operation convert the doubleword register description into the corresponding single-precision register. For example, D3[1], indicating the upper word of D3, becomes S7.

T1

ARMv8-M Floating-point Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	1	1	0	0	0	H	0	Vd	Rt	1	0	1	1	D	0	0	1	(0)	(0)	(0)	(0)		

T1 variant

VMOV{<c>}{<q>}{.<size>} <Dd[x]>, <Rt>

Decode for this encoding

```
if !HaveFPEExt() then UNDEFINED;
d = UInt(D:Vd); t = UInt(Rt);
upper = (H == '1');
if t == 15 || t == 13 then UNPREDICTABLE;
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <size> The data size. It must be either 32 or omitted.
- <Dd[x]> The destination doubleword register and required word. The register <Dd> is encoded in D:Vd. x is 1 for the top half of the register, or 0 for the bottom half of the register, and is encoded in H.
- <Rt> The source general-purpose register, encoded in the "Rt" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if upper then
        D[d]<63:32> = R[t];
    else
        D[d]<31:0> = R[t];
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.281 VMRS

Move to general-purpose Register from Floating-point Special register moves the value of the **FPSCR** to a general-purpose register, or the values of the **FPSCR** condition flags to the **APSR** condition flags.

T1

ARMv8-M Floating-point Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	1	1	0	1	1	1	1	(0)	(0)	(0)	(1)	Rt	1	0	1	0	(0)	(0)	(0)	1	(0)	(0)	(0)	(0)	

T1 variant

VMRS{<c>}{<q>} <Rt>, FPSCR

Decode for this encoding

```
if !HaveFPEExt() then UNDEFINED;
t = UInt(Rt);
if t == 13 then UNPREDICTABLE;
```

Assembler symbols

<c> See *Standard assembler syntax fields on page C1-240*.

<q> See *Standard assembler syntax fields on page C1-240*.

<Rt> Is the general-purpose destination register, encoded in the "Rt" field. Is one of:

R0-R14 General-purpose register.

APSR_nzcv If <spec_reg> is FPSCR, encoded as 0b1111. This instruction transfers the FPSCR. {N, Z, C, V} condition flags to the APSR. {N, Z, C, V} condition flags.

Operation

```
if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();
  SerializeVFP();
  VFPExcBarrier();
  if t == 15 then
    APSR.N = FPSCR.N;
    APSR.Z = FPSCR.Z;
    APSR.C = FPSCR.C;
    APSR.V = FPSCR.V;
  else
    R[t] = FPSCR;
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.282 VMSR

Move to Floating-point Special register from general-purpose Register moves the value of a general-purpose register to the FPSCR.

T1

ARMv8-M Floating-point Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	1	1	0	1	1	1	0	(0)	(0)	(0)	(1)	Rt	1	0	1	0	(0)	(0)	(0)	1	(0)	(0)	(0)	(0)	

T1 variant

VMSR{<c>}{<q>} FPSCR, <Rt>

Decode for this encoding

```
if !HaveFPExt() then UNDEFINED;
t = UInt(Rt);
if t == 15 || t == 13 then UNPREDICTABLE;
```

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<Rt> Is the general-purpose source register to be transferred to the FPSCR, encoded in the "Rt" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    SerializeVFP();
    VFPExcBarrier();
    FPSCR = R[t];
```

Exceptions


UsageFault, BusFault, MemManage, and SecureFault.

C2.4.283 VMUL

Floating-point Multiply multiplies two floating-point register values, and places the result in the destination floating-point register.

T2

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

VMUL{<c>}{<q>}.F32 {<Sd>}, {<Sn>}, {<Sm>}

Double-precision scalar variant

Applies when $sz == 1$.

VMUL{<c>}{<q>}.F64 {<Dd>}, {<Dn>}, {<Dm>}

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sn> Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.
- <Sm> Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dn> Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.
- <Dm> Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();
  if dp_operation then
    D[d] = FPMu1(D[n], D[m], TRUE);
  else
    S[d] = FPMu1(S[n], S[m], TRUE);
  
```


Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.284 VNEG

Floating-point Negate inverts the sign bit of a single-precision or double-precision register, and places the result in the destination register.

T2

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	1	0	1	D	1	1	0	0	0	1	Vd	1	0	1	sz	0	1	M	0	Vm		

Single-precision scalar variant

Applies when $sz == 0$.

VNEG{<c>}{<q>}.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VNEG{<c>}{<q>}.F64 <Dd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
  
```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();
  if dp_operation then
    D[d] = FPNeg(D[m]);
  else
    S[d] = FPNeg(S[m]);
  
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.285 VNMLA

Floating-point Multiply Accumulate and Negate multiplies two floating-point register values, adds the negation of the floating-point value in the destination register to the negation of the product, and writes the result back to the destination register.

———— Note —————

ARM recommends that software does not use the VNMLA instruction in the Round towards +Infinity and Round towards -Infinity rounding modes, because the rounding of the product and of the sum can change the result of the instruction in opposite directions, defeating the purpose of these rounding modes.

T1

ARMv8-M Floating-point Extension only, sz == 1 UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	1	0	0	D	0	1	Vn	Vd	1	0	1	sz	N	1	M	0	Vm			

op

Single-precision scalar variant

Applies when sz == 0.

VNMLA{<c>}{<q>}.F32 <Sd>, <Sn>, <Sm>

Double-precision scalar variant

Applies when sz == 1.

VNMLA{<c>}{<q>}.F64 <Dd>, <Dn>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPExt() then UNDEFINED;
type = if op == '1' then VFPNegMul_VNMLA else VFPNegMul_VNMLS;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sn> Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.
- <Sm> Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dn> Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.
- <Dm> Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

Operation

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if dp_operation then
        product64 = FPMu1(D[n], D[m], TRUE);
        case type of
            when VFPNegMu1_VNMLA D[d] = FAdd(FPNeg(D[d]), FPNeg(product64), TRUE);
            when VFPNegMu1_VNMLS D[d] = FAdd(FPNeg(D[d]), product64, TRUE);
            when VFPNegMu1_VNMUL D[d] = FPNeg(product64);
    else
        product32 = FPMu1(S[n], S[m], TRUE);
        case type of
            when VFPNegMu1_VNMLA S[d] = FAdd(FPNeg(S[d]), FPNeg(product32), TRUE);
            when VFPNegMu1_VNMLS S[d] = FAdd(FPNeg(S[d]), product32, TRUE);
            when VFPNegMu1_VNMUL S[d] = FPNeg(product32);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.286 VNMLS

Floating-point Multiply Subtract and Negate multiplies two floating-point register values, adds the negation of the floating-point value in the destination register to the product, and writes the result back to the destination register.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

VNMLS{<c>}{<q>}.F32 <Sd>, <Sn>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VNMLS{<c>}{<q>}.F64 <Dd>, <Dn>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
type = if op == '1' then VFPNegMul_VNMLA else VFPNegMul_VNMLS;
dp_operation = (sz == '1');
if dp_operation && HaveSPFOnly() then UNDEFINED;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sn> Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.
- <Sm> Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dn> Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.
- <Dm> Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if dp_operation then
        product64 = FPMul(D[n], D[m], TRUE);
        case type of
            when VFPNegMul_VNMLA D[d] = FPAAdd(FPNeg(D[d]), FPNeg(product64), TRUE);
            when VFPNegMul_VNMLS D[d] = FPAAdd(FPNeg(D[d]), product64, TRUE);

```

```
        when VFPNegMul_VNMUL D[d] = FPNeg(product64);
else
    product32 = FPMu1(S[n], S[m], TRUE);
    case type of
        when VFPNegMul_VNMLA S[d] = FPAdd(FPNeg(S[d]), FPNeg(product32), TRUE);
        when VFPNegMul_VNMLS S[d] = FPAdd(FPNeg(S[d]), product32, TRUE);
        when VFPNegMul_VNMUL S[d] = FPNeg(product32);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.287 VNMUL

Floating-point Multiply and Negate multiplies two floating-point register values, and writes the negation of the result to the destination register.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	1	0	0	D	1	0	Vn	Vd	1	0	1	sz	N	1	M	0	Vm			

Single-precision scalar variant

Applies when $sz == 0$.

VNMUL{<c>}{<q>}.F32 {<Sd>}, <Sn>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VNMUL{<c>}{<q>}.F64 {<Dd>}, <Dn>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
type = if op == '1' then VFPNegMul_VNMLA else VFPNegMul_VNMLS;
dp_operation = (sz == '1');
if dp_operation && HaveSPFOnly() then UNDEFINED;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<Sd>	Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
<Sn>	Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.
<Sm>	Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.
<Dd>	Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
<Dn>	Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.
<Dm>	Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if dp_operation then
        product64 = FPMul(D[n], D[m], TRUE);
        case type of
            when VFPNegMul_VNMLA D[d] = FPAAdd(FPNeg(D[d]), FPNeg(product64), TRUE);
            when VFPNegMul_VNMLS D[d] = FPAAdd(FPNeg(D[d]), product64, TRUE);

```

```
        when VFPNegMul_VNMUL D[d] = FPNeg(product64);
else
    product32 = FPMu1(S[n], S[m], TRUE);
    case type of
        when VFPNegMul_VNMLA S[d] = FPAdd(FPNeg(S[d]), FPNeg(product32), TRUE);
        when VFPNegMul_VNMLS S[d] = FPAdd(FPNeg(S[d]), product32, TRUE);
        when VFPNegMul_VNMUL S[d] = FPNeg(product32);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.288 VPOP


Pop FP registers from Stack loads multiple consecutive floating-point register file registers from the stack.

This instruction is an alias of the [VLDM](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [VLDM](#).
- The description of [VLDM](#) gives the operational pseudocode for this instruction.

T1

ARMv8-M Floating-point Extension only



Increment After variant

VPOP{<c>}{<q>}{.<size>} <dreglist>


is equivalent to

VLDM{<c>}{<q>}{.<size>} SP!, <dreglist>

and is always the preferred disassembly.

T2

ARMv8-M Floating-point Extension only



Increment After variant

VPOP{<c>}{<q>}{.<size>} <sreglist>

is equivalent to

VLDM{<c>}{<q>}{.<size>} SP!, <sreglist>

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<size> An optional data size specifier. If present, it must be equal to the size in bits, 32 or 64, of the registers being transferred.

<sreglist> Is the list of consecutively numbered 32-bit floating-point registers to be transferred. The first register in the list is encoded in "Vd:D", and "imm8" is set to the number of registers in the list. The list must contain at least one register.

<dreglist> Is the list of consecutively numbered 64-bit floating-point registers to be transferred. The first register in the list is encoded in "D:Vd", and "imm8" is set to twice the number of registers in the list. The list must contain at least one register, and must not contain more than 16 registers.

Operation for all encodings

The description of [VLDM](#) gives the operational pseudocode for this instruction.

C2.4.289 VPUSH


Push FP registers to Stack stores multiple consecutive registers from the floating-point register file to the stack.

This instruction is an alias of the [VSTM](#) instruction. This means that:

- The encodings in this description are named to match the encodings of [VSTM](#).
- The description of [VSTM](#) gives the operational pseudocode for this instruction.

T1

ARMv8-M Floating-point Extension only



Decrement Before variant

VPUSH{<c>}{<q>}{.<size>} <dreglist>


is equivalent to

VSTMDB{<c>}{<q>}{.<size>} SP!, <dreglist>

and is always the preferred disassembly.

T2

ARMv8-M Floating-point Extension only



Decrement Before variant

VPUSH{<c>}{<q>}{.<size>} <sreglist>

is equivalent to

VSTMDB{<c>}{<q>}{.<size>} SP!, <sreglist>

and is always the preferred disassembly.

Assembler symbols

<c> See [Standard assembler syntax fields on page C1-240](#).

<q> See [Standard assembler syntax fields on page C1-240](#).

<size> An optional data size specifier. If present, it must be equal to the size in bits, 32 or 64, of the registers being transferred.

<sreglist> Is the list of consecutively numbered 32-bit floating-point registers to be transferred. The first register in the list is encoded in "Vd:D", and "imm8" is set to the number of registers in the list. The list must contain at least one register.

<dreglist> Is the list of consecutively numbered 64-bit floating-point registers to be transferred. The first register in the list is encoded in "D:Vd", and "imm8" is set to twice the number of registers in the list. The list must contain at least one register, and must not contain more than 16 registers.

Operation for all encodings


The description of [VSTM](#) gives the operational pseudocode for this instruction.

C2.4.290 VRINTA

Floating-point Round to Nearest Integer with Ties to Away rounds a floating-point value to an integral floating-point value of the same size using the Round to Nearest with Ties to Away rounding mode. A zero input gives a zero result with the same sign, an infinite input gives an infinite result with the same sign, and a NaN is propagated as for normal arithmetic.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

VRINTA{<q>}.F32.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VRINTA{<q>}.F64.F64 <Dd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
case RM of
  when '00' // Round to nearest, with ties away
    rmode = '01'; away = TRUE;
  when '01' // Round to nearest, with ties to even
    rmode = '00'; away = FALSE;
  when '10' // Round towards Plus Infinity
    rmode = '01'; away = FALSE;
  when '11' // Round towards Minus Infinity
    rmode = '10'; away = FALSE;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();

exact = FALSE;

```

```
if dp_operation then
    D[d] = FPRoundInt(D[m], rmode, away, exact);
else
    S[d] = FPRoundInt(S[m], rmode, away, exact);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Inexact, Invalid Operation, Overflow, Underflow, and Input Denormal.

C2.4.291 VRINTM

Floating-point Round to Integer towards -Infinity rounds a floating-point value to an integral floating-point value of the same size using the Round towards -Infinity rounding mode. A zero input gives a zero result with the same sign, an infinite input gives an infinite result with the same sign, and a NaN is propagated as for normal arithmetic.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

VRINTM{<q>}.F32.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VRINTM{<q>}.F64.F64 <Dd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
case RM of
  when '00' // Round to nearest, with ties away
    rmode = '01'; away = TRUE;
  when '01' // Round to nearest, with ties to even
    rmode = '00'; away = FALSE;
  when '10' // Round towards Plus Infinity
    rmode = '01'; away = FALSE;
  when '11' // Round towards Minus Infinity
    rmode = '10'; away = FALSE;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();

  exact = FALSE;

```

```
if dp_operation then
    D[d] = FPRoundInt(D[m], rmode, away, exact);
else
    S[d] = FPRoundInt(S[m], rmode, away, exact);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Inexact, Invalid Operation, Overflow, Underflow, and Input Denormal.

C2.4.292 VRINTN

Floating-point Round to Nearest Integer with Ties to Even rounds a floating-point value to an integral floating-point value of the same size using the Round to Nearest rounding mode. A zero input gives a zero result with the same sign, an infinite input gives an infinite result with the same sign, and a NaN is propagated as for normal arithmetic.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

VRINTN{<q>}.F32.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VRINTN{<q>}.F64.F64 <Dd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
case RM of
  when '00' // Round to nearest, with ties away
    rmode = '01'; away = TRUE;
  when '01' // Round to nearest, with ties to even
    rmode = '00'; away = FALSE;
  when '10' // Round towards Plus Infinity
    rmode = '01'; away = FALSE;
  when '11' // Round towards Minus Infinity
    rmode = '10'; away = FALSE;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();

  exact = FALSE;

```

```
if dp_operation then
    D[d] = FPRoundInt(D[m], rmode, away, exact);
else
    S[d] = FPRoundInt(S[m], rmode, away, exact);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Inexact, Invalid Operation, Overflow, Underflow, and Input Denormal.

C2.4.293 VRINTP

Floating-point Round to Integer towards +Infinity rounds a floating-point value to an integral floating-point value of the same size using the Round towards +Infinity rounding mode. A zero input gives a zero result with the same sign, an infinite input gives an infinite result with the same sign, and a NaN is propagated as for normal arithmetic.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

VRINTP{<q>}.F32.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VRINTP{<q>}.F64.F64 <Dd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
case RM of
  when '00' // Round to nearest, with ties away
    rmode = '01'; away = TRUE;
  when '01' // Round to nearest, with ties to even
    rmode = '00'; away = FALSE;
  when '10' // Round towards Plus Infinity
    rmode = '01'; away = FALSE;
  when '11' // Round towards Minus Infinity
    rmode = '10'; away = FALSE;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
  EncodingSpecificOperations();
  ExecuteFPCheck();

  exact = FALSE;

```

```
if dp_operation then
    D[d] = FPRoundInt(D[m], rmode, away, exact);
else
    S[d] = FPRoundInt(S[m], rmode, away, exact);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Inexact, Invalid Operation, Overflow, Underflow, and Input Denormal.

C2.4.294 VRINTR

Floating-point Round to Integer rounds a floating-point value to an integral floating-point value of the same size using the rounding mode specified in the **FPSCR**. A zero input gives a zero result with the same sign, an infinite input gives an infinite result with the same sign, and a NaN is propagated as for normal arithmetic.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

VRINTR{<c>}{<q>}.F32.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VRINTR{<c>}{<q>}.F64.F64 <Dd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
rmode = if op == '1' then '11' else FPSCR<23:22>;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();

    exact = FALSE;
    away = FALSE;

    if dp_operation then
        D[d] = FPRoundInt(D[m], rmode, away, exact);
    else
        S[d] = FPRoundInt(S[m], rmode, away, exact);

```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Inexact, Invalid Operation, Overflow, Underflow, and Input Denormal.

C2.4.295 VRINTX

This instruction rounds a floating-point value to an integral floating-point value of the same size. A zero input gives a zero result with the same sign, an infinite input gives an infinite result with the same sign, and a NaN is propagated as for normal arithmetic.

VRINTX uses the rounding mode specified in the **FPSCR**, and raises an Inexact exception when the result value is not numerically equal to the input value.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	1	0	1	D	1	1	0	1	1	1	Vd	1	0	1	sz	0	1	M	0	Vm		

Single-precision scalar variant

Applies when $sz == 0$.

VRINTX{<c>}{<q>}.F32.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VRINTX{<c>}{<q>}.F64.F64 <Dd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFOnly() then UNDEFINED;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

<c>	See <i>Standard assembler syntax fields</i> on page C1-240.
<q>	See <i>Standard assembler syntax fields</i> on page C1-240.
<Sd>	Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
<Sm>	Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
<Dd>	Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
<Dm>	Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();

    rmode = FPSCR<23:22>;
    away = FALSE;
    exact = TRUE;

    if dp_operation then

```

```
D[d] = FPRoundInt(D[m], rmode, away, exact);  
else  
S[d] = FPRoundInt(S[m], rmode, away, exact);
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.


Floating-point exceptions: Inexact, Invalid Operation, Overflow, Underflow, and Input Denormal.

C2.4.296 VRINTZ

Floating-point Round to Integer towards Zero rounds a floating-point value to an integral floating-point value of the same size, using the Round towards Zero rounding mode. A zero input gives a zero result with the same sign, an infinite input gives an infinite result with the same sign, and a NaN is propagated as for normal arithmetic.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.



Single-precision scalar variant

Applies when $sz == 0$.

VRINTZ{<c>}{<q>}.F32.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VRINTZ{<c>}{<q>}.F64.F64 <Dd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
rmode = if op == '1' then '11' else FPSCR<23:22>;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

- <c> See [Standard assembler syntax fields on page C1-240](#).
- <q> See [Standard assembler syntax fields on page C1-240](#).
- <Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
- <Sm> Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
- <Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
- <Dm> Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();

    exact = FALSE;
    away = FALSE;

    if dp_operation then
        D[d] = FPRoundInt(D[m], rmode, away, exact);
    else
        S[d] = FPRoundInt(S[m], rmode, away, exact);

```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Inexact, Invalid Operation, Overflow, Underflow, and Input Denormal.

C2.4.297 VSEL

Floating-point Conditional Select allows the destination register to take the value from either one or the other of two source registers according to the condition codes in the [APSR](#).

The condition codes for VSEL are limited to GE, GT, EQ, and VS, with the effect of LT, LE, NE, and VC being achievable by exchanging the source operands.

T1

ARMv8-M Floating-point Extension only, sz == 1 UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	1	1	1	1	0	0	D	cc	Vn	Vd	1	0	1	sz	N	0	M	0	Vm				

VSELEQ, doubleprec variant

Applies when cc == 00 && sz == 1.

VSELEQ.F64 <Dd>, <Dn>, <Dm> // Not permitted in IT block

VSELEQ, singleprec variant

Applies when cc == 00 && sz == 0.

VSELEQ.F32 <Sd>, <Sn>, <Sm> // Not permitted in IT block

VSELGE, doubleprec variant

Applies when cc == 10 && sz == 1.

VSELGE.F64 <Dd>, <Dn>, <Dm> // Not permitted in IT block

VSELGE, singleprec variant

Applies when cc == 10 && sz == 0.

VSELGE.F32 <Sd>, <Sn>, <Sm> // Not permitted in IT block

VSELGT, doubleprec variant

Applies when cc == 11 && sz == 1.

VSELGT.F64 <Dd>, <Dn>, <Dm> // Not permitted in IT block

VSELGT, singleprec variant

Applies when cc == 11 && sz == 0.

VSELGT.F32 <Sd>, <Sn>, <Sm> // Not permitted in IT block

VSELVS, doubleprec variant

Applies when cc == 01 && sz == 1.

VSELVS.F64 <Dd>, <Dn>, <Dm> // Not permitted in IT block

VSELVS, singleprec variant

Applies when cc == 01 && sz == 0.

VSELVS.F32 <Sd>, <Sn>, <Sm> // Not permitted in IT block

Decode for all variants of this encoding

```
if !HaveFPExt() then UNDEFINED;  
if InITBlock() then UNPREDICTABLE;  
dp_operation = (sz == '1');  
if dp_operation && HaveSPFOnly() then UNDEFINED;  
cond = cc:(cc<1> EOR cc<0>):'0';  
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);  
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);  
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);
```

Assembler symbols

<Dd> Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.

<Dn> Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.

<Dm> Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

<Sd> Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.

<Sn> Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.

<Sm> Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.

Operation

```
EncodingSpecificOperations();  
ExecuteFPCheck();  
  
if dp_operation then  
    D[d] = if ConditionHolds(cond) then D[n] else D[m];  
else  
    S[d] = if ConditionHolds(cond) then S[n] else S[m];
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.298 VSQRT

Floating-point Square Root calculates the square root of a floating-point register value and writes the result to another floating-point register.

T1

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	1	0	1	D	1	1	0	0	0	1	Vd	1	0	1	sz	1	1	M	0	Vm		

Single-precision scalar variant

Applies when $sz == 0$.

VSQRT{<c>}{<q>}.F32 <Sd>, <Sm>

Double-precision scalar variant

Applies when $sz == 1$.

VSQRT{<c>}{<q>}.F64 <Dd>, <Dm>

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<Sd>	Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
<Sm>	Is the 32-bit name of the floating-point source register, encoded in the "Vm:M" field.
<Dd>	Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
<Dm>	Is the 64-bit name of the floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if dp_operation then
        D[d] = FPSqrt(D[m]);
    else
        S[d] = FPSqrt(S[m]);

```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.


C2.4.299 VSTM

Floating-point Store Multiple stores multiple extension registers to consecutive memory locations using an address from a general-purpose register.

This instruction is used by the alias **VPUSH**. See *Alias conditions* on page C2-775 for details of when each alias is preferred.

T1

ARMv8-M Floating-point Extension only



Decrement Before variant

Applies when P == 1 && U == 0 && W == 1.

VSTMDB{<c>}{<q>}{.<size>} <Rn>!, <dreglist>

Increment After variant

Applies when P == 0 && U == 1.

VSTM{<c>}{<q>}{.<size>} <Rn>{!}, <dreglist>
 VSTMIA{<c>}{<q>}{.<size>} <Rn>{!}, <dreglist>


Decode for all variants of this encoding

```

if P == '0' && U == '0' && W == '0' then SEE "Related encodings";
if P == '1' && W == '0' then SEE VSTR;
if P == U && W == '1' then UNDEFINED;
if !HaveFPEExt() then UNDEFINED;
// Remaining combinations are PUW = 010 (IA without !), 011 (IA with !), 101 (DB with !)
single_regs = FALSE; add = (U == '1'); wback = (W == '1');
d = UInt(D:Vd); n = UInt(Rn); imm32 = ZeroExtend(imm8:'00', 32);
regs = UInt(imm8) DIV 2;
if n == 15 then UNPREDICTABLE;
if regs == 0 || regs > 16 || (d+regs) > 32 then UNPREDICTABLE;
if VFPSmallRegisterBank() && (d+regs) > 16 then UNPREDICTABLE;
  
```

T2

ARMv8-M Floating-point Extension only



Decrement Before variant

Applies when P == 1 && U == 0 && W == 1.

VSTMDB{<c>}{<q>}{.<size>} <Rn>!, <sreglist>

Increment After variant

Applies when P == 0 && U == 1.

VSTM{<c>}{<q>}{.<size>} <Rn>{!}, <sreglist>

VSTMIA{<c>}{<q>}{.<size>} <Rn>{!}, <sreglist>

Decode for all variants of this encoding

```

if P == '0' && U == '0' then SEE "Related encodings";
if P == '1' && W == '0' then SEE VSTR;
if P == '1' && U == '1' && W == '1' then UNDEFINED;
if !HaveFPEExt() then UNDEFINED;
// Remaining combinations are PUW = 010 (IA without !), 011 (IA with !), 101 (DB with !)
single_regs = TRUE; add = (U == '1'); wback = (W == '1'); d = UInt(Vd:D); n = UInt(Rn);
imm32 = ZeroExtend(imm8:'00', 32); regs = UInt(imm8);
if n == 15 then UNPREDICTABLE;
if regs == 0 || (d+regs) > 32 then UNPREDICTABLE;

```

Notes for all encodings

Related encodings: [Floating-point load/store and 64-bit register moves on page C2-292](#).

Alias conditions

Alias	is preferred when
V PUSH	P == '1' && U == '0' && W == '1' && Rn == '1101'

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
<size>	An optional data size specifier. If present, it must be equal to the size in bits, 32 or 64, of the registers being transferred.
<Rn>	Is the general-purpose base register, encoded in the "Rn" field.
!	Specifies base register writeback. Encoded in the "W" field as 1 if present, otherwise 0.
<sreglist>	Is the list of consecutively numbered 32-bit floating-point registers to be transferred. The first register in the list is encoded in "Vd:D", and "imm8" is set to the number of registers in the list. The list must contain at least one register.
<dreglist>	Is the list of consecutively numbered 64-bit floating-point registers to be transferred. The first register in the list is encoded in "D:Vd", and "imm8" is set to twice the number of registers in the list. The list must contain at least one register, and must not contain more than 16 registers.

Operation for all encodings

```

if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    address = if add then R[n]           else R[n]-imm32;
    regval  = if add then R[n]+imm32    else R[n]-imm32;

    // Determine if the stack pointer limit should be checked
    if n == 13 && wback then
        (limit, applylimit) = LookUpSPLim(LookUpSP());
    else
        applylimit = FALSE;

    // Memory operation only performed if limit not violated
    if !applylimit || (UInt(regval) >= UInt(limit)) then
        for r = 0 to regs-1

```

```
if single_regs then
    MemA[address,4] = S[d+r];
    address          = address+4;
else
    // Store as two word-aligned words in the correct order for current endianness.
    MemA[address,4] = if BigEndian() then D[d+r]<63:32> else D[d+r]<31:0>;
    MemA[address+4,4] = if BigEndian() then D[d+r]<31:0> else D[d+r]<63:32>;
    address = address+8;

// If the stack pointer is being updated update a fault will be raised if
// the limit is violated
if wback then RSPCheck[n] = regval;
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.300 VSTR

Floating-point Store Register stores a single extension register to memory, using an address from a general-purpose register, with an optional offset.

T1

ARMv8-M Floating-point Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	0	
1	1	1	0	1	1	0	1	U	D	0	0	Rn	Vd	1	0	1	1	imm8				0

T1 variant

VSTR{<c>}{<q>}{.64} <Dd>, [<Rn>{, #<+/-><imm>}]

Decode for this encoding

```
if !HaveFPEExt() then UNDEFINED;
single_reg = FALSE; add = (U == '1'); imm32 = ZeroExtend(imm8:'00', 32);
d = UInt(D:Vd); n = UInt(Rn);
if n == 15 then UNPREDICTABLE;
```

T2

ARMv8-M Floating-point Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	0	
1	1	1	0	1	1	0	1	U	D	0	0	Rn	Vd	1	0	1	0	imm8				0

T2 variant

VSTR{<c>}{<q>}{.32} <Sd>, [<Rn>{, #<+/-><imm>}]

Decode for this encoding

```
if !HaveFPEExt() then UNDEFINED;
single_reg = TRUE; add = (U == '1'); imm32 = ZeroExtend(imm8:'00', 32);
d = UInt(Vd:D); n = UInt(Rn);
if n == 15 then UNPREDICTABLE;
```

Assembler symbols

<c>	See Standard assembler syntax fields on page C1-240 .
<q>	See Standard assembler syntax fields on page C1-240 .
.64	Optional data size specifiers.
<Dd>	The source register for a doubleword store.
.32	Optional data size specifiers.
<Sd>	The source register for a singleword store.
<Rn>	Is the general-purpose base register, encoded in the "Rn" field.

- +/- Specifies the offset is added to or subtracted from the base register, defaulting to + if omitted and encoded in the "U" field. It can have the following values:
- when U = 0
 - + when U = 1
- <imm> The immediate offset used for forming the address. Values are multiples of 4 in the range 0-1020. <imm> can be omitted, meaning an offset of +0.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    address = if add then (R[n] + imm32) else (R[n] - imm32);
    if single_reg then
        MemA[address,4] = S[d];
    else
        // Store as two word-aligned words in the correct order for current endianness.
        MemA[address,4] = if BigEndian() then D[d]<63:32> else D[d]<31:0>;
        MemA[address+4,4] = if BigEndian() then D[d]<31:0> else D[d]<63:32>;
```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

C2.4.301 VSUB

Floating-point Subtract subtracts one floating-point register value from another floating-point register value, and places the results in the destination floating-point register.

T2

ARMv8-M Floating-point Extension only, $sz == 1$ UNDEFINED in single-precision only implementations.

15	14	13	12	11	10	9	8	7	6	5	4	3	0	15	12	11	10	9	8	7	6	5	4	3	0
1	1	1	0	1	1	1	0	0	D	1	1	Vn	Vd	1	0	1	sz	N	1	M	0	Vm			

Single-precision scalar variant

Applies when $sz == 0$.

VSUB{<c>}{<q>}.F32 {<Sd>}, {<Sn>}, {<Sm>}

Double-precision scalar variant

Applies when $sz == 1$.

VSUB{<c>}{<q>}.F64 {<Dd>}, {<Dn>}, {<Dm>}

Decode for all variants of this encoding

```

if !HaveFPEExt() then UNDEFINED;
dp_operation = (sz == '1');
if dp_operation && HaveSPFPOnly() then UNDEFINED;
d = if dp_operation then UInt(D:Vd) else UInt(Vd:D);
n = if dp_operation then UInt(N:Vn) else UInt(Vn:N);
m = if dp_operation then UInt(M:Vm) else UInt(Vm:M);

```

Assembler symbols

<c>	See <i>Standard assembler syntax fields</i> on page C1-240.
<q>	See <i>Standard assembler syntax fields</i> on page C1-240.
<Sd>	Is the 32-bit name of the floating-point destination register, encoded in the "Vd:D" field.
<Sn>	Is the 32-bit name of the first floating-point source register, encoded in the "Vn:N" field.
<Sm>	Is the 32-bit name of the second floating-point source register, encoded in the "Vm:M" field.
<Dd>	Is the 64-bit name of the floating-point destination register, encoded in the "D:Vd" field.
<Dn>	Is the 64-bit name of the first floating-point source register, encoded in the "N:Vn" field.
<Dm>	Is the 64-bit name of the second floating-point source register, encoded in the "M:Vm" field.

Operation

```

if ConditionPassed() then
    EncodingSpecificOperations();
    ExecuteFPCheck();
    if dp_operation then
        D[d] = FPSub(D[n], D[m], TRUE);
    else
        S[d] = FPSub(S[n], S[m], TRUE);

```

Exceptions

UsageFault, BusFault, MemManage, and SecureFault.

Floating-point exceptions: Invalid Operation, Inexact, Overflow, Underflow, and Input Denormal.

C2.4.302 WFE

Wait For Event is a hint instruction. If the Event Register is clear, it suspends execution in the lowest power state available consistent with a fast wakeup without the need for software restoration, until a reset, exception or other event occurs.

This is a [NOP](#)-compatible hint. For more information about [NOP](#)-compatible hints, see [NOP-compatible hint instructions](#) on page C1-251.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	1	1	1	1	1	1	0	0	1	0	0	0	0	0

T1 variant

WFE{<c>}{<q>}

Decode for this encoding

// No additional decoding required

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	0	0	1	1	1	0	1	0	(1)	(1)	(1)	(1)	1	0	(0)	0	(0)	0	0	0	0	0	0	0	1	0		

T2 variant

WFE{<c>}.W

Decode for this encoding

if !HaveMainExt() then UNDEFINED;
// No additional decoding required

Assembler symbols

<c> See [Standard assembler syntax fields](#) on page C1-240.

<q> See [Standard assembler syntax fields](#) on page C1-240.

Operation for all encodings

```

if ConditionPassed() then
    EncodingSpecificOperations();
    if EventRegistered() then
        ClearEventRegister();
    else
        WaitForEvent();

```

Exceptions

None.

C2.4.303 WFI

Wait For Interrupt is a hint instruction. It suspends execution, in the lowest power state available consistent with a fast wakeup without the need for software restoration, until a reset, asynchronous exception or other event occurs.

This is a *NOP*-compatible hint. For more information about *NOP*-compatible hints, see *NOP-compatible hint instructions* on page C1-251.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	1	1	1	1	1	1	0	0	1	1	0	0	0	0

T1 variant

WFI{<c>}{<q>}

Decode for this encoding

// No additional decoding required

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	0	0	1	1	1	0	1	0	(1)	(1)	(1)	(1)	1	0	(0)	0	(0)	0	0	0	0	0	0	0	1	1		

T2 variant

WFI{<c>}.W

Decode for this encoding

if !HaveMainExt() then UNDEFINED;
// No additional decoding required

Assembler symbols

<c> See *Standard assembler syntax fields* on page C1-240.

<q> See *Standard assembler syntax fields* on page C1-240.

Operation for all encodings

```
if ConditionPassed() then
    EncodingSpecificOperations();
    WaitForInterrupt();
```

Exceptions

None.

C2.4.304 YIELD

Yield is a hint instruction. It enables software with a multithreading capability to indicate to the hardware that it is performing a task, for example a spinlock, that could be swapped out to improve overall system performance. Hardware can use this hint to suspend and resume multiple code threads if it supports the capability.

This is a **NOP**-compatible hint. For more information about **NOP**-compatible hints, see *NOP-compatible hint instructions* on page C1-251.

T1

ARMv8-M

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	1	1	1	1	1	1	0	0	0	1	0	0	0	0

T1 variant

YIELD{<c>}{<q>}

Decode for this encoding

// No additional decoding required

T2

ARMv8-M Main Extension only

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	0	0	1	1	1	0	1	0	(1)	(1)	(1)	(1)	1	0	(0)	(0)	(0)	0	0	0	0	0	0	0	0	1		

T2 variant

YIELD{<c>}.W

Decode for this encoding

if !HaveMainExt() then UNDEFINED;
 // No additional decoding required

Assembler symbols

- <c> See *Standard assembler syntax fields* on page C1-240.
- <q> See *Standard assembler syntax fields* on page C1-240.

Operation for all encodings

```
if ConditionPassed() then
  EncodingSpecificOperations();
  Hint_Yield();
```

Exceptions

None.

Part D

ARMv8-M Registers

Chapter D1

Register Overview

This chapter describes the register descriptions contained in [Chapter D2 Register Specification](#). It contains the following section:

- [Understanding the register descriptions in the register specification on page D1-788.](#)

D1.1 Understanding the register descriptions in the register specification

Each register description in [Chapter D2 Register Specification](#) has the following content:

- A title.
- A list of *Characteristics*.
- A bit assignment diagram.
- A description of each field that the register contains.

The following figure shows an example. A register description always starts on a new page.

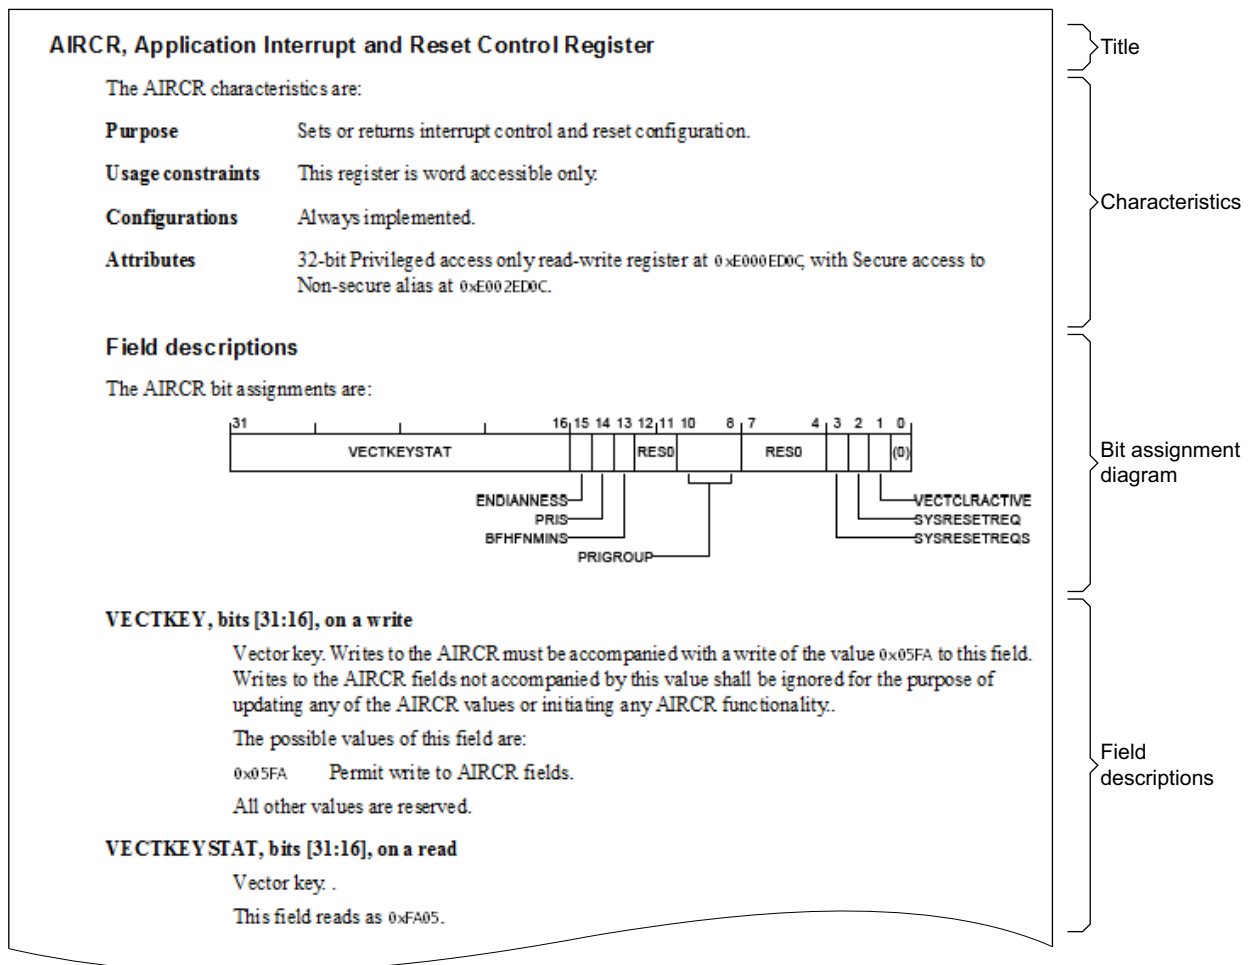


Figure D1-1 Register description example

The following section describes the *Characteristics*. ARM assumes that the title, bit assignment diagram, and field descriptions are self-evident.

D1.1.1 Characteristics

1. Purpose. Briefly describes the purpose of the register.
2. Usage constraints. Specifies, for example, when a register is accessible.
3. Configurations. Specifies the PE configurations that implement the register. For example, some registers are only implemented if a particular v8-M extension is implemented.
4. Attributes. Specifies, for example, the access type, and the address of the register if it is memory-mapped.

Chapter D2

Register Specification

This chapter specifies the ARMv8-M registers. It contains the following sections:

- [Register index on page D2-790.](#)
- [Alphabetical list of registers on page D2-806.](#)

D2.1 Register index

Address	Component
-	<i>Special and general-purpose registers on page D2-791</i>
-	<i>Payloads on page D2-791</i>
0xE0000000	<i>Instrumentation Macrocell on page D2-791</i>
0xE0001000	<i>Data Watchpoint and Trace on page D2-793</i>
0xE0002000	<i>Flash Patch and Breakpoint on page D2-794</i>
0xE000E004	<i>Implementation Control Block on page D2-794</i>
0xE000E010	<i>SysTick Timer on page D2-794</i>
0xE000E100	<i>Nested Vectored Interrupt Controller on page D2-796</i>
0xE000ED00	<i>System Control Block on page D2-796</i>
0xE000ED90	<i>Memory Protection Unit on page D2-798</i>
0xE000EDD0	<i>Security Attribution Unit on page D2-798</i>
0xE000EDF0	<i>Debug Control Block on page D2-798</i>
0xE000EF00	<i>Software Interrupt Generation on page D2-799</i>
0xE000EF34	<i>Floating-Point Extension on page D2-799</i>
0xE000EF50	<i>Cache Maintenance Operations on page D2-799</i>
0xE000EFB0	<i>Debug Identification Block on page D2-799</i>
0xE002E004	<i>Implementation Control Block (NS alias) on page D2-801</i>
0xE002E010	<i>SysTick Timer (NS alias) on page D2-801</i>
0xE002E100	<i>Nested Vectored Interrupt Controller (NS alias) on page D2-801</i>
0xE002ED00	<i>System Control Block (NS alias) on page D2-801</i>
0xE002ED90	<i>Memory Protection Unit (NS alias) on page D2-803</i>
0xE002EDF0	<i>Debug Control Block (NS alias) on page D2-803</i>
0xE002EF00	<i>Software Interrupt Generation (NS alias) on page D2-803</i>
0xE002EF34	<i>Floating-Point Extension (NS alias) on page D2-803</i>
0xE002EF50	<i>Cache Maintenance Operations (NS alias) on page D2-804</i>
0xE002EFB0	<i>Debug Identification Block (NS alias) on page D2-804</i>
0xE0040000	<i>Trace Port Interface Unit on page D2-805</i>

D2.1.1 Special and general-purpose registers

Name	Description
APSR	Application Program Status Register
BASEPRI	Base Priority Mask Register
CONTROL	Control Register
EPSR	Execution Program Status Register
FAULTMASK	Fault Mask Register
FPSCR	Floating-point Status and Control Register
IPSR	Interrupt Program Status Register
LR	Link Register
MSPLIM	Main Stack Pointer Limit Register
PC	Program Counter
PRIMASK	Exception Mask Register
PSPLIM	Process Stack Pointer Limit Register
R<n>	General-Purpose Register <i>n</i>
SP	Current Stack Pointer Register
SP_NS	Stack Pointer (Non-secure)
XPSR	Combined Program Status Registers

D2.1.2 Payloads

Name	Description
EXC_RETURN	Exception Return Payload
FNC_RETURN	Function Return Payload
MAIR_ATTR	Memory Attribute Indirection Register Attributes
RETPSR	Combined Exception Return Program Status Registers
TT_RESP	Test Target Response Payload

D2.1.3 Instrumentation Macrocell

Address	Register	Description
0xE0000000	ITM_STIM<n>	ITM Stimulus Port Register <i>n</i>
0xE0000E00	ITM_TER<n>	ITM Trace Enable Register <i>n</i>
0xE0000E40	ITM_TPR	ITM Trace Privilege Register
0xE0000E80	ITM_TCR	ITM Trace Control Register

Address	Register	Description
0xE000FB0	ITM_LAR	ITM Software Lock Access Register
0xE000FB4	ITM_LSR	ITM Software Lock Status Register
0xE000FBC	ITM_DEVARCH	ITM Device Architecture Register
0xE000FCC	ITM_DEVTYPE	ITM Device Type Register
0xE000FD0	ITM_PIDR4	ITM Peripheral Identification Register 4
0xE000FD4	ITM_PIDR5	ITM Peripheral Identification Register 5
0xE000FD8	ITM_PIDR6	ITM Peripheral Identification Register 6
0xE000FDC	ITM_PIDR7	ITM Peripheral Identification Register 7
0xE000FE0	ITM_PIDR0	ITM Peripheral Identification Register 0
0xE000FE4	ITM_PIDR1	ITM Peripheral Identification Register 1
0xE000FE8	ITM_PIDR2	ITM Peripheral Identification Register 2
0xE000FEC	ITM_PIDR3	ITM Peripheral Identification Register 3
0xE000FF0	ITM_CIDR0	ITM Component Identification Register 0
0xE000FF4	ITM_CIDR1	ITM Component Identification Register 1
0xE000FF8	ITM_CIDR2	ITM Component Identification Register 2
0xE000FFC	ITM_CIDR3	ITM Component Identification Register 3

D2.1.4 Data Watchpoint and Trace

Address	Register	Description
0xE0001000	DWT_CTRL	DWT Control Register
0xE0001004	DWT_CYCCNT	DWT Cycle Count Register
0xE0001008	DWT_CPICNT	DWT CPI Count Register
0xE000100C	DWT_EXCCNT	DWT Exception Overhead Count Register
0xE0001010	DWT_SLEEPCNT	DWT Sleep Count Register
0xE0001014	DWT_LSUCNT	DWT LSU Count Register
0xE0001018	DWT_FOLDCNT	DWT Folded Instruction Count Register
0xE000101C	DWT_PCSR	DWT Program Counter Sample Register
0xE0001020	DWT_COMP<n>	DWT Comparator Register <i>n</i>
0xE0001028	DWT_FUNCTION<n>	DWT Comparator Function Register <i>n</i>
0xE0001FB0	DWT_LAR	DWT Software Lock Access Register
0xE0001FB4	DWT_LSR	DWT Software Lock Status Register
0xE0001FBC	DWT_DEVARCH	DWT Device Architecture Register
0xE0001FCC	DWT_DEVTYPE	DWT Device Type Register
0xE0001FD0	DWT_PIDR4	DWT Peripheral Identification Register 4
0xE0001FD4	DWT_PIDR5	DWT Peripheral Identification Register 5
0xE0001FD8	DWT_PIDR6	DWT Peripheral Identification Register 6
0xE0001FDC	DWT_PIDR7	DWT Peripheral Identification Register 7
0xE0001FE0	DWT_PIDR0	DWT Peripheral Identification Register 0
0xE0001FE4	DWT_PIDR1	DWT Peripheral Identification Register 1
0xE0001FE8	DWT_PIDR2	DWT Peripheral Identification Register 2
0xE0001FEC	DWT_PIDR3	DWT Peripheral Identification Register 3
0xE0001FF0	DWT_CIDR0	DWT Component Identification Register 0
0xE0001FF4	DWT_CIDR1	DWT Component Identification Register 1
0xE0001FF8	DWT_CIDR2	DWT Component Identification Register 2
0xE0001FFC	DWT_CIDR3	DWT Component Identification Register 3

D2.1.5 Flash Patch and Breakpoint

Address	Register	Description
0xE0002000	FP_CTRL	Flash Patch Control Register
0xE0002004	FP_REMAP	Flash Patch Remap Register
0xE0002008	FP_COMP<n>	Flash Patch Comparator Register <i>n</i>
0xE0002FB0	FP_LAR	FPB Software Lock Access Register
0xE0002FB4	FP_LSR	FPB Software Lock Status Register
0xE0002FBC	FP_DEVARCH	FPB Device Architecture Register
0xE0002FCC	FPB_DEVTYPE	FPB Device Type Register
0xE0002FD0	FP_PIDR4	FP Peripheral Identification Register 4
0xE0002FD4	FP_PIDR5	FP Peripheral Identification Register 5
0xE0002FD8	FP_PIDR6	FP Peripheral Identification Register 6
0xE0002FDC	FP_PIDR7	FP Peripheral Identification Register 7
0xE0002FE0	FP_PIDR0	FP Peripheral Identification Register 0
0xE0002FE4	FP_PIDR1	FP Peripheral Identification Register 1
0xE0002FE8	FP_PIDR2	FP Peripheral Identification Register 2
0xE0002FEC	FP_PIDR3	FP Peripheral Identification Register 3
0xE0002FF0	FP_CIDR0	FP Component Identification Register 0
0xE0002FF4	FP_CIDR1	FP Component Identification Register 1
0xE0002FF8	FP_CIDR2	FP Component Identification Register 2
0xE0002FFC	FP_CIDR3	FP Component Identification Register 3

D2.1.6 Implementation Control Block

Address	Register	Description
0xE000E004	ICTR	Interrupt Controller Type Register
0xE000E008	ACTLR	Auxiliary Control Register
0xE000E00C	CPPWR	Coprocessor Power Control Register

D2.1.7 SysTick Timer

Address	Register	Description
0xE000E010	SYST_CSR	SysTick Control and Status Register

Address	Register	Description
0xE000E014	SYST_RVR	SysTick Reload Value Register
0xE000E018	SYST_CVR	SysTick Current Value Register
0xE000E01C	SYST_CALIB	SysTick Calibration Value Register

D2.1.8 Nested Vectored Interrupt Controller

Address	Register	Description
0xE000E100	NVIC_ISER<n>	Interrupt Set Enable Register <i>n</i>
0xE000E180	NVIC_ICER<n>	Interrupt Clear Enable Register <i>n</i>
0xE000E200	NVIC_ISPR<n>	Interrupt Set Pending Register <i>n</i>
0xE000E280	NVIC_ICPR<n>	Interrupt Clear Pending Register <i>n</i>
0xE000E300	NVIC_IABR<n>	Interrupt Active Bit Register <i>n</i>
0xE000E380	NVIC_ITNS<n>	Interrupt Target Non-secure Register <i>n</i>
0xE000E400	NVIC_IPR<n>	Interrupt Priority Register <i>n</i>

D2.1.9 System Control Block

Address	Register	Description
0xE000ED00	CPUID	CPUID Base Register
0xE000ED04	ICSR	Interrupt Control and State Register
0xE000ED08	VTOR	Vector Table Offset Register
0xE000ED0C	AIRCR	Application Interrupt and Reset Control Register
0xE000ED10	SCR	System Control Register
0xE000ED14	CCR	Configuration and Control Register
0xE000ED18	SHPR1	System Handler Priority Register 1
0xE000ED1C	SHPR2	System Handler Priority Register 2
0xE000ED20	SHPR3	System Handler Priority Register 3
0xE000ED24	SHCSR	System Handler Control and State Register
0xE000ED28	CFSR	Configurable Fault Status Register
0xE000ED28	MMFSR	MemManage Fault Status Register
0xE000ED29	BFSR	BusFault Status Register
0xE000ED2A	UFSR	UsageFault Status Register
0xE000ED2C	HFSR	HardFault Status Register
0xE000ED30	DFSR	Debug Fault Status Register
0xE000ED34	MMFAR	MemManage Fault Address Register
0xE000ED38	BFAR	BusFault Address Register
0xE000ED3C	AFSR	Auxiliary Fault Status Register
0xE000ED40	ID_PFR0	Processor Feature Register 0
0xE000ED44	ID_PFR1	Processor Feature Register 1

Address	Register	Description
0xE000ED48	ID_DFR0	Debug Feature Register 0
0xE000ED4C	ID_AFR0	Auxiliary Feature Register 0
0xE000ED50	ID_MMFR0	Memory Model Feature Register 0
0xE000ED54	ID_MMFR1	Memory Model Feature Register 1
0xE000ED58	ID_MMFR2	Memory Model Feature Register 2
0xE000ED5C	ID_MMFR3	Memory Model Feature Register 3
0xE000ED60	ID_ISAR0	Instruction Set Attribute Register 0
0xE000ED64	ID_ISAR1	Instruction Set Attribute Register 1
0xE000ED68	ID_ISAR2	Instruction Set Attribute Register 2
0xE000ED6C	ID_ISAR3	Instruction Set Attribute Register 3
0xE000ED70	ID_ISAR4	Instruction Set Attribute Register 4
0xE000ED74	ID_ISAR5	Instruction Set Attribute Register 5
0xE000ED78	CLIDR	Cache Level ID Register
0xE000ED7C	CTR	Cache Type Register
0xE000ED80	CCSIDR	Current Cache Size ID register
0xE000ED84	CSSELR	Cache Size Selection Register
0xE000ED88	CPACR	Coprocessor Access Control Register
0xE000ED8C	NSACR	Non-secure Access Control Register

D2.1.10 Memory Protection Unit

Address	Register	Description
0xE000ED90	MPU_TYPE	MPU Type Register
0xE000ED94	MPU_CTRL	MPU Control Register
0xE000ED98	MPU_RNR	MPU Region Number Register
0xE000ED9C	MPU_RBAR	MPU Region Base Address Register
0xE000EDA0	MPU_RLAR	MPU Region Limit Address Register
0xE000EDA4	MPU_RBAR_A<n>	MPU Region Base Address Register Alias <i>n</i>
0xE000EDA8	MPU_RLAR_A<n>	MPU Region Limit Address Register Alias <i>n</i>
0xE000EDC0	MPU_MAIR0	MPU Memory Attribute Indirection Register 0
0xE000EDC4	MPU_MAIR1	MPU Memory Attribute Indirection Register 1

D2.1.11 Security Attribution Unit

Address	Register	Description
0xE000EDD0	SAU_CTRL	SAU Control Register
0xE000EDD4	SAU_TYPE	SAU Type Register
0xE000EDD8	SAU_RNR	SAU Region Number Register
0xE000EDDC	SAU_RBAR	SAU Region Base Address Register
0xE000EDE0	SAU_RLAR	SAU Region Limit Address Register
0xE000EDE4	SFSR	Secure Fault Status Register
0xE000EDE8	SFAR	Secure Fault Address Register

D2.1.12 Debug Control Block

Address	Register	Description
0xE000EDF0	DHCSR	Debug Halting Control and Status Register
0xE000EDF4	DCRSR	Debug Core Register Select Register
0xE000EDF8	DCRDR	Debug Core Register Data Register
0xE000EDFC	DEMCR	Debug Exception and Monitor Control Register
0xE000EE04	DAUTHCTRL	Debug Authentication Control Register
0xE000EE08	DSCSR	Debug Security Control and Status Register

D2.1.13 Software Interrupt Generation

Address	Register	Description
0xE000EF00	STIR	Software Triggered Interrupt Register

D2.1.14 Floating-Point Extension

Address	Register	Description
0xE000EF34	FPCCR	Floating-Point Context Control Register
0xE000EF38	FPCAR	Floating-Point Context Address Register
0xE000EF3C	FPDSCR	Floating-Point Default Status Control Register
0xE000EF40	MVFR0	Media and VFP Feature Register 0
0xE000EF44	MVFR1	Media and VFP Feature Register 1
0xE000EF48	MVFR2	Media and VFP Feature Register 2

D2.1.15 Cache Maintenance Operations

Address	Register	Description
0xE000EF50	ICIALLU	Instruction Cache Invalidate All to PoU
0xE000EF58	ICIMVAU	Instruction Cache line Invalidate by Address to PoU
0xE000EF5C	DCIMVAC	Data Cache line Invalidate by Address to PoC
0xE000EF60	DCISW	Data Cache line Invalidate by Set/Way
0xE000EF64	DCCMVAU	Data Cache line Clean by address to PoU
0xE000EF68	DCCMVAC	Data Cache line Clean by Address to PoC
0xE000EF6C	DCCSW	Data Cache Clean line by Set/Way
0xE000EF70	DCCIMVAC	Data Cache line Clean and Invalidate by Address to PoC
0xE000EF74	DCCISW	Data Cache line Clean and Invalidate by Set/Way
0xE000EF78	BPIALL	Branch Predictor Invalidate All

D2.1.16 Debug Identification Block

Address	Register	Description
0xE000EFB0	DLAR	SCS Software Lock Access Register
0xE000EFB4	DLSR	SCS Software Lock Status Register
0xE000EFB8	DAUTHSTATUS	Debug Authentication Status Register
0xE000EFBC	DDEVARCH	SCS Device Architecture Register
0xE000EFC0	DDEVTYPE	SCS Device Type Register

Address	Register	Description
0xE000EFD0	DPIDR4	SCS Peripheral Identification Register 4
0xE000EFD4	DPIDR5	SCS Peripheral Identification Register 5
0xE000EFD8	DPIDR6	SCS Peripheral Identification Register 6
0xE000EFD C	DPIDR7	SCS Peripheral Identification Register 7
0xE000EFE0	DPIDR0	SCS Peripheral Identification Register 0
0xE000EFE4	DPIDR1	SCS Peripheral Identification Register 1
0xE000EFE8	DPIDR2	SCS Peripheral Identification Register 2
0xE000EFEC	DPIDR3	SCS Peripheral Identification Register 3
0xE000EFF0	DCIDR0	SCS Component Identification Register 0
0xE000EFF4	DCIDR1	SCS Component Identification Register 1
0xE000EFF8	DCIDR2	SCS Component Identification Register 2
0xE000EFFC	DCIDR3	SCS Component Identification Register 3

D2.1.17 Implementation Control Block (NS alias)

Address	Register	Description
0xE002E004	ICTR_NS	Interrupt Controller Type Register (NS)
0xE002E008	ACTLR_NS	Auxiliary Control Register (NS)
0xE002E00C	CPPWR_NS	Coprocessor Power Control Register (NS)

D2.1.18 SysTick Timer (NS alias)

Address	Register	Description
0xE002E010	SYST_CSR_NS	SysTick Control and Status Register (NS)
0xE002E014	SYST_RVR_NS	SysTick Reload Value Register (NS)
0xE002E018	SYST_CVR_NS	SysTick Current Value Register (NS)
0xE002E01C	SYST_CALIB_NS	SysTick Calibration Value Register (NS)

D2.1.19 Nested Vectored Interrupt Controller (NS alias)

Address	Register	Description
0xE002E100	NVIC_ISER<n>_NS	Interrupt Set Enable Register <i>n</i> (NS)
0xE002E180	NVIC_ICER<n>_NS	Interrupt Clear Enable Register <i>n</i> (NS)
0xE002E200	NVIC_ISPR<n>_NS	Interrupt Set Pending Register <i>n</i> (NS)
0xE002E280	NVIC_ICPR<n>_NS	Interrupt Clear Pending Register <i>n</i> (NS)
0xE002E300	NVIC_IABR<n>_NS	Interrupt Active Bit Register <i>n</i> (NS)
0xE002E400	NVIC_IPR<n>_NS	Interrupt Priority Register <i>n</i> (NS)

D2.1.20 System Control Block (NS alias)

Address	Register	Description
0xE002ED00	CPUID_NS	CPUID Base Register (NS)
0xE002ED04	ICSR_NS	Interrupt Control and State Register (NS)
0xE002ED08	VTOR_NS	Vector Table Offset Register (NS)
0xE002ED0C	AIRCR_NS	Application Interrupt and Reset Control Register (NS)
0xE002ED10	SCR_NS	System Control Register (NS)
0xE002ED14	CCR_NS	Configuration and Control Register (NS)
0xE002ED18	SHPR1_NS	System Handler Priority Register 1 (NS)
0xE002ED1C	SHPR2_NS	System Handler Priority Register 2 (NS)
0xE002ED20	SHPR3_NS	System Handler Priority Register 3 (NS)

Address	Register	Description
0xE002ED24	SHCSR_NS	System Handler Control and State Register (NS)
0xE002ED28	CFSR_NS	Configurable Fault Status Register (NS)
0xE002ED28	MMFSR_NS	MemManage Fault Status Register (NS)
0xE002ED29	BFSR_NS	BusFault Status Register (NS)
0xE002ED2A	UFSR_NS	UsageFault Status Register (NS)
0xE002ED2C	HFSR_NS	HardFault Status Register (NS)
0xE002ED30	DFSR_NS	Debug Fault Status Register (NS)
0xE002ED34	MMFAR_NS	MemManage Fault Address Register (NS)
0xE002ED38	BFAR_NS	BusFault Address Register (NS)
0xE002ED3C	AFSR_NS	Auxiliary Fault Status Register (NS)
0xE002ED40	ID_PFR0_NS	Processor Feature Register 0 (NS)
0xE002ED44	ID_PFR1_NS	Processor Feature Register 1 (NS)
0xE002ED48	ID_DFR0_NS	Debug Feature Register 0 (NS)
0xE002ED4C	ID_AFR0_NS	Auxiliary Feature Register 0 (NS)
0xE002ED50	ID_MMFR0_NS	Memory Model Feature Register 0 (NS)
0xE002ED54	ID_MMFR1_NS	Memory Model Feature Register 1 (NS)
0xE002ED58	ID_MMFR2_NS	Memory Model Feature Register 2 (NS)
0xE002ED5C	ID_MMFR3_NS	Memory Model Feature Register 3 (NS)
0xE002ED60	ID_ISAR0_NS	Instruction Set Attribute Register 0 (NS)
0xE002ED64	ID_ISAR1_NS	Instruction Set Attribute Register 1 (NS)
0xE002ED68	ID_ISAR2_NS	Instruction Set Attribute Register 2 (NS)
0xE002ED6C	ID_ISAR3_NS	Instruction Set Attribute Register 3 (NS)
0xE002ED70	ID_ISAR4_NS	Instruction Set Attribute Register 4 (NS)
0xE002ED74	ID_ISAR5_NS	Instruction Set Attribute Register 5 (NS)
0xE002ED78	CLIDR_NS	Cache Level ID Register (NS)
0xE002ED7C	CTR_NS	Cache Type Register (NS)
0xE002ED80	CCSIDR_NS	Current Cache Size ID register (NS)
0xE002ED84	CSSELR_NS	Cache Size Selection Register (NS)
0xE002ED88	CPACR_NS	Coprocessor Access Control Register (NS)

D2.1.21 Memory Protection Unit (NS alias)

Address	Register	Description
0xE002ED90	MPU_TYPE_NS	MPU Type Register (NS)
0xE002ED94	MPU_CTRL_NS	MPU Control Register (NS)
0xE002ED98	MPU_RNR_NS	MPU Region Number Register (NS)
0xE002ED9C	MPU_RBAR_NS	MPU Region Base Address Register (NS)
0xE002EDA0	MPU_RLAR_NS	MPU Region Limit Address Register (NS)
0xE002EDA4	MPU_RBAR_A<n>_NS	MPU Region Base Address Register Alias <i>n</i> (NS)
0xE002EDA8	MPU_RLAR_A<n>_NS	MPU Region Limit Address Register Alias <i>n</i> (NS)
0xE002EDC0	MPU_MAIR0_NS	MPU Memory Attribute Indirection Register 0 (NS)
0xE002EDC4	MPU_MAIR1_NS	MPU Memory Attribute Indirection Register 1 (NS)

D2.1.22 Debug Control Block (NS alias)

Address	Register	Description
0xE002EDF0	DHCSR_NS	Debug Halting Control and Status Register (NS)
0xE002EDF8	DCRDR_NS	Debug Core Register Data Register (NS)
0xE002EDFC	DEMCR_NS	Debug Exception and Monitor Control Register (NS)

D2.1.23 Software Interrupt Generation (NS alias)

Address	Register	Description
0xE002EF00	STIR_NS	Software Triggered Interrupt Register (NS)

D2.1.24 Floating-Point Extension (NS alias)

Address	Register	Description
0xE002EF34	FPCCR_NS	Floating-Point Context Control Register (NS)
0xE002EF38	FPCAR_NS	Floating-Point Context Address Register (NS)
0xE002EF3C	FPDSCR_NS	Floating-Point Default Status Control Register (NS)
0xE002EF40	MVFR0_NS	Media and VFP Feature Register 0 (NS)
0xE002EF44	MVFR1_NS	Media and VFP Feature Register 1 (NS)
0xE002EF48	MVFR2_NS	Media and VFP Feature Register 2 (NS)

D2.1.25 Cache Maintenance Operations (NS alias)

Address	Register	Description
0xE002EF50	ICIALLU_NS	Instruction Cache Invalidate All to PoU (NS)
0xE002EF58	ICIMVAU_NS	Instruction Cache line Invalidate by Address to PoU (NS)
0xE002EF5C	DCIMVAC_NS	Data Cache line Invalidate by Address to PoC (NS)
0xE002EF60	DCISW_NS	Data Cache line Invalidate by Set/Way (NS)
0xE002EF64	DCCMVAU_NS	Data Cache line Clean by address to PoU (NS)
0xE002EF68	DCCMVAC_NS	Data Cache line Clean by Address to PoC (NS)
0xE002EF6C	DCCSW_NS	Data Cache Clean line by Set/Way (NS)
0xE002EF70	DCCIMVAC_NS	Data Cache line Clean and Invalidate by Address to PoC (NS)
0xE002EF74	DCCISW_NS	Data Cache line Clean and Invalidate by Set/Way (NS)
0xE002EF78	BPIALL_NS	Branch Predictor Invalidate All (NS)

D2.1.26 Debug Identification Block (NS alias)

Address	Register	Description
0xE002EFB0	DLAR_NS	SCS Software Lock Access Register (NS)
0xE002EFB4	DLSR_NS	SCS Software Lock Status Register (NS)
0xE002EFB8	DAUTHSTATUS_NS	Debug Authentication Status Register (NS)
0xE002EFBC	DDEVARCH_NS	SCS Device Architecture Register (NS)
0xE002EFCC	DDEVTYPE_NS	SCS Device Type Register (NS)
0xE002EFD0	DPIDR4_NS	SCS Peripheral Identification Register 4 (NS)
0xE002EFD4	DPIDR5_NS	SCS Peripheral Identification Register 5 (NS)
0xE002EFD8	DPIDR6_NS	SCS Peripheral Identification Register 6 (NS)
0xE002EFD4	DPIDR7_NS	SCS Peripheral Identification Register 7 (NS)
0xE002EFE0	DPIDR0_NS	SCS Peripheral Identification Register 0 (NS)
0xE002EFE4	DPIDR1_NS	SCS Peripheral Identification Register 1 (NS)
0xE002EFE8	DPIDR2_NS	SCS Peripheral Identification Register 2 (NS)
0xE002EFEC	DPIDR3_NS	SCS Peripheral Identification Register 3 (NS)
0xE002EFF0	DCIDR0_NS	SCS Component Identification Register 0 (NS)
0xE002EFF4	DCIDR1_NS	SCS Component Identification Register 1 (NS)
0xE002EFF8	DCIDR2_NS	SCS Component Identification Register 2 (NS)
0xE002EFFC	DCIDR3_NS	SCS Component Identification Register 3 (NS)

D2.1.27 Trace Port Interface Unit

Address	Register	Description
0xE0040000	TPIU_SSPSR	TPIU Supported Parallel Port Sizes Register
0xE0040004	TPIU_CSPPSR	TPIU Current Parallel Port Sizes Register
0xE0040010	TPIU_ACPR	TPIU Asynchronous Clock Prescaler Register
0xE00400F0	TPIU_SPPR	TPIU Selected Pin Protocol Register
0xE0040300	TPIU_FFSR	TPIU Formatter and Flush Status Register
0xE0040304	TPIU_FFRCR	TPIU Formatter and Flush Control Register
0xE0040308	TPIU_PSCR	TPIU Periodic Synchronization Control Register
0xE0040FB0	TPIU_LAR	TPIU Software Lock Access Register
0xE0040FB4	TPIU_LSR	TPIU Software Lock Status Register
0xE0040FC8	TPIU_TYPE	TPIU Device Identifier Register
0xE0040FCC	TPIU_DEVTYPE	TPIU Device Type Register
0xE0040FD0	TPIU_PIDR4	TPIU Peripheral Identification Register 4
0xE0040FD4	TPIU_PIDR5	TPIU Peripheral Identification Register 5
0xE0040FD8	TPIU_PIDR6	TPIU Peripheral Identification Register 6
0xE0040FDC	TPIU_PIDR7	TPIU Peripheral Identification Register 7
0xE0040FE0	TPIU_PIDR0	TPIU Peripheral Identification Register 0
0xE0040FE4	TPIU_PIDR1	TPIU Peripheral Identification Register 1
0xE0040FE8	TPIU_PIDR2	TPIU Peripheral Identification Register 2
0xE0040FEC	TPIU_PIDR3	TPIU Peripheral Identification Register 3
0xE0040FF0	TPIU_CIDR0	TPIU Component Identification Register 0
0xE0040FF4	TPIU_CIDR1	TPIU Component Identification Register 1
0xE0040FF8	TPIU_CIDR2	TPIU Component Identification Register 2
0xE0040FFC	TPIU_CIDR3	TPIU Component Identification Register 3

D2.2 Alphabetical list of registers

D2.2.1 ACTLR, Auxiliary Control Register

The ACTLR characteristics are:

Purpose	Provides IMPLEMENTATION DEFINED configuration and control options.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000E008. Secure software can access the Non-secure view of this register via ACTLR_NS located at 0xE002E008. The location 0xE002E008 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The ACTLR bit assignments are:



IMPLEMENTATION DEFINED, bits [31:0]

IMPLEMENTATION DEFINED. The contents of this field are IMPLEMENTATION DEFINED.

D2.2.2 AFSR, Auxiliary Fault Status Register

The AFSR characteristics are:

Purpose	Provides IMPLEMENTATION DEFINED fault status information.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000ED3C. Secure software can access the Non-secure view of this register via AFSR_NS located at 0xE002ED3C. The location 0xE002ED3C is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The AFSR bit assignments are:



IMPLEMENTATION DEFINED, bits [31:0]

IMPLEMENTATION DEFINED. The contents of this field are IMPLEMENTATION DEFINED.

D2.2.3 AIRCR, Application Interrupt and Reset Control Register


The AIRCR characteristics are:

Purpose	Sets or returns interrupt control and reset configuration.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000ED0C. Secure software can access the Non-secure view of this register via AIRCR_NS located at 0xE002ED0C. The location 0xE002ED0C is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states on a bit by bit basis.


Field descriptions

The AIRCR bit assignments are:

On a read:

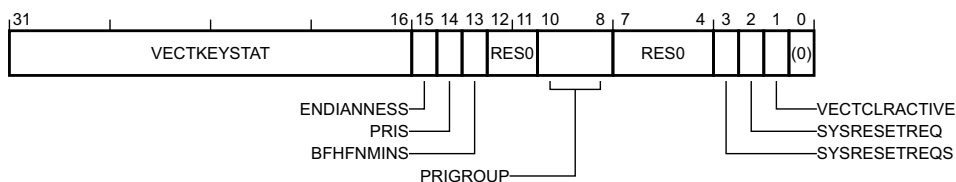

On a write:

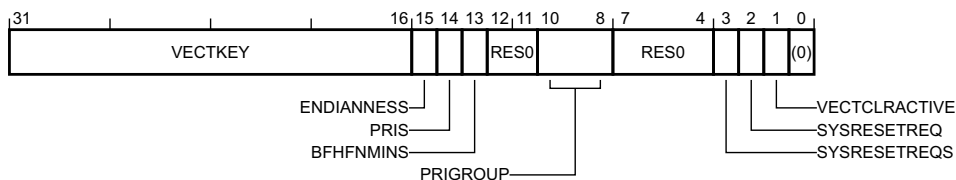

VECTKEY, bits [31:16], on a write

Vector key. Writes to the AIRCR must be accompanied by a write of the value 0x05FA to this field. Writes to the AIRCR fields that are not accompanied by this value are ignored for the purpose of updating any of the AIRCR values or initiating any AIRCR functionality.

This field is not banked between Security states.

The possible values of this field are:

0x05FA Permit write to AIRCR fields.

Not 0x05FA

Accompanying write to AIRCR fields ignored.

VECTKEYSTAT, bits [31:16], on a read

Vector key status. Returns the bitwise inverse of the value required to be written to VECTKEY.

This field is not banked between Security states.

This field reads as 0xFA05.

ENDIANNESS, bit [15]

Data endianness. Indicates how the PE interprets the memory system data endianness.

This bit is not banked between Security states.

The possible values of this bit are:

0 Little-endian.

1 Big-endian.

This bit is read-only.

This bit reads as an IMPLEMENTATION DEFINED value.

PRIS, bit [14]

Prioritize Secure exceptions. The value of this bit defines whether Secure exception priority boosting is enabled.

This bit is not banked between Security states.

The possible values of this bit are:

0 Priority ranges of Secure and Non-secure exceptions are identical.

1 Non-secure exceptions are de-prioritized.

To allow lock down of this bit, it is IMPLEMENTATION DEFINED whether this bit is writable.

This bit is RAZ/WI from Non-secure.

This bit resets to zero on a Warm reset.

BFHFNMINs, bit [13]

BusFault, HardFault, and NMI Non-secure enable. The value of this bit defines whether BusFault and NMI exceptions are Non-secure, and whether exceptions target the Non-secure HardFault exception.

This bit is not banked between Security states.

The possible values of this bit are:

0 BusFault, HardFault, and NMI are Secure.

1 BusFault and NMI are Non-secure and exceptions can target Non-secure HardFault.

If an implementation resets into Secure state, this bit resets to zero. If an implementation does not support Secure state, this bit is RAO/WI. To allow lock down of this field it is IMPLEMENTATION DEFINED whether this bit is writable. The effect of setting both BFHFNMINs and PRIS to 1 is UNPREDICTABLE.

This bit is read-only from Non-secure.

This bit resets to zero on a Warm reset.

Bits [12:11]

Reserved, RES0.

PRIGROUP, bits [10:8]

Priority grouping. The value of this field defines the exception priority binary point position for the selected Security state.

This field is banked between Security states.

The possible values of this field are:

0b000 Group priority [7:1], subpriority [0].

0b001 Group priority [7:2], subpriority [1:0].

0b010 Group priority [7:3], subpriority [2:0].

0b011 Group priority [7:4], subpriority [3:0].

0b100 Group priority [7:5], subpriority [4:0].

0b101 Group priority [7:6], subpriority [5:0].

0b110 Group priority [7], subpriority [6:0].

0b111 No group priority, subpriority [7:0].

If the Main Extension is not implemented, this field is RES0.

This field resets to zero on a Warm reset.

Bits [7:4]

Reserved, RES0.

SYSRESETREQS, bit [3]

System reset request Secure only. The value of this bit defines whether the SYSRESETREQ bit is functional for Non-secure use.

This bit is not banked between Security states.

The possible values of this bit are:

0 SYSRESETREQ functionality is available to both Security states.

1 SYSRESETREQ functionality is only available to Secure state.

This bit is RAZ/WI from Non-secure.

This bit resets to zero on a Warm reset.

SYSRESETREQ, bit [2]

System reset request. This bit allows software or a debugger to request a system reset.

This bit is not banked between Security states.

The possible values of this bit are:

0 Do not request a system reset.

1 Request a system reset.

When SYSRESETREQS is set to 1, the Non-secure view of this bit is RAZ/WI.

This bit resets to zero on a Warm reset.

VECTCLRACTIVE, bit [1]

Clear active state.

A debugger write of one to this bit when the PE is halted in Debug state:

- IPSR is cleared to zero.
- The active state for all Non-secure exceptions is cleared.
- If DHCSR.S_SDE=1, the active state for all Secure exceptions are cleared.

This bit is not banked between Security states.

The possible values of this bit are:

0 Do not clear active state.

1 Clear active state.

Writes to this bit while the PE is in Non-debug state are ignored.

This bit reads as zero.

Bit [0]

Reserved, RES0.


D2.2.4 APSR, Application Program Status Register

The APSR characteristics are:

Purpose	Provides privileged and unprivileged access to the PE Execution state fields.
Usage constraints	Privileged and unprivileged access permitted.
Configurations	This register is always implemented.
Attributes	32-bit read/write special-purpose register. This register is not banked between Security states.

Field descriptions

The APSR bit assignments are:



N, bit [31]

Negative condition flag. When updated by a flag setting instruction this bit indicates whether the result of the operation when treated as a two's complement signed integer is negative.

The possible values of this bit are:

- 0** Result is positive or zero.
- 1** Result is negative.

See individual instruction pages for details.

This bit resets to an UNKNOWN value on a Warm reset.

Z, bit [30]

Zero condition flag. When updated by a flag setting instruction this bit indicates whether the result of the operation was zero.

The possible values of this bit are:

- 0** Result is non-zero.
- 1** Result is zero.

See individual instruction pages for details.

This bit resets to an UNKNOWN value on a Warm reset.

C, bit [29]

Carry Condition flag. When updated by a flag setting instruction this bit indicates whether the operation resulted in an unsigned overflow or whether the last bit shifted out of the result was set.

The possible values of this bit are:

- 0** No carry occurred, or last bit shifted was clear.
- 1** Carry occurred, or last bit shifted was set.

See individual instruction pages for details.

This bit resets to an UNKNOWN value on a Warm reset.

V, bit [28]

Overflow condition flag. When updated by a flag setting instruction this bit indicates whether a signed overflow occurred.

The possible values of this bit are:

- 0** Signed overflow did not occur.

1 Signed overflow occurred.

See individual instruction pages for details.

This bit resets to an UNKNOWN value on a Warm reset.

Q, bit [27]

Sticky saturation flag. When updated by certain instructions this bit indicates either that an overflow occurred or that the result was saturated. This bit is cumulative and can only be cleared to zero by software.

The possible values of this bit are:

0 Saturation or overflow has not occurred since bit was last cleared.

1 Saturation or overflow has occurred since bit was last cleared.

See individual instruction pages for details.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to an UNKNOWN value on a Warm reset.

Bits [26:20]

Reserved, RES0.

GE, bits [19:16]

Greater than or equal flags. When updated by parallel addition and subtraction instructions these bits record whether the result was greater than or equal to zero. SEL instructions use these bits to determine which register to select a particular byte from.

See individual instruction pages for details.

If the DSP Extension is not implemented, this field is RES0.

This field resets to an UNKNOWN value on a Warm reset.

Bits [15:0]

Reserved, RES0.


D2.2.5 BASEPRI, Base Priority Mask Register

The BASEPRI characteristics are:

Purpose	Changes the priority level required for exception preemption.
Usage constraints	Privileged access only. Unprivileged access is RAZ/WI.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read/write special-purpose register. This register is banked between Security states.

Field descriptions

The BASEPRI bit assignments are:



Bits [31:8]

Reserved, RES0.

BASEPRI, bits [7:0]

Base priority mask. BASEPRI changes the priority level required for exception preemption. It has an effect only when BASEPRI has a lower value than the unmasked priority level of the currently executing software.

The possible values of this field are:

- 0** Disables masking by BASEPRI.
- 1-255** Priority value.

The number of implemented bits in BASEPRI is the same as the number of implemented bits in each field of the priority registers, and BASEPRI has the same format as those fields.

This field resets to zero on a Warm reset.


D2.2.6 BFAR, BusFault Address Register

The BFAR characteristics are:

Purpose	Shows the address associated with a precise data access BusFault.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read/write register located at 0xE000ED38. Secure software can access the Non-secure view of this register via BFAR_NS located at 0xE002ED38. The location 0xE002ED38 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The BFAR bit assignments are:



ADDRESS, bits [31:0]

Data address for a precise BusFault. This register is updated with the address of a location that produced a BusFault. The BFSR shows the reason for the fault. This field is valid only when BFSR.BFARVALID is set, otherwise it is UNKNOWN.

In implementations without unique BFAR and MMFAR registers, the value of this register is UNKNOWN if MMFSR.MMARVALID is set.

If AIRCR.BFHFNMIN is zero this field is RAZ/WI from Non-secure state.

This field resets to an UNKNOWN value on a Warm reset.

————— **Note** —————

If an implementation shares a common BFAR and MMFAR it must not leak Secure state information to the Non-secure state. One possible implementation is that BFAR shares resource with the Secure MMFAR if AIRCR.BFHFNMIN is zero, and with the Non-secure MMFAR if AIRCR.BFHFNMIN is set.


D2.2.7 BFSR, BusFault Status Register

The BFSR characteristics are:

Purpose	Shows the status of bus errors resulting from instruction fetches and data accesses.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. If the Main Extension is implemented, this register is word, halfword, and byte accessible. If the Main Extension is not implemented, this register is word accessible only, halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	8-bit read/write-one-to-clear register located at 0xE000ED29. Secure software can access the Non-secure view of this register via BFSR_NS located at 0xE002ED29. The location 0xE002ED29 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states. This register is part of CFSR.

Field descriptions

The BFSR bit assignments are:

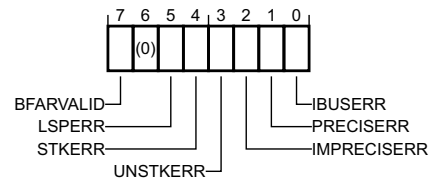

BFARVALID, bit [7]

BFAR valid. Indicates validity of the contents of the BFAR register.

The possible values of this bit are:

- 0** BFAR content not valid.
- 1** BFAR content valid.

This bit resets to zero on a Warm reset.

Bit [6]

Reserved, RES0.

LSPERR, bit [5]

Lazy state preservation error. Records whether a BusFault occurred during FP lazy state preservation.

The possible values of this bit are:

- 0** No BusFault occurred.
- 1** BusFault occurred.

This bit resets to zero on a Warm reset.

STKERR, bit [4]

Stack error. Records whether a derived BusFault occurred during exception entry stacking.

The possible values of this bit are:

- 0** No derived BusFault occurred.

1 Derived BusFault occurred during exception entry.
This bit resets to zero on a Warm reset.

UNSTKERR, bit [3]

Unstack error. Records whether a derived BusFault occurred during exception return unstacking.
The possible values of this bit are:

0 No derived BusFault occurred.
1 Derived BusFault occurred during exception return.
This bit resets to zero on a Warm reset.

IMPRECISERR, bit [2]

Imprecise error. Records whether an imprecise data access error has occurred.
The possible values of this bit are:

0 No imprecise data access error has occurred.
1 Imprecise data access error has occurred.
This bit resets to zero on a Warm reset.

PRECISERR, bit [1]

Precise error. Records whether a precise data access error has occurred.
The possible values of this bit are:

0 No precise data access error has occurred.
1 Precise data access error has occurred.

When a precise error is recorded, the associated address is written to the BFAR and BFSR.BFARVALID bit is set.

This bit resets to zero on a Warm reset.

IBUSERR, bit [0]

Instruction bus error. Records whether a BusFault on an instruction prefetch has occurred.
The possible values of this bit are:

0 No BusFault on instruction prefetch has occurred.
1 A BusFault on an instruction prefetch has occurred.

An IBUSERR is only recorded if the instruction is issued for execution.

This bit resets to zero on a Warm reset.


D2.2.8 BPIALL, Branch Predictor Invalidate All

The BPIALL characteristics are:

Purpose	Invalidate all entries from branch predictors.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit write-only register located at 0xE000EF78. Secure software can access the Non-secure view of this register via BPIALL_NS located at 0xE002EF78. The location 0xE002EF78 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The BPIALL bit assignments are:



Ignored, bits [31:0]

Ignored. The value written to this field is ignored.


D2.2.9 CCR, Configuration and Control Register

The CCR characteristics are:

Purpose	Sets or returns configuration and control data.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000ED14. Secure software can access the Non-secure view of this register via CCR_NS located at 0xE002ED14. The location 0xE002ED14 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states on a bit by bit basis.

Field descriptions

The CCR bit assignments are:

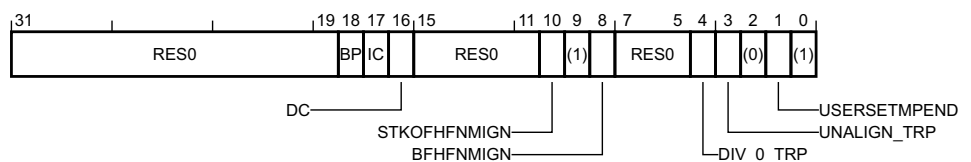

Bits [31:19]

Reserved, RES0.

BP, bit [18]

Branch prediction enable. Enables program flow prediction for the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

0 Program flow prediction disabled for the selected Security state.

1 Program flow prediction enabled for the selected Security state.

If program flow prediction cannot be disabled, this bit is RAO/WI. If the program flow prediction is not supported, this bit is RAZ/WI.

This bit resets to zero on a Warm reset.

IC, bit [17]

Instruction cache enable. This is a global enable bit for instruction caches in the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

0 Instruction caches disabled for the selected Security state.

1 Instruction caches enabled for the selected Security state.

If the PE does not implement instruction caches, this bit is RAZ/WI.

This bit resets to zero on a Warm reset.

DC, bit [16]

Data cache enable. Enables data caching of all data accesses to Normal memory for the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

- 0** Data caching disabled for the selected Security state.
- 1** Data caching enabled for the selected Security state.

If the PE does not implement data caches, this bit is RAZ/WI.

This bit resets to zero on a Warm reset.

Bits [15:11]

Reserved, RES0.

STKOFHFNMIGN, bit [10]

Stack overflow in HardFault and NMI ignore. Controls the effect of a stack limit violation while executing at a requested priority less than 0.

This bit is banked between Security states.

The possible values of this bit are:

- 0** Stack limit faults not ignored.
- 1** Stack limit faults at requested priorities of less than 0 ignored.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

Bit [9]

Reserved, RES1.

BFHFNMIGN, bit [8]

BusFault in HardFault or NMI ignore. Determines the effect of precise BusFaults on handlers running at a requested priority less than 0.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** Precise BusFaults not ignored.
- 1** Precise BusFaults at requested priorities of less than 0 ignored.

If AIRCR.BFHFNMIN is 0, this bit is read only from Non-secure state.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

Bits [7:5]

Reserved, RES0.

DIV_0_TRP, bit [4]

Divide by zero trap. Controls the generation of a DIVBYZERO UsageFault when attempting to perform integer division by zero.

This bit is banked between Security states.

The possible values of this bit are:

- 0** DIVBYZERO UsageFault generation disabled.
- 1** DIVBYZERO UsageFault generation enabled.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

UNALIGN_TRP, bit [3]

Unaligned trap. Controls the trapping of unaligned word or halfword accesses.

This bit is banked between Security states.

The possible values of this bit are:

0 Unaligned accesses permitted from LDR, LDRH, STR, and STRH.

1 Any unaligned transaction generates an UNALIGNED UsageFault.

Unaligned load/store multiples and atomic/exclusive accesses always generate an UNALIGNED UsageFault.

If the Main Extension is not implemented, this bit is RES1.

This bit resets to zero on a Warm reset if the Main Extension is implemented.

Bit [2]

Reserved, RES0.

USERSETMPEND, bit [1]

User set main pending. Determines whether unprivileged accesses are permitted to pend interrupts via the STIR.

This bit is banked between Security states.

The possible values of this bit are:

0 Unprivileged accesses to the STIR generate a fault.

1 Unprivileged accesses to the STIR are permitted.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

Bit [0]

Reserved, RES1.

D2.2.10 CCSIDR, Current Cache Size ID register

The CCSIDR characteristics are:


Purpose	The CCSIDR provides information about the architecture of the currently selected cache.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If CSSELR points to an unimplemented cache, the value of this register is UNKNOWN.
Configurations	This register is always implemented.
Attributes	32-bit read-only register located at 0xE000ED80. Secure software can access the Non-secure view of this register via CCSIDR_NS located at 0xE002ED80. The location 0xE002ED80 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Preface

Provides indirect read access to the architecture of the cache currently selected by CSSELR.

Field descriptions

The CCSIDR bit assignments are:

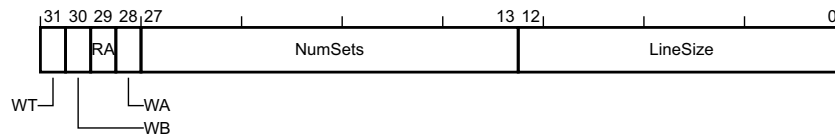

WT, bit [31]

Write-through. Indicates whether the currently selected cache level supports write-through.

The possible values of this bit are:

0 Not supported.

1 Supported.

This bit reads as an IMPLEMENTATION DEFINED value.

WB, bit [30]

Writeback. Indicates whether the currently selected cache level supports writeback.

The possible values of this bit are:

0 Not supported.

1 Supported.

This bit reads as an IMPLEMENTATION DEFINED value.

RA, bit [29]

Read-allocate. Indicates whether the currently selected cache level supports read-allocation.

The possible values of this bit are:

0 Not supported.

1 Supported.

This bit reads as an IMPLEMENTATION DEFINED value.

WA, bit [28]

Write-allocate. Indicates whether the currently selected cache level supports write-allocation.

The possible values of this bit are:

0 Not supported.

1 Supported.

This bit reads as an IMPLEMENTATION DEFINED value.

NumSets, bits [27:13]

Number of sets. Indicates (Number of sets in the currently selected cache) - 1. Therefore, a value of 0 indicates that 1 is set in the cache. The number of sets does not have to be a power of 2.

This field reads as an IMPLEMENTATION DEFINED value.

LineSize, bits [2:0]

Line size. Indicates ($\text{Log}_2(\text{Number of words per line in the currently selected cache}) - 2$).

This field reads as an IMPLEMENTATION DEFINED value.

D2.2.12 CLIDR, Cache Level ID Register

The CLIDR characteristics are:

Purpose	Identifies the type of caches implemented and the level of coherency and unification.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read-only register located at 0xE000ED78. Secure software can access the Non-secure view of this register via CLIDR_NS located at 0xE002ED78. The location 0xE002ED78 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The CLIDR bit assignments are:

31	30	29	27	26	24	23	21	20	18	17	15	14	12	11	9	8	6	5	3	2	0
ICB	LoUU	LoC	LoUIS	Ctype7	Ctype6	Ctype5	Ctype4	Ctype3	Ctype2	Ctype1											

ICB, bits [31:30]

Inner cache boundary. This field indicates the boundary between inner and outer domain.

The possible values of this field are:

0b00	Not disclosed in this mechanism.
0b01	L1 cache is the highest inner level.
0b10	L2 cache is the highest inner level.
0b11	L3 cache is the highest inner level.

This field reads as an IMPLEMENTATION DEFINED value.

LoUU, bits [29:27]

Level of Unification Uniprocessor. This field indicates the Level of Unification Uniprocessor for the cache hierarchy.

This field reads as an IMPLEMENTATION DEFINED value.

LoC, bits [26:24]

Level of Coherence. This field indicates the Level of Coherence for the cache hierarchy.

This field reads as an IMPLEMENTATION DEFINED value.

LoUIS, bits [23:21]

Level of Unification Inner Shareable. This field indicates the Level of Unification Shareable for the cache hierarchy.

This field reads as an IMPLEMENTATION DEFINED value.

Ctypem, bits [3(m-1)+2:3(m-1)], for m = 1 to 7

Cache type field *m*. Indicates the type of cache implemented at level *m*.

The possible values of this field are:

0b000	No cache.
0b001	Instruction cache only.
0b010	Data cache only.

0b011 Separate instruction and data caches.

0b100 Unified cache.

All other values are reserved.

If software reads the Cache Type fields from Ctype1 upwards, once it has seen a value of 000, no caches exist at further-out levels of the hierarchy. So, for example, if Ctype3 is the first Cache Type field with a value of 000, the values of Ctype4 to Ctype7 must be ignored.

This field reads as an IMPLEMENTATION DEFINED value.


D2.2.13 CONTROL, Control Register

The CONTROL characteristics are:

Purpose	Provides access to the PE control fields.
Usage constraints	Privileged access only. Unprivileged access is RAZ/WI.
Configurations	This register is always implemented.
Attributes	32-bit read/write special-purpose register. This register is banked between Security states on a bit by bit basis.

Field descriptions

The CONTROL bit assignments are:

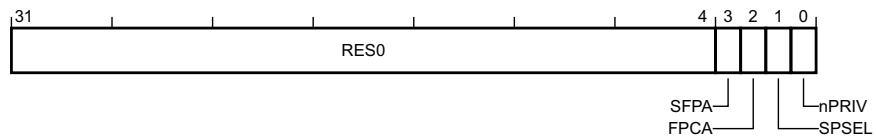

Bits [31:4]

Reserved, RES0.

SPFA, bit [3]

Secure floating-point active. Indicates that the floating-point registers contain active state that belongs to the Secure state.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** The floating-point registers do not contain state that belongs to the Secure state.
- 1** The floating-point registers contain state that belongs to the Secure state.

This bit is accessible from both privileged and unprivileged modes, but unprivileged writes are ignored.

This bit is RAZ/WI from Non-secure.

If the Security Extension is not implemented, this bit is RES0.

If the Floating-point Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

FPCA, bit [2]

Floating-point context active. Defines whether the FP Extension is active in the current context.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** FP Extension is not active.
- 1** FP Extension is active.

When NSACR.CP10 is set to zero, the Non-secure view of this bit is read-only. If FPCCR.ASPEN is set to 1, enabling automatic Floating-point state preservation, then the PE sets this bit to 1 on successful completion of any Floating-point instruction.

If the Floating-point Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

SPSEL, bit [1]

Stack-pointer select. Defines the stack pointer to be used.

This bit is banked between Security states.

The possible values of this bit are:

- 0** Use SP_main as the current stack.
- 1** In Thread mode use SP_process as the current stack.

This bit resets to zero on a Warm reset.

nPRIV, bit [0]

Not privileged. Defines the execution privilege in Thread mode.

This bit is banked between Security states.

The possible values of this bit are:

- 0** Thread mode has privileged access.
- 1** Thread mode has unprivileged access only.

If the Main Extension is not implemented, it is IMPLEMENTATION DEFINED whether this field is RW or RAZ/WI.

This bit resets to zero on a Warm reset.

D2.2.14 CPACR, Coprocessor Access Control Register

The CPACR characteristics are:

Purpose	Specifies the access privileges for coprocessors and the FP Extension.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000ED88. Secure software can access the Non-secure view of this register via CPACR_NS located at 0xE002ED88. The location 0xE002ED88 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Field descriptions

The CPACR bit assignments are:

31	24	23	22	21	20	19	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES0				CP11	CP10	RES0		CP7	CP6	CP5	CP4	CP3	CP2	CP1	CP0								

Bits [31:24]

Reserved, RES0.

CP11, bits [23:22]

CP11 Privilege. The value in this field is ignored. If the implementation does not include the FP Extension, this field is RAZ/WI. If the value of this bit is not programmed to the same value as the CP10 field, then the value is UNKNOWN.

This field resets to zero on a Warm reset.

CP10, bits [21:20]

CP10 Privilege. Defines the access rights for the floating-point functionality.

The possible values of this field are:

0b00	All accesses to the FP Extension result in NOCP UsageFault.
0b01	Unprivileged accesses to the FP Extension result in NOCP UsageFault.
0b11	Full access to the FP Extension.

All other values are reserved.

The features controlled by this field are the execution of any floating-point instruction and access to any floating-point registers D0-D16. If the implementation does not include the FP Extension, this field is RAZ/WI. See individual floating-point instruction pages for details.

This field resets to zero on a Warm reset.

Bits [19:16]

Reserved, RES0.

CP m , bits [2 m +1:2 m], for $m = 0$ to 7

Coprocessor m privilege. Controls access privileges for coprocessor m .

The possible values of this field are:

0b00	Access denied. Any attempted access generates a NOCP UsageFault.
0b01	Privileged access only. An unprivileged access generates a NOCP UsageFault.
0b10	Reserved.

0b11 Full access.

If coprocessor *m* is not implemented, this field is RAZ/WI.

This field resets to zero on a Warm reset.


D2.2.15 CPPWR, Coprocessor Power Control Register

The CPPWR characteristics are:

Purpose	Specifies whether coprocessors are permitted to enter a non-retentive power state.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000E00C. Secure software can access the Non-secure view of this register via CPPWR_NS located at 0xE002E00C. The location 0xE002E00C is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The CPPWR bit assignments are:

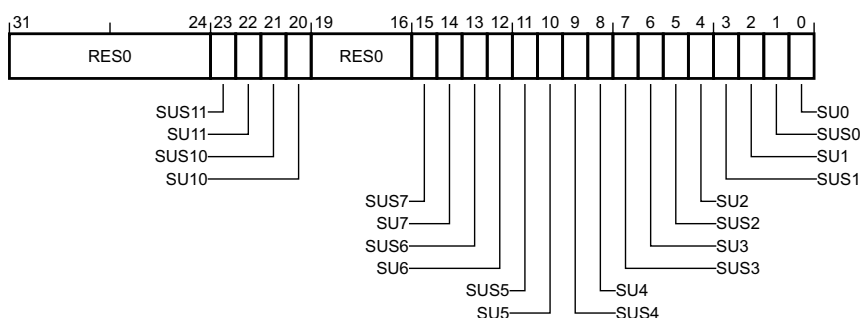

Bits [31:24]

Reserved, RES0.

SUS11, bit [23]

State UNKNOWN Secure only 11. The value in this field is ignored. If SUS11 is RAZ/WI this field is also RAZ/WI. If the value of this bit is not programmed to the same value as the SUS10 field, then the value is UNKNOWN.

This bit resets to zero on a Warm reset.

SU11, bit [22]

State UNKNOWN 11. The value in this field is ignored. If SUS11 is RAZ/WI this field is also RAZ/WI. If the value of this bit is not programmed to the same value as the SU10 field, then the value is UNKNOWN.

This bit resets to zero on a Warm reset.

SUS10, bit [21]

State UNKNOWN Secure only 10. This bit indicates and allows modification of whether the SU10 field can be modified from Non-secure state.

The possible values of this bit are:

- 0** The SU10 field is accessible from both Security states.
- 1** The SU10 field is only accessible from the Secure state.

If SU10 is always RAZ/WI this field is also RAZ/WI.

This bit is RAZ/WI from Non-secure.

This bit resets to zero on a Warm reset.

SU10, bit [20]

State UNKNOWN 10. This bit indicates and allows modification of whether the state associated with the floating-point unit is permitted to become UNKNOWN. This can be used as a hint to power control logic that the floating-point unit might be powered down.

The possible values of this bit are:

0 The floating-point state is not permitted to become UNKNOWN.

1 The floating-point state is permitted to become UNKNOWN.

When SUS10 is set to 1, the Non-secure view of this bit is RAZ/WI. It is IMPLEMENTATION DEFINED whether this bit is always RAZ/WI.

This bit resets to zero on a Warm reset.

Bits [19:16]

Reserved, RES0.

SUS m , bit [2 m +1], for $m = 0$ to 7

State UNKNOWN Secure only m . This field indicates and allows modification of whether the SUm field can be modified from Non-secure state.

The possible values of this field are:

0 The SUm field is accessible from both Security states.

1 The SUm field is only accessible from the Secure state.

If SUm is always RAZ/WI this field is also RAZ/WI.

This field is RAZ/WI from Non-secure.

This field resets to zero on a Warm reset.

SUm, bit [2 m], for $m = 0$ to 7

State UNKNOWN m . This field indicates and allows modification of whether the state associated with coprocessor m is permitted to become UNKNOWN. This can be used as a hint to power control logic that the coprocessor might be powered down.

The possible values of this field are:

0 The coprocessor state is not permitted to become UNKNOWN.

1 The coprocessor state is permitted to become UNKNOWN.

When SUS m is set to 1, the Non-secure view of this bit is RAZ/WI. It is IMPLEMENTATION DEFINED whether this bit is always RAZ/WI.

This field resets to zero on a Warm reset.

This field reads as an IMPLEMENTATION DEFINED value.


D2.2.17 CSSELR, Cache Size Selection Register

The CSSELR characteristics are:

Purpose	Selects the current Cache Size ID Register, CCSIDR, by specifying the required cache level and the cache type (either instruction or data cache)
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000ED84. Secure software can access the Non-secure view of this register via CSSELR_NS located at 0xE002ED84. The location 0xE002ED84 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Field descriptions

The CSSELR bit assignments are:



Bits [31:4]

Reserved, RES0.

Level, bits [3:1]

Cache level. Selects which cache level is to be identified. Permitted values are from 0b000, indicating Level 1 cache, to 0b110 indicating Level 7 cache.

The possible values of this field are:

0b000	Level 1 cache.
0b001	Level 2 cache.
0b010	Level 3 cache.
0b011	Level 4 cache.
0b100	Level 5 cache.
0b101	Level 6 cache.
0b110	Level 7 cache.

All other values are reserved.

This field resets to an UNKNOWN value on a Warm reset.

InD, bit [0]

Instruction not data. Selects whether the instruction or the data cache is to be identified.

The possible values of this bit are:

0	Data or unified cache.
1	Instruction cache.

This bit resets to an UNKNOWN value on a Warm reset.

D2.2.18 CTR, Cache Type Register

The CTR characteristics are:

Purpose	Provides information about the architecture of the caches.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read-only register located at 0xE000ED7C. Secure software can access the Non-secure view of this register via CTR_NS located at 0xE002ED7C. The location 0xE002ED7C is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Field descriptions

The CTR bit assignments are:

31	30	28,27	24,23	20,19	16,15	14	13	4	3	0
(1)	RES0	CWG	ERG	DminLine	RES1	RES0			IminLine	

Bit [31]

Reserved, RES1.

Bits [30:28]

Reserved, RES0.

CWG, bits [27:24]

Cache Writeback Granule. \log_2 of the number of words of the maximum size of memory that can be overwritten as a result of the eviction of a cache entry that has had a memory location in it modified.

The possible values of this field are:

0b0000 Indicates that this register does not provide Cache Writeback Granule information and either the architectural maximum of 512 words (2KB) must be assumed, or the Cache Writeback Granule can be determined from maximum cache line size encoded in the Cache Size ID Registers.

0b0001-0b1000

\log_2 of the number of words.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

ERG, bits [23:20]

Exclusives Reservation Granule. \log_2 of the number of words of the maximum size of the reservation granule that has been implemented for the Load-Exclusive and Store-Exclusive instructions.

The possible values of this field are:

0b0000 Indicates that this register does not provide Exclusives Reservation Granule information and the architectural maximum of 512 words (2KB) must be assumed.

0b0001-0b1000

\log_2 of the number of words.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

DminLine, bits [19:16]

Data cache minimum line length. \log_2 of the number of words in the smallest cache line of all the data caches and unified caches that are controlled by the PE.

This field reads as an IMPLEMENTATION DEFINED value.

Bits [15:14]

Reserved, RES1.

Bits [13:4]

Reserved, RES0.

IminLine, bits [3:0]

Instruction cache minimum line length. \log_2 of the number of words in the smallest cache line of all the instruction caches that are controlled by the PE.

This field reads as an IMPLEMENTATION DEFINED value.


D2.2.19 DAUTHCTRL, Debug Authentication Control Register

The DAUTHCTRL characteristics are:

Purpose	This register allows the IMPLEMENTATION DEFINED authentication interface to be overridden from software.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. This register is RES0 if accessed via the debugger.
Configurations	Present only if halting debug or the Main Extension is implemented. This register is RES0 if both halting debug and Main Extension are not implemented. Present only if the Security Extension is implemented. This register is RES0 if the Security Extension is not implemented.
Attributes	32-bit read/write register located at 0xE000EE04. This register is RAZ/WI when accessed as Non-secure. This register is not banked between Security states.

Field descriptions

The DAUTHCTRL bit assignments are:

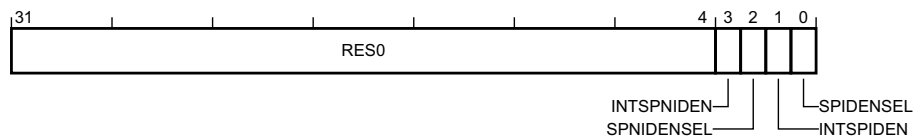

Bits [31:4]

Reserved, RES0.

INTSPNIDEN, bit [3]

Internal Secure non-invasive debug enable. Overrides the external Secure non-invasive debug authentication interface.

The possible values of this bit are:

- 0** Secure Non-invasive debug disabled.
- 1** Secure Non-invasive debug enabled.

Ignored if DAUTHCTRL.SPIDENSEL == 0. See SecureNoninvasiveDebugAllowed().

This bit resets to zero on a Cold reset.

SPNIDENSEL, bit [2]

Secure non-invasive debug enable select. Selects between DAUTHCTRL and the IMPLEMENTATION DEFINED external authentication interface for control of Secure non-invasive debug.

The possible values of this bit are:

- 0** Secure non-invasive debug controlled by the IMPLEMENTATION DEFINED external authentication interface. In the CoreSight authentication interface, this is controlled by the SPNIDEN signal.
- 1** Secure non-invasive debug controlled by DAUTHCTRL.INTSPNIDEN.

The PE ignores the value of this bit and Secure non-invasive debug is enabled if DHCSR.S_SDE == 1. See SecureNoninvasiveDebugAllowed().

This bit resets to zero on a Cold reset.

INTSPIDEN, bit [1]

Internal Secure invasive debug enable. Overrides the external Secure invasive debug authentication interfaces.

The possible values of this bit are:

- 0** Secure halting and self-hosted debug disabled.
- 1** Secure halting and self-hosted debug enabled.

Ignored if DAUTHCTRL.SPIDENSEL == 0. See SecureHaltingDebugAllowed() and SecureDebugMonitorAllowed().

This bit resets to zero on a Cold reset.

SPIDENSEL, bit [0]

Secure invasive debug enable select. Selects between DAUTHCTRL and the IMPLEMENTATION DEFINED external authentication interface for control of Secure invasive debug.

The possible values of this bit are:

- 0** Secure halting and self-hosted debug controlled by the IMPLEMENTATION DEFINED external authentication interface. In the CoreSight authentication interface, both are controlled by the SPIDEN signal.
- 1** Secure halting and self-hosted debug controlled by DAUTHCTRL.INTSPIDEN.

See SecureHaltingDebugAllowed() and SecureDebugMonitorAllowed().

This bit resets to zero on a Cold reset.


D2.2.20 DAUTHSTATUS, Debug Authentication Status Register

The DAUTHSTATUS characteristics are:

Purpose	Provides information about the state of the IMPLEMENTATION DEFINED authentication interface for debug.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if halting debug is implemented. This register is RES0 if halting debug is not implemented.
Attributes	32-bit read-only register located at 0xE000EFB8. Secure software can access the Non-secure view of this register via DAUTHSTATUS_NS located at 0xE002EFB8. The location 0xE002EFB8 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DAUTHSTATUS bit assignments are:



Bits [31:8]

Reserved, RES0.

SNID, bits [7:6]

Secure Non-invasive Debug. Indicates whether Secure non-invasive debug is enabled.

The possible values of this field are:

0b00	Security Extension not implemented.
0b01	Reserved.
0b10	Security Extension implemented and Secure non-invasive debug disabled.
0b11	Security Extension implemented and Secure non-invasive debug enabled.

SID, bits [5:4]

Secure Invasive Debug. Indicates whether Secure invasive debug is enabled.

The possible values of this field are:

0b00	Security Extension not implemented.
0b01	Reserved.
0b10	Security Extension implemented and Secure invasive debug disabled.
0b11	Security Extension implemented and Secure invasive debug enabled.

NSNID, bits [3:2]

Non-secure Non-invasive Debug. Indicates whether Non-secure non-invasive debug is enabled.

The possible values of this field are:

0b0x	Reserved.
------	-----------

- 0b10 Non-secure non-invasive debug disabled.
- 0b11 Non-secure non-invasive debug enabled.

NSID, bits [1:0]

Non-secure Invasive Debug. Indicates whether Non-secure invasive debug is enabled.

The possible values of this field are:

- 0b0x Reserved.
- 0b10 Non-secure invasive debug disabled.
- 0b11 Non-secure invasive debug enabled.


D2.2.21 DCCIMVAC, Data Cache line Clean and Invalidate by Address to PoC

The DCCIMVAC characteristics are:

- Purpose** Clean and invalidate data or unified cache line by address to PoC.
- Usage constraints** Privileged access permitted only. Unprivileged accesses generate a BusFault.
This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
- Configurations** This register is always implemented.
- Attributes** 32-bit write-only register located at 0xE000EF70.
Secure software can access the Non-secure view of this register via DCCIMVAC_NS located at 0xE002EF70. The location 0xE002EF70 is RES0 to software executing in Non-secure state and the debugger.
This register is not banked between Security states.

Field descriptions

The DCCIMVAC bit assignments are:



ADDRESS, bits [31:0]

Address. Writing to this field initiates the maintenance operation for the address written.


D2.2.23 DCCMVAC, Data Cache line Clean by Address to PoC

The DCCMVAC characteristics are:

- Purpose** Clean data or unified cache line by address to PoC.
- Usage constraints** Privileged access permitted only. Unprivileged accesses generate a BusFault.
This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
- Configurations** This register is always implemented.
- Attributes** 32-bit write-only register located at 0xE000EF68.
Secure software can access the Non-secure view of this register via DCCMVAC_NS located at 0xE002EF68. The location 0xE002EF68 is RES0 to software executing in Non-secure state and the debugger.
This register is not banked between Security states.

Field descriptions

The DCCMVAC bit assignments are:



ADDRESS, bits [31:0]

Address. Writing to this field initiates the maintenance operation for the address written.


D2.2.24 DCCMVAU, Data Cache line Clean by address to PoU

The DCCMVAU characteristics are:

Purpose	Clean data or unified cache line by address to PoU.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit write-only register located at 0xE000EF64. Secure software can access the Non-secure view of this register via DCCMVAU_NS located at 0xE002EF64. The location 0xE002EF64 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DCCMVAU bit assignments are:



ADDRESS, bits [31:0]

Address. Writing to this field initiates the maintenance operation for the address written.


D2.2.26 DCIDR0, SCS Component Identification Register 0

The DCIDR0 characteristics are:

Purpose	Provides CoreSight discovery information for the SCS.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if halting debug is implemented. This register is RES0 if halting debug is not implemented.
Attributes	32-bit read-only register located at 0xE000EFF0. Secure software can access the Non-secure view of this register via DCIDR0_NS located at 0xE002EFF0. The location 0xE002EFF0 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DCIDR0 bit assignments are:



Bits [31:8]

Reserved, RES0.

PRMBL_0, bits [7:0]

CoreSight component identification preamble. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as 0x0D.


D2.2.27 DCIDR1, SCS Component Identification Register 1

The DCIDR1 characteristics are:

Purpose	Provides CoreSight discovery information for the SCS.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if halting debug is implemented. This register is RES0 if halting debug is not implemented.
Attributes	32-bit read-only register located at 0xE000EFF4. Secure software can access the Non-secure view of this register via DCIDR1_NS located at 0xE002EFF4. The location 0xE002EFF4 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DCIDR1 bit assignments are:



Bits [31:8]

Reserved, RES0.

CLASS, bits [7:4]

CoreSight component class. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as 0x9.

PRMBL_1, bits [3:0]

CoreSight component identification preamble. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as 0x0.


D2.2.28 DCIDR2, SCS Component Identification Register 2

The DCIDR2 characteristics are:

Purpose	Provides CoreSight discovery information for the SCS.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if halting debug is implemented. This register is RES0 if halting debug is not implemented.
Attributes	32-bit read-only register located at 0xE000EFF8. Secure software can access the Non-secure view of this register via DCIDR2_NS located at 0xE002EFF8. The location 0xE002EFF8 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DCIDR2 bit assignments are:



Bits [31:8]

Reserved, RES0.

PRMBL_2, bits [7:0]

CoreSight component identification preamble. See the *ARM® CoreSight™ Architecture Specification*.
This field reads as 0x05.


D2.2.30 DCIMVAC, Data Cache line Invalidate by Address to PoC

The DCIMVAC characteristics are:

- Purpose** Invalidate data or unified cache line by address to PoC.
- Usage constraints** Privileged access permitted only. Unprivileged accesses generate a BusFault.
This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
- Configurations** This register is always implemented.
- Attributes** 32-bit write-only register located at 0xE000EF5C.
Secure software can access the Non-secure view of this register via DCIMVAC_NS located at 0xE002EF5C. The location 0xE002EF5C is RES0 to software executing in Non-secure state and the debugger.
This register is not banked between Security states.

Field descriptions

The DCIMVAC bit assignments are:



ADDRESS, bits [31:0]

Address. Writing to this field initiates the maintenance operation for the address written.


D2.2.32 DCRDR, Debug Core Register Data Register

The DCRDR characteristics are:

Purpose	With the DCRSR, provides debug access to the general-purpose registers, special-purpose registers, and the FP Extension registers. If the Main Extension is implemented, it can also be used for message passing between an external debugger and a debug agent running on the PE.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if halting debug is implemented. This register is RES0 if halting debug is not implemented.
Attributes	32-bit read/write register located at 0xE000EDF8. Secure software can access the Non-secure view of this register via DCRDR_NS located at 0xE002EDF8. The location 0xE002EDF8 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DCRDR bit assignments are:



DBGTMP, bits [31:0]

Data temporary buffer. Provides debug access for reading and writing the general-purpose registers, special-purpose registers, and Floating-point Extension registers.

The value of this register is UNKNOWN if the PE is in Debug state, the debugger has written to DCRSR since entering Debug state and DHCSR.S_REGRDY is set to 0. The value of this register is UNKNOWN if the Main Extension is not implemented and the PE is in Non-debug state.

This field resets to an UNKNOWN value on a Warm reset.


D2.2.33 DCRSR, Debug Core Register Select Register

The DCRSR characteristics are:

Purpose	With the DCRDR, provides debug access to the general-purpose registers, special-purpose registers, and the FP extension registers. A write to the DCRSR specifies the register to transfer, whether the transfer is a read or write, and starts the transfer.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. Writes to this register while the PE is in Non-debug state are ignored. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if halting debug is implemented. This register is RES0 if halting debug is not implemented.
Attributes	32-bit write-only register located at 0xE00EDF4. This register is not banked between Security states.

Field descriptions

The DCRSR bit assignments are:



Bits [31:17]

Reserved, RES0.

REGWnR, bit [16]

Register write/not-read. Specifies the access type for the transfer.

The possible values of this bit are:

- 0** Read.
- 1** Write.

Bits [15:7]

Reserved, RES0.

REGSEL, bits [6:0]

Register selector. Specifies the general-purpose register, special-purpose register, or FP register to transfer.

The possible values of this field are:

- 0b0000000-0b0001100
General-purpose registers R0-R12.
- 0b0001101 Current stack pointer, SP.
- 0b0001110 LR.
- 0b0001111 DebugReturnAddress.
- 0b0010000 xPSR.
- 0b0010001 Current state main stack pointer, SP_main.
- 0b0010010 Current state process stack pointer, SP_process.
- 0b0010100 Current state {CONTROL[7:0],FAULTMASK[7:0],BASEPRI[7:0],PRIMASK[7:0]}.

- If the Main Extension is not implemented, bits [23:8] of the transfer value are RES0.
- 0b0011000 Non-secure main stack pointer, MSP_NS.
If the Security Extension is not implemented, this value is reserved.
- 0b0011001 Non-secure process stack pointer, PSP_NS.
If the Security Extension is not implemented, this value is reserved.
- 0b0011010 Secure main stack pointer, MSP_S. Accessible only when DHCSR.S_SDE == 1.
If the Security Extension is not implemented, this value is reserved.
- 0b0011011 Secure process stack pointer, PSP_S. Accessible only when DHCSR.S_SDE == 1.
If the Security Extension is not implemented, this value is reserved.
- 0b0011100 Secure main stack limit, MSPLIM_S. Accessible only when DHCSR.S_SDE == 1.
If the Security Extension is not implemented, this value is reserved.
- 0b0011101 Secure process stack limit, PSPLIM_S. Accessible only when DHCSR.S_SDE == 1.
If the Security Extension is not implemented, this value is reserved.
- 0b0011110 Non-secure main stack limit, MSPLIM_NS.
If the Main Extension is not implemented, this value is reserved.
- 0b0011111 Non-secure process stack limit, PSPLIM_NS.
If the Main Extension is not implemented, this value is reserved.
- 0b0100001 FPSCR.
If the Floating-point Extension is not implemented, this value is reserved.
- 0b0100010 {CONTROL[7:0],FAULTMASK[7:0],BASEPRI[7:0],PRIMASK[7:0]}_S.
If the Main Extension is not implemented, bits [23:8] of the transfer value are RES0. If the Security Extension is not implemented, this value is reserved.
- 0b0100011 {CONTROL[7:0],FAULTMASK[7:0],BASEPRI[7:0],PRIMASK[7:0]}_NS.
If the Main Extension is not implemented, bits [23:8] of the transfer value are RES0. If the Security Extension is not implemented, this value is reserved.
- 0b1000000-0b1011111
FP registers, S0-S31.
If the Floating-point Extension is not implemented, these values are reserved.

All other values are reserved.

If the Floating-point and Security Extensions are implemented, then the FPSCR and S0-S31 are not accessible from Non-secure state if DHCSR.S_SDE == 0 and either:

- FPCCR indicates the registers contain values from Secure state.
- NSACR prevents Non-secure access to the registers.

Registers that are not accessible are RAZ/WI.

If this field is written with a reserved value, the PE might behave as if a defined value was written, or ignore the value written, and the value of DCRDR becomes UNKNOWN.


D2.2.34 DDEVARCH, SCS Device Architecture Register

The DDEVARCH characteristics are:

Purpose	Provides CoreSight discovery information for the SCS.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if halting debug is implemented. This register is RES0 if halting debug is not implemented.
Attributes	32-bit read-only register located at 0xE000EFBC. Secure software can access the Non-secure view of this register via DDEVARCH_NS located at 0xE002EFBC. The location 0xE002EFBC is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DDEVARCH bit assignments are:



ARCHITECT, bits [31:21]

Architect. Defines the architect of the component. Bits [31:28] are the JEP106 continuation code (JEP106 bank ID, minus 1) and bits [27:21] are the JEP106 ID code.

The possible values of this field are:

0x23B JEP106 continuation code 0x4, ID code 0x3B. ARM Limited.

Other values are defined by the JEDEC JEP106 standard.

This field reads as 0x23B.

PRESENT, bit [20]

DEVARCH Present. Defines that the DEVARCH register is present.

The possible values of this bit are:

1 DEVARCH information present.

This bit reads as one.

REVISION, bits [19:16]

Revision. Defines the architecture revision of the component.

The possible values of this field are:

0000 M-profile debug architecture v3.0.

This field reads as 0b0000.

ARCHVER, bits [15:12]

Architecture Version. Defines the architecture version of the component.

The possible values of this field are:

0010 M-profile debug architecture v3.

ARCHVER and ARCHPART are also defined as a single field, ARCHID, such that ARCHVER is ARCHID[15:12].

This field reads as 0b0010.

ARCHPART, bits [11:0]

Architecture Part. Defines the architecture of the component.

The possible values of this field are:

0xA04 M-profile debug architecture.

ARCHVER and ARCHPART are also defined as a single field, ARCHID, such that ARCHPART is ARCHID[11:0].

This field reads as 0xA04.


D2.2.36 DEMCR, Debug Exception and Monitor Control Register

The DEMCR characteristics are:

Purpose	Manages vector catch behavior and DebugMonitor handling when debugging.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if halting debug or the Main Extension is implemented. This register is RES0 if both halting debug and Main Extension are not implemented.
Attributes	32-bit read/write register located at 0xE000EDFC. Secure software can access the Non-secure view of this register via DEMCR_NS located at 0xE002EDFC. The location 0xE002EDFC is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DEMCR bit assignments are:

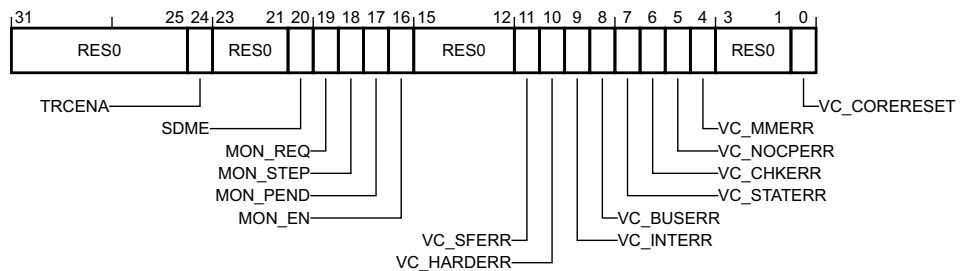

Bits [31:25]

Reserved, RES0.

TRCENA, bit [24]

Trace enable. Global enable for all DWT and ITM features.

The possible values of this bit are:

- 0** DWT and ITM features disabled.
- 1** DWT and ITM features enabled.

If the DWT and ITM units are not implemented, this bit is RES0. See the descriptions of DWT and ITM for details of which features this bit controls.

Setting this bit to 0 might not stop all events. To ensure that all events are stopped, software must set all DWT and ITM feature enable bits to 0, and that all trace generated by the DWT and ITM has been flushed, before setting this bit to 0.

The effect of this bit on the TPIU, ETM, and other system trace components is IMPLEMENTATION DEFINED.

This bit resets to zero on a Cold reset.

Bits [23:21]

Reserved, RES0.

SDME, bit [20]

Secure DebugMonitor enable. Indicates whether the DebugMonitor targets the Secure or the Non-secure state and whether debug events are allowed in Secure state.

The possible values of this bit are:

- 0** Debug events prohibited in Secure state and the DebugMonitor exception targets Non-secure state.
- 1** Debug events allowed in Secure state and the DebugMonitor exception targets Secure state.

When DebugMonitor is not pending or active, this bit reflects the value of SecureDebugMonitorAllowed(), otherwise, the previous value is retained.

This bit is read-only.

If the Security Extension is not implemented, this bit is RES0.

If the Main Extension is not implemented, this bit is RES0.

MON_REQ, bit [19]

Monitor request. DebugMonitor semaphore bit.

The PE does not use this bit. The monitor software defines the meaning and use of this bit.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

MON_STEP, bit [18]

Monitor step. Enable DebugMonitor stepping.

The possible values of this bit are:

- 0** Stepping disabled.
- 1** Stepping enabled.

The effect of changing this bit at an execution priority that is lower than the priority of the DebugMonitor exception is UNPREDICTABLE.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

MON_PEND, bit [17]

Monitor pend. Sets or clears the pending state of the DebugMonitor exception.

The possible values of this bit are:

- 0** Clear the status of the DebugMonitor exception to not pending.
- 1** Set the status of the DebugMonitor exception to pending.

When the DebugMonitor exception is pending it becomes active subject to the exception priority rules. The effect of setting this bit to 1 is not affected by the value of the MON_EN bit. This means that software or a debugger can set MON_PEND to 1 and pend a DebugMonitor exception, even when MON_EN is set to 0.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

MON_EN, bit [16]

Monitor enable. Enable the DebugMonitor exception.

The possible values of this bit are:

- 0** DebugMonitor exception disabled.
- 1** DebugMonitor exception enabled.

If a debug event halts the PE, the PE ignores the value of this bit.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

Bits [15:12]

Reserved, RES0.

VC_SFERR, bit [11]

Vector Catch SecureFault. SecureFault exception halting debug vector catch enable.

The possible values of this bit are:

0 Halting debug trap on SecureFault disabled.

1 Halting debug trap on SecureFault enabled.

The PE ignores the value of this bit if `DHCSR.C_DEBUGEN == 0`, `HaltingDebugAllowed() == FALSE`, or `DHCSR.S_SDE == 0`.

If the Security Extension is not implemented, this bit is RES0.

If the Main Extension is not implemented, this bit is RES0.

If halting debug is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.

VC_HARDERR, bit [10]

Vector Catch HardFault errors. HardFault exception halting debug vector catch enable.

The possible values of this bit are:

0 Halting debug trap on HardFault disabled.

1 Halting debug trap on HardFault enabled.

The PE ignores the value of this bit if `DHCSR.C_DEBUGEN == 0`, `HaltingDebugAllowed() == FALSE`, or the Security Extension is implemented, `DHCSR.S_SDE == 0` and the exception targets Secure state.

If halting debug is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.

VC_INTERR, bit [9]

Vector Catch interrupt errors. Enable halting debug vector catch for faults during exception entry and return.

The possible values of this bit are:

0 Halting debug trap on faults during exception entry and return disabled.

1 Halting debug trap on faults during exception entry and return enabled.

The PE ignores the value of this bit if `DHCSR.C_DEBUGEN == 0`, `HaltingDebugAllowed() == FALSE`, or the Security Extension is implemented, `DHCSR.S_SDE == 0` and the exception targets Secure state.

If the Main Extension is not implemented, this bit is RES0.

If halting debug is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.

VC_BUSERR, bit [8]

Vector Catch BusFault errors. BusFault exception halting debug vector catch enable.

The possible values of this bit are:

0 Halting debug trap on BusFault disabled.

1 Halting debug trap on BusFault enabled.

The PE ignores the value of this bit if `DHCSR.C_DEBUGEN == 0`, `HaltingDebugAllowed() == FALSE`, or the Security Extension is implemented, `DHCSR.S_SDE == 0` and the exception targets Secure state.

If the Main Extension is not implemented, this bit is RES0.

If halting debug is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.

VC_STATERR, bit [7]

Vector Catch state errors. Enable halting debug trap on a UsageFault exception caused by a state information error, for example an Undefined Instruction exception.

The possible values of this bit are:

0 Halting debug trap on UsageFault caused by state information error disabled.

1 Halting debug trap on UsageFault caused by state information error enabled.

The PE ignores the value of this bit if `DHCSR.C_DEBUGEN == 0`, `HaltingDebugAllowed() == FALSE`, or the Security Extension is implemented, `DHCSR.S_SDE == 0` and the exception targets Secure state.

If the Main Extension is not implemented, this bit is RES0.

If halting debug is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.

VC_CHKERR, bit [6]

Vector Catch check errors. Enable halting debug trap on a UsageFault exception caused by a checking error, for example an alignment check error.

The possible values of this bit are:

0 Halting debug trap on UsageFault caused by checking error disabled.

1 Halting debug trap on UsageFault caused by checking error enabled.

The PE ignores the value of this bit if `DHCSR.C_DEBUGEN == 0`, `HaltingDebugAllowed() == FALSE`, or the Security Extension is implemented, `DHCSR.S_SDE == 0` and the exception targets Secure state.

If the Main Extension is not implemented, this bit is RES0.

If halting debug is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.

VC_NOCPERR, bit [5]

Vector Catch NOCP errors. Enable halting debug trap on a UsageFault caused by an access to a coprocessor.

The possible values of this bit are:

0 Halting debug trap on UsageFault caused by access to a coprocessor disabled.

1 Halting debug trap on UsageFault caused by access to a coprocessor enabled.

The PE ignores the value of this bit if `DHCSR.C_DEBUGEN == 0`, `HaltingDebugAllowed() == FALSE`, or the Security Extension is implemented, `DHCSR.S_SDE == 0` and the exception targets Secure state.

If the Main Extension is not implemented, this bit is RES0.

If halting debug is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.

VC_MMERR, bit [4]

Vector Catch MemManage errors. Enable halting debug trap on a MemManage exception.

The possible values of this bit are:

0 Halting debug trap on MemManage disabled.

1 Halting debug trap on MemManage enabled.

The PE ignores the value of this bit if `DHCSR.C_DEBUGEN == 0`, `HaltingDebugAllowed() == FALSE`, or the Security Extension is implemented, `DHCSR.S_SDE == 0` and the exception targets Secure state.

If the Main Extension is not implemented, this bit is RES0.

If halting debug is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.

Bits [3:1]

Reserved, RES0.

VC_CORERESET, bit [0]

Vector Catch core reset. Enable Reset Vector Catch. This causes a warm reset to halt a running system.

The possible values of this bit are:

0 Halting debug trap on reset disabled.

1 Halting debug trap on reset enabled.

If `DHCSR.C_DEBUGEN == 0` or `HaltingDebugAllowed() == FALSE`, the PE ignores the value of this bit. Otherwise, when this bit is set to 1 a Warm reset will pend a Vector Catch debug event. The debug event is pended even the PE resets into Secure state and `DHCSR.S_SDE == 0`.

If halting debug is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.


D2.2.37 DFSR, Debug Fault Status Register

The DFSR characteristics are:

Purpose	Shows which debug event occurred.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if halting debug or the Main Extension is implemented. This register is RES0 if both halting debug and Main Extension are not implemented.
Attributes	32-bit read/write-one-to-clear register located at 0xE000ED30. Secure software can access the Non-secure view of this register via DFSR_NS located at 0xE002ED30. The location 0xE002ED30 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DFSR bit assignments are:

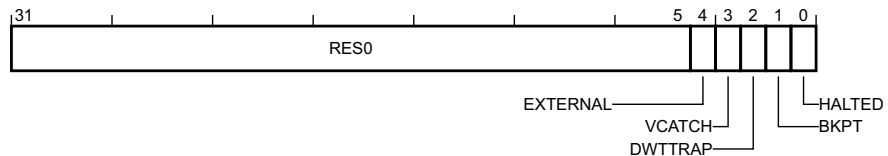

Bits [31:5]

Reserved, RES0.

EXTERNAL, bit [4]

External event. Sticky flag indicating whether an External debug request debug event has occurred.

The possible values of this bit are:

- 0** Debug event has not occurred.
- 1** Debug event has occurred.

This bit resets to zero on a Cold reset.

VCATCH, bit [3]

Vector Catch event. Sticky flag indicating whether a Vector catch debug event has occurred.

The possible values of this bit are:

- 0** Debug event has not occurred.
- 1** Debug event has occurred.

If halting debug is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.

DWTTRAP, bit [2]

Watchpoint event. Sticky flag indicating whether a Watchpoint debug event has occurred.

The possible values of this bit are:

- 0** Debug event has not occurred.
- 1** Debug event has occurred.

If the DWT is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.

BKPT, bit [1]

Breakpoint event. Sticky flag indicating whether a Breakpoint debug event has occurred.

The possible values of this bit are:

0 Debug event has not occurred.

1 Debug event has occurred.

This bit resets to zero on a Cold reset.

HALTED, bit [0]

Halt or step event. Sticky flag indicating that a Halt request debug event or Step debug event has occurred.

The possible values of this bit are:

0 Debug event has not occurred.

1 Debug event has occurred.

This bit resets to zero on a Cold reset.

D2.2.38 DHCSR, Debug Halting Control and Status Register


The DHCSR characteristics are:

- Purpose** Controls halting debug.
- Usage constraints** Privileged access permitted only. Unprivileged accesses generate a BusFault.
This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
- Configurations** Present only if halting debug is implemented.
This register is RES0 if halting debug is not implemented.
- Attributes** 32-bit read/write register located at 0xE000EDF0.
Secure software can access the Non-secure view of this register via DHCSR_NS located at 0xE002EDF0. The location 0xE002EDF0 is RES0 to software executing in Non-secure state and the debugger.
This register is not banked between Security states.


Field descriptions

The DHCSR bit assignments are:

On a read:

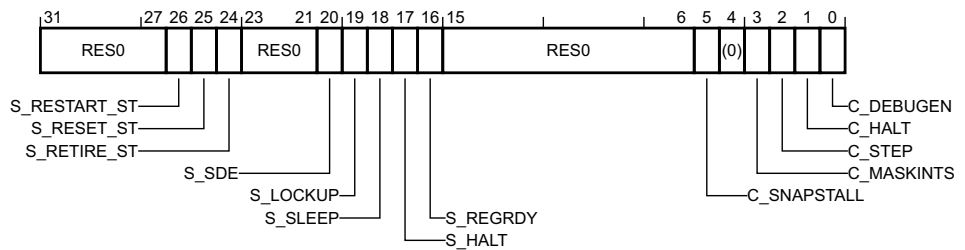

On a write:

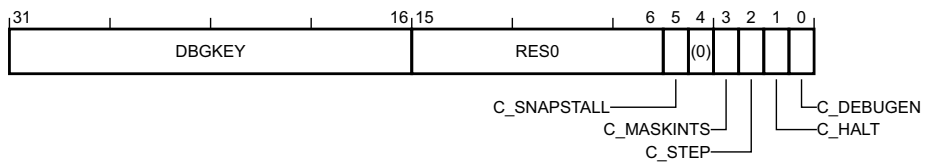

DBGKEY, bits [31:16], on a write

Debug key. A debugger must write 0xA05F to this field to enable write access to the remaining bits, otherwise the PE ignores the write access.

The possible values of this field are:

0xA05F Writes accompanied by this value update bits[15:0].

Not 0xA05F Write ignored.

Bits [31:27], on a read

Reserved, RES0.

S_RESTART_ST, bit [26], on a read

Restart sticky status. Indicates the PE has processed a request to clear DHCSR.C_HALT to 0. That is, either a write to DHCSR that clears DHCSR.C_HALT from 1 to 0, or an External Restart Request.

The possible values of this bit are:

0 PE has not left Debug state since the last read of DHCSR.

1 PE has left Debug state since the last read of DHCSR.

If the PE is not halted when C_HALT is cleared to zero, it is UNPREDICTABLE whether this bit is set to 1. If DHCSR.C_DEBUGEN == 0 this bit reads as an UNKNOWN value.

This bit clears to zero when read.

———— Note —————

If the request to clear C_HALT is made simultaneously with a request to set C_HALT, for example a restart request and external debug request occur together, then the PE notionally leaves Debug state and immediately halts again and S_RESTART_ST is set to 1.

S_RESET_ST, bit [25], on a read

Reset sticky status. Indicates whether the PE has been reset since the last read of the DHCSR.

The possible values of this bit are:

0 No reset since last DHCSR read.

1 At least one reset since last DHCSR read.

This bit clears to zero when read.

This bit resets to one on a Warm reset.

S_RETIRE_ST, bit [24], on a read

Retire sticky status. Set to 1 every time the PE retires one or more instructions.

The possible values of this bit are:

0 No instruction retired since last DHCSR read.

1 At least one instruction retired since last DHCSR read.

This bit clears to zero when read.

This bit resets to an UNKNOWN value on a Warm reset.

Bits [23:21], on a read

Reserved, RES0.

S_SDE, bit [20], on a read

Secure debug enabled. Indicates whether Secure invasive debug is allowed.

The possible values of this bit are:

0 Secure invasive debug prohibited.

1 Secure invasive debug allowed.

If the PE is in Non-debug state, this bit reflects the value of SecureHaltingDebugEnabled().

If the PE is in Debug state then this bit is 1 if the PE entered Debug state from either Non-secure state with SecureHaltingDebugEnabled() == TRUE or from Secure state, and 0 otherwise. The value of this bit does not change whilst the PE remains in Debug state.

If the Security Extension is not implemented, this bit is RES0.

S_LOCKUP, bit [19], on a read

Lockup status. Indicates whether the PE is in Lockup state.

The possible values of this bit are:

- 0** Not locked up.
- 1** Locked up.

This bit can only be read as 1 by a remote debugger, using the DAP. The value of 1 indicates that the PE is running but locked up. The bit clears to 0 when the PE enters Debug state.

S_SLEEP, bit [18], on a read

Sleeping status. Indicates whether the PE is sleeping.

The possible values of this bit are:

- 0** Not sleeping.
- 1** Sleeping.

The debugger must set the C_HALT bit to 1 to gain control, or wait for an interrupt or other wakeup event to wakeup the system.

S_HALT, bit [17], on a read

Halted status. Indicates whether the PE is in Debug state.

The possible values of this bit are:

- 0** In Non-debug state.
- 1** In Debug state.

S_REGRDY, bit [16], on a read

Register ready status. Handshake flag to transfers through the DCRDR.

The possible values of this bit are:

- 0** Write to DCRSR performed, but transfer not yet complete.
- 1** Transfer complete, or no outstanding transfer.

This bit is valid only when the PE is in Debug state, otherwise this bit is UNKNOWN.

This bit resets to an UNKNOWN value on a Warm reset.

Bits [15:6]

Reserved, RES0.

C_SNAPSTALL, bit [5]

Snap stall control. Allow imprecise entry to Debug state.

The possible values of this bit are:

- 0** No action.
- 1** Allow imprecise entry to Debug state, for example by forcing any stalled load or store instruction to be abandoned.

Setting this bit to 1 allows a debugger to request imprecise entry to Debug state. Writing 1 to this bit makes the state of the memory system UNPREDICTABLE. Therefore if a debugger writes 1 to this bit it must reset the system before leaving Debug state.

The effect of setting this bit to 1 is UNPREDICTABLE unless the DHCSR write also sets C_DEBUGEN and C_HALT to 1. This means that if the PE is not already in Debug state, it enters Debug state when the stalled instruction completes.

If the Security Extension is implemented, then writes to this bit are ignored when DHCSR.S_SDE == 0.

If DHCSR.C_DEBUGEN == 0 or HaltingDebugAllowed() == FALSE, the PE ignores this bit and behaves as if it is set to 0.

If the Main Extension is not implemented, this bit is RES0.

Note

A debugger can write to the DHCSR to clear this bit to 0, However, this does not remove the UNPREDICTABLE state of the memory system caused by setting C_SNAPSTALL to 1. The architecture does not guarantee that setting this bit to 1 will force entry to Debug State. ARM strongly recommends that a value of 1 is never written to C_SNAPSTALL when the PE is in Debug state.

Bit [4]

Reserved, RES0.

C_MASKINTS, bit [3]

Mask interrupts control. When debug is enabled, the debugger can write to this bit to mask PendSV, SysTick and external configurable interrupts.

The possible values of this bit are:

- 0** Do not mask.
- 1** Mask PendSV, SysTick and external configurable interrupts.

The effect of any single write to DHCSR that changes the value of this bit is UNPREDICTABLE unless one of:

- Before the write, DHCSR.C_HALT == 1 and the write also writes 1 to DHCSR.C_HALT.
- Before the write, DHCSR.C_DEBUGEN == 0 or HaltingDebugAllowed() == FALSE and the write writes 0 to this bit.

This means that a single write to DHCSR must not clear DHCSR.C_HALT to 0 and change the value of the C_MASKINTS bit.

If the Security Extension is implemented and DHCSR.S_SDE == 0, this bit does not affect interrupts targeting Secure state.

If DHCSR.C_DEBUGEN == 0 or HaltingDebugAllowed() == FALSE, the PE ignores this bit and behaves as if it is set to 0.

If DHCSR.C_DEBUGEN == 0 this bit reads as an UNKNOWN value.

This bit resets to an UNKNOWN value on a Cold reset.

Note

This bit does not affect NMI.

C_STEP, bit [2]

Step control. Enable single instruction step.

The possible values of this bit are:

- 0** No effect.
- 1** Single step enabled.

The PE ignores this bit and behaves as if it set to 0 if any of:

- DHCSR.C_DEBUGEN == 0 or HaltingDebugAllowed() == FALSE.
- The Security Extension is implemented, DHCSR.S_SDE == 0 and the PE is in Secure state.

If DHCSR.C_DEBUGEN == 0 this bit reads as an UNKNOWN value.

This bit resets to an UNKNOWN value on a Cold reset.

C_HALT, bit [1]

Halt control. PE enter Debug state halt request.

The possible values of this bit are:

- 0** Causes the PE to leave Debug state, if in Debug state.
- 1** Halt the PE.

The PE sets C_HALT to 1 when a debug event pends an entry to Debug state.

The PE ignores this bit and behaves as if it is set to 0 if any of:

- DHCSR.C_DEBUGEN == 0 or HaltingDebugAllowed() == FALSE.
- The Security Extension is implemented, DHCSR.S_SDE == 0 and the PE is in Secure state.

If DHCSR.C_DEBUGEN == 0 this bit reads as an UNKNOWN value.

This bit resets to zero on a Warm reset.

C_DEBUGEN, bit [0]

Debug enable control. Enable Halting debug.

The possible values of this bit are:

- 0** Disabled.
- 1** Enabled.

If a debugger writes to DHCSR to change the value of this bit from 0 to 1, it must also write 0 to the C_MASKINTS bit, otherwise behavior is UNPREDICTABLE.

If this bit is set to 0:

- The PE behaves as if DHCSR.{C_MASKINTS, C_STEP, C_HALT} are all set to 0.
- DHCSR.{S_RESTART_ST, C_MASKINTS, C_STEP, C_HALT} are UNKNOWN on reads of DHCSR.

This bit is read/write to the debugger. Writes from software are ignored.

This bit resets to zero on a Cold reset.


D2.2.39 DLAR, SCS Software Lock Access Register

The DLAR characteristics are:

Purpose	Provides CoreSight Software Lock control for the SCS, see the <i>ARM® CoreSight™ Architecture Specification</i> for details.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. This register is RAZ/WI if accessed via the debugger.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the optional Software Lock is implemented. This register is RAZ/WI if the Software Lock is not implemented.
Attributes	32-bit write-only register located at 0xE000EFB0. Secure software can access the Non-secure view of this register via DLAR_NS located at 0xE002EFB0. The location 0xE002EFB0 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DLAR bit assignments are:



KEY, bits [31:0]

Lock Access control.

Writing the key value 0xC5ACCE55 to this field unlocks the lock, enabling write accesses to this component's registers through a memory-mapped interface.

Writing any other value to this register locks the lock, disabling write accesses to this component's registers through a memory mapped interface.


D2.2.40 DLSR, SCS Software Lock Status Register

The DLSR characteristics are:

Purpose	Provides CoreSight Software Lock status information for the SCS, see the <i>ARM® CoreSight™ Architecture Specification</i> for details.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. This register is RAZ/WI if accessed via the debugger.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the optional Software Lock is implemented. This register is RAZ/WI if the Software Lock is not implemented.
Attributes	32-bit read-only register located at 0xE000EFB4. Secure software can access the Non-secure view of this register via DLSR_NS located at 0xE002EFB4. The location 0xE002EFB4 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DLSR bit assignments are:

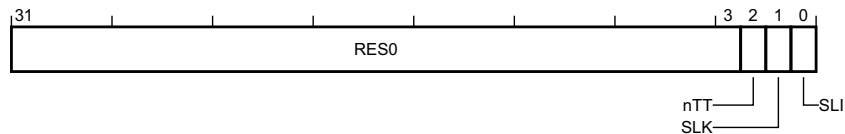

Bits [31:3]

Reserved, RES0.

nTT, bit [2]

Not thirty-two bit. See the *ARM® CoreSight™ Architecture Specification*.
This bit reads as zero.

SLK, bit [1]

Software Lock status. See the *ARM® CoreSight™ Architecture Specification*.

The possible values of this bit are:

- 0** Lock clear. Software writes are permitted to this component's registers.
- 1** Lock set. Software writes to this component's registers are ignored, and reads have no side effects.

For a debugger read of this register, or when the Software Lock is not implemented, this bit is RES0.
This bit resets to one on a Warm reset.

SLI, bit [0]

Software Lock implemented. See the *ARM® CoreSight™ Architecture Specification*.

The possible values of this bit are:

- 0** Software Lock not implemented or debugger access.
- 1** Software Lock is implemented and software access.

For a debugger read of this register, or when the Software Lock is not implemented, this bit is RAZ.

This bit reads as an IMPLEMENTATION DEFINED value.


D2.2.43 DPIDR2, SCS Peripheral Identification Register 2

The DPIDR2 characteristics are:

Purpose	Provides CoreSight discovery information for the SCS.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if halting debug is implemented. This register is RES0 if halting debug is not implemented.
Attributes	32-bit read-only register located at 0xE00EFE8. Secure software can access the Non-secure view of this register via DPIDR2_NS located at 0xE002EFE8. The location 0xE002EFE8 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DPIDR2 bit assignments are:



Bits [31:8]

Reserved, RES0.

REVISION, bits [7:4]

Component revision. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.

JEDEC, bit [3]

JEDEC assignee value is used. See the *ARM® CoreSight™ Architecture Specification*.

This bit reads as one.

DES_1, bits [2:0]

JEP106 identification code bits [6:4]. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.


D2.2.44 DPIDR3, SCS Peripheral Identification Register 3

The DPIDR3 characteristics are:

Purpose	Provides CoreSight discovery information for the SCS.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if halting debug is implemented. This register is RES0 if halting debug is not implemented.
Attributes	32-bit read-only register located at 0xE000EFEC. Secure software can access the Non-secure view of this register via DPIDR3_NS located at 0xE002EFEC. The location 0xE002EFEC is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DPIDR3 bit assignments are:



Bits [31:8]

Reserved, RES0.

REVAND, bits [7:4]

RevAnd. See the *ARM® CoreSight™ Architecture Specification*

This field reads as an IMPLEMENTATION DEFINED value.

CMOD, bits [3:0]

Customer Modified. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.


D2.2.45 DPIDR4, SCS Peripheral Identification Register 4

The DPIDR4 characteristics are:

Purpose	Provides CoreSight discovery information for the SCS.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if halting debug is implemented. This register is RES0 if halting debug is not implemented.
Attributes	32-bit read-only register located at 0xE000EFD0. Secure software can access the Non-secure view of this register via DPIDR4_NS located at 0xE002EFD0. The location 0xE002EFD0 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DPIDR4 bit assignments are:



Bits [31:8]

Reserved, RES0.

SIZE, bits [7:4]

4KB count. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as zero.

DES_2, bits [3:0]

JEP106 continuation code. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.

D2.2.46 DPIDR5, SCS Peripheral Identification Register 5

The DPIDR5 characteristics are:

Purpose	Provides CoreSight discovery information for the SCS.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if halting debug is implemented. This register is RES0 if halting debug is not implemented.
Attributes	32-bit read-only register located at 0xE000EFD4. Secure software can access the Non-secure view of this register via DPIDR5_NS located at 0xE002EFD4. The location 0xE002EFD4 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DPIDR5 bit assignments are:



Bits [31:0]

Reserved, RES0.

D2.2.47 DPIDR6, SCS Peripheral Identification Register 6

The DPIDR6 characteristics are:

Purpose	Provides CoreSight discovery information for the SCS.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if halting debug is implemented. This register is RES0 if halting debug is not implemented.
Attributes	32-bit read-only register located at 0xE000EFD8. Secure software can access the Non-secure view of this register via DPIDR6_NS located at 0xE002EFD8. The location 0xE002EFD8 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DPIDR6 bit assignments are:



Bits [31:0]

Reserved, RES0.

D2.2.48 DPIDR7, SCS Peripheral Identification Register 7

The DPIDR7 characteristics are:

Purpose	Provides CoreSight discovery information for the SCS.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if halting debug is implemented. This register is RES0 if halting debug is not implemented.
Attributes	32-bit read-only register located at 0xE000EFDC. Secure software can access the Non-secure view of this register via DPIDR7_NS located at 0xE002EFDC. The location 0xE002EFDC is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The DPIDR7 bit assignments are:



Bits [31:0]

Reserved, RES0.


D2.2.49 DSCSR, Debug Security Control and Status Register

The DSCSR characteristics are:

Purpose	Provides control and status information for Secure debug.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if the Security Extension is implemented. This register is RES0 if the Security Extension is not implemented. Present only if halting debug is implemented. This register is RES0 if halting debug is not implemented.
Attributes	32-bit read/write register located at 0xE000EE08. This register is not banked between Security states.

Field descriptions

The DSCSR bit assignments are:

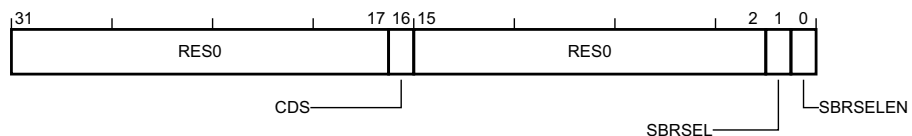

Bits [31:17]

Reserved, RES0.

CDS, bit [16]

Current domain Secure. This field indicates the current Security state of the processor.

The possible values of this bit are:

- 0** PE is in Non-secure state.
- 1** PE is in Secure state.

This bit is only writeable if DHCSR.S_SDE is 1, the access to the register originates from the debugger, and the PE is halted in Debug state.

Note

This means debuggers must take care to avoid a race between a debugger write to this register when the debugger believes the PE is in Non-debug state and the PE halting and entering Debug state.

Bits [15:2]

Reserved, RES0.

SBRSEL, bit [1]

Secure Banked register select. If SBRSELEN is 1 this bit selects whether the Non-secure or the Secure version of the memory-mapped Banked registers are accessible to the debugger.

The possible values of this bit are:

- 0** Selects the Non-secure versions.
- 1** Selects the Secure versions.

This bit behaves as RAZ/WI if DHCSR.S_SDE is 0.

This bit resets to zero on a Cold reset.

SBRSELEN, bit [0]

Secure Banked register select enable. Controls whether the SBRSEL field or the current Security state of the processor selects which version of the memory-mapped Banked registers are accessed to the debugger.

The possible values of this bit are:

- 0** The current Security state of the PE determines which memory-mapped Banked registers are accessed by the debugger.
- 1** DCSR.SBRSEL selects which memory-mapped Banked registers are accessed by the debugger.

This bit behaves as RAO/WI if DHCSR.S_SDE is 0.

This bit resets to zero on a Cold reset.

———— **Note** —————

This method of Banked register selection means that the register aliasing is not used for accesses from the debugger. Accesses to the aliased addresses from the debugger have the same behavior as reserved addresses.


D2.2.50 DWT_CIDR0, DWT Component Identification Register 0

The DWT_CIDR0 characteristics are:

Purpose	Provides CoreSight discovery information for the DWT.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented.
Attributes	32-bit read-only register located at 0xE0001FF0. This register is not banked between Security states.

Field descriptions

The DWT_CIDR0 bit assignments are:



Bits [31:8]

Reserved, RES0.

PRMBL_0, bits [7:0]

CoreSight component identification preamble. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as 0x0D.


D2.2.51 DWT_CIDR1, DWT Component Identification Register 1

The DWT_CIDR1 characteristics are:

Purpose	Provides CoreSight discovery information for the DWT.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented.
Attributes	32-bit read-only register located at 0xE0001FF4. This register is not banked between Security states.

Field descriptions

The DWT_CIDR1 bit assignments are:



Bits [31:8]

Reserved, RES0.

CLASS, bits [7:4]

CoreSight component class. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as 0x9.

PRMBL_1, bits [3:0]

CoreSight component identification preamble. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as 0x0.


D2.2.52 DWT_CIDR2, DWT Component Identification Register 2

The DWT_CIDR2 characteristics are:

Purpose	Provides CoreSight discovery information for the DWT.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented.
Attributes	32-bit read-only register located at 0xE0001FF8. This register is not banked between Security states.

Field descriptions

The DWT_CIDR2 bit assignments are:



Bits [31:8]

Reserved, RES0.

PRMBL_2, bits [7:0]

CoreSight component identification preamble. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as 0x05.


D2.2.53 DWT_CIDR3, DWT Component Identification Register 3

The DWT_CIDR3 characteristics are:

Purpose	Provides CoreSight discovery information for the DWT.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented.
Attributes	32-bit read-only register located at 0xE0001FFC. This register is not banked between Security states.

Field descriptions

The DWT_CIDR3 bit assignments are:



Bits [31:8]

Reserved, RES0.

PRMBL_3, bits [7:0]

CoreSight component identification preamble. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as 0x81.

D2.2.54 DWT_COMP<n>, DWT Comparator Register, n = 0 - 15


The DWT_COMP<n> characteristics are:

Purpose	Provides a reference value for use by watchpoint comparator <i>n</i> .
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented.
Attributes	32-bit read/write register located at $0xE0001020 + 16n$. This register is not banked between Security states.


Field descriptions

The DWT_COMP<n> bit assignments are:


When DWT_FUNCTIONn.MATCH == 0b0001:




When DWT_FUNCTIONn.MATCH == 0b001x:



When DWT_FUNCTIONn.MATCH == 0b10xx:



When DWT_FUNCTIONn.MATCH == 0bx1xx:



CYCVALUE, bits [31:0], when DWT_FUNCTIONn.MATCH == 0b0001

Cycle value. Reference value for comparison with cycle count.
This field resets to an UNKNOWN value on a Cold reset.

PCVALUE, bits [31:1], when DWT_FUNCTIONn.MATCH == 0b001x

PC value. Reference value for comparison with program counter.
This field resets to an UNKNOWN value on a Cold reset.

Bit [0], when DWT_FUNCTIONn.MATCH == 0b001x

Reserved, RES0.

DADDR, bits [31:0], when DWT_FUNCTIONn.MATCH == 0bx1xx

Data address. Reference value for comparison with load or store address.
For halfword address comparisons, DADDR[0] is RES0. For byte address comparisons, DADDR[1:0] are RES0.

This field resets to an UNKNOWN value on a Cold reset.

DVALUE, bits [31:0], when DWT_FUNCTIONn.MATCH == 0b10xx

Data value. Reference value for comparison with load or store data.

For halfword or word comparisons, the data value is in little-endian order. That is, the least significant byte of this register is compared with the byte targeting the lowest address in memory.

For byte or halfword comparisons, if the value of the byte or halfword is not replicated across all byte or halfword lanes, the value used for the comparison is UNKNOWN.

This field resets to an UNKNOWN value on a Cold reset.


D2.2.55 DWT_CPICNT, DWT CPI Count Register

The DWT_CPICNT characteristics are:

Purpose	Counts additional cycles required to execute multi-cycle instructions and instruction fetch stalls.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented. Present only if DWT_CTRL.NOPRFCNT == '0'. This register is RES0 if DWT_CTRL.NOPRFCNT == '1'.
Attributes	32-bit read/write register located at 0xE0001008. This register is not banked between Security states.

Field descriptions

The DWT_CPICNT bit assignments are:



Bits [31:8]

Reserved, RES0.

CPICNT, bits [7:0]

Base instruction overhead counter.

Counts one on each cycle when all of the following are true:

- DWT_CTRL.CPIEVTENA == 1 and DEMCR.TRCENA == 1.
- No instruction is executed.
- No load-store operation is in progress, see DWT_LSUCNT.
- No exception-entry or exception-exit operation is in progress, see DWT_EXCCNT.
- The PE is not in a power saving mode, see DWT_SLEEPcnt.
- Either SecureNoninvasiveDebugAllowed() == TRUE, or the PE is in Non-secure state and NoninvasiveDebugAllowed() == TRUE.

The definition of "no instruction is executed" is IMPLEMENTATION DEFINED. ARM recommends that this counts each cycle on which no instruction is retired.

Initialized to zero when the counter is disabled and DWT_CTRL.CPIEVTENA is written with 1. An Event Counter packet is emitted on counter overflow.

This field resets to an UNKNOWN value on a Cold reset.


D2.2.56 DWT_CTRL, DWT Control Register

The DWT_CTRL characteristics are:

Purpose	Provides configuration and status information for the DWT unit, and used to control features of the unit.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented.
Attributes	32-bit read/write register located at 0xE0001000. This register is not banked between Security states.

Field descriptions

The DWT_CTRL bit assignments are:

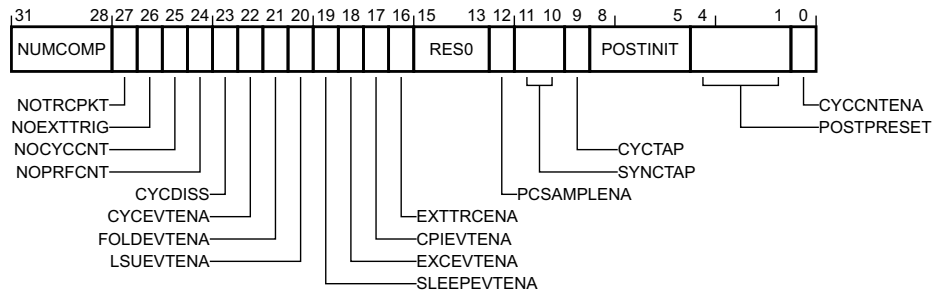

NUMCOMP, bits [31:28]

Number of comparators. Number of DWT comparators implemented.

A value of zero indicates no comparator support.

This field reads as an IMPLEMENTATION DEFINED value.

NOTRCPKT, bit [27]

No trace packets. Indicates whether the implementation does not support trace.

The possible values of this bit are:

- 0** Trace supported.
- 1** Trace not supported.

If this bit is RAZ, the NOCYCCNT bit must also RAZ.

If the Main Extension is not implemented, this bit is RES1.

This bit reads as an IMPLEMENTATION DEFINED value.

NOEXTTRIG, bit [26]

No External Triggers. Shows whether the implementation does not support external triggers.

NOCYCCNT, bit [25]

No cycle count. Indicates whether the implementation does not include a cycle counter.

The possible values of this bit are:

- 0** Cycle counter implemented.

1 Cycle counter not implemented.
If the Main Extension is not implemented, this bit is RES1.
This bit reads as an IMPLEMENTATION DEFINED value.

NOPRFCNT, bit [24]

No profile counters. Indicates whether the implementation does not include the profiling counters.
The possible values of this bit are:
0 Profiling counters implemented.
1 Profiling counters not implemented.
If the Main Extension is not implemented, this bit is RES1.
This bit reads as an IMPLEMENTATION DEFINED value.

CYCDISS, bit [23]

Cycle counter disabled secure. Controls whether the cycle counter is disabled in Secure state.
The possible values of this bit are:
0 No effect.
1 Disable incrementing of the cycle counter when the PE is in Secure state.
RES0 if the NOCYCCNT bit is RAO.
If the Main Extension is not implemented, this bit is RES0.
This bit resets to zero on a Cold reset.

CYCEVTENA, bit [22]

Cycle event enable. Enables Event Counter packet generation on POSTCNT underflow.
The possible values of this bit are:
0 No Event Counter packets generated when POSTCNT underflows.
1 If PCSAMPLENA set to 0, an Event Counter packet is generated when POSTCNT underflows.
RES0 if the NOTRCPKT bit is RAO or the NOCYCCNT bit is RAO.
If the Main Extension is not implemented, this bit is RES0.
This bit resets to zero on a Cold reset.

FOLDEVTENA, bit [21]

Fold event enable. Enables DWT_FOLDCNT counter.
The possible values of this bit are:
0 DWT_FOLDCNT disabled.
1 DWT_FOLDCNT enabled.
RES0 if the NOPRFCNT bit is RAO. The reset value is 0.
If the Main Extension is not implemented, this bit is RES0.
This bit resets to zero on a Cold reset.

LSUEVTENA, bit [20]

LSU event enable. Enables DWT_LSUCNT counter.
The possible values of this bit are:
0 DWT_LSUCNT disabled.
1 DWT_LSUCNT enabled.
RES0 if the NOPRFCNT bit is RAO.
If the Main Extension is not implemented, this bit is RES0.
This bit resets to zero on a Cold reset.

SLEEPEVTENA, bit [19]

Sleep event enable. Enable DWT_SLEEPCNT counter.

The possible values of this bit are:

0 DWT_SLEEPCNT disabled.

1 DWT_SLEEPCNT enabled.

RES0 if the NOPRFCNT bit is RAO.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.

EXCEVTENA, bit [18]

Exception event enable. Enables DWT_EXCCNT counter.

The possible values of this bit are:

0 DWT_EXCCNT disabled.

1 DWT_EXCCNT enabled.

RES0 if the NOPRFCNT bit is RAO.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.

CPIEVTENA, bit [17]

CPI event enable. Enables DWT_CPICNT counter.

The possible values of this bit are:

0 DWT_CPICNT disabled.

1 DWT_CPICNT enabled.

RES0 if the NOPRFCNT bit is RAO.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.

EXTTRCENA, bit [16]

Exception trace enable. Enables generation of Exception Trace packets.

The possible values of this bit are:

0 Exception Trace packet generation disabled.

1 Exception Trace packet generation enabled.

RES0 if the NOTRCPKT bit is RAO.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.

Bits [15:13]

Reserved, RES0.

PCSAMPLENA, bit [12]

PC sample enable. Enables use of POSTCNT counter as a timer for Periodic PC Sample packet generation.

The possible values of this bit are:

0 Periodic PC Sample packet generation disabled.

1 Periodic PC Sample packet generated on POSTCNT underflow.

RES0 if the NOTRCPKT bit is RAO or the NOCYCCNT bit is RAO.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.

SYNCTAP, bits [11:10]

Synchronization tap. Selects the position of the synchronization packet counter tap on the CYCCNT counter. This determines the Synchronization packet rate.

The possible values of this field are:

- 0b00 Synchronization packet generation disabled.
- 0b01 Synchronization counter tap at CYCCNT[24].
- 0b10 Synchronization counter tap at CYCCNT[26].
- 0b11 Synchronization counter tap at CYCCNT[28].

RES0 if the NOCYCCNT bit is RAO.

If the Main Extension is not implemented, this field is RES0.

This field resets to an UNKNOWN value on a Cold reset.

CYCTAP, bit [9]

Cycle count tap. Selects the position of the POSTCNT tap on the CYCCNT counter.

The possible values of this bit are:

- 0 POSTCNT tap at CYCCNT[6].
- 1 POSTCNT tap at CYCCNT[10].

RES0 if the NOCYCCNT bit is RAO.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to an UNKNOWN value on a Cold reset.

POSTINIT, bits [8:5]

POSTCNT initial. Initial value for the POSTCNT counter.

RES0 if the NOCYCCNT bit is RAO.

If the Main Extension is not implemented, this field is RES0.

This field resets to an UNKNOWN value on a Cold reset.

POSTPRESET, bits [4:1]

POSTCNT preset. Reload value for the POSTCNT counter.

RES0 if the NOCYCCNT bit is RAO.

If the Main Extension is not implemented, this field is RES0.

This field resets to an UNKNOWN value on a Cold reset.

CYCCNTENA, bit [0]

CYCCNT enable. Enables CYCCNT.

The possible values of this bit are:

- 0 CYCCNT disabled.
- 1 CYCCNT enabled.

RES0 if the NOCYCCNT bit is RAO.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Cold reset.


D2.2.57 DWT_CYCCNT, DWT Cycle Count Register

The DWT_CYCCNT characteristics are:

Purpose	Shows or sets the value of the processor cycle counter, CYCCNT.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented. Present only if DWT_CTRL.NOCYCCNT == '0'. This register is RES0 if DWT_CTRL.NOCYCCNT == '1'.
Attributes	32-bit read/write register located at 0xE0001004. This register is not banked between Security states.

Field descriptions

The DWT_CYCCNT bit assignments are:



CYCCNT, bits [31:0]

Incrementing cycle counter value. Increments one on each processor clock cycle when DWT_CTRL.CYCCNTENA == 1 and DEMCR.TRCENA == 1. On overflow, CYCCNT wraps to zero.

This field resets to an UNKNOWN value on a Cold reset.


D2.2.58 DWT_DEVARCH, DWT Device Architecture Register

The DWT_DEVARCH characteristics are:

Purpose	Provides CoreSight discovery information for the DWT.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented.
Attributes	32-bit read-only register located at 0xE0001FBC. This register is not banked between Security states.

Field descriptions

The DWT_DEVARCH bit assignments are:



ARCHITECT, bits [31:21]

Architect. Defines the architect of the component. Bits [31:28] are the JEP106 continuation code (JEP106 bank ID, minus 1) and bits [27:21] are the JEP106 ID code.

The possible values of this field are:

0x23B JEP106 continuation code 0x4, ID code 0x3B. ARM Limited.

Other values are defined by the JEDEC JEP106 standard.

This field reads as 0x23B.

PRESENT, bit [20]

DEVARCH Present. Defines that the DEVARCH register is present.

The possible values of this bit are:

1 DEVARCH information present.

This bit reads as one.

REVISION, bits [19:16]

Revision. Defines the architecture revision of the component.

The possible values of this field are:

0000 DWT architecture v2.0.

This field reads as 0b0000.

ARCHVER, bits [15:12]

Architecture Version. Defines the architecture version of the component.

The possible values of this field are:

0001 DWT architecture v2.

ARCHVER and ARCHPART are also defined as a single field, ARCHID, such that ARCHVER is ARCHID[15:12].

This field reads as 0b0001.

ARCHPART, bits [11:0]

Architecture Part. Defines the architecture of the component.

The possible values of this field are:

0xA02 DWT architecture.

ARCHVER and ARCHPART are also defined as a single field, ARCHID, such that ARCHPART is ARCHID[11:0].

This field reads as 0xA02.


D2.2.60 DWT_EXCCNT, DWT Exception Overhead Count Register

The DWT_EXCCNT characteristics are:

Purpose	Counts the total cycles spent in exception processing.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented. Present only if DWT_CTRL.NOPRFCNT == '0'. This register is RES0 if DWT_CTRL.NOPRFCNT == '1'.
Attributes	32-bit read/write register located at 0xE000100C. This register is not banked between Security states.

Field descriptions

The DWT_EXCCNT bit assignments are:



Bits [31:8]

Reserved, RES0.

EXCCNT, bits [7:0]

The exception overhead counter.

Counts one on each cycle when all of the following are true:

- DWT_CTRL.EXCEVTENA == 1 and DEMCR.TRCENA == 1.
- No instruction is executed, see DWT_CPICNT.
- An exception-entry or exception-exit related operation is in progress.
- Either SecureNoninvasiveDebugAllowed() == TRUE, or NS-Req for the operation is set to Non-secure and NoninvasiveDebugAllowed() == TRUE.

Exception-entry or exception-exit related operations include the stacking of registers on exception entry, lazy state preservation, unstacking of registers on exception exit, and preemption.

Initialized to zero when the counter is disabled and DWT_CTRL.EXCEVTENA is written with 1. An Event Counter packet is emitted on counter overflow.

This field resets to an UNKNOWN value on a Cold reset.


D2.2.61 DWT_FOLDCNT, DWT Folded Instruction Count Register

The DWT_FOLDCNT characteristics are:

Purpose	Increments on the additional cycles required to execute all load or store instructions.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented. Present only if DWT_CTRL.NOPRFCNT == '0'. This register is RES0 if DWT_CTRL.NOPRFCNT == '1'.
Attributes	32-bit read/write register located at 0xE0001018. This register is not banked between Security states.

Field descriptions

The DWT_FOLDCNT bit assignments are:



Bits [31:8]

Reserved, RES0.

FOLDCNT, bits [7:0]

Folded instruction counter.

Counts on each cycle when all of the following are true:

- DWT_CTRL.FOLDEVTENA == 1 and DEMCR.TRCENA == 1.
- At least two instructions are executed, see DWT_CPICNT.
- Either SecureNoninvasiveDebugAllowed() == TRUE, or the PE is in Non-secure state and NoninvasiveDebugAllowed() == TRUE.

The counter is incremented by the number of instructions executed, minus one.

Initialized to zero when the counter is disabled and DWT_CTRL.FOLDEVTENA is written with 1.
An event is emitted on counter overflow.

This field resets to an UNKNOWN value on a Cold reset.


D2.2.62 DWT_FUNCTION<n>, DWT Comparator Function Register, n = 0 - 15

The DWT_FUNCTION<n> characteristics are:

Purpose	Controls the operation of watchpoint comparator <i>n</i> .
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented.
Attributes	32-bit read/write register located at 0xE0001028 + 16 <i>n</i> . This register is not banked between Security states.

Field descriptions

The DWT_FUNCTION<n> bit assignments are:

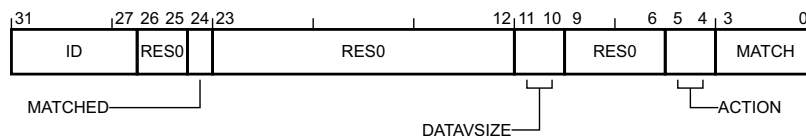

ID, bits [31:27]

Identify capability. Identifies the capabilities for MATCH for comparator *n*.

The possible values of this field are:

0b00000	Reserved.
0b01000	Data Address, and Data Address With Value.
0b01001	Cycle Counter, Data Address, and Data Address With Value.
0b01010	Instruction Address, Data Address, and Data Address With Value.
0b01011	Cycle Counter, Instruction Address, Data Address and Data Address With Value.
0b11000	Data Address, Data Address Limit, and Data Address With Value.
0b11010	Instruction Address, Instruction Address Limit, Data Address, Data Address Limit, and Data Address With Value.
0b11100	Data Address, Data Address Limit, Data Value, Linked Data Value, and Data Address With Value.
0b11110	Instruction Address, Instruction Address Limit, Data Address, Data Address Limit, Data value, Linked Data Value, and Data Address With Value.

All other values are reserved.

Comparator 0 never supports linking. If more than one comparator is implemented, then at least one comparator must support linking. ARM recommends that odd-numbered comparators support linking.

Cycle Counter matching is only supported if the Main Extension is implemented and DWT_CTRL.NOCYCCNT == 0, meaning the cycle counter is implemented. Comparator 0 must support Cycle Counter matching if the cycle counter is implemented.

Data Address With Value is supported for the first four comparators only, and only if the Main Extension and ITM are implemented, and DWT_CTRL.NOTRCPKT == 0. Data Value and Linked Data Value are only supported if the Main Extension is implemented.

This field is read-only.

This field reads as an IMPLEMENTATION DEFINED value.

Bits [26:25]

Reserved, RES0.

MATCHED, bit [24]

Comparator matched. Set to 1 when the comparator matches.

The possible values of this bit are:

0 No match.

1 Match. The comparator has matched since the last read of this register.

For an Instruction Address Limit or Data Address Limit comparator, this bit is UNKNOWN on reads.

This bit is read-only.

This bit clears to zero when read.

This bit resets to an UNKNOWN value on a Cold reset.

Bits [23:12]

Reserved, RES0.

DATAVSIZE, bits [11:10]

Data value size. Defines the size of the object being watched for by Data Value and Data Address comparators.

The possible values of this field are:

0b00 1 byte.

0b01 2 bytes.

0b10 4 bytes.

All other values are reserved.

For an Instruction Address or Instruction Address Limit comparator, DATAVSIZE must be 0b01 (2 bytes). If this comparator is part of a data address range pair, DATAVSIZE must be 0b00 (1 byte).

For a Data Address comparator, DWT_COMP n must be aligned to the size specified by DATAVSIZE. For a Data Value or Linked Data Value comparator, the data value must be replicated at the specified size across DWT_COMP n .

This field resets to an UNKNOWN value on a Cold reset.

Bits [9:6]

Reserved, RES0.

ACTION, bits [5:4]

Action on match. Defines the action on a match. This field is ignored and the comparator generates no actions if it is disabled by MATCH.

The possible values of this field are:

0b00 Trigger only.

0b01 Generate debug event.

0b10 For a Cycle Counter, Instruction Address, Data Address, Data Value or Linked Data Value comparator, generate a Data Trace Match packet.

For a Data Address With Value comparator, generate a Data Trace Data Value packet.

0b11 For a Data Address Limit comparator, generate a Data Trace Data Address packet.

For a Cycle Counter, Instruction Address Limit, or Data Address comparator, generate a Data Trace PC Value packet.

For a Data Address With Value comparator, generate both a Data Trace PC Value packet and a Data Trace Data Value packet.

If the Main Extension is not implemented, the values 0b10 and 0b11 are reserved.

This field resets to an UNKNOWN value on a Cold reset.

MATCH, bits [3:0]

Match type. Controls the type of match generated by this comparator.

The possible values of this field are:

- 0b0000 Disabled. Never generates a match.
- 0b0001 Cycle Counter. Matches if DWT_CYCCNT equals the comparator value. The comparator is checked each time DWT_CYCCNT is written to, directly or indirectly. Only supported if the Main Extension is implemented, DWT_FUNCTION<n>.ID<0> == 1 and DWT_CTRL.NOCYCCNT == 0.
- 0b0010 Instruction Address. If not linked to, an instruction matches if the address of the first byte of the instruction matches the comparator address. Only supported if DWT_FUNCTION<n>.ID<1> == 1.
- 0b0011 Instruction Address Limit. An instruction matches if the address of the first byte of the instruction lies between the lower comparator address (specified by comparator <n-1>) and the limit comparator address (specified by this comparator, <n>). Both addresses are inclusive to the range. Comparator <n-1> must be programmed for Instruction Address (0b0010), and the lower address must be strictly less-than the limit comparator address, otherwise it is UNPREDICTABLE whether or not either comparator generates matches.
Only supported if DWT_FUNCTION<n>.ID<4> == 1 and DWT_FUNCTION<n>.ID<1> == 1.
- 0b0100 Data Address. If not linked to by a Data Address Limit comparator, an access matches if any accessed byte lies between the comparator address and a limit defined by the DATAVSIZE field. Supported for all comparators.
- 0b0101 Data Address, writes. As 0b0100, except that only write accesses generate a match.
- 0b0110 Data Address, reads. As 0b0100, except that only read accesses generate a match.
- 0b0111 Data Address Limit. An access matches if any byte made by the access lies between the lower address (specified by comparator <n-1>) and the limit address (specified by this comparator, <n>). Both addresses are inclusive to the range. Comparator <n-1> must be programmed for Data Address or Data Address With Data Value (0bx1xx, not 0bx111), and the lower address must be strictly less-than the limit comparator address, otherwise it is UNPREDICTABLE whether or not either comparator generates matches. DWT_FUNCTION<n-1>.MATCH[1:0] determines the matching access types.
Only supported if DWT_FUNCTION<n>.ID<4> == 1.
- 0b1000 Data Value. An access matches if the value accessed matches the comparator value.
Only supported if the Main Extension is implemented and DWT_FUNCTION<n>.ID<2> == 1.
- 0b1001 Data Value, writes. As 0b1000, except that only write accesses generate a match.
- 0b1010 Data Value, reads. As 0b1000, except that only read accesses generate a match.
- 0b1011 Linked Data Value. An access matches if the value accessed matches the comparator value (specified by comparator <n>) and the linked data address (specified by comparator <n-1>) for the same access matches. Comparator <n-1> must be programmed for Data Address or Data Address With Value (0bx1xx, not 0bx111), and DATAVSIZE for the two comparators must be the same, otherwise it is UNPREDICTABLE whether or not either comparator generates matches. DWT_FUNCTION<n-1>.MATCH[1:0] determines the matching access types.
Only supported if the Main Extension is implemented and DWT_FUNCTION<n>.ID<4> == 1 and DWT_FUNCTION<n>.ID<2> == 1.
- 0b1100 Data Address With Value. As 0b01xx, except that the data value is traced.
Supported for the first four comparators only, and only if DWT_CTRL.NOTRCPKT == 0 and ITM is also implemented.

- 0b1101 Data Address With Value, writes. As 0b1100, except that only write accesses generate a match.
- 0b1110 Data Address With Value, reads. As 0b1100, except that only read accesses generate a match.

Any value not supported by the comparator is reserved. For a pair of linked comparators, $\langle n \rangle$ and $\langle n-1 \rangle$, `DWT_FUNCTION<n-1>.MATCH[1:0]` determines the matching access types. See MATCH table for further details.

This field resets to zero on a Cold reset.


D2.2.63 DWT_LAR, DWT Software Lock Access Register

The DWT_LAR characteristics are:

Purpose	Provides CoreSight Software Lock control for the DWT, see the <i>ARM® CoreSight™ Architecture Specification</i> for details.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. This register is RAZ/WI if accessed via the debugger.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented. Present only if the optional Software Lock is implemented. This register is RAZ/WI if the Software Lock is not implemented.
Attributes	32-bit write-only register located at 0xE001FB0. This register is not banked between Security states.

Field descriptions

The DWT_LAR bit assignments are:



KEY, bits [31:0]

Lock Access control.

Writing the key value 0xC5ACCE55 to this field unlocks the lock, enabling write accesses to this component's registers through a memory-mapped interface.

Writing any other value to this register locks the lock, disabling write accesses to this component's registers through a memory mapped interface.


D2.2.64 DWT_LSR, DWT Software Lock Status Register

The DWT_LSR characteristics are:

Purpose	Provides CoreSight Software Lock status information for the DWT, see the <i>ARM® CoreSight™ Architecture Specification</i> for details.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. This register is RAZ/WI if accessed via the debugger.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented. Present only if the optional Software Lock is implemented. This register is RAZ/WI if the Software Lock is not implemented.
Attributes	32-bit read-only register located at 0xE0001FB4. This register is not banked between Security states.

Field descriptions

The DWT_LSR bit assignments are:

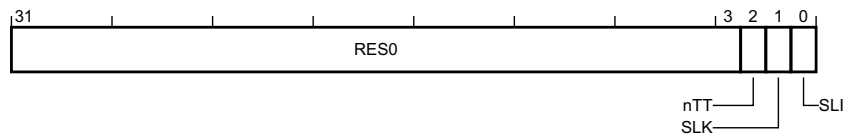

Bits [31:3]

Reserved, RES0.

nTT, bit [2]

Not thirty-two bit. See the *ARM® CoreSight™ Architecture Specification*.

This bit reads as zero.

SLK, bit [1]

Software Lock status. See the *ARM® CoreSight™ Architecture Specification*.

The possible values of this bit are:

- 0** Lock clear. Software writes are permitted to this component's registers.
- 1** Lock set. Software writes to this component's registers are ignored, and reads have no side effects.

For a debugger read of this register, or when the Software Lock is not implemented, this bit is RES0.

This bit resets to one on a Cold reset.

SLI, bit [0]

Software Lock implemented. See the *ARM® CoreSight™ Architecture Specification*.

The possible values of this bit are:

- 0** Software Lock not implemented or debugger access.
- 1** Software Lock is implemented and software access.

For a debugger read of this register, or when the Software Lock is not implemented, this bit is RAZ.

This bit reads as an IMPLEMENTATION DEFINED value.


D2.2.65 DWT_LSUCNT, DWT LSU Count Register

The DWT_LSUCNT characteristics are:

Purpose	Increments on the additional cycles required to execute all load or store instructions.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented. Present only if DWT_CTRL.NOPRFCNT == '0'. This register is RES0 if DWT_CTRL.NOPRFCNT == '1'.
Attributes	32-bit read/write register located at 0xE0001014. This register is not banked between Security states.

Field descriptions

The DWT_LSUCNT bit assignments are:



Bits [31:8]

Reserved, RES0.

LSUCNT, bits [7:0]

Load-store overhead counter.

Counts one on each cycle when all of the following are true:

- DWT_CTRL.LSUEVTENA == 1 and DEMCR.TRCENA == 1.
- No instruction is executed, see DWT_CPICNT.
- No exception-entry or exception-exit operation is in progress, see DWT_EXCCNT.
- A load-store operation is in progress.
- Either SecureNoninvasiveDebugAllowed() == TRUE, or NS-Req for the operation is set to Non-secure and NoninvasiveDebugAllowed() == TRUE.

Initialized to zero when the counter is disabled and DWT_CTRL.LSUEVTENA is written with 1. An Event Counter packet is emitted on counter overflow.

This field resets to an UNKNOWN value on a Cold reset.


D2.2.66 DWT_PCSR, DWT Program Counter Sample Register

The DWT_PCSR characteristics are:

Purpose	Samples the current value of the program counter.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented.
Attributes	32-bit read-only register located at 0xE000101C. This register is not banked between Security states.

Field descriptions

The DWT_PCSR bit assignments are:



EIASAMPLE, bits [31:0]

Executed instruction address sample. Recently executed instruction address sample value.

The possible values of this field are:

0xFFFFFFFF

One of the following is true:

- The PE is halted in Debug state.
- The Security Extension is implemented, the sampled instruction was executed in Secure state, and SecureNoninvasiveDebugAllowed() == FALSE.
- NoninvasiveDebugAllowed() == FALSE - DEMCR.TRCENA == 0.
- The address of a recently-executed instruction is not available.

Not 0xFFFFFFFF

Instruction address of a recently executed instruction. Bit [0] of the sample instruction address is 0.

The conditions when the address of a recently-executed instruction is not available are IMPLEMENTATION DEFINED.


D2.2.68 DWT_PIDR1, DWT Peripheral Identification Register 1

The DWT_PIDR1 characteristics are:

Purpose	Provides CoreSight discovery information for the DWT.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented.
Attributes	32-bit read-only register located at 0xE0001FE4. This register is not banked between Security states.

Field descriptions

The DWT_PIDR1 bit assignments are:



Bits [31:8]

Reserved, RES0.

DES_0, bits [7:4]

JEP106 identification code bits [3:0]. See the *ARM® CoreSight™ Architecture Specification*.
This field reads as an IMPLEMENTATION DEFINED value.

PART_1, bits [3:0]

Part number bits [11:8]. See the *ARM® CoreSight™ Architecture Specification*.
This field reads as an IMPLEMENTATION DEFINED value.


D2.2.69 DWT_PIDR2, DWT Peripheral Identification Register 2

The DWT_PIDR2 characteristics are:

Purpose	Provides CoreSight discovery information for the DWT.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented.
Attributes	32-bit read-only register located at 0xE0001FE8. This register is not banked between Security states.

Field descriptions

The DWT_PIDR2 bit assignments are:



Bits [31:8]

Reserved, RES0.

REVISION, bits [7:4]

Component revision. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.

JEDEC, bit [3]

JEDEC assignee value is used. See the *ARM® CoreSight™ Architecture Specification*.

This bit reads as one.

DES_1, bits [2:0]

JEP106 identification code bits [6:4]. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.


D2.2.71 DWT_PIDR4, DWT Peripheral Identification Register 4

The DWT_PIDR4 characteristics are:

Purpose	Provides CoreSight discovery information for the DWT.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented.
Attributes	32-bit read-only register located at 0xE0001FD0. This register is not banked between Security states.

Field descriptions

The DWT_PIDR4 bit assignments are:



Bits [31:8]

Reserved, RES0.

SIZE, bits [7:4]

4KB count. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as zero.

DES_2, bits [3:0]

JEP106 continuation code. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.

D2.2.72 DWT_PIDR5, DWT Peripheral Identification Register 5

The DWT_PIDR5 characteristics are:

Purpose	Provides CoreSight discovery information for the DWT.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented.
Attributes	32-bit read-only register located at 0xE0001FD4. This register is not banked between Security states.

Field descriptions

The DWT_PIDR5 bit assignments are:



Bits [31:0]

Reserved, RES0.


D2.2.73 DWT_PIDR6, DWT Peripheral Identification Register 6

The DWT_PIDR6 characteristics are:

Purpose	Provides CoreSight discovery information for the DWT.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented.
Attributes	32-bit read-only register located at 0xE0001FD8. This register is not banked between Security states.

Field descriptions

The DWT_PIDR6 bit assignments are:



Bits [31:0]

Reserved, RES0.

D2.2.74 DWT_PIDR7, DWT Peripheral Identification Register 7

The DWT_PIDR7 characteristics are:

Purpose	Provides CoreSight discovery information for the DWT.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented.
Attributes	32-bit read-only register located at 0xE0001FDC. This register is not banked between Security states.

Field descriptions

The DWT_PIDR7 bit assignments are:



Bits [31:0]

Reserved, RES0.


D2.2.75 DWT_SLEEPCNT, DWT Sleep Count Register

The DWT_SLEEPCNT characteristics are:

Purpose	Counts the total number of cycles that the processor is sleeping.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented. Present only if the DWT is implemented. This register is RES0 if the DWT is not implemented. Present only if DWT_CTRL.NOPRFCNT == '0'. This register is RES0 if DWT_CTRL.NOPRFCNT == '1'.
Attributes	32-bit read/write register located at 0xE0001010. This register is not banked between Security states.

Field descriptions

The DWT_SLEEPCNT bit assignments are:



Bits [31:8]

Reserved, RES0.

SLEEPCNT, bits [7:0]

Sleep counter.

Counts one on each cycle when all of the following are true:

- DWT_CTRL.SLEEPEVTENA == 1 and DEMCR.TRCENA == 1.
- No instruction is executed, see DWT_CPICNT.
- No load-store operation is in progress, see DWT_LSUCNT.
- No exception-entry or exception-exit operation is in progress, see DWT_EXCCNT.
- The PE is in a power saving mode.
- Either SecureNoninvasiveDebugAllowed() == TRUE, or the PE is in Non-secure state and NoninvasiveDebugAllowed() == TRUE.

Power saving modes include WFI, WFE, and Sleep-on-exit.

All power saving features are IMPLEMENTATION DEFINED and therefore when this counter counts is IMPLEMENTATION DEFINED. In particular, it is IMPLEMENTATION DEFINED whether the counter increments if the PE is in a power saving mode and SCR.SLEEPDEEP is set.

Initialized to zero when the counter is disabled and DWT_CTRL.SLEEPEVTENA is written with 1. An Event Counter packet is emitted on counter overflow.

This field resets to an UNKNOWN value on a Cold reset.

————— **Note** —————

ARM recommends that this counter counts all cycles when the PE is sleeping and SCR.SLEEPDEEP is clear, regardless of whether a WFI or WFE instruction, or Sleep-on-exit, caused the entry to the power saving mode.


D2.2.76 EPSR, Execution Program Status Register

The EPSR characteristics are:

Purpose	Holds Execution state bits.
Usage constraints	Privileged access only. Unprivileged access is RAZ/WI.
Configurations	This register is always implemented.
Attributes	32-bit read/write special-purpose register. This register is not banked between Security states.

Field descriptions

The EPSR bit assignments are:



Bits [31:27]

Reserved, RES0.

T, bit [24]

T32 state bit. Determines the current instruction set state.

The possible values of this bit are:

0 All instructions generate an INVSTATE UsageFault.

1 Instructions decoded as T32 instructions.

This bit resets to an UNKNOWN value on a Warm reset.

Bits [23:16]

Reserved, RES0.

IT/ICI, bits [15:10, 26:25]

If-then and interrupt continuation. Depending on value, this field encodes either the current condition and position in an IT block sequence, or information on the outstanding register list for an interrupted exception-continuable multi-cycle load or store instruction.

The field IT[7:0] is equivalent to EPSR[15:10,26:25]. The field ICI[7:0] is equivalent to EPSR[26:25,15:10].

If the Main Extension is not implemented, this field is RES0.

This field resets to zero on a Warm reset.

Bits [9:0]

Reserved, RES0.


D2.2.77 EXC_RETURN, Exception Return Payload

The EXC_RETURN characteristics are:

Purpose	Value provided in LR on entry to an exception, and used with a BX or load to PC to perform an exception return.
Usage constraints	None.
Configurations	All.
Attributes	32-bit payload.

Field descriptions

The EXC_RETURN bit assignments are:

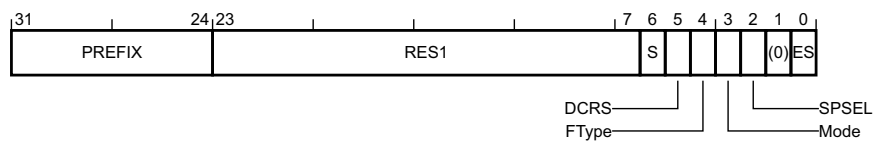

PREFIX, bits [31:24]

Prefix. Indicates that this is an EXC_RETURN value.

This field reads as 0b11111111.

Bits [23:7]

Reserved, RES1.

S, bit [6]

Secure or Non-secure stack. Indicates whether a Secure or Non-secure stack is used to restore stack frame on exception return.

The possible values of this bit are:

- 0 Non-secure stack used.
- 1 Secure stack used.

DCRS, bit [5]

Default callee register stacking. Indicates whether the default stacking rules apply, or whether the callee registers are already on the stack.

The possible values of this bit are:

- 0 Stacking of the callee saved registers skipped.
- 1 Default rules for stacking the callee registers followed.

FType, bit [4]

Stack frame type. Indicates whether the stack frame is a standard integer only stack frame, or an extended floating-point stack frame.

The possible values of this bit are:

- 0 Extended stack frame.
- 1 Standard stack frame.

Mode, bit [3]

Mode. Indicates the Mode that was stacked from.

The possible values of this bit are:

- 0 Handler mode.

1 Thread mode.

SPSEL, bit [2]

Stack pointer selection. Indicates which stack pointer the exception frame resides on.

The possible values of this bit are:

0 Main stack pointer.

1 Process stack pointer.

Bit [1]

Reserved, RES0.

ES, bit [0]

Exception Secure. The security domain the exception was taken to.

The possible values of this bit are:

0 Non-secure.

1 Secure.


D2.2.78 FAULTMASK, Fault Mask Register

The FAULTMASK characteristics are:

Purpose	Provides access to the PE FAULTMASK register.
Usage constraints	Privileged access only. Unprivileged access is RAZ/WI.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read/write special-purpose register. This register is banked between Security states.

Field descriptions

The FAULTMASK bit assignments are:



Bits [31:1]

Reserved, RES0.

FM, bit [0]

Fault mask enable. The Secure and Non-secure FAULTMASK registers individually boost the current execution priority based on the settings of AIRCR.PRIS and AIRCR.BFHFNMINs. If AIRCR.BFHFNMINs is zero, AIRCR.PRIS is zero, and FAULTMASK_NS.FM is one, the execution priority is boosted to 0. If AIRCR.BFHFNMINs is zero, AIRCR.PRIS is one, and FAULTMASK_NS.FM is one, the execution priority is boosted to 0x80. If AIRCR.BFHFNMINs is zero and FAULTMASK_S is one, the execution priority is boosted to -1. If AIRCR.BFHFNMINs is one and FAULTMASK_NS is one, the execution priority is boosted to -1. If AIRCR.BFHFNMINs is one and FAULTMASK_S is one, the execution priority is boosted to -3.

The possible values of this bit are:

- 0** No effect.
- 1** Boost priority.

On an exception return from a raw execution priority greater or equal to zero, the FM bit corresponding to EXC_RETURN.ES is cleared.

This bit resets to zero on a Warm reset.


D2.2.79 FNC_RETURN, Function Return Payload

The FNC_RETURN characteristics are:

Purpose	Value provided in LR on entry to Non-secure state from a Secure BL or BLX.
Usage constraints	None.
Configurations	All.
Attributes	32-bit payload.

Field descriptions

The FNC_RETURN bit assignments are:



PREFIX, bits [31:24]

This field reads as 0b11111110.

ONES, bits [23:1]

This field reads as 0b111111111111111111111111.

S, bit [0]

Secure. Indicates whether the function call was from the Non-secure or Secure state. Because FNC_RETURN is only used when calling from the Secure state, this bit is always set to 1. However, some function chaining cases can result in an SG instruction clearing this bit, so the architecture ignores the state of this bit when processing a branch to FNC_RETURN.

The possible values of this bit are:

0	From Secure state.
1	From Non-secure state.


D2.2.81 FPCCR, Floating-Point Context Control Register

The FPCCR characteristics are:

Purpose	Holds control data for the Floating-point extension.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Floating-point Extension is implemented. This register is RES0 if the Floating-point Extension is not implemented.
Attributes	32-bit read/write register located at 0xE000EF34. Secure software can access the Non-secure view of this register via FPCCR_NS located at 0xE002EF34. The location 0xE002EF34 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states on a bit by bit basis.

Field descriptions

The FPCCR bit assignments are:

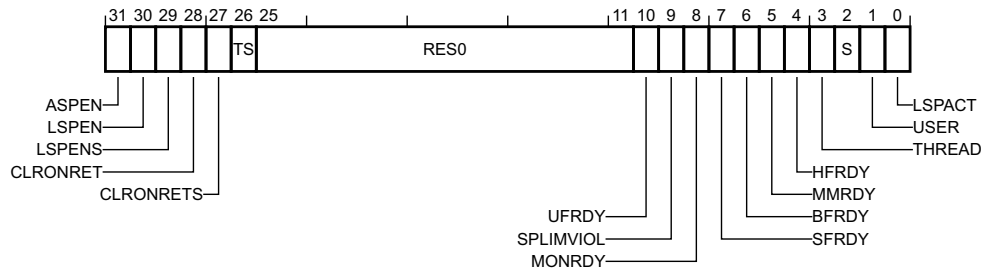

ASPEN, bit [31]

Automatic state preservation enable. When this bit is set to 1, execution of a floating-point instruction sets the CONTROL.FPCA bit to 1.

This bit is banked between Security states.

The possible values of this bit are:

- 0** Executing a floating-point instruction has no effect on CONTROL.FPCA.
- 1** Executing a floating-point instruction sets CONTROL.FPCA to 1.

Setting this bit to 1 means the hardware automatically preserves FP context on exception entry and restores it on exception return.

This bit resets to one on a Warm reset.

LSPEN, bit [30]

Lazy state preservation enable. Enables lazy context save of FP state.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** Disable automatic lazy context save.
- 1** Enable automatic lazy context save.

This bit resets to one on a Warm reset.

LSPENS, bit [29]

Lazy state preservation enable Secure only. This bit controls whether the LSPEN bit is writeable from the Non-secure state.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** LSPEN is readable and writeable from both Security states.
- 1** LSPEN is readable from both Security states, but writes to LSPEN are ignored from the Non-secure state.

This bit is RAZ/WI from Non-secure.

This bit resets to zero on a Warm reset.

CLRONRET, bit [28]

Clear on return. Clear floating-point caller saved registers on exception return.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** Disabled.
- 1** Enabled.

When set to 1 the caller saved floating-point registers (I.E. S0 to S15, and FPSCR) are cleared on exception return (including tail chaining) if CONTROL.FPCA is set to 1 and FPCCR_S.LSPACT is set to 0.

This bit resets to zero on a Warm reset.

CLRONRETS, bit [27]

Clear on return Secure only. This bit controls whether the CLRONRET bit is writeable from the Non-secure state.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** The CLRONRET field is accessible from both Security states.
- 1** The Non-secure view of the CLRONRET field is read only.

This bit is RAZ/WI from Non-secure.

This bit resets to zero on a Warm reset.

TS, bit [26]

Treat as Secure. Treat FP registers as Secure enable.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** Disabled.
- 1** Enabled.

When set to 0 the floating-point registers are treated as Non-secure even when the PE is in the secure state and, therefore, the callee saved registers are never pushed to the stack. If the floating-point registers never contain data that needs to be protected, clearing this flag can reduce interrupt latency. Because this field changes how secure stack frames are interpreted, unpredictable behavior can result if the state of this bit is not consistent with the current secure stacks. Therefore, firmware must take care when modifying this value. This field behaves as RAZ/WI from the Non-secure state.

This bit is RAZ/WI from Non-secure.

This bit resets to zero on a Warm reset.

Bits [25:11]

Reserved, RES0.

UFRDY, bit [10]

UsageFault ready. Indicates whether the software executing when the PE allocated the FP stack frame was able to set the UsageFault exception to pending.

This bit is banked between Security states.

The possible values of this bit are:

- 0** Not able to set the UsageFault exception to pending.
- 1** Able to set the UsageFault exception to pending.

This bit resets to an UNKNOWN value on a Warm reset.

SPLIMVIOL, bit [9]

Stack pointer limit violation. This bit is banked between the Security states and indicates whether the FP context violates the stack pointer limit that was active when lazy state preservation was activated. SPLIMVIOL modifies the lazy FP state preservation behavior.

This bit is banked between Security states.

The possible values of this bit are:

- 0** The existing behavior is retained.
- 1** The memory accesses associated with the floating-point state preservation are not performed. However if the floating-point state is secure and FPCCR.TS is set to 1 the registers are still zeroed and the floating-point state is lost.

This bit resets to an UNKNOWN value on a Warm reset.

MONRDY, bit [8]

DebugMonitor ready. Indicates whether the software executing when the PE allocated the FP stack frame was able to set the DebugMonitor exception to pending.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** Not able to set the DebugMonitor exception to pending.
- 1** Able to set the DebugMonitor exception to pending.

If DEMCR.SDME is one this bit is RAZ/WI from Non-secure state

This bit resets to an UNKNOWN value on a Warm reset.

SFRDY, bit [7]

SecureFault ready. Indicates whether the software executing when the PE allocated the FP stack frame was able to set the SecureFault exception to pending. This bit is only present in the Secure version of the register, and behaves as RAZ/WI when accessed from the Non-secure state.

This bit is not banked between Security states.

This bit is RAZ/WI from Non-secure.

This bit resets to an UNKNOWN value on a Warm reset.

BFRDY, bit [6]

BusFault ready. Indicates whether the software executing when the PE allocated the FP stack frame was able to set the BusFault exception to pending.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** Not able to set the BusFault exception to pending.
- 1** Able to set the BusFault exception to pending.

If AIRCR.BFHFNMINS is zero this bit is RAZ/WI from Non-secure state.

This bit resets to an UNKNOWN value on a Warm reset.

MMRDY, bit [5]

MemManage ready. Indicates whether the software executing when the PE allocated the FP stack frame was able to set the MemManage exception to pending.

This bit is banked between Security states.

The possible values of this bit are:

- 0** Not able to set the MemManage exception to pending.
- 1** Able to set the MemManage exception to pending.

This bit resets to an UNKNOWN value on a Warm reset.

HFRDY, bit [4]

HardFault ready. Indicates whether the software executing when the PE allocated the FP stack frame was able to set the HardFault exception to pending.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** Not able to set the HardFault exception to pending.
- 1** Able to set the HardFault exception to pending.

If AIRCR.BFHFNMINS is zero this bit is RAZ/WI from Non-secure state.

This bit resets to an UNKNOWN value on a Warm reset.

THREAD, bit [3]

Thread mode. Indicates the PE mode when it allocated the FP stack frame.

This bit is banked between Security states.

The possible values of this bit are:

- 0** Handler mode.
- 1** Thread mode.

This bit is for fault handler information only and does not interact with the exception model.

This bit resets to an UNKNOWN value on a Warm reset.

S, bit [2]

Security. Security status of the FP context. This bit is only present in the Secure version of the register, and behaves as RAZ/WI when accessed from the Non-secure state. This bit is updated whenever lazy state preservation is activated, or when a floating-point instruction is executed.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** Indicates the FP context belongs to the non-secure state.
- 1** Indicates the FP context belongs to the secure state.

This bit is RAZ/WI from Non-secure.

This bit resets to one on a Warm reset.

USER, bit [1]

User privilege. Indicates the privilege level of the software executing when the PE allocated the FP stack frame.

This bit is banked between Security states.

The possible values of this bit are:

- 0** Privileged.
- 1** Unprivileged.

This bit resets to an UNKNOWN value on a Warm reset.

LSPACT, bit [0]

Lazy state preservation active. Indicates whether lazy preservation of the FP state is active.

This bit is banked between Security states.

The possible values of this bit are:

- 0** Lazy state preservation is not active.
- 1** Lazy state preservation is active.

This bit resets to zero on a Warm reset.


D2.2.82 FPDSCR, Floating-Point Default Status Control Register

The FPDSCR characteristics are:

Purpose	Holds the default values for the floating-point status control data that the PE assigns to the FPSCR when it creates a new floating-point context.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Floating-point Extension is implemented. This register is RES0 if the Floating-point Extension is not implemented.
Attributes	32-bit read/write register located at 0xE000EF3C. Secure software can access the Non-secure view of this register via FPDSCR_NS located at 0xE002EF3C. The location 0xE002EF3C is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Field descriptions

The FPDSCR bit assignments are:

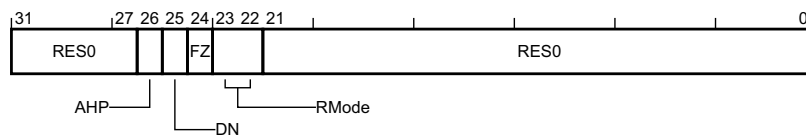

Bits [31:27]

Reserved, RES0.

AHP, bit [26]

Alternative half-precision. Default value for FPSCR.AHP.
This bit resets to zero on a Warm reset.

DN, bit [25]

Default NaN. Default value for FPSCR.DN.
This bit resets to zero on a Warm reset.

FZ, bit [24]

Flush-to-zero. Default value for FPSCR.FZ.
This bit resets to zero on a Warm reset.

RMode, bits [23:22]

Rounding mode. Default value for FPSCR.RMode.
This field resets to zero on a Warm reset.

Bits [21:0]

Reserved, RES0.

D2.2.83 FPSCR, Floating-point Status and Control Register

The FPSCR characteristics are:


Purpose	Provides control of the floating-point system.
Usage constraints	Privileged access only. Unprivileged access is RAZ/WI.
Configurations	Present only if the Floating-point Extension is implemented. This register is RES0 if the Floating-point Extension is not implemented.
Attributes	32-bit read/write special-purpose register. This register is not banked between Security states.

Preface

Writes to the FPSCR can have side-effects on various aspects of processor operation. All of these side-effects are synchronous to the FPSCR write. This means that they are guaranteed not to be visible to earlier instructions in the execution stream, and they are guaranteed to be visible to later instructions in the execution stream.

Field descriptions

The FPSCR bit assignments are:

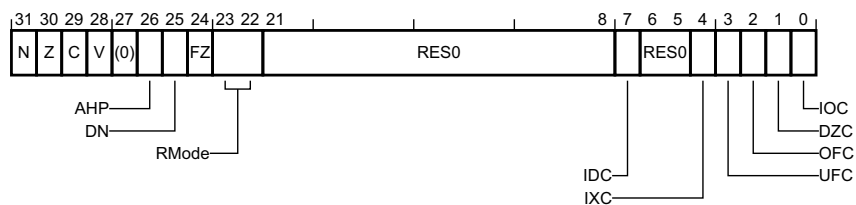

N, bit [31]

Negative condition flag. When updated by a VCMP instruction, this bit indicates whether the result was less than.

The possible values of this bit are:

- 0** Compare result was not less than.
- 1** Compare result was less than.

See VCMP for details.

This bit resets to an UNKNOWN value on a Warm reset.

Z, bit [30]

Zero condition flag. When updated by a VCMP instruction, this bit indicates whether the result was equal.

The possible values of this bit are:

- 0** Compare result was not equal.
- 1** Compare result was equal.

See VCMP for details.

This bit resets to an UNKNOWN value on a Warm reset.

C, bit [29]

Carry condition flag. When updated by a VCMP instruction, this bit indicates whether the result was not less than.

The possible values of this bit are:

- 0** Compare result was less than.

1 Compare result was not less than.
See VCMP for details.
This bit resets to an UNKNOWN value on a Warm reset.

V, bit [28]

Overflow condition flag. When updated by a VCMP instruction, this bit indicates whether the result was unordered.

The possible values of this bit are:

- 0** Compare result was not unordered.
- 1** Compare result was unordered.

See VCMP for details.

This bit resets to an UNKNOWN value on a Warm reset.

Bit [27]

Reserved, RES0.

AHP, bit [26]

Alternative half-precision control bit. This bit controls how the PE interprets 16-bit floating-point values.

The possible values of this bit are:

- 0** IEEE half-precision format selected.
- 1** Alternative half-precision format selected.

This bit resets to an UNKNOWN value on a Warm reset.

DN, bit [25]

Default NaN mode control bit. This bit determines whether floating-point operations propagate NaNs or use the Default NaN.

The possible values of this bit are:

- 0** NaN operands propagate through to the output of a floating-point operation.
- 1** Any operation involving one or more NaNs returns the Default NaN.

This bit resets to an UNKNOWN value on a Warm reset.

FZ, bit [24]

Flush-to-zero mode control. This bit determines whether denormal floating-point values are treated as though zero.

The possible values of this bit are:

- 0** Flush-to-zero mode disabled. Behavior of the floating-point system is fully compliant with the IEEE754 standard.
- 1** Flush-to-zero mode enabled.

This bit resets to an UNKNOWN value on a Warm reset.

RMode, bits [23:22]

Rounding mode control field. This field determines what rounding mode is applied to floating-point operations.

The possible values of this field are:

- 0b00 Round to Nearest (RN) mode.
- 0b01 Round towards Plus Infinity (RP) mode.
- 0b10 Round towards Minus Infinity (RM) mode.
- 0b11 Round towards Zero (RZ) mode.

This field resets to an UNKNOWN value on a Warm reset.

Bits [21:8]

Reserved, RES0.

IDC, bit [7]

Input Denormal cumulative exception bit. This sticky flag records whether a floating-point input denormal exception has been detected since last cleared.

The possible values of this bit are:

0 Input Denormal exception has not occurred since 0 was last written to this bit.

1 Input Denormal exception has occurred since 0 was last written to this bit.

This bit resets to an UNKNOWN value on a Warm reset.

Bits [6:5]

Reserved, RES0.

IXC, bit [4]

Inexact cumulative exception bit. This sticky flag records whether a floating-point inexact exception has been detected since last cleared.

The possible values of this bit are:

0 Inexact exception has not occurred since 0 was last written to this bit.

1 Inexact exception has occurred since 0 was last written to this bit.

This bit resets to an UNKNOWN value on a Warm reset.

UFC, bit [3]

Underflow cumulative exception bit. This sticky flag records whether a floating-point underflow exception has been detected since last cleared.

The possible values of this bit are:

0 Underflow exception has not occurred since 0 was last written to this bit.

1 Underflow exception has occurred since 0 was last written to this bit.

OFC, bit [2]

Overflow cumulative exception bit. This sticky flag records whether a floating-point overflow exception has been detected since last cleared.

The possible values of this bit are:

0 Overflow exception has not occurred since 0 was last written to this bit.

1 Overflow exception has occurred since 0 was last written to this bit.

This bit resets to an UNKNOWN value on a Warm reset.

DZC, bit [1]

Divide by Zero cumulative exception bit. This sticky flag records whether a floating-point divide by zero exception has been detected since last cleared.

The possible values of this bit are:

0 Division by Zero exception has not occurred since 0 was last written to this bit.

1 Division by Zero exception has occurred since 0 was last written to this bit.

This bit resets to an UNKNOWN value on a Warm reset.

IOC, bit [0]

Invalid Operation cumulative exception bit. This sticky flag records whether a floating-point invalid operation exception has been detected since last cleared.

The possible values of this bit are:

0 Invalid Operation exception has not occurred since 0 was last written to this bit.

1 Invalid Operation exception has occurred since 0 was last written to this bit.
This bit resets to an UNKNOWN value on a Warm reset.


D2.2.84 FP_CIDR0, FP Component Identification Register 0

The FP_CIDR0 characteristics are:

Purpose	Provides CoreSight discovery information for the FP.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the FPB is implemented. This register is RES0 if the FPB is not implemented.
Attributes	32-bit read-only register located at 0xE0002FF0. This register is not banked between Security states.

Field descriptions

The FP_CIDR0 bit assignments are:



Bits [31:8]

Reserved, RES0.

PRMBL_0, bits [7:0]

CoreSight component identification preamble. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as 0x0D.


D2.2.86 FP_CIDR2, FP Component Identification Register 2

The FP_CIDR2 characteristics are:

Purpose	Provides CoreSight discovery information for the FP.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the FPB is implemented. This register is RES0 if the FPB is not implemented.
Attributes	32-bit read-only register located at 0xE0002FF8. This register is not banked between Security states.

Field descriptions

The FP_CIDR2 bit assignments are:



Bits [31:8]

Reserved, RES0.

PRMBL_2, bits [7:0]

CoreSight component identification preamble. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as 0x05.

D2.2.88 FP_COMP<n>, Flash Patch Comparator Register, n = 0 - 127


The FP_COMP<n> characteristics are:

Purpose	Holds an address for comparison. The effect of the match depends on the configuration of the FPB and whether the comparator is an instruction address comparator or a literal address comparator.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if the FPB is implemented. This register is RES0 if the FPB is not implemented.
Attributes	32-bit read/write register located at $0xE0002008 + 4n$. This register is not banked between Security states.


Field descriptions

The FP_COMP<n> bit assignments are:

When BE==0:



When BE==1:



BPADDR, bits [31:1], when BE==1

Breakpoint address. Specifies bits[31:1] of the breakpoint instruction address.

FE, bit [31], when BE==0

Flash Patch enable. Specifies if Flash Patch enabled.

The possible values of this bit are:

- 0** Flash Patch disabled.
- 1** Flash Patch enabled.

Bits [30:29], when BE==0

Reserved, RES0.

FPADDR, bits [28:2], when BE==0

Flash Patch address. Specifies bits[28:2] of the Flash Patch address.

Bit [1], when BE==0

Reserved, RES0.

BE, bit [0]

Breakpoint enable. Selects between flashpatch and breakpoint functionality.

The possible values of this bit are:

- 0** Breakpoint disabled, flashpatch mode selected.

1 Breakpoint enabled, flashpatch mode de-selected.
The comparator can be completely disabled by writing the entire register to zero.
This bit resets to zero on a Cold reset.


D2.2.89 FP_CTRL, Flash Patch Control Register

The FP_CTRL characteristics are:

Purpose	Provides FPB implementation information, and the global enable for the FPB unit.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if the FPB is implemented. This register is RES0 if the FPB is not implemented.
Attributes	32-bit read/write register located at 0xE0002000. This register is not banked between Security states.

Field descriptions

The FP_CTRL bit assignments are:

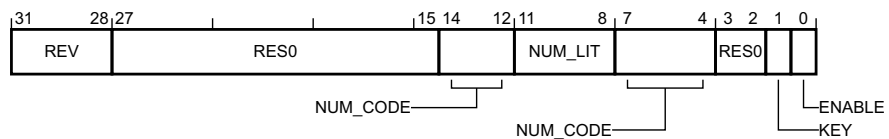

REV, bits [31:28]

Revision. Flash Patch and Breakpoint Unit architecture revision.

The possible values of this field are:

0b0001 Flash Patch Breakpoint version 2 implemented.

All other values are reserved.

This field is read-only.

This field reads as 0b0001.

Bits [27:15]

Reserved, RES0.

NUM_CODE, bits [14:12,7:4]

Number of implemented code comparators. Indicates the number of implemented instruction address comparators. Zero indicates no Instruction Address comparators are implemented. The Instruction Address comparators are numbered from 0 to NUM_CODE - 1.

This field is read-only.

This field reads as an IMPLEMENTATION DEFINED value.

NUM_LIT, bits [11:8]

Number of literal comparators. Indicates the number of implemented literal address comparators. The Literal Address comparators are numbered from NUM_CODE to NUM_CODE + NUM_LIT - 1.

If the Flash Patch remap function is not supported, this field is RES0.

This field is read-only.

This field reads as an IMPLEMENTATION DEFINED value.

Bits [3:2]

Reserved, RES0.

KEY, bit [1]

FP_CTRL write-enable key. Writes to the FP_CTRL are ignored unless KEY is concurrently written to one.

The possible values of this bit are:

- 0** Concurrent write to FP_CTRL ignored.
- 1** Concurrent write to FP_CTRL permitted.

This bit reads-as-zero.

ENABLE, bit [0]

Flashpatch global enable. Enables the FPB.

The possible values of this bit are:

- 0** All FPB functionality disabled.
- 1** FPB enabled.

This bit resets to zero on a Cold reset.


D2.2.90 FP_DEVARCH, FPB Device Architecture Register

The FP_DEVARCH characteristics are:

Purpose	Provides CoreSight discovery information for the FPB.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the FPB is implemented. This register is RES0 if the FPB is not implemented.
Attributes	32-bit read-only register located at 0xE0002FBC. This register is not banked between Security states.

Field descriptions

The FP_DEVARCH bit assignments are:



ARCHITECT, bits [31:21]

Architect. Defines the architect of the component. Bits [31:28] are the JEP106 continuation code (JEP106 bank ID, minus 1) and bits [27:21] are the JEP106 ID code.

The possible values of this field are:

0x23B JEP106 continuation code 0x4, ID code 0x3B. ARM Limited.

Other values are defined by the JEDEC JEP106 standard.

This field reads as 0x23B.

PRESENT, bit [20]

DEVARCH Present. Defines that the DEVARCH register is present.

The possible values of this bit are:

1 DEVARCH information present.

This bit reads as one.

REVISION, bits [19:16]

Revision. Defines the architecture revision of the component.

The possible values of this field are:

0000 FPB architecture v2.0.

This field reads as 0b0000.

ARCHVER, bits [15:12]

Architecture Version. Defines the architecture version of the component.

The possible values of this field are:

0001 FPB architecture v2.

ARCHVER and ARCHPART are also defined as a single field, ARCHID, such that ARCHVER is ARCHID[15:12].

This field reads as 0b0001.

ARCHPART, bits [11:0]

Architecture Part. Defines the architecture of the component.

The possible values of this field are:

0xA03 FPB architecture.

ARCHVER and ARCHPART are also defined as a single field, ARCHID, such that ARCHPART is ARCHID[11:0].

This field reads as 0xA03.


D2.2.92 FP_LAR, FPB Software Lock Access Register

The FP_LAR characteristics are:

Purpose	Provides CoreSight Software Lock control for the FPB, see the <i>ARM® CoreSight™ Architecture Specification</i> for details.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. This register is RAZ/WI if accessed via the debugger.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the FPB is implemented. This register is RES0 if the FPB is not implemented. Present only if the optional Software Lock is implemented. This register is RAZ/WI if the Software Lock is not implemented.
Attributes	32-bit write-only register located at 0xE0002FB0. This register is not banked between Security states.

Field descriptions

The FP_LAR bit assignments are:



KEY, bits [31:0]

Lock Access control.

Writing the key value 0xC5ACCE55 to this field unlocks the lock, enabling write accesses to this component's registers through a memory-mapped interface.

Writing any other value to this register locks the lock, disabling write accesses to this component's registers through a memory mapped interface.


D2.2.93 FP_LSR, FPB Software Lock Status Register

The FP_LSR characteristics are:

Purpose	Provides CoreSight Software Lock status information for the FPB, see the <i>ARM® CoreSight™ Architecture Specification</i> for details.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. This register is RAZ/WI if accessed via the debugger.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the FPB is implemented. This register is RES0 if the FPB is not implemented. Present only if the optional Software Lock is implemented. This register is RAZ/WI if the Software Lock is not implemented.
Attributes	32-bit read-only register located at 0xE0002FB4. This register is not banked between Security states.

Field descriptions

The FP_LSR bit assignments are:

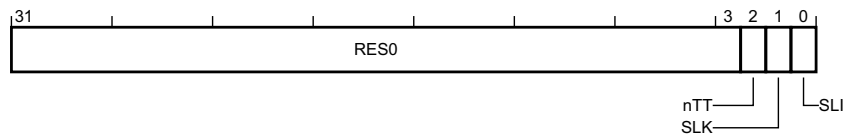

Bits [31:3]

Reserved, RES0.

nTT, bit [2]

Not thirty-two bit. See the *ARM® CoreSight™ Architecture Specification*.

This bit reads as zero.

SLK, bit [1]

Software Lock status. See the *ARM® CoreSight™ Architecture Specification*.

The possible values of this bit are:

- 0** Lock clear. Software writes are permitted to this component's registers.
- 1** Lock set. Software writes to this component's registers are ignored, and reads have no side effects.

For a debugger read of this register, or when the Software Lock is not implemented, this bit is RES0.

This bit resets to one on a Cold reset.

SLI, bit [0]

Software Lock implemented. See the *ARM® CoreSight™ Architecture Specification*.

The possible values of this bit are:

- 0** Software Lock not implemented or debugger access.
- 1** Software Lock is implemented and software access.

For a debugger read of this register, or when the Software Lock is not implemented, this bit is RAZ.

This bit reads as an IMPLEMENTATION DEFINED value.


D2.2.94 FP_PIDR0, FP Peripheral Identification Register 0

The FP_PIDR0 characteristics are:

Purpose	Provides CoreSight discovery information for the FP.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the FPB is implemented. This register is RES0 if the FPB is not implemented.
Attributes	32-bit read-only register located at 0xE0002FE0. This register is not banked between Security states.

Field descriptions

The FP_PIDR0 bit assignments are:



Bits [31:8]

Reserved, RES0.

PART_0, bits [7:0]

Part number bits [7:0]. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.


D2.2.97 FP_PIDR3, FP Peripheral Identification Register 3

The FP_PIDR3 characteristics are:

Purpose	Provides CoreSight discovery information for the FP.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the FPB is implemented. This register is RES0 if the FPB is not implemented.
Attributes	32-bit read-only register located at 0xE0002FEC. This register is not banked between Security states.

Field descriptions

The FP_PIDR3 bit assignments are:



Bits [31:8]

Reserved, RES0.

REVAND, bits [7:4]

RevAnd. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.

CMOD, bits [3:0]

Customer Modified. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.


D2.2.98 FP_PIDR4, FP Peripheral Identification Register 4

The FP_PIDR4 characteristics are:

Purpose	Provides CoreSight discovery information for the FP.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the FPB is implemented. This register is RES0 if the FPB is not implemented.
Attributes	32-bit read-only register located at 0xE0002FD0. This register is not banked between Security states.

Field descriptions

The FP_PIDR4 bit assignments are:



Bits [31:8]

Reserved, RES0.

SIZE, bits [7:4]

4KB count. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as zero.

DES_2, bits [3:0]

JEP106 continuation code. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.

D2.2.99 FP_PIDR5, FP Peripheral Identification Register 5

The FP_PIDR5 characteristics are:

Purpose	Provides CoreSight discovery information for the FP.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the FPB is implemented. This register is RES0 if the FPB is not implemented.
Attributes	32-bit read-only register located at 0xE0002FD4. This register is not banked between Security states.

Field descriptions

The FP_PIDR5 bit assignments are:



Bits [31:0]

Reserved, RES0.

D2.2.100 FP_PIDR6, FP Peripheral Identification Register 6

The FP_PIDR6 characteristics are:

Purpose	Provides CoreSight discovery information for the FP.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the FPB is implemented. This register is RES0 if the FPB is not implemented.
Attributes	32-bit read-only register located at 0xE0002FD8. This register is not banked between Security states.

Field descriptions

The FP_PIDR6 bit assignments are:



Bits [31:0]

Reserved, RES0.


D2.2.101 FP_PIDR7, FP Peripheral Identification Register 7

The FP_PIDR7 characteristics are:

- | | |
|--------------------------|--|
| Purpose | Provides CoreSight discovery information for the FP. |
| Usage constraints | Privileged access permitted only. Unprivileged accesses generate a BusFault.
This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software. |
| Configurations | Present only if CoreSight identification is implemented.
This register is RES0 if CoreSight identification is not implemented.
Present only if the FPB is implemented.
This register is RES0 if the FPB is not implemented. |
| Attributes | 32-bit read-only register located at 0xE0002FDC.
This register is not banked between Security states. |

Field descriptions

The FP_PIDR7 bit assignments are:



Bits [31:0]

Reserved, RES0.


D2.2.102 FP_REMAP, Flash Patch Remap Register

The FP_REMAP characteristics are:

Purpose	Indicates whether the implementation supports Flash Patch remap and, if it does, holds the target address for remap.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if the FPB is implemented. This register is RES0 if the FPB is not implemented.
Attributes	32-bit read-only register located at 0xE0002004. This register is not banked between Security states.

Field descriptions

The FP_REMAP bit assignments are:



Bits [31:30]

Reserved, RES0.

RMPSPT, bit [29]

Remap supported. Indicates whether the FPB unit supports the Flash Patch remap function.

The possible values of this bit are:

0 Flash Patch remap function is not implemented.

1 Flash Patch remap function is implemented.

———— Note ————

The Flash Patch remap function must not be implemented if either the Main Extension is not implemented or the Security Extension is implemented.

This bit reads as an IMPLEMENTATION DEFINED value.

REMAP, bits [28:5]

Remap address. Holds the bits[28:5] of the Flash Patch remap address.

This field is RES0 if the FPB is not implemented, or if the Flash Patch remap function is not supported.

This field resets to an UNKNOWN value on a Cold reset.

Bits [4:0]

Reserved, RES0.


D2.2.103 HFSR, HardFault Status Register

The HFSR characteristics are:

Purpose	Shows the cause of any HardFaults.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read/write-one-to-clear register located at 0xE000ED2C. Secure software can access the Non-secure view of this register via HFSR_NS located at 0xE002ED2C. The location 0xE002ED2C is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The HFSR bit assignments are:

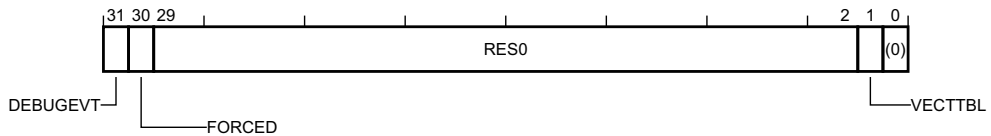

DEBUGEVT, bit [31]

Debug event. Indicates when a Debug event has occurred.

The possible values of this bit are:

- 0** No Debug event has occurred.
- 1** Debug event has occurred. The Debug Fault Status Register has been updated.

The PE sets this bit to 1 only when halting debug is disabled and a Debug event occurs. When AIRCR.BFHFNMINs is set to zero, the Non-secure view of this bit is RAZ/WI.

This bit resets to zero on a Warm reset.

FORCED, bit [30]

Forced. Indicates that a fault with configurable priority has been escalated to a HardFault exception, because it could not be made active, because of priority, or because it was disabled.

The possible values of this bit are:

- 0** No priority escalation has occurred.
- 1** Processor has escalated a configurable-priority exception to HardFault.

When AIRCR.BFHFNMINs is set to zero, the Non-secure view of this bit is RAZ/WI.

This bit resets to zero on a Warm reset.

Bits [29:2]

Reserved, RES0.

VECTTBL, bit [1]

Vector table. Indicates when a fault has occurred because of a vector table read error on exception processing.

The possible values of this bit are:

- 0** No vector table read fault has occurred.

1 Vector table read fault has occurred.

When AIRCR.BFHFNMINs is set to zero, the Non-secure view of this bit is RAZ/WI.

This bit resets to zero on a Warm reset.

Bit [0]

Reserved, RES0.


D2.2.104 ICIALLU, Instruction Cache Invalidate All to PoU

The ICIALLU characteristics are:

- Purpose** Invalidate all instruction caches to PoU.
- Usage constraints** Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
- Configurations** This register is always implemented.
- Attributes** 32-bit write-only register located at 0xE000EF50.
Secure software can access the Non-secure view of this register via ICIALLU_NS located at 0xE002EF50. The location 0xE002EF50 is RES0 to software executing in Non-secure state and the debugger.
This register is not banked between Security states.

Field descriptions

The ICIALLU bit assignments are:



Ignored, bits [31:0]

The value written to this field is ignored. Ignored.


D2.2.105 ICIMVAU, Instruction Cache line Invalidate by Address to PoU

The ICIMVAU characteristics are:

- Purpose** Invalidate instruction cache line by address to PoU.
- Usage constraints** Privileged access permitted only. Unprivileged accesses generate a BusFault.
This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
- Configurations** This register is always implemented.
- Attributes** 32-bit write-only register located at 0xE000EF58.
Secure software can access the Non-secure view of this register via ICIMVAU_NS located at 0xE002EF58. The location 0xE002EF58 is RES0 to software executing in Non-secure state and the debugger.
This register is not banked between Security states.

Field descriptions

The ICIMVAU bit assignments are:



ADDRESS, bits [31:0]

Address. Writing to this field initiates the maintenance operation for the address written.


D2.2.106 ICSR, Interrupt Control and State Register

The ICSR characteristics are:

Purpose	Controls and provides status information for NMI, PendSV, SysTick and interrupts.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000ED04. Secure software can access the Non-secure view of this register via ICSR_NS located at 0xE002ED04. The location 0xE002ED04 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states on a bit by bit basis.

Field descriptions

The ICSR bit assignments are:

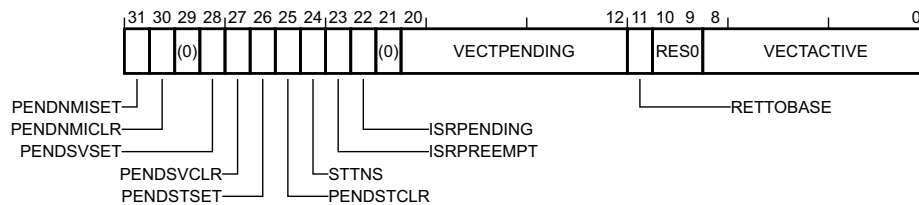

PENDINGNMISET, bit [31], on a write

Pend NMI set. Allows the NMI exception to be set as pending.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** No effect.
- 1** Sets the NMI exception pending.

If both PENDINGNMISET and PENDINGNMICLR are written to one simultaneously, the pending state of the NMI exception becomes UNKNOWN.

This bit is write-one-to-set. Writes of zero are ignored.

If AIRCR.BFHFNMINS is zero this bit is RAZ/WI from Non-secure state.

PENDINGNMISET, bit [31], on a read

Pend NMI set. Indicates whether the NMI exception is pending.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** NMI exception not pending.
- 1** NMI exception pending.

If AIRCR.BFHFNMINS is zero this bit is RAZ/WI from Non-secure state.

This bit resets to zero on a Warm reset.

PENDINGNMICLR, bit [30]

Pend NMI clear. Allows the NMI exception pend state to be cleared.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** No effect.
- 1** Clear pending status.

This bit is write-only, and reads-as-zero.

This bit is write-one-to-clear. Writes of zero are ignored.

If AIRCR.BFHFNMIN is zero this bit is RAZ/WI from Non-secure state.

Bit [29]

Reserved, RES0.

PENDSVSET, bit [28], on a write

Pend PendSV set. Allows the PendSV exception for the selected Security state to be set as pending.

This bit is banked between Security states.

The possible values of this bit are:

- 0** No effect.
- 1** Sets the PendSV exception pending.

If both PENDNSVSET and PENDSVCLR are written to one simultaneously, the pending state of the associated PendSV exception becomes UNKNOWN.

This bit is write-one-to-set. Writes of zero are ignored.

PENDSVSET, bit [28], on a read

Pend PendSV set. Indicates whether the PendSV for the selected Security state exception is pending.

This bit is banked between Security states.

The possible values of this bit are:

- 0** PendSV exception not pending.
- 1** PendSV exception pending.

This bit resets to zero on a Warm reset.

PENDSVCLR, bit [27]

Pend PendSV clear. Allows the PendSV exception pend state to be cleared for the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

- 0** No effect.
- 1** Clear pending status.

This bit is write-only, and reads-as-zero.

This bit is write-one-to-clear. Writes of zero are ignored.

PENDSTSET, bit [26], on a write

Pend SysTick set. Allows the SysTick for the selected Security state exception to be set as pending.

This bit is banked between Security states.

The possible values of this bit are:

- 0** No effect.
- 1** Sets the SysTick exception for the selected Security state pending.

PENDSTSET, bit [26], on a read

Pend SysTick set. Indicates whether the SysTick for the selected Security state exception is pending.

This bit is banked between Security states.

The possible values of this bit are:

- 0** SysTick exception not pending.
- 1** SysTick exception pending.

If both PENDSTSET and PENDSTCLR are written to one simultaneously, the pending state of the associated SysTick exception becomes UNKNOWN.

This bit resets to zero on a Warm reset.

PENDSTCLR, bit [25]

Pend SysTick clear. Allows the SysTick exception pend state to be cleared for the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

- 0** No effect.
- 1** Clear pending status.

This bit is write-only, and reads-as-zero.

This bit is write-one-to-clear. Writes of zero are ignored.

STTNS, bit [24]

SysTick Targets Non-secure. Controls whether in a single SysTick implementation, the SysTick is Secure or Non-secure.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** SysTick is Secure.
- 1** SysTick is Non-secure.

Behaves as RAZ/WI when accessed from Non-secure state, or when either no SysTick or both SysTick timers are implemented.

This bit is RAZ/WI from Non-secure.

This bit resets to zero on a Warm reset.

ISRPREEMPT, bit [23]

Interrupt preempt. Indicates whether a pending exception will be serviced on exit from debug halt state.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** Will not service.
- 1** Will service a pending exception.

The value of this bit is UNKNOWN when not in debug state.

This bit is read-only.

If neither halting debug or the Main Extension are implemented, this bit is RES0.

ISRPENDING, bit [22]

Interrupt pending. Indicates whether an external interrupt, generated by the NVIC, is pending.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** No external interrupt pending.
- 1** External interrupt pending.

This bit is read-only.

If neither halting debug or the Main Extension are implemented, this bit is RES0.

———— **Note** —————

The value of DHCSR.C_MASKINTS is ignored.

Bit [21]

Reserved, RES0.

VECTPENDING, bits [20:12]

Vector pending. The exception number of the highest priority pending and enabled interrupt.

This field is not banked between Security states.

The possible values of this field are:

Zero No pending and enabled exception.

Non zero Exception number.

This field is read-only.

———— **Note** —————

If DHCSR.C_MASKINTS is set, the PendSV, SysTick, and configurable external interrupts are masked and will not be shown as pending in VECTPENDING.

RETTOBASE, bit [11]

Return to base. In Handler mode, indicates whether there is more than one active exception.

This bit is not banked between Security states.

The possible values of this bit are:

0 There is more than one active exception.

1 There is only one active exception.

In Thread mode the value of this bit is UNKNOWN.

This bit is read-only.

If the Main Extension is not implemented, this bit is RES0.

Bits [10:9]

Reserved, RES0.

VECTACTIVE, bits [8:0]

Vector active. The exception number of the current executing exception.

This field is not banked between Security states.

The possible values of this field are:

Zero Thread mode.

Non zero Exception number.

This value is the same as the IPSR Exception number. When the IPSR value has been sent to 1 because of a function call to Non-secure state, this field is also set to 1.

This field is read-only.

If neither halting debug or the Main Extension are implemented, this field is RES0.


D2.2.107 ICTR, Interrupt Controller Type Register

The ICTR characteristics are:

Purpose	Provides information about the interrupt controller.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read-only register located at 0xE000E004. Secure software can access the Non-secure view of this register via ICTR_NS located at 0xE002E004. The location 0xE002E004 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The ICTR bit assignments are:



Bits [31:4]

Reserved, RES0.

INTLINESNUM, bits [3:0]

Interrupt line set number. Indicates the number of the highest implemented register in each of the NVIC control register sets, or in the case of NVIC_IPR n , $4 \times \text{INTLINESNUM}$.

This field reads as an IMPLEMENTATION DEFINED value.

D2.2.109 ID_DFR0, Debug Feature Register 0

The ID_DFR0 characteristics are:

Purpose	Provides top level information about the debug system.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read-only register located at 0xE000ED48. Secure software can access the Non-secure view of this register via ID_DFR0_NS located at 0xE002ED48. The location 0xE002ED48 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.


Preface

If Halting Debug is not implemented this register reads as 0x00000000.

If Halting Debug is implemented this register reads as 0x00200000.

Field descriptions

The ID_DFR0 bit assignments are:



Bits [31:24]

Reserved, RES0.

MProfDbg, bits [23:20]

M-profile debug. Indicates the supported M-profile debug architecture.

The possible values of this field are:

0b0000 Halting Debug is not implemented.

0b0010 ARMv8-M Debug architecture.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

Bits [19:0]

Reserved, RES0.

D2.2.110 ID_ISAR0, Instruction Set Attribute Register 0

The ID_ISAR0 characteristics are:

Purpose	Provides information about the instruction set implemented by the PE.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read-only register located at 0xE000ED60. Secure software can access the Non-secure view of this register via ID_ISAR0_NS located at 0xE002ED60. The location 0xE002ED60 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Preface

If coprocessors excluding the floating-point Extension are not supported this register reads as 0x01101110.

If coprocessors excluding the floating-point Extension are supported this register reads as 0x01141110.

Field descriptions

The ID_ISAR0 bit assignments are:

31	28,27	24,23	20,19	16,15	12,11	8,7	4,3	0
RES0	Divide	Debug	Coproc	CmpBranch	BitField	BitCount	RES0	

Bits [31:28]

Reserved, RES0.

Divide, bits [27:24]

Divide. Indicates the supported Divide instructions.

The possible values of this field are:

0b0001 Supports SDIV and UDIV instructions.

All other values are reserved.

This field reads as 0b0001.

Debug, bits [23:20]

Debug. Indicates the implemented Debug instructions.

The possible values of this field are:

0b0001 Supports BKPT instruction.

All other values are reserved.

This field reads as 0b0001.

Coproc, bits [19:16]

Coprocessor. Indicates the supported Coprocessor instructions.

The possible values of this field are:

0b0000 No coprocessor instructions support other than FPU.

0b0100 Coprocessor instructions supported.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

CmpBranch, bits [15:12]

Compare and branch. Indicates the supported combined Compare and Branch instructions.

The possible values of this field are:

0b0001 Supports CBNZ and CBZ instructions.

All other values are reserved.

This field reads as 0b0001.

BitField, bits [11:8]

Bit field. Indicates the supported bit field instructions.

The possible values of this field are:

0b0001 BFC, BFI, SBFX, and UBFX supported.

All other values are reserved.

This field reads as 0b0001.

BitCount, bits [7:4]

Bit count. Indicates the supported bit count instructions.

The possible values of this field are:

0b0001 CLZ supported.

All other values are reserved.

This field reads as 0b0001.

Bits [3:0]

Reserved, RES0.

D2.2.111 ID_ISAR1, Instruction Set Attribute Register 1

The ID_ISAR1 characteristics are:

Purpose	Provides information about the instruction set implemented by the PE.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read-only register located at 0xE000ED64. Secure software can access the Non-secure view of this register via ID_ISAR1_NS located at 0xE002ED64. The location 0xE002ED64 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.


Preface

If the DSP Extension is not implemented, this register reads as 0x02211000.

If the DSP Extension is implemented, this register reads as 0x02212000.

Field descriptions

The ID_ISAR1 bit assignments are:



Bits [31:28]

Reserved, RES0.

Interwork, bits [27:24]

Interworking. Indicates the implemented Interworking instructions.

The possible values of this field are:

0b0010 BLX, BX, and loads to PC interwork.

All other values are reserved.

This field reads as 0b0010.

Immediate, bits [23:20]

Immediate. Indicates the implemented for data-processing instructions with long immediates.

The possible values of this field are:

0b0010 ADDW, MOVW, MOVT, and SUBW supported.

All other values are reserved.

This field reads as 0b0010.

IfThen, bits [19:16]

If-Then. Indicates the implemented If-Then instructions.

The possible values of this field are:

0b0001 IT instruction supported.

All other values are reserved.

This field reads as 0b0001.

Extend, bits [15:12]

Extend. Indicates the implemented Extend instructions.

The possible values of this field are:

0b0001 SXTB, SXTH, UXTB, and UXTH.

0b0010 Adds SXTB16, SXTAB, SXTAB16, SXTAH, UXTB16, UXTAB, UXTAB16, and UXTAH, DSP Extension only.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

Bits [11:0]

Reserved, RES0.

D2.2.112 ID_ISAR2, Instruction Set Attribute Register 2

The ID_ISAR2 characteristics are:

Purpose	Provides information about the instruction set implemented by the PE.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read-only register located at 0xE000ED68. Secure software can access the Non-secure view of this register via ID_ISAR2_NS located at 0xE002ED68. The location 0xE002ED68 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Preface


With bits [11:8] masked, if the DSP Extension is not implemented, this register reads as 0x20112032.

With bits[11:8] masked, if the DSP Extension is implemented, this register reads as 0x20232032.

The value of bits [11:8] is determined by whether the PE implements restartable or continuable multi-access instructions.

Field descriptions

The ID_ISAR2 bit assignments are:



Reversal, bits [31:28]

Reversal. Indicates the implemented Reversal instructions.

The possible values of this field are:

0b0010 REV, REV16, REVSH and RBIT instructions supported.

All other values are reserved.

This field reads as 0b0010.

Bits [27:24]

Reserved, RES0.

MultU, bits [23:20]

Multiply unsigned. Indicates the implemented advanced unsigned Multiply instructions.

The possible values of this field are:

0b0001 UMULL and UMLAL.

0b0010 Adds UMAAL, DSP Extension only.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

MultS, bits [19:16]

Multiply signed. Indicates the implemented advanced signed Multiply instructions.

The possible values of this field are:

0b0001 SMULL and SMLAL.

0b0011 Adds all saturating and DSP signed multiplies, DSP Extension only.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

Mult, bits [15:12]

Multiplies. Indicates the implemented additional Multiply instructions.

The possible values of this field are:

0b0010 MUL, MLA, and MLS.

All other values are reserved.

This field reads as 0b0010.

MultiAccessInt, bits [11:8]

Multi-access instructions. Indicates the support for interruptible multi-access instructions.

The possible values of this field are:

0b0000 No support. LDM and STM instructions are not interruptible.

0b0001 LDM and STM instructions are restartable.

0b0010 LDM and STM instructions are continuable.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

MemHint, bits [7:4]

Memory hints. Indicates the implemented Memory Hint instructions.

The possible values of this field are:

0b0011 PLI and PLD instructions implemented.

All other values are reserved.

This field reads as 0b0011.

LoadStore, bits [3:0]

Load/store. Indicates the implemented additional load/store instructions.

The possible values of this field are:

0b0010 Supports load-acquire, store-release, and exclusive load and store instructions.

All other values are reserved.

This field reads as 0b0010.

D2.2.113 ID_ISAR3, Instruction Set Attribute Register 3

The ID_ISAR3 characteristics are:

Purpose	Provides information about the instruction set implemented by the PE.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read-only register located at 0xE000ED6C. Secure software can access the Non-secure view of this register via ID_ISAR3_NS located at 0xE002ED6C. The location 0xE002ED6C is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Preface

If the DSP Extension is not implemented, this register reads as 0x01111110.

If the DSP Extension is implemented, this register reads as 0x01111131.

Field descriptions

The ID_ISAR3 bit assignments are:

31	28,27	24,23	20,19	16,15	12,11	8,7	4,3	0
RES0	TrueNOP	T32Copy	TabBranch	SynchPrim	SVC	SIMD	Saturate	

Bits [31:28]

Reserved, RES0.

TrueNOP, bits [27:24]

True no-operation. Indicates the implemented true NOP instructions.

The possible values of this field are:

0b0001 NOP instruction and compatible hints implemented.

All other values are reserved.

This field reads as 0b0001.

T32Copy, bits [23:20]

T32 copy. Indicates the support for T32 non flag-setting MOV instructions.

The possible values of this field are:

0b0001 Encoding T1 of MOV (register) supports copying low register to low register.

All other values are reserved.

This field reads as 0b0001.

TabBranch, bits [19:16]

Table branch. Indicates the implemented Table Branch instructions.

The possible values of this field are:

0b0001 TBB and TBH implemented.

All other values are reserved.

This field reads as 0b0001.

SynchPrim, bits [15:12]

Synchronization primitives. Used in conjunction with ID_ISAR4.SynchPrim_frac to indicate the implemented Synchronization Primitive instructions.

The possible values of this field are:

0b0001 LDREX, STREX, LDREXB, STREXB, LDREXH, STREXH, and CLREX implemented.

All other values are reserved.

This field reads as 0b0001.

SVC, bits [11:8]

Supervisor call. Indicates the implemented SVC instructions.

The possible values of this field are:

0b0001 SVC instruction implemented.

All other values are reserved.

This field reads as 0b0001.

SIMD, bits [7:4]

Single-instruction, multiple-data. Indicates the implemented SIMD instructions.

The possible values of this field are:

0b0001 SSAT, USAT, and Q-bit implemented.

0b0011 Adds all packed arithmetic and GE-bits, DSP Extension only.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

Saturate, bits [3:0]

Saturate. Indicates the implemented saturating instructions.

The possible values of this field are:

0b0000 None implemented.

0b0001 QADD, QDADD, QDSUB, QSUB, and Q-bit implemented, DSP Extension only.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

D2.2.114 ID_ISAR4, Instruction Set Attribute Register 4

The ID_ISAR4 characteristics are:


Purpose	Provides information about the instruction set implemented by the PE.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read-only register located at 0xE000ED70. Secure software can access the Non-secure view of this register via ID_ISAR4_NS located at 0xE002ED70. The location 0xE002ED70 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Preface

This register reads as 0x01310131.

Field descriptions

The ID_ISAR4 bit assignments are:



Bits [31:28]

Reserved, RES0.

PSR_M, bits [27:24]

Program status registers M. Indicates the implemented M profile instructions to modify the PSRs.

The possible values of this field are:

0b0001 M profile forms of CPS, MRS, and MSR implemented.

All other values are reserved.

This field reads as 0b0001.

SyncPrim_frac, bits [23:20]

Synchronization primitives fractional. Used in conjunction with ID_ISAR3.SyncPrim to indicate the implemented Synchronization Primitive instructions.

The possible values of this field are:

0b0011 LDREX, STREX, CLREX, LDREXB, LDREXH, STREXB, and STREXH implemented.

All other values are reserved.

This field reads as 0b0011.

Barrier, bits [19:16]

Barrier. Indicates the implemented Barrier instructions.

The possible values of this field are:

0b0011 DMB, DSB, and ISB barrier instructions implemented.

All other values are reserved.

This field reads as 0b0001.

Bits [15:12]

Reserved, RES0.

Writeback, bits [11:8]

Writeback. Indicates the support for writeback addressing modes.

The possible values of this field are:

0b0001 All writeback addressing modes supported.

All other values are reserved.

This field reads as 0b0001.

WithShifts, bits [7:4]

With shifts. Indicates the support for writeback addressing modes.

The possible values of this field are:

0b0011 Support for constant shifts on load/store and other instructions.

All other values are reserved.

This field reads as 0b0011.

Unpriv, bits [3:0]

Unprivileged. Indicates the implemented unprivileged instructions.

The possible values of this field are:

0b0010 LDRBT, LDRHT, LDRSBT, LDRSHT, LDRT, STRBT, STRHT, and STRT implemented.

All other values are reserved.

This field reads as 0b0010.

D2.2.115 ID_ISAR5, Instruction Set Attribute Register 5

The ID_ISAR5 characteristics are:

Purpose	Provides information about the instruction set implemented by the PE.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read-only register located at 0xE000ED74. Secure software can access the Non-secure view of this register via ID_ISAR5_NS located at 0xE002ED74. The location 0xE002ED74 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The ID_ISAR5 bit assignments are:



Bits [31:0]

Reserved, RES0.


D2.2.116 ID_MMFR0, Memory Model Feature Register 0

The ID_MMFR0 characteristics are:

Purpose	Provides information about the implemented memory model and memory management support.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read-only register located at 0xE000ED50. Secure software can access the Non-secure view of this register via ID_MMFR0_NS located at 0xE002ED50. The location 0xE002ED50 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The ID_MMFR0 bit assignments are:



Bits [31:24]

Reserved, RES0.

AuxReg, bits [23:20]

Auxiliary Registers. Indicates support for Auxiliary Control Registers.

The possible values of this field are:

0b0000 No Auxiliary Control Registers.

0b0001 Auxiliary Control Registers supported.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

TCM, bits [19:16]

Tightly coupled memories. Indicates support for tightly coupled memories (TCMs).

The possible values of this field are:

0b0000 None supported.

0b0001 TCMs supported with IMPLEMENTATION DEFINED control.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

ShareLvl, bits [15:12]

Shareability Levels. Indicates the number of shareability levels implemented.

The possible values of this field are:

0b0000 One level of shareability implemented.

0b0001 Two levels of shareability implemented.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

OuterShr, bits [11:8]

Outermost Shareability. Indicates the outermost shareability domain implemented.

The possible values of this field are:

0b0000 Implemented as Non-cacheable.

0b0001 Implemented with hardware coherency support.

0b1111 Shareability ignored.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

PMSA, bits [7:4]

Protected memory system architecture. Indicates support for the protected memory system architecture (PMSA).

The possible values of this field are:

0b0100 Supports PMSAv8.

All other values are reserved.

This field reads as 0b0100.

Bits [3:0]

Reserved, RES0.

D2.2.117 ID_MMFR1, Memory Model Feature Register 1

The ID_MMFR1 characteristics are:

Purpose	Provides information about the implemented memory model and memory management support.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read-only register located at 0xE000ED54. Secure software can access the Non-secure view of this register via ID_MMFR1_NS located at 0xE002ED54. The location 0xE002ED54 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The ID_MMFR1 bit assignments are:



Bits [31:0]

Reserved, RES0.


D2.2.118 ID_MMFR2, Memory Model Feature Register 2

The ID_MMFR2 characteristics are:

Purpose	Provides information about the implemented memory model and memory management support.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read-only register located at 0xE000ED58. Secure software can access the Non-secure view of this register via ID_MMFR2_NS located at 0xE002ED58. The location 0xE002ED58 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The ID_MMFR2 bit assignments are:



Bits [31:28]

Reserved, RES0.

WFISStall, bits [27:24]

WFI stall. Indicates the support for Wait For Interrupt (WFI) stalling.

The possible values of this field are:

0b0000 WFI never stalls.

0b0001 WFI has the ability to stall.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

Bits [23:0]

Reserved, RES0.


D2.2.119 ID_MMFR3, Memory Model Feature Register 3

The ID_MMFR3 characteristics are:

Purpose	Provides information about the implemented memory model and memory management support.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read-only register located at 0xE000ED5C. Secure software can access the Non-secure view of this register via ID_MMFR3_NS located at 0xE002ED5C. The location 0xE002ED5C is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The ID_MMFR3 bit assignments are:



Bits [31:12]

Reserved, RES0.

BPMaint, bits [11:8]

Branch predictor maintenance. Indicates the supported branch predictor maintenance.

The possible values of this field are:

0b0000 None supported.

0b0001 Support for invalidate all of branch predictors.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

CMaintSW, bits [7:4]

Cache maintenance set/way. Indicates the supported cache maintenance operations by set/way.

The possible values of this field are:

0b0000 None supported.

0b0001 Maintenance by set/way operations supported.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

CMaintVA, bits [3:0]

Cache maintenance by address. Indicates the supported cache maintenance operations by address.

The possible values of this field are:

0b0000 None supported.

0b0001 Maintenance by address and instruction cache invalidate all supported.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

D2.2.120 ID_PFR0, Processor Feature Register 0

The ID_PFR0 characteristics are:


Purpose	Gives top-level information about the instruction set supported by the PE.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read-only register located at 0xE000ED40. Secure software can access the Non-secure view of this register via ID_PFR0_NS located at 0xE002ED40. The location 0xE002ED40 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Preface

This register reads as 0x00000030.

Field descriptions

The ID_PFR0 bit assignments are:



Bits [31:8]

Reserved, RES0.

State1, bits [7:4]

State one. T32 instruction set support.

The possible values of this field are:

0b0011 T32 instruction set including Thumb-2 Technology implemented.

All other values are reserved.

This field reads as 0b0011.

State0, bits [3:0]

State two. A32 instruction set support.

The possible values of this field are:

0b0000 A32 instruction set not implemented.

All other values are reserved.

This field reads as 0b0000.


D2.2.122 IPSR, Interrupt Program Status Register

The IPSR characteristics are:

Purpose	Provides privileged access to the current exception number field.
Usage constraints	Privileged access only. Unprivileged access is RAZ/WI.
Configurations	This register is always implemented.
Attributes	32-bit read/write special-purpose register. This register is not banked between Security states.

Field descriptions

The IPSR bit assignments are:



Bits [31:9]

Reserved, RES0.

Exception, bits [8:0]

Exception number. Holds the exception number of the currently-executing exception, or zero for Thread mode.

The possible values of this field are:

Zero PE in Thread mode.

Non zero PE in Handler mode in given exception number.

This field resets to zero on a Warm reset.


D2.2.126 ITM_CIDR3, ITM Component Identification Register 3

The ITM_CIDR3 characteristics are:

Purpose	Provides CoreSight discovery information for the ITM.
Usage constraints	If the Main Extension is implemented, both privileged and unprivileged accesses are permitted. If the Main Extension is not implemented, unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the ITM is implemented. This register is RES0 if the ITM is not implemented. If the Main Extension is not implemented then the ITM is not implemented.
Attributes	32-bit read-only register located at 0xE0000FFC. This register is not banked between Security states.

Field descriptions

The ITM_CIDR3 bit assignments are:



Bits [31:8]

Reserved, RES0.

PRMBL_3, bits [7:0]

CoreSight component identification preamble. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as 0xB1.

The possible values of this field are:

0001 ITM architecture v2.

ARCHVER and ARCHPART are also defined as a single field, ARCHID, such that ARCHVER is ARCHID[15:12].

This field reads as 0b0001.

ARCHPART, bits [11:0]

Architecture Part. Defines the architecture of the component.

The possible values of this field are:

0xA01 ITM architecture.

ARCHVER and ARCHPART are also defined as a single field, ARCHID, such that ARCHPART is ARCHID[11:0].

This field reads as 0xA01.


D2.2.128 ITM_DEVTYPE, ITM Device Type Register

The ITM_DEVTYPE characteristics are:

Purpose	Provides CoreSight discovery information for the ITM.
Usage constraints	<p>If the Main Extension is implemented, both privileged and unprivileged accesses are permitted.</p> <p>If the Main Extension is not implemented, unprivileged accesses generate a BusFault.</p> <p>This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.</p> <p>If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.</p>
Configurations	<p>Present only if CoreSight identification is implemented.</p> <p>This register is RES0 if CoreSight identification is not implemented.</p> <p>Present only if the ITM is implemented.</p> <p>This register is RES0 if the ITM is not implemented.</p> <p>If the Main Extension is not implemented then the ITM is not implemented.</p>
Attributes	<p>32-bit read/write register located at 0xE000FCC.</p> <p>This register is not banked between Security states.</p>

Field descriptions

The ITM_DEVTYPE bit assignments are:



Bits [31:8]

Reserved, RES0.

SUB, bits [7:4]

Sub-type. Component sub-type.

The possible values of this field are:

0x0 Other. Only permitted if the MAJOR field reads as 0x0.

0x4 Associated with a Bus, stimulus derived from bus activity. Only permitted if the MAJOR field reads as 0x3.

This field reads as an IMPLEMENTATION DEFINED value.

MAJOR, bits [3:0]

Major type. Component major type.

The possible values of this field are:

0x0 Miscellaneous.

0x3 Trace Source.

This field reads as an IMPLEMENTATION DEFINED value.


D2.2.129 ITM_LAR, ITM Software Lock Access Register

The ITM_LAR characteristics are:

Purpose	Provides CoreSight Software Lock control for the ITM, see the <i>ARM® CoreSight™ Architecture Specification</i> for details.
Usage constraints	<p>If the Main Extension is implemented, both privileged and unprivileged accesses are permitted, but unprivileged writes are ignored.</p> <p>If the Main Extension is not implemented, unprivileged accesses generate a BusFault.</p> <p>This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.</p> <p>This register is RAZ/WI if accessed via the debugger.</p>
Configurations	<p>Present only if CoreSight identification is implemented.</p> <p>This register is RES0 if CoreSight identification is not implemented.</p> <p>Present only if the ITM is implemented.</p> <p>This register is RES0 if the ITM is not implemented.</p> <p>If the Main Extension is not implemented then the ITM is not implemented.</p> <p>Present only if the optional Software Lock is implemented.</p> <p>This register is RAZ/WI if the Software Lock is not implemented.</p>
Attributes	<p>32-bit write-only register located at 0xE000FB0.</p> <p>This register is not banked between Security states.</p>

Field descriptions

The ITM_LAR bit assignments are:



KEY, bits [31:0]

Lock Access control.

Writing the key value 0xC5ACCE55 to this field unlocks the lock, enabling write accesses to this component's registers through a memory-mapped interface.

Writing any other value to this register locks the lock, disabling write accesses to this component's registers through a memory mapped interface.


D2.2.130 ITM_LSR, ITM Software Lock Status Register

The ITM_LSR characteristics are:

Purpose	Provides CoreSight Software Lock status information for the ITM, see the <i>ARM® CoreSight™ Architecture Specification</i> for details.
Usage constraints	If the Main Extension is implemented, both privileged and unprivileged accesses are permitted. If the Main Extension is not implemented, unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. This register is RAZ/WI if accessed via the debugger.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the ITM is implemented. This register is RES0 if the ITM is not implemented. If the Main Extension is not implemented then the ITM is not implemented. Present only if the optional Software Lock is implemented. This register is RAZ/WI if the Software Lock is not implemented.
Attributes	32-bit read-only register located at 0xE0000FB4. This register is not banked between Security states.

Field descriptions

The ITM_LSR bit assignments are:

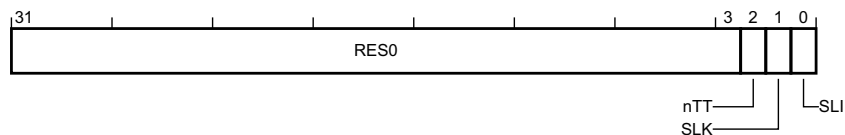

Bits [31:3]

Reserved, RES0.

nTT, bit [2]

Not thirty-two bit. See the *ARM® CoreSight™ Architecture Specification*.
This bit reads as zero.

SLK, bit [1]

Software Lock status. See the *ARM® CoreSight™ Architecture Specification*.
The possible values of this bit are:

- 0** Lock clear. Software writes are permitted to this component's registers.
- 1** Lock set. Software writes to this component's registers are ignored, and reads have no side effects.

For a debugger read of this register, or when the Software Lock is not implemented, this bit is RES0.
This bit resets to one on a Warm reset.

SLI, bit [0]

Software Lock implemented. See the *ARM® CoreSight™ Architecture Specification*.
The possible values of this bit are:

- 0** Software Lock not implemented or debugger access.

1 Software Lock is implemented and software access.
For a debugger read of this register, or when the Software Lock is not implemented, this bit is RAZ.
This bit reads as an IMPLEMENTATION DEFINED value.


D2.2.131 ITM_PIDR0, ITM Peripheral Identification Register 0

The ITM_PIDR0 characteristics are:

Purpose	Provides CoreSight discovery information for the ITM.
Usage constraints	If the Main Extension is implemented, both privileged and unprivileged accesses are permitted. If the Main Extension is not implemented, unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the ITM is implemented. This register is RES0 if the ITM is not implemented. If the Main Extension is not implemented then the ITM is not implemented.
Attributes	32-bit read-only register located at 0xE000FE0. This register is not banked between Security states.

Field descriptions

The ITM_PIDR0 bit assignments are:



Bits [31:8]

Reserved, RES0.

PART_0, bits [7:0]

Part number bits [7:0]. See the *ARM® CoreSight™ Architecture Specification*.
This field reads as an IMPLEMENTATION DEFINED value.


D2.2.133 ITM_PIDR2, ITM Peripheral Identification Register 2

The ITM_PIDR2 characteristics are:

Purpose	Provides CoreSight discovery information for the ITM.
Usage constraints	If the Main Extension is implemented, both privileged and unprivileged accesses are permitted. If the Main Extension is not implemented, unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the ITM is implemented. This register is RES0 if the ITM is not implemented. If the Main Extension is not implemented then the ITM is not implemented.
Attributes	32-bit read-only register located at 0xE0000FE8. This register is not banked between Security states.

Field descriptions

The ITM_PIDR2 bit assignments are:



Bits [31:8]

Reserved, RES0.

REVISION, bits [7:4]

Component revision. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.

JEDEC, bit [3]

JEDEC assignee value is used. See the *ARM® CoreSight™ Architecture Specification*.

This bit reads as one.

DES_1, bits [2:0]

JEP106 identification code bits [6:4]. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.


D2.2.134 ITM_PIDR3, ITM Peripheral Identification Register 3

The ITM_PIDR3 characteristics are:

Purpose	Provides CoreSight discovery information for the ITM.
Usage constraints	If the Main Extension is implemented, both privileged and unprivileged accesses are permitted. If the Main Extension is not implemented, unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the ITM is implemented. This register is RES0 if the ITM is not implemented. If the Main Extension is not implemented then the ITM is not implemented.
Attributes	32-bit read-only register located at 0xE000FEC. This register is not banked between Security states.

Field descriptions

The ITM_PIDR3 bit assignments are:



Bits [31:8]

Reserved, RES0.

REVAND, bits [7:4]

RevAnd. See the *ARM® CoreSight™ Architecture Specification*.
This field reads as an IMPLEMENTATION DEFINED value.

CMOD, bits [3:0]

Customer Modified. See the *ARM® CoreSight™ Architecture Specification*.
This field reads as an IMPLEMENTATION DEFINED value.


D2.2.135 ITM_PIDR4, ITM Peripheral Identification Register 4

The ITM_PIDR4 characteristics are:

Purpose	Provides CoreSight discovery information for the ITM.
Usage constraints	If the Main Extension is implemented, both privileged and unprivileged accesses are permitted. If the Main Extension is not implemented, unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the ITM is implemented. This register is RES0 if the ITM is not implemented. If the Main Extension is not implemented then the ITM is not implemented.
Attributes	32-bit read-only register located at 0xE000FD0. This register is not banked between Security states.

Field descriptions

The ITM_PIDR4 bit assignments are:



Bits [31:8]

Reserved, RES0.

SIZE, bits [7:4]

4KB count. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as zero.

DES_2, bits [3:0]

JEP106 continuation code. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.


D2.2.136 ITM_PIDR5, ITM Peripheral Identification Register 5

The ITM_PIDR5 characteristics are:

Purpose	Provides CoreSight discovery information for the ITM.
Usage constraints	If the Main Extension is implemented, both privileged and unprivileged accesses are permitted. If the Main Extension is not implemented, unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the ITM is implemented. This register is RES0 if the ITM is not implemented. If the Main Extension is not implemented then the ITM is not implemented.
Attributes	32-bit read-only register located at 0xE000FD4. This register is not banked between Security states.

Field descriptions

The ITM_PIDR5 bit assignments are:



Bits [31:0]

Reserved, RES0.


D2.2.137 ITM_PIDR6, ITM Peripheral Identification Register 6

The ITM_PIDR6 characteristics are:

Purpose	Provides CoreSight discovery information for the ITM.
Usage constraints	If the Main Extension is implemented, both privileged and unprivileged accesses are permitted. If the Main Extension is not implemented, unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the ITM is implemented. This register is RES0 if the ITM is not implemented. If the Main Extension is not implemented then the ITM is not implemented.
Attributes	32-bit read-only register located at 0xE000FD8. This register is not banked between Security states.

Field descriptions

The ITM_PIDR6 bit assignments are:



Bits [31:0]

Reserved, RES0.


D2.2.138 ITM_PIDR7, ITM Peripheral Identification Register 7

The ITM_PIDR7 characteristics are:

Purpose	Provides CoreSight discovery information for the ITM.
Usage constraints	If the Main Extension is implemented, both privileged and unprivileged accesses are permitted. If the Main Extension is not implemented, unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the ITM is implemented. This register is RES0 if the ITM is not implemented. If the Main Extension is not implemented then the ITM is not implemented.
Attributes	32-bit read-only register located at 0xE000FDC. This register is not banked between Security states.

Field descriptions

The ITM_PIDR7 bit assignments are:



Bits [31:0]

Reserved, RES0.

D2.2.139 ITM_STIM<n>, ITM Stimulus Port Register, n = 0 - 255

The ITM_STIM<n> characteristics are:

- Purpose** Provides the interface for generating Instrumentation packets.
- Usage constraints**

If the Main Extension is implemented, both privileged and unprivileged accesses are permitted, but unprivileged writes are ignored if ITM_TPR.PRIVMASK[n/8] is set to one. If the Main Extension is not implemented, unprivileged accesses generate a BusFault.

All writes are ignored if ITM_TCR.ITMENA == 0 or ITM_TER{n DIV 32}.STIMENA[n MOD 32] == 0.

This register is word, halfword, and byte accessible.

Accesses that are not word aligned are UNPREDICTABLE.
- Configurations**

Present only if the ITM is implemented.

This register is RES0 if the ITM is not implemented.

If the Main Extension is not implemented then the ITM is not implemented.
- Attributes**


32-bit read/write register located at 0xE0000000 + 4n.

This register is not banked between Security states.


Field descriptions

The ITM_STIM<n> bit assignments are:

On a read:



On a write:



STIMULUS, bits [31:0], on a write

Stimulus data. Data to write to the Stimulus Port FIFO, for forwarding as an Instrumentation packet. The size of write access determines the type of Instrumentation packet generated.

Bits [31:2], on a read

Reserved, RES0.

DISABLED, bit [1], on a read

Disabled. Indicates whether the Stimulus Port is enabled or disabled.

The possible values of this bit are:

- 0** Stimulus Port and ITM are enabled.
- 1** Stimulus Port or ITM is disabled.

FIFOREADY, bit [0], on a read

FIFO ready. Indicates whether the Stimulus Port can accept data.

The possible values of this bit are:

- 0** Stimulus Port cannot accept data.
- 1** Stimulus Port can accept at least one word.


D2.2.140 ITM_TCR, ITM Trace Control Register

The ITM_TCR characteristics are:

Purpose	Configures and controls transfers through the ITM interface.
Usage constraints	If the Main Extension is implemented, both privileged and unprivileged accesses are permitted, but unprivileged writes are ignored. If the Main Extension is not implemented, unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the ITM is implemented. This register is RES0 if the ITM is not implemented. If the Main Extension is not implemented then the ITM is not implemented.
Attributes	32-bit read/write register located at 0xE0000E80. This register is not banked between Security states.

Field descriptions

The ITM_TCR bit assignments are:

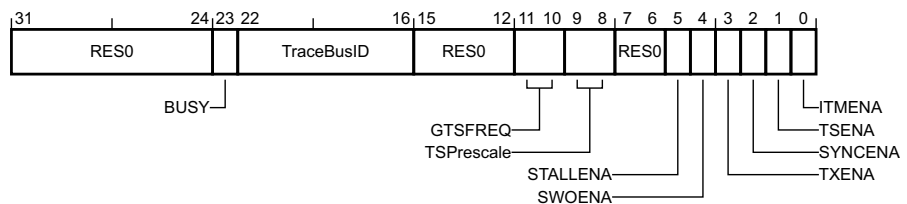

Bits [31:24]

Reserved, RES0.

BUSY, bit [23]

ITM busy. Indicates whether the ITM is currently processing events.

The possible values of this bit are:

- 0** ITM is not processing any events.
- 1** Events present and being drained.

Events means the ITM is generating or processing any of:

- Packets generated by the ITM from writes to Stimulus Ports.
- Other packets generated by the ITM itself.
- Packets generated by the DWT.

This bit is read-only.

TraceBusID, bits [22:16]

Trace bus identity. Identifier for multi-source trace stream formatting. If multi-source trace is in use, the debugger must write a non-zero value to this field.

The possible values of this field are:

- Zero** Multi-source trace not in use.
- Non zero** ID number to be used for ITM trace packets.

If the ITM does not support multi-source trace stream formatting, this field is RES0.

This field resets to an UNKNOWN value on a Cold reset.

Bits [15:12]

Reserved, RES0.

GTSFREQ, bits [11:10]

Global timestamp frequency. Defines how often the ITM generates a global timestamp, based on the global timestamp clock frequency, or disables generation of global timestamps.

The possible values of this field are:

- 0b00 Disable generation of Global Timestamp packets.
- 0b01 Generate timestamp request whenever the ITM detects a change in global timestamp counter bits [47:7]. This is approximately every 128 cycles.
- 0b10 Generate timestamp request whenever the ITM detects a change in global timestamp counter bits [47:13]. This is approximately every 8192 cycles.
- 0b11 Generate a timestamp after every packet, if the output FIFO is empty.

If the implementation does not support global timestamping then these bits are reserved, RAZ/WI.

This field resets to zero on a Cold reset.

TSPrescale, bits [9:8]

Timestamp prescale. Local timestamp prescaler, used with the trace packet reference clock.

The possible values of this field are:

- 0b00 No prescaling.
- 0b01 Divide by 4.
- 0b10 Divide by 16.
- 0b11 Divide by 64.

If the processor does not implement the timestamp prescaler then these bits are reserved, RAZ/WI.

This field resets to zero on a Cold reset.

Bits [7:6]

Reserved, RES0.

STALLENA, bit [5]

Stall enable. Stall the PE to guarantee delivery of Data Trace packets.

The possible values of this bit are:

- 0 Drop Hardware Source packets and generate an Overflow packet if the ITM output is stalled.
- 1 Stall the PE to guarantee delivery of Data Trace packets.

If stalling is not implemented, this bit is RAZ/WI.

SWOENA, bit [4]

SWO enable. Enables asynchronous clocking of the timestamp counter.

The possible values of this bit are:

- 0 Timestamp counter uses the processor system clock.
- 1 Timestamp counter uses asynchronous clock from the TPIU interface. The timestamp counter is held in reset while the output line is idle.

Which clocking modes are implemented is IMPLEMENTATION DEFINED. If the implementation does not support both modes this bit is either RAZ or RAO, to indicate the implemented mode.

This bit resets to an UNKNOWN value on a Cold reset.

TXENA, bit [3]

Transmit enable. Enables forwarding of hardware event packet from the DWT unit to the ITM for output to the TPIU.

The possible values of this bit are:

0 Disabled.

1 Enabled.

It is IMPLEMENTATION DEFINED whether the DWT discards packets that it cannot forward to the ITM.

This bit resets to zero on a Cold reset.

———— **Note** —————

If a debugger changes this bit from 0 to 1, the DWT might forward a hardware event packet that it has previously generated.

SYNCENA, bit [2]

Synchronization enable. Enables Synchronization packet transmission for a synchronous TPIU.

The possible values of this bit are:

0 Disabled.

1 Enabled.

This bit resets to zero on a Cold reset.

———— **Note** —————

If a debugger sets this bit to 1 it must also configure DWT_CTRL.SYNTAP for the correct synchronization speed.

TSENA, bit [1]

Timestamp enable. Enables Local timestamp generation.

The possible values of this bit are:

0 Disabled.

1 Enabled.

This bit resets to zero on a Cold reset.

ITMENA, bit [0]

ITM enable. Enables the ITM.

The possible values of this bit are:

0 Disabled.

1 Enabled.

This is the master enable for the ITM unit. A debugger must set this bit to 1 to permit writes to all Stimulus Port registers.

This bit resets to zero on a Cold reset.


D2.2.141 ITM_TER<n>, ITM Trace Enable Register, n = 0 - 7

The ITM_TER<n> characteristics are:

Purpose	Provide an individual enable bit for each ITM_STIM register.
Usage constraints	If the Main Extension is implemented, both privileged and unprivileged accesses are permitted. If the Main Extension is not implemented, unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the ITM is implemented. This register is RES0 if the ITM is not implemented. If the Main Extension is not implemented then the ITM is not implemented.
Attributes	32-bit read/write register located at $0xE0000E00 + 4n$. This register is not banked between Security states.

Field descriptions

The ITM_TER<n> bit assignments are:



STIMENA, bits [31:0]

Stimulus enable. For STIMENA[m] in ITM_TER n , controls whether ITM_STIM(32n + m) is enabled.

The possible values of each bit are:

- 0** Stimulus port (32n + m) disabled.
- 1** Stimulus port (32n + m) enabled.

Bits corresponding to unimplemented stimulus ports are RAZ/WI. Unprivileged writes to ITM_TER n do not update STIMENA[m] if ITM_TPR.PRIVMASK[(32n+m) DIV 8] is set to 1.

This field resets to zero on a Cold reset.


D2.2.142 ITM_TPR, ITM Trace Privilege Register

The ITM_TPR characteristics are:

Purpose	Controls which stimulus ports can be accessed by unprivileged code.
Usage constraints	If the Main Extension is implemented, both privileged and unprivileged accesses are permitted, but unprivileged writes are ignored. If the Main Extension is not implemented, unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the ITM is implemented. This register is RES0 if the ITM is not implemented. If the Main Extension is not implemented then the ITM is not implemented.
Attributes	32-bit read/write register located at 0xE0000E40. This register is not banked between Security states.

Field descriptions

The ITM_TPR bit assignments are:



PRIVMASK, bits [31:0]

Privilege mask. For PRIVMASK[m], defines the access permissions of ITM_STIM Stimulus Ports $8m$ to $8m+7$ inclusive.

The possible values of each bit are:

0 Unprivileged access permitted.

1 Privileged access only.

Bits corresponding to unimplemented stimulus ports are RAZ/WI.

This field resets to zero on a Cold reset.


D2.2.143 LR, Link Register

The LR characteristics are:

- Purpose** Exception and procedure call link register.
- Usage constraints** Privileged and unprivileged access permitted.
- Configurations** This register is always implemented.
- Attributes** 32-bit read/write special-purpose register.
This register is not banked between Security states.

Field descriptions

The LR bit assignments are:



VALUE, bits [31:0]

Link register. 32-bit link register updated to hold a return address, `FNC_RETURN` or `EXC_RETURN` on a function call or exception entry. LR can be used as a general-purpose register.

Software can refer to LR as R14.

This field resets to `0xFFFFFFFF` on a Warm reset if the Main Extension is implemented.

———— **Note** ————

In general, ARM strongly recommends using the names SP, LR and PC instead of R13, R14 and R15. However, sometimes it is simpler to use the R13-R15 names when referring to a group of registers. For example, it is simpler to refer to registers R8 to R15, rather than to registers R8 to R12, the SP, LR and PC. These two descriptions of the group of registers have exactly the same meaning.

D2.2.144 MAIR_ATTR, Memory Attribute Indirection Register Attributes


The MAIR_ATTR characteristics are:

Purpose	Defines the memory attribute encoding for use in the MPU_MAIR0 and MPU_MAIR1.
Usage constraints	None.
Configurations	All.
Attributes	8-bit payload.


Field descriptions

The MAIR_ATTR bit assignments are:

When Outer != '0000':



When Outer == '0000':



Outer, bits [7:4]

Outer attributes. Specifies the Outer memory attributes.

The possible values of this field are:

0b0000	Device memory.
0b00RW	Normal memory, Outer write-through transient (RW!='00').
0b0100	Normal memory, Outer non-cacheable.
0b01RW	Normal memory, Outer write-back transient (RW!='00').
0b10RW	Normal memory, Outer write-through non-transient.
0b11RW	Normal memory, Outer write-back non-transient.

R and W specify the outer read and write allocation policy: 0 = do not allocate, 1 = allocate.

Device, bits [3:2], when Outer == '0000'

Device attributes. Specifies the memory attributes for Device.

The possible values of this field are:

0b00	Device-nGnRnE.
0b01	Device-nGnRE.
0b10	Device-nGRE.
0b11	Device-GRE.

Bits [1:0], when Outer == '0000'

Reserved, RES0.

Inner, bits [3:0], when Outer != '0000'

Inner attributes. Specifies the Inner memory attributes.

The possible values of this field are:

0b0000	UNPREDICTABLE.
--------	----------------

0b00RW Normal memory, Inner write-through transient (RW!=‘00’).

0b0100 Normal memory, Inner non-cacheable.

0b01RW Normal memory, Inner write-back transient (RW!=‘00’).

0b10RW Normal memory, Inner write-through non-transient.

0b11RW Normal memory, Inner write-back non-transient.

R and W specify the inner read and write allocation policy: 0 = do not allocate, 1 = allocate.


D2.2.145 MMFAR, MemManage Fault Address Register

The MMFAR characteristics are:

Purpose	Shows the address of the memory location that caused an MPU fault.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read/write register located at 0xE000ED34. Secure software can access the Non-secure view of this register via MMFAR_NS located at 0xE002ED34. The location 0xE002ED34 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Field descriptions

The MMFAR bit assignments are:



ADDRESS, bits [31:0]

Data address for an MemManage fault. This register is updated with the address of a location that produced a MemManage fault. The MMFSR shows the cause of the fault, and whether this field is valid. This field is valid only when MMFSR.MMARVALID is set, otherwise it is UNKNOWN.

In implementations without unique BFAR and MMFAR registers, the value of this register is UNKNOWN if BFSR.BFARVALID is set.

This field resets to an UNKNOWN value on a Warm reset.


D2.2.146 MMFSR, MemManage Fault Status Register

The MMFSR characteristics are:

Purpose	Shows the status of MPU faults.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. If the Main Extension is implemented, this register is word, halfword, and byte accessible. If the Main Extension is not implemented, this register is word accessible only, halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	8-bit read/write-one-to-clear register located at 0xE000ED28. Secure software can access the Non-secure view of this register via MMFSR_NS located at 0xE002ED28. The location 0xE002ED28 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states. This register is part of CFSR.

Field descriptions

The MMFSR bit assignments are:

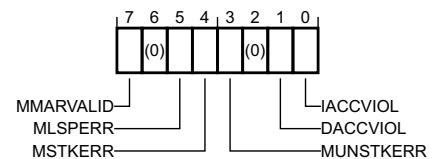

MMARVALID, bit [7]

MMFAR valid flag. Indicates validity of the MMFAR register.

The possible values of this bit are:

- 0** MMFAR content not valid.
- 1** MMFAR content valid.

This bit resets to zero on a Warm reset.

Bit [6]

Reserved, RES0.

MLSPERR, bit [5]

MemManage lazy state preservation error flag. Records whether a MemManage fault occurred during FP lazy state preservation.

The possible values of this bit are:

- 0** No MemManage occurred.
- 1** MemManage occurred.

This bit resets to zero on a Warm reset.

MSTKERR, bit [4]

MemManage stacking error flag. Records whether a derived MemManage fault occurred during exception entry stacking.

The possible values of this bit are:

- 0** No derived MemManage occurred.

1 Derived MemManage occurred during exception entry.

This bit resets to zero on a Warm reset.

MUNSTKERR, bit [3]

MemManage unstacking error flag. Records whether a derived MemManage fault occurred during exception return unstacking.

The possible values of this bit are:

0 No derived MemManage fault occurred.

1 Derived MemManage fault occurred during exception return.

This bit resets to zero on a Warm reset.

Bit [2]

Reserved, RES0.

DACCVIOL, bit [1]

Data access violation flag. Records whether a data access violation has occurred.

The possible values of this bit are:

0 No MemManage fault on data access has occurred.

1 MemManage fault on data access has occurred.

A DACCVIOL will be accompanied by an MMFAR update.

This bit resets to zero on a Warm reset.

IACCVIOL, bit [0]

Instruction access violation. Records whether an instruction related memory access violation has occurred.

The possible values of this bit are:

0 No MemManage fault on instruction access has occurred.

1 MemManage fault on instruction access has occurred.

An IACCVIOL is only recorded if a faulted instruction is executed.

This bit resets to zero on a Warm reset.


D2.2.147 MPU_CTRL, MPU Control Register

The MPU_CTRL characteristics are:

Purpose	Enables the MPU and, when the MPU is enabled, controls whether the default memory map is enabled as a background region for privileged accesses, and whether the MPU is enabled for HardFaults, NMIs, and exception handlers when FAULTMASK is set to 1.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000ED94. Secure software can access the Non-secure view of this register via MPU_CTRL_NS located at 0xE002ED94. The location 0xE002ED94 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Field descriptions

The MPU_CTRL bit assignments are:

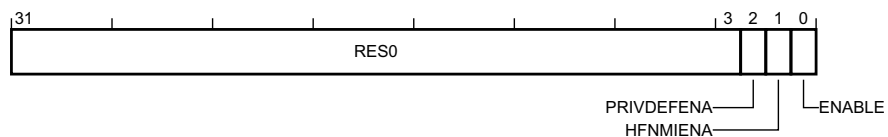

Bits [31:3]

Reserved, RES0.

PRIVDEFENA, bit [2]

Privileged default enable. Controls whether the default memory map is enabled for privileged software.

The possible values of this bit are:

- 0** Use of default memory map disabled.
- 1** Use of default memory map enabled for privilege code.

When the ENABLE bit is set to 0, the PE ignores the PRIVDEFENA bit. If no regions are enabled and the PRIVDEFENA and ENABLE bits are set to 1, only privileged code can execute from the system address map. If no MPU regions are implemented this bit is RES0.

This bit resets to zero on a Warm reset.

HFNMIENA, bit [1]

HardFault, NMI enable. Controls whether handlers executing with priority less than 0 access memory with the MPU enabled or disabled. This applies to HardFaults, NMIs, and exception handlers when FAULTMASK is set to 1.

The possible values of this bit are:

- 0** MPU disabled for these handlers.
- 1** MPU enabled for these handlers.

If HFNMIENA is set to 1 when ENABLE is set to 0, behavior is UNPREDICTABLE. If no MPU regions are implemented this bit is RES0.

This bit resets to zero on a Warm reset.

ENABLE, bit [0]

Enable. Enables the MPU.

The possible values of this bit are:

- 0** The MPU is disabled.
- 1** The MPU is enabled.

Disabling the MPU, by setting the ENABLE bit to 0, means that privileged and unprivileged accesses use the default memory map. If no MPU regions are implemented this bit is RES0.

This bit resets to zero on a Warm reset.

D2.2.148 MPU_MAIR0, MPU Memory Attribute Indirection Register 0

The MPU_MAIR0 characteristics are:


Purpose	Along with MPU_MAIR1, provides the memory attribute encodings corresponding to the AttrIndex values.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000EDC0. Secure software can access the Non-secure view of this register via MPU_MAIR0_NS located at 0xE002EDC0. The location 0xE002EDC0 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Preface

This register is RES0 if no MPU regions are implemented in the corresponding Security state.

Field descriptions

The MPU_MAIR0 bit assignments are:



Attr m , bits [8 m +7:8 m], for $m = 0$ to 3

Attribute m . Memory attribute encoding for MPU regions with an AttrIndex of m .

The possible values of this field are:

All See MAIR_ATTR for encoding.

This field resets to an UNKNOWN value on a Warm reset.

D2.2.149 MPU_MAIR1, MPU Memory Attribute Indirection Register 1

The MPU_MAIR1 characteristics are:


Purpose	Along with MPU_MAIR0, provides the memory attribute encodings corresponding to the AttrIndex values.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000EDC4. Secure software can access the Non-secure view of this register via MPU_MAIR1_NS located at 0xE002EDC4. The location 0xE002EDC4 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Preface

This register is RES0 if no MPU regions are implemented in the corresponding Security state.

Field descriptions

The MPU_MAIR1 bit assignments are:



Attr m , bits [8($m-4$)+7:8($m-4$)], for $m = 4$ to 7

Attribute m . Memory attribute encoding for MPU regions with an AttrIndex of m .

The possible values of this field are:

All See MAIR_ATTR for encoding.

This field resets to an UNKNOWN value on a Warm reset.

D2.2.150 MPU_RBAR, MPU Region Base Address Register

The MPU_RBAR characteristics are:


Purpose	Provides indirect read and write access to the base address of the currently selected MPU region for the selected Security state.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000ED9C. Secure software can access the Non-secure view of this register via MPU_RBAR_NS located at 0xE002ED9C. The location 0xE002ED9C is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Preface

This register provides access to the configuration of the MPU region selected by MPU_RNR.REGION for the appropriate Security state. The field descriptions apply to the currently selected region.

Field descriptions

The MPU_RBAR bit assignments are:



BASE, bits [31:5]

Base address. Contains bits [31:5] of the lower inclusive limit of the selected MPU memory region. This value is zero extended to provide the base address to be checked against.
This field resets to an UNKNOWN value on a Warm reset.

SH, bits [4:3]

Shareability. Defines the Shareability domain of this region for Normal memory.

The possible values of this field are:

0b00 Non-shareable.

0b10 Outer Shareable.

0b11 Inner Shareable.

All other values are reserved.

For any type of Device memory, the value of this field is ignored.

This field resets to an UNKNOWN value on a Warm reset.

AP[2:1], bits [2:1]

Access permissions. Defines the access permissions for this region.

The possible values of this field are:

0b00 Read/write by privileged code only.

0b01 Read/write by any privilege level.

0b10 Read-only by privileged code only.

0b11 Read-only by any privilege level.

This field resets to an UNKNOWN value on a Warm reset.

XN, bit [0]

Execute never. Defines whether code can be executed from this region.

The possible values of this bit are:

0 Execution only permitted if read permitted.

1 Execution not permitted.

This bit resets to an UNKNOWN value on a Warm reset.

D2.2.151 MPU_RBAR_A<n>, MPU Region Base Address Register Alias, n = 1 - 3

The MPU_RBAR_A<n> characteristics are:


Purpose	Provides indirect read and write access to the base address of the MPU region selected by MPU_RNR[7:2]:(n[1:0]) for the selected Security state.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read/write register located at 0xE000EDA4 + 8(n-1). Secure software can access the Non-secure view of this register via MPU_RBAR_A<n>_NS located at 0xE002EDA4 + 8(n-1). The location 0xE002EDA4 + 8(n-1) is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Preface

This register is an alias of the MPU_RBAR register and provides access to the configuration of the MPU region selected by MPU_RNR.REGION had REGION[1:0] been set to n[1:0].

Field descriptions

The MPU_RBAR_A<n> bit assignments are:



BASE, bits [31:5]

Base address. Contains bits [31:5] of the lower inclusive limit of the selected MPU memory region. This value is zero extended to provide the base address to be checked against.
This field resets to an UNKNOWN value on a Warm reset.

SH, bits [4:3]

Shareability. Defines the Shareability domain of this region for Normal memory.
The possible values of this field are:

0b00	Non-shareable.
0b10	Outer Shareable.
0b11	Inner Shareable.

All other values are reserved.
For any type of Device memory, the value of this field is ignored.
This field resets to an UNKNOWN value on a Warm reset.

AP[2:1], bits [2:1]

Access permissions. Defines the access permissions for this region.
The possible values of this field are:

0b00	Read/write by privileged code only.
0b01	Read/write by any privilege level.
0b10	Read-only by privileged code only.

0b11 Read-only by any privilege level.
This field resets to an UNKNOWN value on a Warm reset.

XN, bit [0]

Execute never. Defines whether code can be executed from this region.

The possible values of this bit are:

0 Execution only permitted if read permitted.

1 Execution not permitted.

This bit resets to an UNKNOWN value on a Warm reset.

D2.2.152 MPU_RLAR, MPU Region Limit Address Register

The MPU_RLAR characteristics are:


Purpose	Provides indirect read and write access to the limit address of the currently selected MPU region for the selected Security state.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000EDA0. Secure software can access the Non-secure view of this register via MPU_RLAR_NS located at 0xE002EDA0. The location 0xE002EDA0 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Preface

This register provides access to the configuration of the MPU region selected by MPU_RNR.REGION for the appropriate Security state. The field descriptions apply to the currently selected region.

Field descriptions

The MPU_RLAR bit assignments are:



LIMIT, bits [31:5]

Limit address. Contains bits [31:5] of the upper inclusive limit of the selected MPU memory region. This value is postfixed with 0x1F to provide the limit address to be checked against. This field resets to an UNKNOWN value on a Warm reset.

Bit [4]

Reserved, RES0.

AttrIdx, bits [3:1]

Attribute index. Associates a set of attributes in the MPU_MAIR0 and MPU_MAIR1 fields. This field resets to an UNKNOWN value on a Warm reset.

EN, bit [0]

Enable. Region enable.

The possible values of this bit are:

0 Region disabled.

1 Region enabled.

This bit resets to zero on a Warm reset.


D2.2.154 MPU_RNR, MPU Region Number Register

The MPU_RNR characteristics are:

Purpose	Selects the region currently accessed by MPU_RBAR and MPU_RLAR.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000ED98. Secure software can access the Non-secure view of this register via MPU_RNR_NS located at 0xE002ED98. The location 0xE002ED98 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Field descriptions

The MPU_RNR bit assignments are:



Bits [31:8]

Reserved, RES0.

REGION, bits [7:0]

Region number. Indicates the memory region accessed by MPU_RBAR and MPU_RLAR.
If no MPU regions are implemented, this field is RES0. Writing a value corresponding to an unimplemented region is CONSTRAINED UNPREDICTABLE.
This field resets to an UNKNOWN value on a Warm reset.


D2.2.155 MPU_TYPE, MPU Type Register

The MPU_TYPE characteristics are:

Purpose	The MPU Type Register indicates how many regions the MPU for the selected Security state supports.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read-only register located at 0xE000ED90. Secure software can access the Non-secure view of this register via MPU_TYPE_NS located at 0xE002ED90. The location 0xE002ED90 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Field descriptions

The MPU_TYPE bit assignments are:



Bits [31:16]

Reserved, RES0.

DREGION, bits [15:8]

Data regions. Number of regions supported by the MPU.

If this field reads-as-zero, the PE does not implement an MPU for the selected Security state.

This field reads as an IMPLEMENTATION DEFINED value.

Bits [7:1]

Reserved, RES0.

SEPARATE, bit [0]

Separate. Indicates support for separate instructions and data address regions.

ARMv8-M only supports unified MPU regions.

This bit reads as zero.

D2.2.156 MSPLIM, Main Stack Pointer Limit Register

The MSPLIM characteristics are:

Purpose	Holds the lower limit of the Main stack pointer.
Usage constraints	Privileged access only. Unprivileged access is RAZ/WI.
Configurations	This register is always implemented.
Attributes	32-bit read/write special-purpose register. This register is banked between Security states.

Field descriptions

The MSPLIM bit assignments are:



LIMIT, bits [31:3]

Stack limit. Bits [31:3] of the Main stack pointer limit address 'FTSSS.

Many instructions and exception entry will generate an exception if the appropriate stack pointer would be updated to a value lower than this limit. If the Main Extension is not implemented, the Non-secure MSPLIM is RAZ/WI.

This field resets to zero on a Warm reset.

Bits [2:0]

Reserved, RES0.

D2.2.157 MVFR0, Media and VFP Feature Register 0

The MVFR0 characteristics are:

Purpose	Describes the features provided by the Floating-point Extension.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Floating-point Extension is implemented. This register is RES0 if the Floating-point Extension is not implemented.
Attributes	32-bit read-only register located at 0xE000EF40. Secure software can access the Non-secure view of this register via MVFR0_NS located at 0xE002EF40. The location 0xE002EF40 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Preface

When floating-point is not implemented this register reads as 0x00000000.

Where single-precision only floating-point is supported this register reads as 0x10110021.

Where single and double-precision floating-point are supported this register reads as 0x10110221.

Field descriptions

The MVFR0 bit assignments are:

31	28,27	24,23	20,19	16,15	12,11	8,7	4,3	0
FPRound	RES0	FPSqrt	FPDivide	RES0	FPDP	FPSP	SIMDReg	

FPRound, bits [31:28]

Floating-point rounding modes. Indicates the rounding modes supported by the FP Extension.

The possible values of this field are:

0b0001 All rounding modes supported.

All other values are reserved.

This field reads as 0b0001.

Bits [27:24]

Reserved, RES0.

FPSqrt, bits [23:20]

Floating-point square root. Indicates the support for FP square root operations.

The possible values of this field are:

0b0001 Supported.

All other values are reserved.

This field reads as 0b0001.

FPDivide, bits [19:16]

Floating-point divide. Indicates the support for FP divide operations.

The possible values of this field are:

0b0001 Supported.

All other values are reserved.

This field reads as 0b0001.

Bits [15:12]

Reserved, RES0.

FPDP, bits [11:8]

Floating-point double-precision. Indicates support for FP double-precision operations.

The possible values of this field are:

0b0000 Not supported.

0b0010 Supported.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

FPSP, bits [7:4]

Floating-point single-precision. Indicates support for FP single-precision operations.

The possible values of this field are:

0b0010 Supported.

All other values are reserved.

This field reads as 0b0010.

SIMDReg, bits [3:0]

SIMD registers. Indicates size of FP register file.

The possible values of this field are:

0b0001 16 × 64-bit registers.

All other values are reserved.

This field reads as 0b0001.

D2.2.158 MVFR1, Media and VFP Feature Register 1

The MVFR1 characteristics are:

Purpose	Describes the features provided by the Floating-point Extension.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Floating-point Extension is implemented. This register is RES0 if the Floating-point Extension is not implemented.
Attributes	32-bit read-only register located at 0xE000EF44. Secure software can access the Non-secure view of this register via MVFR1_NS located at 0xE002EF44. The location 0xE002EF44 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Preface

When floating-point is not implemented this register reads as 0x00000000.

Where single-precision only floating-point is supported this register reads as 0x11000011.

Where single and double-precision floating-point are supported this register reads as 0x12000011.

Field descriptions

The MVFR1 bit assignments are:



FMAC, bits [31:28]

Fused multiply accumulate. Indicates whether the FP Extension implements the fused multiply accumulate instructions.

The possible values of this field are:

0b0001 Implemented.

All other values are reserved.

This field reads as 0b0001.

FPHP, bits [27:24]

Floating-point half-precision. Indicates whether the FP Extension implements half-precision FP conversion instructions.

The possible values of this field are:

0b0001 Half-precision to single-precision implemented.

0b0010 Half-precision to single and double-precision implemented.

All other values are reserved.

This field reads as an IMPLEMENTATION DEFINED value.

Bits [23:8]

Reserved, RES0.

FPDNaN, bits [7:4]

Floating-point default NaN. Indicates whether the FP hardware implementation supports NaN propagation.

The possible values of this field are:

0b0001 Propagation of NaN values supported.

All other values are reserved.

This field reads as 0b0001.

FPFtZ, bits [3:0]

Floating-point flush-to-zero. Indicates whether subnormals are always flushed-to-zero.

The possible values of this field are:

0b0001 Full denormalized numbers arithmetic supported.

All other values are reserved.

This field reads as 0b0001.

D2.2.159 MVFR2, Media and VFP Feature Register 2

The MVFR2 characteristics are:

Purpose	Describes the features provided by the Floating-point Extension.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Floating-point Extension is implemented. This register is RES0 if the Floating-point Extension is not implemented.
Attributes	32-bit read-only register located at 0xE000EF48. Secure software can access the Non-secure view of this register via MVFR2_NS located at 0xE002EF48. The location 0xE002EF48 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.


Preface

When floating-point is not implemented this register reads as 0x00000000.

When floating-point is implemented this register reads as 0x00000040.

Field descriptions

The MVFR2 bit assignments are:



Bits [31:8]

Reserved, RES0.

FPMisc, bits [7:4]

Floating-point miscellaneous. Indicates support for miscellaneous FP features.

The possible values of this field are:

0b0100 Selection, directed conversion to integer, VMINNM and VMAXNM supported.

All other values are reserved.

This field reads as 0b0100.

Bits [3:0]

Reserved, RES0.


D2.2.160 NSACR, Non-secure Access Control Register

The NSACR characteristics are:

Purpose	Defines the Non-secure access permissions for both the FP Extension and coprocessors CP0 to CP7.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000ED8C. This register is RAZ/WI when accessed as Non-secure. This register is not banked between Security states.

Field descriptions

The NSACR bit assignments are:

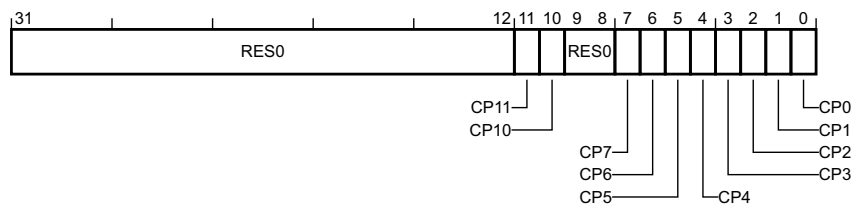

Bits [31:12]

Reserved, RES0.

CP11, bit [11]

CP11 access. Enables Non-secure access to the Floating-point Extension.

Programming with a different value than that used for CP10 is UNPREDICTABLE. If the Floating-point Extension is not implemented, this bit is RAZ/WI.

This bit resets to an UNKNOWN value on a Warm reset.

CP10, bit [10]

CP10 access. Enables Non-secure access to the Floating-point Extension.

The possible values of this bit are:

0 Non-secure accesses to the Floating-point Extension generate a NOCP UsageFault.

1 Non-secure access to the Floating-point Extension permitted.

If the Floating-point Extension is not implemented, this bit is RAZ/WI.

This bit resets to an UNKNOWN value on a Warm reset.

Bits [9:8]

Reserved, RES0.

CP m , bit [m], for $m = 0$ to 7

CP m access. Enables Non-secure access to coprocessor CP m .

The possible values of this field are:

0 Non-secure accesses to this coprocessor generate a NOCP UsageFault.

1 Non-secure access to this coprocessor permitted.

If CP m is not implemented, then this bit is RAZ/WI.

This field resets to an UNKNOWN value on a Warm reset.

D2.2.161 NVIC_IABR<n>, Interrupt Active Bit Register, n = 0 - 15

The NVIC_IABR<n> characteristics are:

Purpose	For each group of 32 interrupts, shows the active state of each interrupt.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read-only register located at $0xE000E300 + 4n$. Secure software can access the Non-secure view of this register via NVIC_IABR<n>_NS located at $0xE002E300 + 4n$. The location $0xE002E300 + 4n$ is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The NVIC_IABR<n> bit assignments are:



ACTIVE, bits [31:0]

Active state. For ACTIVE[m] in NVIC_IABR_n, indicates the active state for interrupt $32n+m$.

The possible values of each bit are:

- 0** Interrupt not active.
- 1** Interrupt is active.

Bits corresponding to unimplemented interrupts are RES0. Bits corresponding to interrupts targeting Secure state are RAZ/WI from Non-secure.

This field resets to zero on a Warm reset.


D2.2.162 NVIC_ICER<n>, Interrupt Clear Enable Register, n = 0 - 15

The NVIC_ICER<n> characteristics are:

Purpose	Clears or reads the enabled state of each group of 32 interrupts.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write-one-to-clear register located at $0xE000E180 + 4n$. Secure software can access the Non-secure view of this register via NVIC_ICER<n>_NS located at $0xE002E180 + 4n$. The location $0xE002E180 + 4n$ is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The NVIC_ICER<n> bit assignments are:



CLRENA, bits [31:0], on a write

Clear enable. For CLRENA[m] in NVIC_ICERn, allows interrupt $32n + m$ to be disabled.

The possible values of each bit are:

- 0** No effect.
- 1** Disable interrupt $32n + m$.

Bits corresponding to unimplemented interrupts are RES0. Bits corresponding to interrupts targeting Secure state are RAZ/WI from Non-secure.

CLRENA, bits [31:0], on a read

Clear enable. For CLRENA[m] in NVIC_ICERn, indicates whether interrupt $32n + m$ is enabled.

The possible values of each bit are:

- 0** Interrupt $32n + m$ disabled.
- 1** Interrupt $32n + m$ enabled.

Bits corresponding to unimplemented interrupts are RES0. Bits corresponding to interrupts targeting Secure state are RAZ/WI from Non-secure.

This field resets to zero on a Warm reset.


D2.2.163 NVIC_ICPR<n>, Interrupt Clear Pending Register, n = 0 - 15

The NVIC_ICPR<n> characteristics are:

Purpose	Clears or reads the pending state of each group of 32 interrupts.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write-one-to-clear register located at $0xE000E280 + 4n$. Secure software can access the Non-secure view of this register via NVIC_ICPR<n>_NS located at $0xE002E280 + 4n$. The location $0xE002E280 + 4n$ is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The NVIC_ICPR<n> bit assignments are:



CLRPEND, bits [31:0], on a write

Clear pending. For CLRPEND[m] in NVIC_ICPRn, allows interrupt $32n + m$ to be unpend.

The possible values of each bit are:

- 0** No effect.
- 1** Clear pending state of interrupt $32n + m$.

Bits corresponding to unimplemented interrupts are RES0. Bits corresponding to interrupts targeting Secure state are RAZ/WI from Non-secure.

CLRPEND, bits [31:0], on a read

Clear pending. For CLRPEND[m] in NVIC_ICPRn, indicates whether interrupt $32n + m$ is pending.

The possible values of each bit are:

- 0** Interrupt $32n + m$ is not pending.
- 1** Interrupt $32n + m$ is pending.

Bits corresponding to unimplemented interrupts are RES0. Bits corresponding to interrupts targeting Secure state are RAZ/WI from Non-secure.


D2.2.164 NVIC_IPR<n>, Interrupt Priority Register, n = 0 - 123

The NVIC_IPR<n> characteristics are:

Purpose	Sets or reads interrupt priorities.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. If the Main Extension is implemented, this register is word, halfword, and byte accessible. If the Main Extension is not implemented, this register is word accessible only, halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at $0xE000E400 + 4n$. Secure software can access the Non-secure view of this register via NVIC_IPR<n>_NS located at $0xE002E400 + 4n$. The location $0xE002E400 + 4n$ is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The NVIC_IPR<n> bit assignments are:



PRI_Nm, bits [8m+7:8m], for m = 0 to 3

Priority 'N'+m. For register NVIC_IPRn, this field indicates and allows modification of the priority of interrupt number 4n+m, or is RES0 if the PE does not implement this interrupt.

If the PE implements less than 8 bits of priority, then the least significant bits of this field are RES0. If interrupt number 4n+3 targets Secure state, this field is RAZ/WI from Non-secure.

This field resets to zero on a Warm reset.


D2.2.165 NVIC_ISER<n>, Interrupt Set Enable Register, n = 0 - 15

The NVIC_ISER<n> characteristics are:

Purpose	Enables or reads the enabled state of each group of 32 interrupts.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write-one-to-set register located at $0xE000E100 + 4n$. Secure software can access the Non-secure view of this register via NVIC_ISER<n>_NS located at $0xE002E100 + 4n$. The location $0xE002E100 + 4n$ is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The NVIC_ISER<n> bit assignments are:



SETENA, bits [31:0], on a write

Set enable. For SETENA[m] in NVIC_ISER n , allows interrupt $32n + m$ to be set enabled.

The possible values of each bit are:

- 0** No effect.
- 1** Enable interrupt $32n + m$.

Bits corresponding to unimplemented interrupts are RES0. Bits corresponding to interrupts targeting Secure state are RAZ/WI from Non-secure.

This field resets to zero on a Warm reset.

SETENA, bits [31:0], on a read

Set enable. For SETENA[m] in NVIC_ISER n , indicates whether interrupt $32n + m$ is enabled.

The possible values of each bit are:

- 0** Interrupt $32n + m$ disabled.
- 1** Interrupt $32n + m$ enabled.

Bits corresponding to unimplemented interrupts are RES0. Bits corresponding to interrupts targeting Secure state are RAZ/WI from Non-secure.

This field resets to zero on a Warm reset.

D2.2.166 NVIC_ISPR<n>, Interrupt Set Pending Register, n = 0 - 15

The NVIC_ISPR<n> characteristics are:

Purpose	Enables or reads the pending state of each group of 32 interrupts.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write-one-to-set register located at $0xE000E200 + 4n$. Secure software can access the Non-secure view of this register via NVIC_ISPR<n>_NS located at $0xE002E200 + 4n$. The location $0xE002E200 + 4n$ is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The NVIC_ISPR<n> bit assignments are:



SETPEND, bits [31:0], on a write

Set pending. For SETPEND[*m*] in NVIC_ISPR_{*n*}, allows interrupt $32n + m$ to be set pending.

The possible values of each bit are:

- 0** No effect.
- 1** Pend interrupt $32n + m$.

Bits corresponding to unimplemented interrupts are RES0. Bits corresponding to interrupts targeting Secure state are RAZ/WI from Non-secure.

This field is write-one-to-set. Writes of zero are ignored.

This field resets to zero on a Warm reset.

SETPEND, bits [31:0], on a read

Set pending. For SETPEND[*m*] in NVIC_ISPR_{*n*}, indicates whether interrupt $32n + m$ is pending.

The possible values of each bit are:

- 0** Interrupt $32n + m$ is not pending.
- 1** Interrupt $32n + m$ pending.

Bits corresponding to unimplemented interrupts are RES0. Bits corresponding to interrupts targeting Secure state are RAZ/WI from Non-secure.

This field resets to zero on a Warm reset.


D2.2.167 NVIC_ITNS<n>, Interrupt Target Non-secure Register, n = 0 - 15

The NVIC_ITNS<n> characteristics are:

Purpose	For each group of 32 interrupts, determines whether each interrupt targets Non-secure or Secure state.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at $0xE000E380 + 4n$. This register is RAZ/WI when accessed as Non-secure. This register is not banked between Security states.

Field descriptions

The NVIC_ITNS<n> bit assignments are:



ITNS, bits [31:0]

Interrupt Targets Non-secure. For ITNS[*m*] in NVIC_ITNS_{*n*}, this field indicates and allows modification of the target Security state for interrupt $32n+m$.

The possible values of each bit are:

- 0** Interrupt targets Secure state.
- 1** Interrupt targets Non-secure state.

Bits corresponding to unimplemented interrupts are RES0. It is IMPLEMENTATION DEFINED whether individual bits are WI and have an IMPLEMENTATION DEFINED constant value. Where an interrupt is configured to target Secure state, accesses to the associated fields in Non-secure versions of the NVIC_IABR, NVIC_ICER, NVIC_ISER, NVIC_ICPR, NVIC_IPR and NVIC_ISPR are RAZ/WI.

This field resets to zero on a Warm reset.


D2.2.168 PC, Program Counter

The PC characteristics are:

Purpose	Holds the current program counter value.
Usage constraints	Privileged and unprivileged access permitted.
Configurations	This register is always implemented.
Attributes	32-bit read/write special-purpose register. This register is not banked between Security states.

Field descriptions

The PC bit assignments are:



VALUE, bits [31:0]

Program counter. Holds the address of the current instruction plus four.

Software can refer to PC as R15.

This field resets to an UNKNOWN value on a Warm reset.

————— **Note** —————

In general, ARM strongly recommends using the names SP, LR and PC instead of R13, R14 and R15. However, sometimes it is simpler to use the R13-R15 names when referring to a group of registers. For example, it is simpler to refer to registers R8 to R15, rather than to registers R8 to R12, the SP, LR and PC. These two descriptions of the group of registers have exactly the same meaning.


D2.2.169 PRIMASK, Exception Mask Register

The PRIMASK characteristics are:

Purpose	Provides access to the PE PRIMASK register.
Usage constraints	Privileged access only. Unprivileged access is RAZ/WI.
Configurations	This register is always implemented.
Attributes	32-bit read/write special-purpose register. This register is banked between Security states.

Field descriptions

The PRIMASK bit assignments are:



Bits [31:1]

Reserved, RES0.

PM, bit [0]

Exception mask register. Setting the Secure PRIMASK to one raises the execution priority to 0. Setting the Non-secure PRIMASK to one raises the execution priority to 0 if AIRCR.PRIS is clear, or 0x80 if AIRCR.PRIS is set.

The possible values of this bit are:

- 0** No effect on execution priority.
- 1** Boosts execution priority to either 0 or 0x80.

This bit resets to zero on a Warm reset.

D2.2.170 PSPLIM, Process Stack Pointer Limit Register

The PSPLIM characteristics are:

Purpose	Holds the lower limit for the Process stack pointer.
Usage constraints	Privileged access only. Unprivileged access is RAZ/WI.
Configurations	This register is always implemented.
Attributes	32-bit read/write special-purpose register. This register is banked between Security states.

Field descriptions

The PSPLIM bit assignments are:



LIMIT, bits [31:3]

Stack limit. Bits [31:3] of the Process stack limit address for the selected Security state.

Many instructions and exception entry will generate an exception if the appropriate stack pointer would be updated to a value lower than this limit. If the Main Extension is not implemented, the Non-secure PSPLIM is RAZ/WI.

This field resets to zero on a Warm reset.

Bits [2:0]

Reserved, RES0.


D2.2.171 R<n>, General-Purpose Register, n = 0 - 12

The R<n> characteristics are:

- | | |
|--------------------------|--|
| Purpose | General-purpose register. |
| Usage constraints | Both privileged and unprivileged accesses are permitted.
This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. |
| Configurations | This register is always implemented. |
| Attributes | 32-bit read/write register.
This register is not banked between Security states. |

Field descriptions

The R<n> bit assignments are:



VALUE, bits [31:0]

General purpose register value. ARMv8-M implemented thirteen general-purpose 32-bit registers, R0 to R12.

This field resets to an UNKNOWN value on a Warm reset.

D2.2.172 RETPSR, Combined Exception Return Program Status Registers


The RETPSR characteristics are:

Purpose	Value pushed to the stack on exception entry. On exception return this is used to restore the flags and other architectural state. This payload is also used for FNC_RETURN stacking, however in this case only some of the fields are used. See FunctionReturn() for details.
Usage constraints	None.
Configurations	All.
Attributes	32-bit payload.


Field descriptions

The RETPSR bit assignments are:

When {RETPSR[26:25], RETPSR[11:10]} != 0:



When {RETPSR[26:25], RETPSR[11:10]} == 0:



N, bit [31]

Negative flag. Value corresponding to APSR.N.

Z, bit [30]

Zero flag. Value corresponding to APSR.Z.

C, bit [29]

Carry flag. Value corresponding to APSR.C.

V, bit [28]

Overflow flag. Value corresponding to APSR.V.

Q, bit [27]

Saturate flag. Value corresponding to APSR.Q.

T, bit [24]

T32 state. Value corresponding to EPSR.T.

Bits [23:21]

Reserved, RES0.

SFPA, bit [20]

Secure floating-point active. Value corresponding to CONTROL.SFPA.

GE, bits [19:16]

Greater-than or equal flag. Value corresponding to APSR.GE.

IT, bits [15:10,26:25], when {RETPSR[26:25], RETPSR[11:10]} != 0

If-then flags. Value corresponding to EPSR.IT.

ICI, bits [26:25,15:10], when {RETPSR[26:25], RETPSR[11:10]} == 0

Interrupt continuation flags. Value corresponding to EPSR.ICI.

SPREALIGN, bit [9]

Stack-pointer re-align. Indicates whether the SP was re-aligned to an 8-byte alignment on exception entry.

The possible values of this bit are:

- 0** The stack pointer was 8-byte aligned before exception entry began, no special handling is required on exception return.
- 1** The stack pointer was only 4-byte aligned before exception entry. The exception entry realigned SP to 8-byte alignment by increasing the stack frame size by 4-bytes.

Exception, bits [8:0]

Exception number. Value corresponding to IPSR.Exception.


D2.2.173 SAU_CTRL, SAU Control Register

The SAU_CTRL characteristics are:

Purpose	Allows enabling of the Security Attribution Unit.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000EDD0. This register is RAZ/WI when accessed as Non-secure. This register is not banked between Security states.

Field descriptions

The SAU_CTRL bit assignments are:



Bits [31:2]

Reserved, RES0.

ALLNS, bit [1]

All Non-secure. When SAU_CTRL.ENABLE is 0 this bit controls if the memory is marked as Non-secure or Secure.

The possible values of this bit are:

- 0** Memory is marked as Secure and is not Non-secure callable.
- 1** Memory is marked as Non-secure.

This bit resets to an IMPLEMENTATION DEFINED value on a Warm reset.

ENABLE, bit [0]

Enable. Enables the SAU.

The possible values of this bit are:

- 0** The SAU is disabled.
- 1** The SAU is enabled.

If this register resets to 1, the SAU region registers also reset to an IMPLEMENTATION DEFINED value.

This bit resets to an IMPLEMENTATION DEFINED value on a Warm reset.


D2.2.174 SAU_RBAR, SAU Region Base Address Register

The SAU_RBAR characteristics are:

Purpose	Provides indirect read and write access to the base address of the currently selected SAU region.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000EDDC. This register is RAZ/WI when accessed as Non-secure. This register is not banked between Security states.

Field descriptions

The SAU_RBAR bit assignments are:



BADDR, bits [31:5]

Base address. Holds bits [31:5] of the base address for the selected SAU region.
Bits [4:0] of the base address are defined as 0x00.
This field resets to an IMPLEMENTATION DEFINED value on a Warm reset.

Bits [4:0]

Reserved, RES0.


D2.2.175 SAU_RLAR, SAU Region Limit Address Register

The SAU_RLAR characteristics are:

Purpose	Provides indirect read and write access to the limit address of the currently selected SAU region.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000EDE0. This register is RAZ/WI when accessed as Non-secure. This register is not banked between Security states.

Field descriptions

The SAU_RLAR bit assignments are:



LADDR, bits [31:5]

Limit address. Holds bits [31:5] of the limit address for the selected SAU region.

Bits [4:0] of the limit address are defined as 0x1F.

This field resets to an IMPLEMENTATION DEFINED value on a Warm reset.

Bits [4:2]

Reserved, RES0.

NSC, bit [1]

Non-secure callable. Controls whether Non-secure state is permitted to execute an SG instruction from this region.

The possible values of this bit are:

0 Region is not Non-secure callable.

1 Region is Non-secure callable.

This bit resets to an IMPLEMENTATION DEFINED value on a Warm reset.

ENABLE, bit [0]

Enable. SAU region enable.

The possible values of this bit are:

0 SAU region is disabled.

1 SAU region is enabled.

This bit resets to an IMPLEMENTATION DEFINED value on a Warm reset.


D2.2.177 SAU_TYPE, SAU Type Register

The SAU_TYPE characteristics are:

Purpose	Indicates the number of regions implemented by the Security Attribution Unit.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read-only register located at 0xE000EDD4. This register is RAZ/WI when accessed as Non-secure. This register is not banked between Security states.

Field descriptions

The SAU_TYPE bit assignments are:



Bits [31:8]

Reserved, RES0.

SREGION, bits [7:0]

SAU regions. The number of implemented SAU regions.
This field reads as an IMPLEMENTATION DEFINED value.

D2.2.178 SCR, System Control Register

The SCR characteristics are:

Purpose	Sets or returns system control data.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000ED10. Secure software can access the Non-secure view of this register via SCR_NS located at 0xE002ED10. The location 0xE002ED10 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states on a bit by bit basis.

Field descriptions

The SCR bit assignments are:



Bits [31:5]

Reserved, RES0.

SEVONPEND, bit [4]

Send event on pend. Determines whether an interrupt assigned to the same Security state as the SEVONPEND bit transitioning from inactive state to pending state generates a wakeup event.

This bit is banked between Security states.

The possible values of this bit are:

0 Transitions from inactive to pending are not wakeup events.

1 Transitions from inactive to pending are wakeup events.

This bit resets to zero on a Warm reset.

SLEEPDEEPS, bit [3]

Sleep deep secure. This field controls whether the SLEEPDEEP bit is only accessible from the secure state.

This bit is not banked between Security states.

The possible values of this bit are:

0 The SLEEPDEEP bit accessible from both Security states.

1 The SLEEPDEEP bit behaves as RAZ/WI when accessed from the Non-secure state.

This bit is only accessible from the secure state, and behaves as RAZ/WI when accessed from the Non-secure state. If a PE does not implement the deep sleep state this bit behaves as RAZ/WI from both Security states.

This bit is RAZ/WI from Non-secure.

This bit resets to zero on a Warm reset.

SLEEPDEEP, bit [2]

Sleep deep. Provides a qualifying hint indicating that waking from sleep might take longer. An implementation can use this bit to select between two alternative sleep states.

This bit is not banked between Security states.

The possible values of this bit are:

0 Selected sleep state is not deep sleep.

1 Selected sleep state is deep sleep.

Details of the implemented sleep states, if any, and details of the use of this bit, are IMPLEMENTATION DEFINED. If the PE does not implement a deep sleep state then this bit can be RAZ/WI.

This bit resets to zero on a Warm reset.

SLEEPONEXIT, bit [1]

Sleep on exit. Determines whether, on an exit from an ISR that returns to the base level of execution priority, the PE enters a sleep state.

This bit is banked between Security states.

The possible values of this bit are:

0 Do not enter sleep state.

1 Enter sleep state.

This bit resets to zero on a Warm reset.

Bit [0]

Reserved, RES0.


D2.2.179 SFAR, Secure Fault Address Register

The SFAR characteristics are:

Purpose	Shows the address of the memory location that caused a Security violation.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read/write register located at 0xE000EDE8. This register is RAZ/WI when accessed as Non-secure. This register is not banked between Security states.

Field descriptions

The SFAR bit assignments are:



ADDRESS, bits [31:0]

Address. The address of an access that caused a attribution unit violation. This field is only valid when SFSR.SFARVALID is set. This allows the actual flip flops associated with this register to be shared with other fault address registers. If an implementation chooses to share the storage in this way, care must be taken to not leak Secure address information to the Non-secure state. One way of achieving this is to share the SFAR register with the MMFAR_S register, which is not accessible to the Non-secure state.

This field resets to an UNKNOWN value on a Warm reset.


D2.2.180 SFSR, Secure Fault Status Register

The SFSR characteristics are:

Purpose	Provides information about any security related faults.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read/write-one-to-clear register located at 0xE000EDE4. This register is RAZ/WI when accessed as Non-secure. This register is not banked between Security states.

Field descriptions

The SFSR bit assignments are:

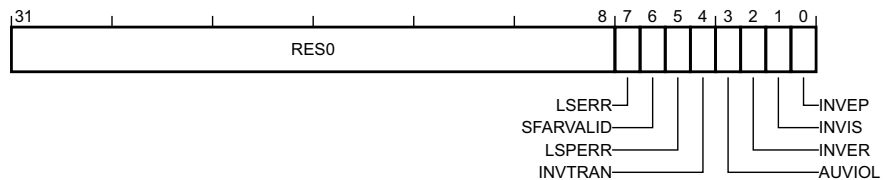

Bits [31:8]

Reserved, RES0.

LSERR, bit [7]

Lazy state error flag. Sticky flag indicating that an error occurred during lazy state activation or deactivation.

The possible values of this bit are:

- 0** Error has not occurred.
- 1** Error has occurred.

This bit resets to zero on a Warm reset.

SFARVALID, bit [6]

Secure fault address valid. This bit is set when the SFAR register contains a valid value. As with similar fields, such as BFSR.BFARVALID and MMFSR.MMARVALID, this bit can be cleared by other exceptions, such as BusFault.

The possible values of this bit are:

- 0** SFAR content not valid.
- 1** SFAR content valid.

This bit resets to zero on a Warm reset.

LSPERR, bit [5]

Lazy state preservation error flag. Sticky flag indicating that an SAU or IDAU violation occurred during the lazy preservation of floating-point state.

The possible values of this bit are:

- 0** Error has not occurred.
- 1** Error has occurred.

This bit resets to zero on a Warm reset.

INVTRAN, bit [4]

Invalid transition flag. Sticky flag indicating that an exception was raised due to a branch that was not flagged as being domain crossing causing a transition from Secure to Non-secure memory.

The possible values of this bit are:

- 0** Error has not occurred.
- 1** Error has occurred.

This bit resets to zero on a Warm reset.

AUVIOL, bit [3]

Attribution unit violation flag. Sticky flag indicating that an attempt was made to access parts of the address space that are marked as Secure with NS-Req for the transaction set to Non-secure. This bit is not set if the violation occurred during lazy state preservation. See LSPERR.

The possible values of this bit are:

- 0** Error has not occurred.
- 1** Error has occurred.

This bit resets to zero on a Warm reset.

INVER, bit [2]

Invalid exception return flag. This can be caused by EXC_RETURN.DCRS being set to 0 when returning from an exception in the Non-secure state, or by EXC_RETURN.ES being set to 1 when returning from an exception in the Non-secure state.

The possible values of this bit are:

- 0** Error has not occurred.
- 1** Error has occurred.

This bit resets to zero on a Warm reset.

INVIS, bit [1]

Invalid integrity signature flag. This bit is set if the integrity signature in an exception stack frame is found to be invalid during the unstacking operation.

The possible values of this bit are:

- 0** Error has not occurred.
- 1** Error has occurred.

This bit resets to zero on a Warm reset.

INVEP, bit [0]

Invalid entry point. This bit is set if a function call from the Non-secure state or exception targets a non-SG instruction in the Secure state. This bit is also set if the target address is a SG instruction, but there is no matching SAU/IDAU region with the NSC flag set.

The possible values of this bit are:

- 0** Error has not occurred.
- 1** Error has occurred.

This bit resets to zero on a Warm reset.

D2.2.181 SHCSR, System Handler Control and State Register

The SHCSR characteristics are:

Purpose	Provides access to the active and pending status of system exceptions.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000ED24. Secure software can access the Non-secure view of this register via SHCSR_NS located at 0xE002ED24. The location 0xE002ED24 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states on a bit by bit basis.

Preface

Exception processing automatically updates the SHCSR fields. However, software can write to the register to add or remove the pending or active state of an exception. When updating the SHCSR, ARM recommends using a read-modify-write sequence, to avoid unintended effects on the state of the exception handlers.


Removing the active state of an exception can change the current execution priority, and affect the exception return consistency checks. If software removes the active state, causing a change in current execution priority, this can defeat the architectural behavior that prevents an exception from preempting its own handler.

Pending state bits are set to one when an exception occurs and are cleared to zero when the exception becomes active.

Active state bits are set to one when the associated exception becomes active.

Field descriptions

The SHCSR bit assignments are:

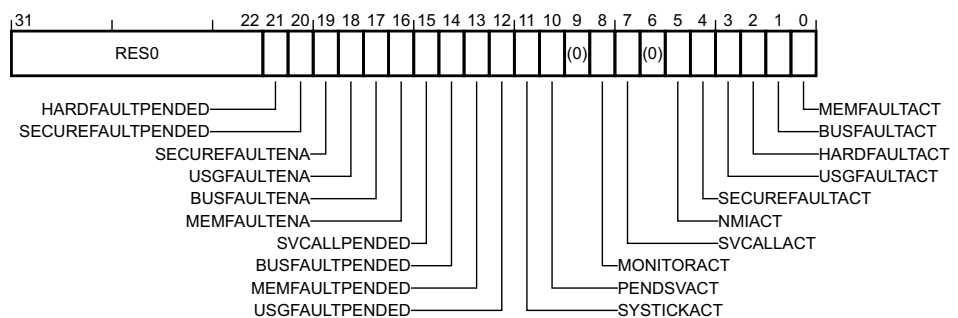

Bits [31:22]

Reserved, RES0.

HARDFaultPENDED, bit [21]

HardFault exception pended state. This bit indicates and allows modification of the pending state of the HardFault exception corresponding to the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

- 0** HardFault exception not pending for the selected Security state.
- 1** HardFault exception pending for the selected Security state.

This bit resets to zero on a Warm reset.

———— **Note** ————

The Non-secure HardFault exception will not preempt if AIRCR.BFHFNMINs is set to zero.

SECUREFAULTPENDEd, bit [20]

SecureFault exception pended state. This bit indicates and allows modification of the pending state of the SecureFault exception.

This bit is not banked between Security states.

The possible values of this bit are:

0 SecureFault exception not pending.

1 SecureFault exception pending.

This bit is RAZ/WI from Non-secure.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

SECUREFAULTENA, bit [19]

SecureFault exception enable. The value of this bit defines whether the SecureFault exception is enabled.

This bit is not banked between Security states.

The possible values of this bit are:

0 SecureFault exception disabled.

1 SecureFault exception enabled.

When disabled, exceptions that target SecureFault escalate to Secure state HardFault.

This bit is RAZ/WI from Non-secure.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

USGFAULTENA, bit [18]

UsageFault exception enable. The value of this bit defines whether the UsageFault exception is enabled for the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

0 UsageFault exception disabled for the selected Security state.

1 UsageFault exception enabled for the selected Security state.

When the UsageFault exception is disabled, exceptions targeting UsageFault escalate to HardFault.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

BUSFAULTENA, bit [17]

BusFault exception enable. The value of this bit defines whether the BusFault exception is enabled.

This bit is not banked between Security states.

The possible values of this bit are:

0 BusFault exception disabled.

1 BusFault exception enabled.

The BusFault exception is not banked between Security states. When the BusFault exception is disabled, exceptions targeting BusFault escalate to HardFault.

If AIRCR.BFHFNMINs is zero this bit is RAZ/WI from Non-secure state.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

MEMFAULTENA, bit [16]

MemManage exception enable. The value of this bit defines whether the MemManage exception is enabled for the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

0 MemManage exception disabled for the selected Security state.

1 MemManage exception enabled for the selected Security state.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

———— Note ————

When the MemManage exception is disabled, exceptions targeting MemManage escalate to HardFault.

SVCALLPENDEDED, bit [15]

SVCAll exception pended state. This bit indicates and allows modification of the pending state of the SVCAll exception for the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

0 SVCAll exception not pending for the selected Security state.

1 SVCAll exception pending for the selected Security state.

This bit resets to zero on a Warm reset.

BUSFAULTPENDEDED, bit [14]

BusFault exception pended state. This bit indicates and allows modification of the pending state of the BusFault exception.

This bit is not banked between Security states.

The possible values of this bit are:

0 BusFault exception not pending.

1 BusFault exception pending.

The BusFault exception is not banked between Security states.

If AIRCR.BFHFNMINS is zero this bit is RAZ/WI from Non-secure state.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

MEMFAULTPENDEDED, bit [13]

MemManage exception pended state. This bit indicates and allows modification of the pending state of the MemManage exception for the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

0 MemManage exception not pending for the selected Security state.

1 MemManage exception pending for the selected Security state.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

USGFAULTPENDEd, bit [12]

UsageFault exception pended state. The UsageFault exception is banked between Security states, this bit indicates and allows modification of the pending state of the UsageFault exception for the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

0 UsageFault exception not pending for the selected Security state.

1 UsageFault exception pending for the selected Security state.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

SYSTICKACT, bit [11]

SysTick exception active state. This bit indicates and allows modification of the active state of the SysTick exception for the selected Security state.

If two SysTick timers are implemented this bit is banked between Security states.

If less than two SysTick timers are implemented this bit is not banked between Security states, and is RAZ/WI if AIRCR.STTNS is zero.

The possible values of this bit are:

0 SysTick exception not active for the selected Security state.

1 SysTick exception active for the selected Security state.

If two timers are implemented, then SYSTICKACT is banked between Security states. If one timer is implemented this bit corresponds to the Secure state if AIRCR.STTNS is zero, or the Non-secure state3 if AIRCR.STTNS is one.

This bit resets to zero on a Warm reset.

PENDSVACT, bit [10]

PendSV exception active state. This bit indicates and allows modification of the active state of the PendSV exception for the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

0 PendSV exception not active for the selected Security state.

1 PendSV exception active for the selected Security state.

This bit resets to zero on a Warm reset.

Bit [9]

Reserved, RES0.

MONITORACT, bit [8]

DebugMonitor exception active state. This bit indicates and allows modification of the active state of the DebugMonitor exception.

This bit is not banked between Security states.

The possible values of this bit are:

0 DebugMonitor exception not active.

1 DebugMonitor exception active.

If DEMCR.SDME is one this bit is RAZ/WI from Non-secure state

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

SVCALLACT, bit [7]

SVCALL exception active state. This bit indicates and allows modification of the active state of the SVCALL exception for the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

0 SVCALL exception not active for the selected Security state.

1 SVCALL exception active for the selected Security state.

This bit resets to zero on a Warm reset.

Bit [6]

Reserved, RES0.

NMIACT, bit [5]

NMI exception active state. This bit indicates and allows modification of the active state of the NMI exception.

This bit is not banked between Security states.

The possible values of this bit are:

0 NMI exception not active.

1 NMI exception active.

The NMI exception is not banked between Security states. When AIRCR.BFHFNMINs is zero, the Non-secure view of this bit is RAZ/WI. This field ignores writes if either the value being written is one, AIRCR.BFHFNMINs is zero, the access is from Non-secure state, the access is not via the NS alias, or the access is from a debugger when DHCSR.S_SDE is zero.

This bit resets to zero on a Warm reset.

SECUREFAULTACT, bit [4]

SecureFault exception active state. This bit indicates and allows modification of the active state of the SecureFault exception.

This bit is not banked between Security states.

The possible values of this bit are:

0 SecureFault exception not active.

1 SecureFault exception active.

This bit is RAZ/WI from Non-secure.

This bit resets to zero on a Warm reset.

USGFAULTACT, bit [3]

UsageFault exception active state for the selected Security state. This bit indicates and allows modification of the active state of the UsageFault exception for the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

0 UsageFault exception not active for the selected Security state.

1 UsageFault exception active for the selected Security state.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

HARDFFAULTACT, bit [2]

HardFault exception active state. Indicates and allows limited modification of the active state of the HardFault exception for the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

- 0** HardFault exception not active for the selected Security state.
- 1** HardFault exception active for the selected Security state.

This field ignores writes if either the value being written is one, the write targets the Secure HardFault active bit, the access is from Non-secure state, or the access is from a debugger when DHCSR.S_SDE is zero.

This bit resets to zero on a Warm reset.

BUSFAULTACT, bit [1]

BusFault exception active state. This bit indicates and allows modification of the active state of the BusFault exception.

This bit is not banked between Security states.

The possible values of this bit are:

- 0** BusFault exception not active.
- 1** BusFault exception active.

The BusFault exception is not banked between Security states.

If AIRCR.BFHFNMIN is zero this bit is RAZ/WI from Non-secure state.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.

MEMFAULTACT, bit [0]

MemManage exception active state for the selected Security state. This bit indicates and allows modification of the active state of the MemManage exception for the selected Security state.

This bit is banked between Security states.

The possible values of this bit are:

- 0** MemManage exception not active for the selected Security state.
- 1** MemManage exception active for the selected Security state.

If the Main Extension is not implemented, this bit is RES0.

This bit resets to zero on a Warm reset.


D2.2.182 SHPR1, System Handler Priority Register 1

The SHPR1 characteristics are:

Purpose	Sets or returns priority for system handlers 4 - 7.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. If the Main Extension is implemented, this register is word, halfword, and byte accessible. If the Main Extension is not implemented, this register is word accessible only, halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit read/write register located at 0xE000ED18. Secure software can access the Non-secure view of this register via SHPR1_NS located at 0xE002ED18. The location 0xE002ED18 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states on a bit by bit basis.

Field descriptions

The SHPR1 bit assignments are:



PRI_7, bits [31:24]

Priority 7. Priority of system handler 7, SecureFault.
This field is not banked between Security states.
If the PE implements less than 8 bits of priority, then the least significant bits of this field are RES0.
This field is RAZ/WI from Non-secure.
This field resets to zero on a Warm reset.

PRI_6, bits [23:16]

Priority 6. Priority of system handler 6, UsageFault.
This field is banked between Security states.
If the PE implements less than 8 bits of priority, then the least significant bits of this field are RES0.
This field resets to zero on a Warm reset.

PRI_5, bits [15:8]

Priority 5. Priority of system handler 5, BusFault.
This field is not banked between Security states.
If the PE implements less than 8 bits of priority, then the least significant bits of this field are RES0.
If AIRCR.BFHFNMINS is zero this field is RAZ/WI from Non-secure state.
This field resets to zero on a Warm reset.

PRI_4, bits [7:0]

Priority 4. Priority of system handler 4, MemManage.
This field is banked between Security states.
If the PE implements less than 8 bits of priority, then the least significant bits of this field are RES0.
This field resets to zero on a Warm reset.


D2.2.183 SHPR2, System Handler Priority Register 2

The SHPR2 characteristics are:

Purpose	Sets or returns priority for system handlers 8 - 11.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. If the Main Extension is implemented, this register is word, halfword, and byte accessible. If the Main Extension is not implemented, this register is word accessible only, halfword and byte accesses are UNPREDICTABLE.
Configurations	This register is always implemented.
Attributes	32-bit read/write register located at 0xE000ED1C. Secure software can access the Non-secure view of this register via SHPR2_NS located at 0xE002ED1C. The location 0xE002ED1C is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Field descriptions

The SHPR2 bit assignments are:



PRI_11, bits [31:24]

Priority 11. Priority of system handler 11, SVCALL.

This field is banked between Security states.

If the PE implements less than 8 bits of priority, then the least significant bits of this field are RES0.

This field resets to zero on a Warm reset.

PRI_10, bits [23:16]

Reserved, RES0.

PRI_9, bits [15:8]

Reserved, RES0.

PRI_8, bits [7:0]

Reserved, RES0.

This field resets to zero on a Warm reset.


D2.2.185 SP, Current Stack Pointer Register

The SP characteristics are:

Purpose	Exception and procedure stack pointer register.
Usage constraints	Privileged and unprivileged access permitted.
Configurations	This register is always implemented.
Attributes	32-bit read/write special-purpose register. This register is not banked between Security states.

Field descriptions

The SP bit assignments are:



VALUE, bits [31:2]

Stack pointer. Holds bits[31:2] of the stack pointer address. The current stack pointer is selected from one of MSP_NS, PSP_NS, MSP_S or PSP_S.

Software can refer to SP as R13.

This field resets to an UNKNOWN value on a Warm reset.

———— **Note** ————

In general, ARM strongly recommends using the names SP, LR and PC instead of R13, R14 and R15. However, sometimes it is simpler to use the R13-R15 names when referring to a group of registers. For example, it is simpler to refer to registers R8 to R15, rather than to registers R8 to R12, the SP, LR and PC. These two descriptions of the group of registers have exactly the same meaning.

Bits [1:0]

Reserved, RES0.


D2.2.186 SP_NS, Stack Pointer (Non-secure)

The SP_NS characteristics are:

- Purpose** Provides access to the current Non-secure stack pointer.
- Usage constraints** Privileged access only. Unprivileged access is RAZ/WI.
- Configurations** This register is always implemented.
- Attributes** 32-bit read/write special-purpose register.
This register is not banked between Security states.

Field descriptions

The SP_NS bit assignments are:



VALUE, bits [31:2]

Stack pointer. Holds bits[31:2] of the current Non-secure stack pointer address. SP_NS is selected from one of MSP_NS or PSP_NS. Access to SP_NS is provided via MRS and MSR and is subject to stack limit checking.

This field resets to an UNKNOWN value on a Warm reset.


D2.2.187 STIR, Software Triggered Interrupt Register

The STIR characteristics are:

Purpose	Provides a mechanism for software to generate an interrupt.
Usage constraints	Unprivileged accesses generate a fault if CCR.USERSETMPEND is zero. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	32-bit write-only register located at 0xE000EF00. Secure software can access the Non-secure view of this register via STIR_NS located at 0xE002EF00. The location 0xE002EF00 is RES0 to software executing in Non-secure state and the debugger. This register is not banked between Security states.

Field descriptions

The STIR bit assignments are:



Bits [31:9]

Reserved, RES0.

INTID, bits [8:0], on a write

Interrupt ID. Indicates the interrupt to be pended. The value written is (ExceptionNumber - 16).

Writing to this register has the same effect as setting the NVIC_ISPR n bit corresponding to the interrupt to 1. Like NVIC_ISPR n , an attempt to pend an interrupt targeting Secure state from Non-secure is ignored.

INTID, bits [8:0], on a read

This field reads as zero.

D2.2.188 SYST_CALIB, SysTick Calibration Value Register

The SYST_CALIB characteristics are:


Purpose	Reads the SysTick timer calibration value and parameters for the selected Security state.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if at least one SysTick timer is implemented. This register is RES0 if no SysTick timer is implemented.
Attributes	32-bit read-only register located at 0xE000E01C. Secure software can access the Non-secure view of this register via SYST_CALIB_NS located at 0xE002E01C. The location 0xE002E01C is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Preface

If the Main Extension is implemented then, two SysTick timers are implemented. If the Main Extension is not implemented, then it is IMPLEMENTATION DEFINED whether none, one or two SysTick timers are implemented. Where two SysTick timers are implemented, this register is banked. Where one SysTick timer is implemented, this register is not banked, and Non-secure accesses behave as RAZ/WI if ICSR.STTNS is clear. If no SysTick timer is implemented, both aliases of this register behave as RES0.

Field descriptions

The SYST_CALIB bit assignments are:



NOREF, bit [31]

No reference. Indicates whether the IMPLEMENTATION DEFINED reference clock is implemented.

The possible values of this bit are:

- 0** Reference clock is implemented.
- 1** Reference clock is not implemented.

When this bit is 1, the CLKSOURCE bit of the SYST_CSR register is forced to 1 and cannot be cleared to 0.

If only one SysTick timer is implemented and ICSR.STTNS is clear, this bit is RAZ/WI from Non-secure state.

If no SysTick timer is implemented this bit is RES0.

This bit reads as an IMPLEMENTATION DEFINED value.

SKEW, bit [30]

Skew. Indicates whether the 10ms calibration value is exact.

The possible values of this bit are:

- 0** TENMS calibration value is exact.
- 1** TENMS calibration value is inexact.

If only one SysTick timer is implemented and ICSR.STTNS is clear, this bit is RAZ/WI from Non-secure state.

If no SysTick timer is implemented this bit is RES0.
This bit reads as an IMPLEMENTATION DEFINED value.

Bits [29:24]

Reserved, RES0.

TENMS, bits [23:0]

Ten milliseconds. Optionally, holds a reload value to be used for 10ms (100Hz) timing, subject to system clock skew errors. If this field is zero, the calibration value is not known.

If only one SysTick timer is implemented and ICSR.STTNS is clear, this field is RAZ/WI from Non-secure state.

If no SysTick timer is implemented this field is RES0.

This field reads as an IMPLEMENTATION DEFINED value.

D2.2.189 SYST_CSR, SysTick Control and Status Register

The SYST_CSR characteristics are:


Purpose	Controls the SysTick timer and provides status data for the selected Security state.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if at least one SysTick timer is implemented. This register is RES0 if no SysTick timer is implemented.
Attributes	32-bit read/write register located at 0xE000E010. Secure software can access the Non-secure view of this register via SYST_CSR_NS located at 0xE002E010. The location 0xE002E010 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Preface

If the Main Extension is implemented, then two SysTick timers are implemented. If the Main Extension is not implemented, then it is IMPLEMENTATION DEFINED whether none, one or two SysTick timers are implemented. Where two SysTick timers are implemented, this register is banked. Where one SysTick timer is implemented, this register is not banked, and Non-secure accesses behave as RAZ/WI if ICSR.STTNS is clear. If no SysTick timer is implemented, both aliases of this register behave as RES0.

Field descriptions

The SYST_CSR bit assignments are:

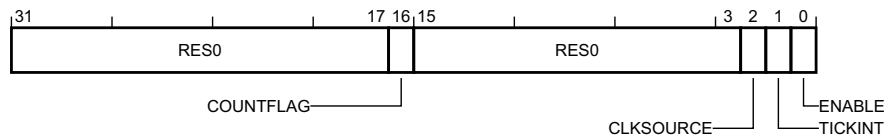

Bits [31:17]

Reserved, RES0.

COUNTFLAG, bit [16]

Count flag. Indicates whether the counter has counted to zero since the last read of this register.

The possible values of this bit are:

- 0** Timer has not counted to 0.
- 1** Timer has counted to 0.

COUNTFLAG is set to 1 by a count transition from 1 to 0. COUNTFLAG is cleared to 0 if software reads this bit as one, and by any write to the SYST_CVR for the selected Security state. Debugger reads do not clear the COUNTFLAG.

If set this bit clears to zero when read by software. Reads from the debugger do not clear this bit.

If only one SysTick timer is implemented and ICSR.STTNS is clear, this bit is RAZ/WI from Non-secure state.

If no SysTick timer is implemented this bit is RES0.

This bit resets to zero on a Warm reset.

Bits [15:3]

Reserved, RES0.

CLKSOURCE, bit [2]

Clock source. Indicates the SysTick clock source.

The possible values of this bit are:

- 0** Uses the IMPLEMENTATION DEFINED external reference clock.
- 1** Uses the PE clock.

If no external clock is implemented, this bit reads as 1 and ignores writes.

If only one SysTick timer is implemented and ICSR.STTNS is clear, this bit is RAZ/WI from Non-secure state.

If no SysTick timer is implemented this bit is RES0.

This bit resets to an IMPLEMENTATION DEFINED value on a Warm reset.

TICKINT, bit [1]

Tick interrupt. Indicates whether counting to 0 causes the status of the SysTick exception to change to pending.

The possible values of this bit are:

- 0** Count to 0 does not affect the SysTick exception status.
- 1** Count to 0 changes the SysTick exception status to pending.

Changing the value of the counter to 0 by writing the SysTick does not change the status of the SysTick exception.

If only one SysTick timer is implemented and ICSR.STTNS is clear, this bit is RAZ/WI from Non-secure state.

If no SysTick timer is implemented this bit is RES0.

This bit resets to zero on a Warm reset.

ENABLE, bit [0]

SysTick enable. Indicates the enabled status of the SysTick counter.

The possible values of this bit are:

- 0** Counter is disabled.
- 1** Counter is enabled.

If only one SysTick timer is implemented and ICSR.STTNS is clear, this bit is RAZ/WI from Non-secure state.

If no SysTick timer is implemented this bit is RES0.

This bit resets to zero on a Warm reset.

D2.2.190 SYST_CVR, SysTick Current Value Register

The SYST_CVR characteristics are:


Purpose	Reads or clears the SysTick timer current counter value for the selected Security state.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if at least one SysTick timer is implemented. This register is RES0 if no SysTick timer is implemented.
Attributes	32-bit read/write-to-clear register located at 0xE000E018. Secure software can access the Non-secure view of this register via SYST_CVR_NS located at 0xE002E018. The location 0xE002E018 is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states.

Preface

If the Main Extension is implemented, then two SysTick timers are implemented. If the Main Extension is not implemented, then it is IMPLEMENTATION DEFINED whether none, one or two SysTick timers are implemented. Where two SysTick timers are implemented, this register is banked. Where one SysTick timer is implemented, this register is not banked, and Non-secure accesses behave as RAZ/WI if ICSR.STTNS is clear. If no SysTick timer is implemented, both aliases of this register behave as RES0.

Field descriptions

The SYST_CVR bit assignments are:



Bits [31:24]

Reserved, RES0.

CURRENT, bits [23:0], on a read

Current counter value. Provides the value of the SysTick timer counter for the selected Security state.

It is IMPLEMENTATION DEFINED whether the current counter value decrements if the PE is sleeping and SCR.SLEEPDEEP is set.

If only one SysTick timer is implemented and ICSR.STTNS is clear, this field is RAZ/WI from Non-secure state.

If no SysTick timer is implemented this field is RES0.

This field resets to an UNKNOWN value on a Warm reset.

CURRENT, bits [23:0], on a write

Reset counter value. Writing any value clears the SysTick timer counter for the selected Security state to zero.


D2.2.192 TPIU_ACPR, TPIU Asynchronous Clock Prescaler Register

The TPIU_ACPR characteristics are:

Purpose	Defines a prescaler value for the baud rate of the Serial Wire Output (SWO). Writing to the register automatically updates the prescale counter, immediately affecting the baud rate of the serial data output.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software. If a debugger changes the register value while the TPIU is transmitting data, the effect on the output stream is UNPREDICTABLE and the required recovery process is IMPLEMENTATION DEFINED.
Configurations	Present only if the TPIU is implemented and supports SWO. This register is RES0 if the TPIU is not implemented or does not support SWO.
Attributes	32-bit read/write register located at 0xE0040010. This register is not banked between Security states.

Field descriptions

The TPIU_ACPR bit assignments are:



Bits [31:16]

Reserved, RES0.

SWOSCALER, bits [15:0]

SWO baud rate prescaler. Sets the ratio between an IMPLEMENTATION DEFINED reference clock and the SWO output clock rates. The supported scaler value range is IMPLEMENTATION DEFINED, to a maximum scalar value of 0xFFFF. Unused bits of this field are RAZ/WI.

The possible values of this field are:

$$n \quad \text{SWO output clock} = \text{Asynchronous_Reference_Clock}/(n + 1).$$

This field resets to zero on a Cold reset.


D2.2.193 TPIU_CIDR0, TPIU Component Identification Register 0

The TPIU_CIDR0 characteristics are:

Purpose	Provides CoreSight discovery information for the TPIU.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read-only register located at 0xE0040FF0. This register is not banked between Security states.

Field descriptions

The TPIU_CIDR0 bit assignments are:



Bits [31:8]

Reserved, RES0.

PRMBL_0, bits [7:0]

CoreSight component identification preamble. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as 0x0D.


D2.2.194 TPIU_CIDR1, TPIU Component Identification Register 1

The TPIU_CIDR1 characteristics are:

Purpose	Provides CoreSight discovery information for the TPIU.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read-only register located at 0xE0040FF4. This register is not banked between Security states.

Field descriptions

The TPIU_CIDR1 bit assignments are:



Bits [31:8]

Reserved, RES0.

CLASS, bits [7:4]

CoreSight component class. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as 0x9.

PRMBL_1, bits [3:0]

CoreSight component identification preamble. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as 0x0.


D2.2.195 TPIU_CIDR2, TPIU Component Identification Register 2

The TPIU_CIDR2 characteristics are:

Purpose	Provides CoreSight discovery information for the TPIU.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read-only register located at 0xE0040FF8. This register is not banked between Security states.

Field descriptions

The TPIU_CIDR2 bit assignments are:



Bits [31:8]

Reserved, RES0.

PRMBL_2, bits [7:0]

CoreSight component identification preamble. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as 0x05.


D2.2.197 TPIU_CSPSR, TPIU Current Parallel Port Sizes Register

The TPIU_CSPSR characteristics are:

Purpose	Controls the width of the parallel trace port.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read/write register located at 0xE0040004. This register is not banked between Security states.

Field descriptions

The TPIU_CSPSR bit assignments are:



CWIDTH, bits [31:0]

Current width. CWIDTH[m] represents a parallel trace port width of ($m+1$).

The possible values of each bit are:

- 0** Width ($N+1$) is not the current parallel trace port width.
- 1** Width ($N+1$) is the current parallel trace port width.

A debugger must set only one bit is set to 1, and all others must be zero. The effect of writing a value with more than one bit set to 1 is UNPREDICTABLE. The effect of a write to an unsupported bit is UNPREDICTABLE.

This register resets to the value for the smallest supported parallel trace port size.

This field resets to an IMPLEMENTATION DEFINED value on a Cold reset.


D2.2.198 TPIU_DEVTYPE, TPIU Device Type Register

The TPIU_DEVTYPE characteristics are:

Purpose	Provides CoreSight discovery information for the TPIU.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read/write register located at 0xE0040FCC. This register is not banked between Security states.

Field descriptions

The TPIU_DEVTYPE bit assignments are:



Bits [31:8]

Reserved, RES0.

SUB, bits [7:4]

Sub-type. Component sub-type.

The possible values of this field are:

0x0 Other. Only permitted if the MAJOR field reads as 0x0.

0x1 Trace port. Only permitted if the MAJOR field reads as 0x1.

This field reads as an IMPLEMENTATION DEFINED value.

MAJOR, bits [3:0]

Major type. Component major type.

The possible values of this field are:

0x0 Miscellaneous.

0x1 Trace sink.

This field reads as an IMPLEMENTATION DEFINED value.


D2.2.199 TPIU_FFCR, TPIU Formatter and Flush Control Register

The TPIU_FFCR characteristics are:

Purpose	Controls the TPIU formatter. This register might contain other formatter and flush control fields that are outside the scope of the architecture. Contact ARM for more information.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read/write register located at 0xE0040304. This register is not banked between Security states.

Field descriptions

The TPIU_FFCR bit assignments are:

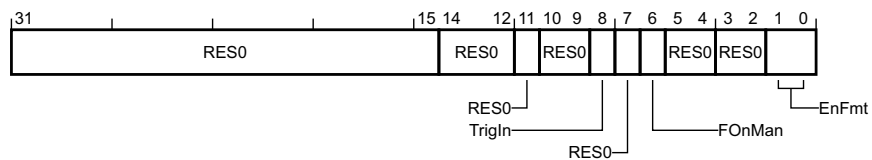

Bits [31:15,11,7,3:2]

Reserved, RES0.

Bits [14:12]

Reserved for formatter stop controls.

Reserved, RES0.

Bits [10:9]

Reserved for additional trigger mark controls.

Reserved, RES0.

TrigIn, bit [8]

Trigger input asserted. Indicate a trigger on the trace port when an IMPLEMENTATION DEFINED TRIGIN signal is asserted.

It is IMPLEMENTATION DEFINED whether this bit is R/W or RAO.

This bit resets to zero on a Cold reset.

FOnMan, bit [6]

Flush On Manual. Setting this bit to 1 generates a flush. The TPIU clears the bit to 0 when the flush completes.

This bit resets to zero on a Cold reset.

Bits [5:4]

Reserved for additional flush controls.

Reserved, RES0.

EnFmt, bits [1:0]

Formatter control. Selects the output formatting mode.

The possible values of this field are:

- 0b00 Bypass. Disable formatting. Only supported when SWO mode is selected. Only a single trace source is supported in bypass mode:
- If only a single trace source is connected to this TPIU, it is selected.
 - If multiple sources (including the ITM) are implemented and connected to this TPIU, then all other trace sources, except for the ITM, must be disabled. Otherwise, the trace output is UNPREDICTABLE.
- All other trace sources are discarded.
- 0b10 Continuous. Enable formatting and embed triggers and null cycles in the formatted output.

All other values are reserved.

If no formatter is implemented, this field is RES0. This field must be set to 0b10 when the parallel trace port is selected, or when using multiple trace sources. Changing the value of this field when TPIU_FFSR.FtStopped is 0 is UNPREDICTABLE.

This field resets to zero on a Cold reset.

———— **Note** —————

An optional TRACECTL pin might be implemented as part of the parallel trace port that allows Bypass mode when using a parallel trace port and a further mode, EnFmt == 0b01. The CoreSight architecture describes EnFmt[1] as the EnFCont bit and EnFmt[0] as the EnFTC bit.


D2.2.200 TPIU_FFSR, TPIU Formatter and Flush Status Register

The TPIU_FFSR characteristics are:

Purpose	Shows the status and capabilities of the TPIU formatter.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read-only register located at 0xE0040300. This register is not banked between Security states.

Field descriptions

The TPIU_FFSR bit assignments are:

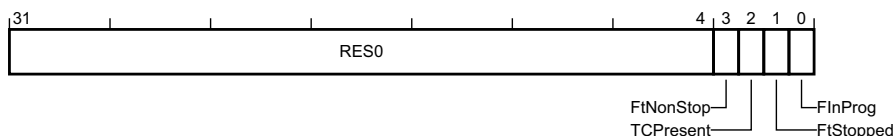

Bits [31:4]

Reserved, RES0.

FtNonStop, bit [3]

Non-stop formatter. Indicates the formatter cannot be stopped.

The possible values of this bit are:

- 0** Formatter can be stopped.
- 1** Formatter cannot be stopped.

If no formatter is implemented, this bit is RAO.

TCPresent, bit [2]

TRACECTL present. Indicates presence of the TRACECTL pin.

The possible values of this bit are:

- 0** No TRACECTL pin is available. The data formatter must be used and only in continuous mode.
- 1** The optional TRACECTL pin is present.

If a parallel trace port is not implemented, this bit is RAZ.

———— **Note** ————

If a parallel trace port is implemented, ARM recommends the TRACECTL pin is not implemented.

FtStopped, bit [1]

Formatter stopped. Indicates the formatter is stopped.

The possible values of this bit are:

- 0** Formatter is enabled.
- 1** The formatter has received a stop request signal and all trace data and post-amble has been output. Any further trace data is ignored.

If no formatter is implemented, or the formatter cannot be stopped, this bit is RAZ.

FInProg, bit [0]

Flush in progress. Set to 1 when a flush is initiated and clears to zero when all data received before the flush is acknowledged has been output on the trace port. That is, the trace has been received at the sink, formatted, and output on the trace port.


D2.2.201 TPIU_LAR, TPIU Software Lock Access Register

The TPIU_LAR characteristics are:

Purpose	Provides CoreSight Software Lock control for the TPIU, see the <i>ARM® CoreSight™ Architecture Specification</i> for details.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. This register is RAZ/WI if accessed via the debugger.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented. Present only if the optional Software Lock is implemented. This register is RAZ/WI if the Software Lock is not implemented.
Attributes	32-bit write-only register located at 0xE0040FB0. This register is not banked between Security states.

Field descriptions

The TPIU_LAR bit assignments are:



KEY, bits [31:0]

Lock Access control.

Writing the key value 0xC5ACCE55 to this field unlocks the lock, enabling write accesses to this component's registers through a memory-mapped interface.

Writing any other value to this register locks the lock, disabling write accesses to this component's registers through a memory mapped interface.


D2.2.202 TPIU_LSR, TPIU Software Lock Status Register

The TPIU_LSR characteristics are:

Purpose	Provides CoreSight Software Lock status information for the TPIU, see the <i>ARM® CoreSight™ Architecture Specification</i> for details.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software. This register is RAZ/WI if accessed via the debugger.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented. Present only if the optional Software Lock is implemented. This register is RAZ/WI if the Software Lock is not implemented.
Attributes	32-bit read-only register located at 0xE0040FB4. This register is not banked between Security states.

Field descriptions

The TPIU_LSR bit assignments are:

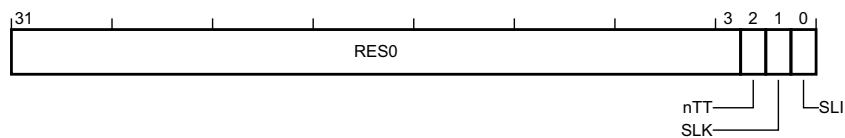

Bits [31:3]

Reserved, RES0.

nTT, bit [2]

Not thirty-two bit. See the *ARM® CoreSight™ Architecture Specification*.

This bit reads as zero.

SLK, bit [1]

Software Lock status. See the *ARM® CoreSight™ Architecture Specification*.

The possible values of this bit are:

- 0** Lock clear. Software writes are permitted to this component's registers.
- 1** Lock set. Software writes to this component's registers are ignored, and reads have no side effects.

For a debugger read of this register, or when the Software Lock is not implemented, this bit is RES0.

This bit resets to one on a Cold reset.

SLI, bit [0]

Software Lock implemented. See the *ARM® CoreSight™ Architecture Specification*.

The possible values of this bit are:

- 0** Software Lock not implemented or debugger access.
- 1** Software Lock is implemented and software access.

For a debugger read of this register, or when the Software Lock is not implemented, this bit is RAZ.
This bit reads as an IMPLEMENTATION DEFINED value.


D2.2.203 TPIU_PIDR0, TPIU Peripheral Identification Register 0

The TPIU_PIDR0 characteristics are:

Purpose	Provides CoreSight discovery information for the TPIU.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read-only register located at 0xE004FE0. This register is not banked between Security states.

Field descriptions

The TPIU_PIDR0 bit assignments are:



Bits [31:8]

Reserved, RES0.

PART_0, bits [7:0]

Part number bits [7:0]. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.


D2.2.204 TPIU_PIDR1, TPIU Peripheral Identification Register 1

The TPIU_PIDR1 characteristics are:

Purpose	Provides CoreSight discovery information for the TPIU.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read-only register located at 0xE0040FE4. This register is not banked between Security states.

Field descriptions

The TPIU_PIDR1 bit assignments are:



Bits [31:8]

Reserved, RES0.

DES_0, bits [7:4]

JEP106 identification code bits [3:0]. See the *ARM® CoreSight™ Architecture Specification*.
This field reads as an IMPLEMENTATION DEFINED value.

PART_1, bits [3:0]

Part number bits [11:8]. See the *ARM® CoreSight™ Architecture Specification*.
This field reads as an IMPLEMENTATION DEFINED value.


D2.2.205 TPIU_PIDR2, TPIU Peripheral Identification Register 2

The TPIU_PIDR2 characteristics are:

Purpose	Provides CoreSight discovery information for the TPIU.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read-only register located at 0xE0040FE8. This register is not banked between Security states.

Field descriptions

The TPIU_PIDR2 bit assignments are:



Bits [31:8]

Reserved, RES0.

REVISION, bits [7:4]

Component revision. See the *ARM® CoreSight™ Architecture Specification*.
This field reads as an IMPLEMENTATION DEFINED value.

JEDEC, bit [3]

JEDEC assignee value is used. See the *ARM® CoreSight™ Architecture Specification*.
This bit reads as one.

DES_1, bits [2:0]

JEP106 identification code bits [6:4]. See the *ARM® CoreSight™ Architecture Specification*.
This field reads as an IMPLEMENTATION DEFINED value.


D2.2.206 TPIU_PIDR3, TPIU Peripheral Identification Register 3

The TPIU_PIDR3 characteristics are:

Purpose	Provides CoreSight discovery information for the TPIU.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read-only register located at 0xE0040FEC. This register is not banked between Security states.

Field descriptions

The TPIU_PIDR3 bit assignments are:



Bits [31:8]

Reserved, RES0.

REVAND, bits [7:4]

RevAnd. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.

CMOD, bits [3:0]

Customer Modified. See the *ARM® CoreSight™ Architecture Specification*.

This field reads as an IMPLEMENTATION DEFINED value.

D2.2.208 TPIU_PIDR5, TPIU Peripheral Identification Register 5

The TPIU_PIDR5 characteristics are:

Purpose	Provides CoreSight discovery information for the TPIU.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read-only register located at 0xE0040FD4. This register is not banked between Security states.

Field descriptions

The TPIU_PIDR5 bit assignments are:



Bits [31:0]

Reserved, RES0.


D2.2.209 TPIU_PIDR6, TPIU Peripheral Identification Register 6

The TPIU_PIDR6 characteristics are:

Purpose	Provides CoreSight discovery information for the TPIU.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read-only register located at 0xE0040FD8. This register is not banked between Security states.

Field descriptions

The TPIU_PIDR6 bit assignments are:



Bits [31:0]

Reserved, RES0.

D2.2.210 TPIU_PIDR7, TPIU Peripheral Identification Register 7

The TPIU_PIDR7 characteristics are:

Purpose	Provides CoreSight discovery information for the TPIU.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if CoreSight identification is implemented. This register is RES0 if CoreSight identification is not implemented. Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read-only register located at 0xE0040FDC. This register is not banked between Security states.

Field descriptions

The TPIU_PIDR7 bit assignments are:



Bits [31:0]

Reserved, RES0.


D2.2.211 TPIU_PSCR, TPIU Periodic Synchronization Control Register

The TPIU_PSCR characteristics are:

Purpose	Defines the reload value for the Periodic Synchronization Counter register. The Periodic Synchronization Counter decrements for each byte that is output by the TPIU. If the formatter is implemented and enabled, the TPIU forces completion of the current frame when the counter reaches zero. It is IMPLEMENTATION DEFINED whether the TPIU forces all trace sources to generate synchronization packets when the counter reaches zero. Bytes generated by the TPIU as part of a Halfword synchronization packet or a Full frame synchronization packet are not counted.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present if the TPIU is implemented and DWT_CYCCNT is not implemented. OPTIONAL if both the TPIU and DWT_CYCCNT are implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read/write register located at 0xE0040308. This register is not banked between Security states.

Field descriptions

The TPIU_PSCR bit assignments are:



Bits [31:5]

Reserved, RES0.

PSCCount, bits [4:0]

Periodic Synchronization Count. Determines the reload value of the Periodic Synchronization Counter. The reload value takes effect the next time the counter reaches zero. Reads from this register return the reload value programmed into this register.

The possible values of this field are:

00000	Synchronization disabled.
00111	128 bytes.
01000	256 bytes.
...	...
11111	2 ³¹ bytes.

All other values are reserved.

The Periodic Synchronization Counter might have a maximum value smaller than 2³¹. In this case, if the programmed reload value is greater than the maximum value, then the Periodic Synchronization Counter is reloaded with its maximum value and the TPIU will generate synchronization requests at this interval.

This field resets to 0xA on a Cold reset.

———— **Note** —————

In the CoreSight TPIU, TPIU_PSCR specifies the number of frames between synchronizations, each frame being 16 bytes. This definition of TPIU_PSCR specifies a number of bytes and is encoded as a power-of-two rather than a plain binary number.


D2.2.212 TPIU_SPPR, TPIU Selected Pin Protocol Register

The TPIU_SPPR characteristics are:

Purpose	Selects the protocol used for trace output.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software. If a debugger changes the register value while the TPIU is transmitting data, the effect on the output stream is UNPREDICTABLE and the required recovery process is IMPLEMENTATION DEFINED.
Configurations	Present only if the TPIU is implemented and supports SWO. This register is RES0 if the TPIU is not implemented or does not support SWO.
Attributes	32-bit read/write register located at 0xE00400F0. This register is not banked between Security states.

Field descriptions

The TPIU_SPPR bit assignments are:



Bits [31:2]

Reserved, RES0.

TXMODE, bits [1:0]

Transmit mode. Specifies the protocol for trace output from the TPIU.

The possible values of this field are:

- 00** Parallel trace port mode. This value is reserved if TPIU_TYPE.PTINVALID == '1'.
- 01** Asynchronous SWO, using Manchester encoding. This value is reserved if TPIU_TYPE.MANCVAlID == '0'.
- 10** Asynchronous SWO, using NRZ encoding. This value is reserved if TPIU_TYPE.NRZVALID == '0'.

All other values are reserved.

The effect of selecting a reserved value, or a mode that the implementation does not support, is UNPREDICTABLE.

This field resets to an IMPLEMENTATION DEFINED value on a Cold reset.


D2.2.213 TPIU_SSPSR, TPIU Supported Parallel Port Sizes Register

The TPIU_SSPSR characteristics are:

Purpose	Indicates the supported parallel trace port sizes.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read/write register located at 0xE0040000. This register is not banked between Security states.

Field descriptions

The TPIU_SSPSR bit assignments are:



SWIDTH, bits [31:0]

Supported width. SWIDTH[m] indicates whether a parallel trace port width of ($m+1$) is supported.

The possible values of each bit are:

0 Parallel trace port width ($m+1$) not supported.

1 Parallel trace port width ($m+1$) supported.

The value of this register is IMPLEMENTATION DEFINED.

This field reads as an IMPLEMENTATION DEFINED value.


D2.2.214 TPIU_TYPE, TPIU Device Identifier Register

The TPIU_TYPE characteristics are:

Purpose	Describes the TPIU to a debugger.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. This register is word accessible only. Halfword and byte accesses are UNPREDICTABLE. If the Main Extension is not implemented then it is IMPLEMENTATION DEFINED whether this register is accessible only to the debugger and RES0 for software.
Configurations	Present only if the TPIU is implemented. This register is RES0 if the TPIU is not implemented.
Attributes	32-bit read-only register located at 0xE0040FC8. This register is not banked between Security states.

Field descriptions

The TPIU_TYPE bit assignments are:

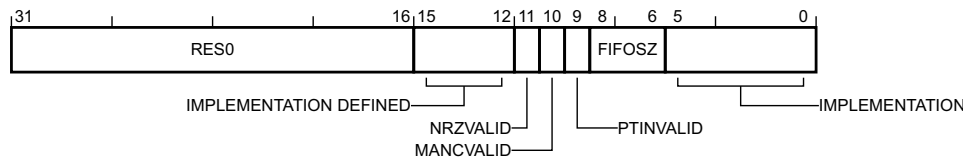

Bits [31:16]

Reserved, RES0.

Bits [15:12]

IMPLEMENTATION DEFINED.

NRZVALID, bit [11]

NRZ valid. Indicates support for SWO using UART/NRZ encoding.

The possible values of this bit are:

- 0** Not supported.
- 1** Supported.

This bit reads as an IMPLEMENTATION DEFINED value.

MANCVVALID, bit [10]

Manchester valid. Indicates support for SWO using Manchester encoding.

The possible values of this bit are:

- 0** Not supported.
- 1** Supported.

This bit reads as an IMPLEMENTATION DEFINED value.

PTINVALID, bit [9]

Parallel Trace Interface invalid. Indicates support for parallel trace port operation.

The possible values of this bit are:

- 0** Supported.
- 1** Not supported.

This bit reads as an IMPLEMENTATION DEFINED value.

FIFOSZ, bits [8:6]

FIFO depth. Indicates the minimum implemented size of the TPIU output FIFO for trace data.

The possible values of this field are:

0 IMPLEMENTATION DEFINED FIFO depth.

Other Minimum FIFO size is 2^{FIFOSZ} .

For example, a value of `0b011` indicates a FIFO size of at least $2^3 = 8$ bytes.

This field reads as an IMPLEMENTATION DEFINED value.

Bits [5:0]

IMPLEMENTATION DEFINED.


D2.2.215 TT_RESP, Test Target Response Payload

The TT_RESP characteristics are:

Purpose	Provides the response information from a TT, TTA, TTT, or TTAT instruction.
Usage constraints	None.
Configurations	All.
Attributes	32-bit payload.

Field descriptions

The TT_RESP bit assignments are:

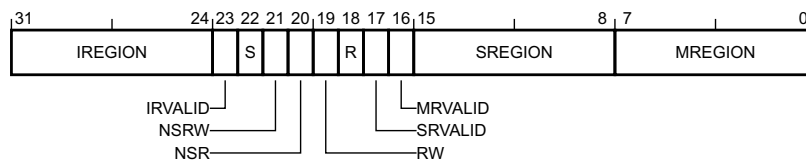

IREGION, bits [31:24]

IDAU region number. Indicates the IDAU region number containing the target address. This field is zero if IRVALID is zero.

IRVALID, bit [23]

IREGION valid flag. For a Secure request, indicates the validity of the IREGION field.

The possible values of this bit are:

- 0** IREGION content not valid.
- 1** IREGION content valid.

This bit is always zero if the IDAU cannot provide a region number, the address is exempt from security attribution, or if the requesting TT instruction was executed from the Non-secure state.

S, bit [22]

Security. For a Secure request, indicates the Security attribute of the target address.

The possible values of this bit are:

- 0** Target address is Non-secure.
- 1** Target address is Secure.

This bit is always zero if the requesting TT instruction was executed from the Non-secure state.

NSRW, bit [21]

Non-secure read and writeable. Equal to RW AND NOT S. Can be used in combination with the LSLS (immediate) instruction to check both the MPU and SAU/IDAU permissions. This field is only valid if the instruction was executed from Secure state and the RW field is valid.

NSR, bit [20]

Non-secure readable. Equal to R AND NOT S. Can be used in combination with the LSLS (immediate) instruction to check both the MPU and SAU/IDAU permissions. This field is only valid if the instruction was executed from Secure state and the R field is valid.

RW, bit [19]

Read and writeable. Set to 1 if the memory location can be read and written according to the permissions of the selected MPU when operating in the current mode. For TTT and TTAT, this field returns the permissions for unprivileged access, regardless of whether the current mode is privileged or unprivileged.

R, bit [18]

Readable. Read accessibility. Set to 1 if the memory location can be read according to the permissions of the selected MPU when operating in the current mode. For TTT and TTAT, this field returns the permissions for unprivileged access, regardless of whether the current mode is privileged or unprivileged.

SRVALID, bit [17]

SREGION valid flag. For a Secure request indicates validity of the SREGION field.

The possible values of this bit are:

0 SREGION content not valid.

1 SREGION content valid.

This bit is always zero if the requesting TT instruction was executed from the Non-secure state.

MRVALID, bit [16]

MREGION valid flag. Indicates validity of the MREGION field.

The possible values of this bit are:

0 MREGION content not valid.

1 MREGION content valid.

This bit is only valid for TT and TTA instructions, executed in the Secure state or in privileged mode in Non-secure state.

SREGION, bits [15:8]

SAU region number. Holds the SAU region that the address maps to.

This field is only valid if the instruction was executed from Secure state. This field is zero if SRVALID is 0.

MREGION, bits [7:0]

MPU region number. Holds the MPU region that the address maps to.

This field is zero if MRVALID is 0.


D2.2.216 UFSR, UsageFault Status Register

The UFSR characteristics are:

Purpose	Contains the status for some instruction execution faults, and for data access faults.
Usage constraints	Privileged access permitted only. Unprivileged accesses generate a BusFault. If the Main Extension is implemented, this register is word, halfword, and byte accessible. If the Main Extension is not implemented, this register is word accessible only, halfword and byte accesses are UNPREDICTABLE.
Configurations	Present only if the Main Extension is implemented. This register is RES0 if the Main Extension is not implemented.
Attributes	16-bit read/write-one-to-clear register located at 0xE000ED2A. Secure software can access the Non-secure view of this register via UFSR_NS located at 0xE002ED2A. The location 0xE002ED2A is RES0 to software executing in Non-secure state and the debugger. This register is banked between Security states. This register is part of CFSR.

Field descriptions

The UFSR bit assignments are:

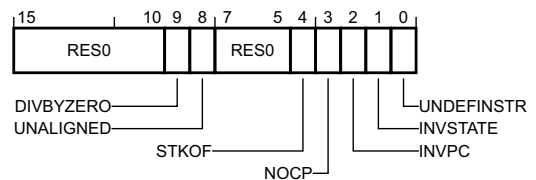

Bits [15:10]

Reserved, RES0.

DIVBYZERO, bit [9]

Divide by zero flag. Sticky flag indicating whether an integer division by zero error has occurred.

The possible values of this bit are:

- 0** Error has not occurred.
- 1** Error has occurred.

This bit resets to zero on a Warm reset.

UNALIGNED, bit [8]

Unaligned access flag. Sticky flag indicating whether an unaligned access error has occurred.

The possible values of this bit are:

- 0** Error has not occurred.
- 1** Error has occurred.

This bit resets to zero on a Warm reset.

Bits [7:5]

Reserved, RES0.

STKOF, bit [4]

Stack overflow flag. Sticky flag indicating whether a stack overflow error has occurred.

The possible values of this bit are:

0 Error has not occurred.

1 Error has occurred.

This bit resets to zero on a Warm reset.

NOCP, bit [3]

No coprocessor flag. Sticky flag indicating whether a coprocessor disabled or not present error has occurred.

The possible values of this bit are:

0 Error has not occurred.

1 Error has occurred.

This bit resets to zero on a Warm reset.

INVPC, bit [2]

Invalid PC flag. Sticky flag indicating whether an integrity check error has occurred.

The possible values of this bit are:

0 Error has not occurred.

1 Error has occurred.

This bit resets to zero on a Warm reset.

INVSTATE, bit [1]

Invalid state flag. Sticky flag indicating whether an EPSR.T or EPSR.IT validity error has occurred.

The possible values of this bit are:

0 Error has not occurred.

1 Error has occurred.

This bit resets to zero on a Warm reset.

UNDEFINSTR, bit [0]

Undefined instruction flag. Sticky flag indicating whether an undefined instruction error has occurred.

The possible values of this bit are:

0 Error has not occurred.

1 Error has occurred.

This includes attempting to execute an undefined instruction associated with an enable coprocessor.

This bit resets to zero on a Warm reset.

D2.2.218 XPSR, Combined Program Status Registers


The XPSR characteristics are:

Purpose	Provides access to a combination of the APSR, EPSR and IPSR.
Usage constraints	Privileged access only. Unprivileged access is RAZ/WI.
Configurations	This register is always implemented.
Attributes	32-bit read/write special-purpose register. This register is not banked between Security states.


Field descriptions

The XPSR bit assignments are:

When {XPSR[26:25], XPSR[11:10]} != 0:



When {XPSR[26:25], XPSR[11:10]} == 0:



N, bit [31]

Negative flag. Reads or writes the current value of APSR.N.

Z, bit [30]

Zero flag. Reads or writes the current value of APSR.Z.

C, bit [29]

Carry flag. Reads or writes the current value of APSR.C.

V, bit [28]

Overflow flag. Reads or writes the current value of APSR.V.

Q, bit [27]

Saturate flag. Reads or writes the current value of APSR.Q.

T, bit [24]

T32 state. Reads or writes the current value of EPSR.T.

Bits [23:20]

Reserved, RES0.

GE, bits [19:16]

Greater-than or equal flag. Reads or writes the current value of APSR.GE.

IT, bits [15:10,26:25], when {XPSR[26:25], XPSR[11:10]} != 0

If-then flags. Reads or writes the current value of EPSR.IT.

ICI, bits [26:25,15:10], when {XPSR[26:25], XPSR[11:10]} == 0

Interrupt continuation flags. Reads or writes the current value of EPSR.ICI.

Bit [9]

Reserved, RES0.

Exception, bits [8:0]

Exception number. Reads or writes the current value of IPSR.Exception.

Part E

ARMv8-M Pseudocode

Chapter E1

Pseudocode Overview

This chapter describes the pseudocode descriptions contained in [Chapter E3 Pseudocode Specification](#). It contains the following sections:

- [About the pseudocode on page E1-1118.](#)
- [Pseudocode operators and keywords on page E1-1119.](#)

E1.1 About the pseudocode

The ARMv8-M pseudocode describes the main operation of the instructions and exception model. For a detailed description of the pseudocode used and of the relationship between the encoding diagram, the encoding-specific pseudocode and the encoding-independent pseudocode, see [Chapter E3 Pseudocode Specification](#).

E1.2 Pseudocode operators and keywords

Table E1-1 shows the pseudocode operators and keywords.

Table E1-1 Pseudocode operators and keywords

Operator	Meaning
-	Unary minus on integers or reals
-	Subtraction of integers, reals and bitstrings
+	Unary plus on integers or reals
+	Addition of integers, reals and bitstrings
.	Extract named member from a list
.	Extract named bit or field from a register
:	Bitstring concatenation
:	Integer range in bitstring extraction operator
!	Boolean NOT
!=	Compare for non-equality (any type)
!=	Compare for non-equality (between integers and reals)
(...)	Around arguments of procedure
(...)	Around arguments of function
[...]	Around array index
[...]	Around arguments of array-like function
*	Multiplication of integers and reals
/	Division of integers and reals (real result)
/*...*/	Comment delimiters
//	Introduces comment terminated by end of line
&&	Boolean AND
<	<i>Less than</i> comparison of integers and reals
<...>	Extraction of specified bits of bitstring or integer
<<	Multiply integer by power of 2 (with rounding towards -infinity)
<=	<i>Less than or equal</i> comparison of integers and reals
=	Assignment
==	Compare for equality (any type)
==	Compare for equality (between integers and reals)
>	<i>Greater than</i> comparison of integers and reals
>=	<i>Greater than or equal</i> comparison of integers and reals
>>	Divide integer by power of 2 (with rounding towards -infinity)

Table E1-1 Pseudocode operators and keywords (continued)

Operator	Meaning
	Boolean OR
x ^N	N th integer power of integers or real ^a
AND	Bitwise AND of bitstrings
array	Keyword introducing array type definition
bit	Bitstring type of length 1
bits(N)	Bitstring type of length N
boolean	Boolean type
case ... of ...	Control structure
DIV	Quotient from integer division
enumeration	Keyword introducing enumeration type definition
EOR	Bitwise EOR of bitstrings
FALSE	Boolean constant
for ...	Control structure
for ... downto	Counts down
if ... then ... else ...	Expression selecting between two values
if ... then ... else ...	Control structure
IN	Tests membership of a set of values
IMPLEMENTATION_DEFINED	Describes IMPLEMENTATION_DEFINED behavior
integer	Unbounded integer type
MOD	Remainder from integer division
OR	Bitwise OR of bitstrings
otherwise	Introduces default case in case ... of ... control structure
real	Real number type
repeat ... until ...	Control structure
return	Procedure or function return
SEE	Points to other pseudocode to use instead
TRUE	Boolean constant
type	Names a type
UNDEFINED	Cause Undefined Instruction exception
UNKNOWN	Unspecified value

Table E1-1 Pseudocode operators and keywords (continued)

Operator	Meaning
UNPREDICTABLE	Unspecified behavior
when	Introduces specific case in case ... of ... control structure
while ... do ...	Control structure

a. N must be an integer, x can be an integer or a real.

Chapter E2

ARM Pseudocode Definition

This appendix provides a definition of the pseudocode that is used in this manual, and defines some *built-in* functions that are used by pseudocode. It contains the following sections:

- [About the ARM pseudocode on page E2-1124.](#)
- [Data types on page E2-1125.](#)
- [Operators on page E2-1130.](#)
- [Statements and control structures on page E2-1136.](#)
- [Built-in functions on page E2-1142.](#)
- [ARM pseudocode definition index on page E2-1145.](#)

———— **Note** —————

This appendix is not a formal language definition for the pseudocode. It is a guide to help understand the use of ARM pseudocode. This appendix is not complete. Changes are planned for future releases.

E2.1 About the ARM pseudocode

The ARM pseudocode provides precise descriptions of some areas of the ARM architecture. This includes description of the decoding and operation of all valid instructions.

The following sections describe the ARM pseudocode in detail:

- [Data types on page E2-1125](#).
- [Operators on page E2-1130](#).
- [Statements and control structures on page E2-1136](#).

[Built-in functions on page E2-1142](#) describes some built-in functions that are used by the pseudocode functions that are described elsewhere in this manual. [ARM pseudocode definition index on page E2-1145](#) contains the indexes to the pseudocode.

E2.1.1 General limitations of ARM pseudocode

The pseudocode statements IMPLEMENTATION_DEFINED, SEE, UNDEFINED, and UNPREDICTABLE indicate behavior that differs from that indicated by the pseudocode being executed. If one of them is encountered:

- Earlier behavior indicated by the pseudocode is only specified as occurring to the extent required to determine that the statement is executed.
- No subsequent behavior indicated by the pseudocode occurs.

For more information, see [Special statements on page E2-1140](#).

E2.2 Data types

This section describes:

- [General data type rules](#).
- [Bitstrings](#).
- [Integers](#) on page E2-1126.
- [Reals](#) on page E2-1126.
- [Booleans](#) on page E2-1126.
- [Enumerations](#) on page E2-1127.
- [Tuples](#) on page E2-1128.
- [Structures](#) on page E2-1127.
- [Arrays](#) on page E2-1129.

E2.2.1 General data type rules

ARM architecture pseudocode is a strongly typed language. Every literal and variable is of one of the following types:

- Bitstring.
- Integer.
- Boolean.
- Real.
- Enumeration.
- Tuple.
- Struct.
- Array.

The type of a literal is determined by its syntax. A variable can be assigned to without an explicit declaration. The variable implicitly has the type of the assigned value. For example, the following assignments implicitly declare the variables `x`, `y` and `z` to have types integer, bitstring of length 1, and Boolean, respectively.

```
x = 1;
y = '1';
z = TRUE;
```

Variables can also have their types declared explicitly by preceding the variable name with the name of the type. The following example declares explicitly that a variable named `count` is an integer.

```
integer count;
```

This is most often done in function definitions for the arguments and the result of the function.

The remaining subsections describe each data type in more detail.

E2.2.2 Bitstrings

This section describes the bitstring data type.

Syntax

`bits(N)` The type name of a bitstring of length `N`.
`bit` A synonym of `bits(1)`.

Description

A bitstring is a finite-length string of 0s and 1s. Each length of bitstring is a different type. The minimum permitted length of a bitstring is 0.

Bitstring constants literals are written as a single quotation mark, followed by the string of 0s and 1s, followed by another single quotation mark. For example, the two constants literals of type bit are '0' and '1'. Spaces can be included in bitstrings for clarity.

The bits in a bitstring are numbered from left to right $N-1$ to 0. This numbering is used when accessing the bitstring using bitslices. In conversions to and from integers, bit $N-1$ is the MSByte and bit 0 is the LSByte. This order matches the order in which bitstrings derived from encoding diagrams are printed.

Every bitstring value has a left-to-right order, with the bits being numbered in standard *little-endian* order. That is, the leftmost bit of a bitstring of length N is bit $(N-1)$ and its right-most bit is bit 0. This order is used as the most-significant-to-least-significant bit order in conversions to and from integers. For bitstring constants and bitstrings that are derived from encoding diagrams, this order matches the way that they are printed.

Bitstrings are the only concrete data type in pseudocode, corresponding directly to the contents values that are manipulated in registers, memory locations, and instructions. All other data types are abstract.

E2.2.3 Integers

This section describes the data type for integer numbers.

Syntax

`integer` The type name for the integer data type.

Description

Pseudocode integers are unbounded in size and can be either positive or negative. That is, they are mathematical integers rather than what computer languages and architectures commonly call integers. Computer integers are represented in pseudocode as bitstrings of the appropriate length, and the pseudocode provides functions to interpret those bitstrings as integers.

Integer literals are normally written in decimal form, such as 0, 15, -1234. They can also be written in C-style hexadecimal form, such as 0x55 or 0x80000000. Hexadecimal integer literals are treated as positive unless they have a preceding minus sign. For example, 0x80000000 is the integer $+2^{31}$. If -2^{31} needs to be written in hexadecimal, it must be written as -0x80000000.

E2.2.4 Reals

This section describes the data type for real numbers.

Syntax

`real` The type name for the real data type.

Description

Pseudocode reals are unbounded in size and precision. That is, they are mathematical real numbers, not computer floating-point numbers. Computer floating-point numbers are represented in pseudocode as bitstrings of the appropriate length, associated with suitable and the pseudocode provides functions to interpret those bitstrings as reals.

Real constants literals are written in decimal form with a decimal point. This means 0 is an integer constant literal, but 0.0 is a real constant literal.

E2.2.5 Booleans

This section describes the Boolean data type.

Syntax

`boolean` The type name for the Boolean data type.
`TRUE, FALSE` The two values a Boolean variable can take.

Description

A Boolean is a logical TRUE or FALSE value.

———— Note ————

This is not the same type as `bit`, which is a bitstring of length 1. A Boolean can only take on one of two values: TRUE or FALSE.

E2.2.6 Enumerations

This section describes the enumeration data type.

Syntax and examples

`enumeration` Keyword to defined a new enumeration type.
`enumeration Example {Example_One, Example_Two, Example_Three};`
 A definition of a new enumeration called `Example`, which can take on the values `Example_One`, `Example_Two`, `Example_Three`.

Description

An enumeration is a defined set of named values.

An enumeration must contain at least one named value. A named value must not be shared between enumerations.

Enumerations must be defined explicitly, although a variable of an enumeration type can be declared implicitly by assigning one of the named values to it. By convention, each named value starts with the name of the enumeration followed by an underscore. The name of the enumeration is its *type name*, or *type*, and the named values are its possible *values*.

E2.2.7 Structures

This section describes the structure data type.

Syntax and examples

`type` The keyword used to declare the structure data type.
`type ShiftSpec is (bits(2) shift, integer amount)`
 An example definition for a new structure called `ShiftSpec` that contains an bitstring member called `shift` and a integer member named `amount`. Structure definitions must not be terminated with a semicolon.
`ShiftSpec abc;`
 A declaration of a variable named `abc` of type `ShiftSpec`.
`abc.shift`
 Syntax to refer to the individual members within the structure variable.

Description

A structure is a compound data type composed of one or more data items. The data items can be of different data types. This can include compound data types. The data items of a structure are called its members and are named.

In the syntax section, the example defines a structure called `ShiftSpec` with two members. The first is a bitstring of length 2 named `shift` and the second is an integer named `amount`. After declaring a variable of that type named `abc`, the members of this structure are referred to as `abc.shift` and `abc.amount`.

Every definition of a structure creates a different type, even if the number and type of their members are identical. For example:

```
type ShiftSpec1 is (bits(2) shift, integer amount)
type ShiftSpec2 is (bits(2) shift, integer amount)
```

`ShiftSpec1` and `ShiftSpec2` are two different types despite having identical definitions. This means that the value in a variable of type `ShiftSpec1` cannot be assigned to variable of type `ShiftSpec2`.

E2.2.8 Tuples

This section describes the tuple data type.

Examples

```
(bits(32) shifter_result, bit shifter_carry_out)
```

An example of the tuple syntax.

```
(shift_t, shift_n) = ('00', 0);
```

An example of assigning values to a tuple.

Description

A tuple is an ordered set of data items, separated by commas and enclosed in parentheses. The items can be of different types and a tuple must contain at least one data item.

Tuples are often used as the return type for functions that return multiple results. For example, in the syntax section, the example tuple is the return type of the function `Shift_C()`, which performs a standard A32/T32 shift or rotation. Its return type is a tuple containing two data items, with the first of type `bits(32)` and the second of type `bit`.

Each tuple is a separate compound data type. The compound data type is represented as a comma-separated list of ordered data types between parentheses. This means that the example tuple at the start of this section is of type `(bits(32), bit)`. The general principle that types can be implied by an assignment extends to implying the type of the elements in the tuple. For example, in the syntax section, the example assignment implicitly declares:

- `shift_t` to be of type `bits(2)`.
- `shift_n` to be of type `integer`.
- `(shift_t, shift_n)` to be a tuple of type `(bits(2), integer)`.

E2.2.9 Arrays

This section describes the array data type.

Syntax

array The type name for the array data type.

```
array data_type array_name[A..B];
```

Declaration of an array of type `data_type`, which might be compound data type. It is named `array_name` and is indexed with an integer range from A to B.

Description

An array is an ordered set of fixed size containing items of a single data type. This can include compound data types. Pseudocode arrays are indexed by either enumerations or integer ranges. An integer range is represented by the lower inclusive end of the range, then `..`, then the upper inclusive end of the range.

For example:

The following example declares an array of 31 bitstrings of length 64, indexed from 0 to 30.

```
array bits(64) _R[0..30];
```

Arrays are always explicitly declared, and there is no notation for a constant literal array. Arrays always contain at least one element data item, because:

- Enumerations always contain at least one symbolic constant named value.
- Integer ranges always contain at least one integer.

An array declared with an enumeration type as the index must be accessed using enumeration values of that enumeration type. An array declared with an integer range type as the index must be accessed using integer values from that inclusive range. Accessing such an array with an integer value outside of the range is a coding error.

Arrays do not usually appear directly in pseudocode. The items that syntactically look like arrays in pseudocode are usually array-like functions such as `R[i]`, `MemU[address, size]` or `Elem[vector, i, size]`. These functions package up and abstract additional operations normally performed on accesses to the underlying arrays, such as register banking, memory protection, endian-dependent byte ordering, exclusive-access housekeeping and Advanced SIMD element processing. See [Function and procedure calls on page E2-1136](#).

E2.3 Operators

This section describes:

- [Relational operators](#).
- [Boolean operators](#).
- [Arithmetic operators on page E2-1131](#).

E2.3.1 Relational operators

The following operations yield results of type `boolean`.

Equality and non-equality

If two variables `x` and `y` are of the same type, their values can be tested for equality by using the expression `x == y` and for non-equality by using the expression `x != y`. In both cases, the result is of type `boolean`.

Both `x` and `y` must be of type `bits(N)`, `real`, `enumeration`, `boolean`, or `integer`. Named values from an enumeration can only be compared if they are both from the same enumeration. An exception is that a bitstring can be tested for equality with an integer to allow a `d==15` test.

A special form of comparison is defined with a bitstring literal that can contain bit values '0', '1', and 'x'. Any bit with value 'x' is ignored in determining the result of the comparison. For example, if `opcode` is a 4-bit bitstring, the expression `opcode == '1x0x'` matches the values '1000', '1100', '1001', and '1101'. This is known as a bitmask.

———— **Note** —————

This special form is permitted in the implied equality comparisons in the `when` parts of `case ... of ...` structures.

Comparisons

If `x` and `y` are integers or reals, then `x < y`, `x <= y`, `x > y`, and `x >= y` are less than, less than or equal, greater than, and greater than or equal comparisons between them, producing Boolean results.

Set membership with `IN`

`<expression> IN {<set>}` produces `TRUE` if `<expression>` is a member of `<set>`. Otherwise, it is `FALSE`. `<set>` must be a list of expressions separated by commas.

E2.3.2 Boolean operators

If `x` is a Boolean expression, then `!x` is its logical inverse.

If `x` and `y` are Boolean expressions, then `x && y` is the result of ANDing them together. As in the C language, if `x` is `FALSE`, the result is determined to be `FALSE` without evaluating `y`.

———— **Note** —————

This is known as short circuit evaluation.

If `x` and `y` are booleans, then `x || y` is the result of ORing them together. As in the C language, if `x` is `TRUE`, the result is determined to be `TRUE` without evaluating `y`.

———— **Note** —————

If `x` and `y` are booleans or Boolean expressions, then the result of `x != y` is the same as the result of exclusive-ORing `x` and `y` together. The operator `EOR` only accepts bitstring arguments.

E2.3.3 Bitstring operators

The following operations can be applied only to bitstrings.

Logical operations on bitstrings

If x is a bitstring, $\text{NOT}(x)$ is the bitstring of the same length obtained by logically inverting every bit of x .

If x and y are bitstrings of the same length, $x \text{ AND } y$, $x \text{ OR } y$, and $x \text{ EOR } y$ are the bitstrings of that same length obtained by logically ANDing, logically ORing, and exclusive-ORing corresponding bits of x and y together.

Bitstring concatenation and slicing

If x and y are bitstrings of lengths N and M respectively, then $x:y$ is the bitstring of length $N+M$ constructed by concatenating x and y in left-to-right order.

The bitstring slicing operator addresses specific bits in a bitstring. This can be used to create a new bitstring from extracted bits or to set the value of specific bits. Its syntax is $x\langle\text{integer_list}\rangle$, where x is the integer or bitstring being sliced, and $\langle\text{integer_list}\rangle$ is a comma-separated list of integers enclosed in angle brackets. The length of the resulting bitstring is equal to the number of integers in $\langle\text{integer_list}\rangle$. In $x\langle\text{integer_list}\rangle$, each of the integers in $\langle\text{integer_list}\rangle$ must be:

- ≥ 0 .
- $< \text{Len}(x)$ if x is a bitstring.

The definition of $x\langle\text{integer_list}\rangle$ depends on whether integer_list contains more than one integer:

- If integer_list contains more than one integer, $x\langle i, j, k, \dots, n \rangle$ is defined to be the concatenation:
 $x\langle i \rangle : x\langle j \rangle : x\langle k \rangle : \dots : x\langle n \rangle$.
- If integer_list consists of just one integer i , $x\langle i \rangle$ is defined to be:
 - If x is a bitstring, '0' if bit i of x is a zero and '1' if bit i of x is a one.
 - If x is an integer, and y is the unique integer in the range 0 to $2^{i+1}-1$ that is congruent to x modulo 2^{i+1} . Then $x\langle i \rangle$ is '0' if $y < 2^i$ and '1' if $y \geq 2^i$.
Loosely, this definition treats an integer as equivalent to a sufficiently long two's complement representation of it as a bitstring.

The notation for a range expression is $i:j$ with $i \geq j$ is shorthand for the integers in order from i down to j , with both end values included. For example, $\text{instr}\langle 31:28 \rangle$ represents $\text{instr}\langle 31, 30, 29, 28 \rangle$.

$x\langle\text{integer_list}\rangle$ is assignable provided x is an assignable bitstring and no integer appears more than once in $\langle\text{integer_list}\rangle$. In particular, $x\langle i \rangle$ is assignable if x is an assignable bitstring and $0 \leq i < \text{Len}(x)$.

Encoding diagrams for registers frequently show named bits or multi-bit fields. For example, the encoding diagram for the [APSR](#) shows its $\text{bit}\langle 31 \rangle$ as N . In such cases, the syntax [APSR.N](#) is used as a more readable synonym for $\text{APSR}\langle 31 \rangle$ as named bits can be referred to with the same syntax as referring to members of a struct. A comma-separated list of named bits enclosed in angle brackets following the register name allows multiple bits to be addressed simultaneously. For example, $\text{APSR}\langle N, C, Q \rangle$ is synonymous with $\text{APSR}\langle 31, 29, 27 \rangle$.

E2.3.4 Arithmetic operators

Most pseudocode arithmetic is performed on integer or real values, with operands obtained by conversions from bitstrings and results converted back to bitstrings. As these data types are the unbounded mathematical types, no issues arise about overflow or similar errors.

Unary plus and minus

If x is an integer or real, then $+x$ is x unchanged, $-x$ is x with its sign reversed. Both are of the same type as x .

Addition and subtraction

If x and y are integers or reals, $x+y$ and $x-y$ are their sum and difference. Both are of type `integer` if x and y are both of type `integer`, and `real` otherwise.

There are two cases where the types of x and y can be different. A bitstring and an integer can be added together to allow the operation $PC + 4$. An integer can be subtracted from a bitstring to allow the operation $PC - 2$.

If x and y are bitstrings of the same length N , so that $N = \text{Len}(x) = \text{Len}(y)$, then $x+y$ and $x-y$ are the least significant N bits of the results of converting x and y to integers and adding or subtracting them. Signed and unsigned conversions produce the same result:

$$\begin{aligned}x+y &= (\text{SInt}(x) + \text{SInt}(y))\langle N-1:0 \rangle \\ &= (\text{UInt}(x) + \text{UInt}(y))\langle N-1:0 \rangle \\ x-y &= (\text{SInt}(x) - \text{SInt}(y))\langle N-1:0 \rangle \\ &= (\text{UInt}(x) - \text{UInt}(y))\langle N-1:0 \rangle\end{aligned}$$

If x is a bitstring of length N and y is an integer, $x+y$ and $x-y$ are the bitstrings of length N defined by $x+y = x + y\langle N-1:0 \rangle$ and $x-y = x - y\langle N-1:0 \rangle$. Similarly, if x is an integer and y is a bitstring of length M , $x+y$ and $x-y$ are the bitstrings of length M defined by $x+y = x\langle M-1:0 \rangle + y$ and $x-y = x\langle M-1:0 \rangle - y$.

Multiplication

If x and y are integers or reals, then $x * y$ is the product of x and y . It is of type `integer` if x and y are both of type `integer`, and `real` otherwise.

Division and modulo

If x and y are reals, then x/y is the result of dividing x by y , and is always of type `real`.

If x and y are integers, then $x \text{ DIV } y$ and $x \text{ MOD } y$ are defined by:

$$\begin{aligned}x \text{ DIV } y &= \text{RoundDown}(x/y) \\ x \text{ MOD } y &= x - y * (x \text{ DIV } y)\end{aligned}$$

It is a pseudocode error to use any of x/y , $x \text{ MOD } y$, or $x \text{ DIV } y$ in any context where y can be zero.

Scaling

If x and n are of type `integer`, then:

- $x \ll n = \text{RoundDown}(x * 2^n)$.
- $x \gg n = \text{RoundDown}(x * 2^{(-n)})$.

Raising to a power

If x is an integer or a real and n is an integer then x^n is the result of raising x to the power of n , and:

- If x is of type `integer` then x^n is of type `integer`.
- If x is of type `real` then x^n is of type `real`.

E2.3.5 The assignment operator

The assignment operator is the `=` character, which assigns the value of the right-hand side to the left-hand side. An assignment statement takes the form:

```
<assignable_expression> = <expression>;
```

This following subsection defines valid expression syntax.

General expression syntax

An expression is one of the following:

- A literal.

- A variable, optionally preceded by a data type name to declare its type.
- The word UNKNOWN preceded by a data type name to declare its type.
- The result of applying a language-defined operator to other expressions.
- The result of applying a function to other expressions.

Variable names normally consist of alphanumeric and underscore characters, starting with an alphabetic or underscore character.

Each register defined in an ARM architecture specification defines a correspondingly named pseudocode bitstring variable, and that variable has the stated behavior of the register. For example, if a bit of a register is defined as RAZ/WI, then the corresponding bit of its variable reads as '0' and ignore writes.

An expression like `bits(32) UNKNOWN` indicates that the result of the expression is a value of the given type, but the architecture does not specify what value it is and software must not rely on such values. The value produced must not:

- Return information that cannot be accessed at the current or a lower level of privilege using instructions that are not UNPREDICTABLE or CONSTRAINED UNPREDICTABLE and do not return UNKNOWN values,
- Be promoted as providing any useful information to software.

———— **Note** —————

UNKNOWN values are similar to the definition of UNPREDICTABLE, but do not indicate that the entire architectural state becomes unspecified.

Only the following expressions are assignable. This means that these are the only expressions that can be placed on the left-hand side of an assignment.

- Variables.
- The results of applying some operators to other expressions.
The description of each language-defined operator that can generate an assignable expression specifies the circumstances under which it does so. For example, those circumstances might require that one or more of the expressions the operator operates on is an assignable expression.
- The results of applying array-like functions to other expressions. The description of an array-like function specifies the circumstances under which it can generate an assignable expression.

———— **Note** —————

If the right-hand side in an assignment is a function returning a tuple, an item in the assignment destination can be written as `-` to indicate that the corresponding item of the assigned tuple value is discarded. For example:

```
(shifted, -) = LSL_C(operand, amount);
```

The expression on the right-hand side itself can be a tuple. For example:

```
(x, y) = (function_1(), function_2());
```

Every expression has a data type.

- For a literal, this data type is determined by the syntax of the literal.
- For a variable, there are the following possible sources for the data type
 - An optional preceding data type name.
 - A data type the variable was given earlier in the pseudocode by recursive application of this rule.
 - A data type the variable is being given by assignment, either by direct assignment to the variable, or by assignment to a list of which the variable is a member.

It is a pseudocode error if none of these data type sources exists for a variable, or if more than one of them exists and they do not agree about the type.

- For a language-defined operator, the definition of the operator determines the data type.
- For a function, the definition of the function determines the data type.

E2.3.6 Precedence rules

The precedence rules for expressions are:

1. Literals, variables and function invocations are evaluated with higher priority than any operators using their results, but see [Boolean operators on page E2-1130](#).
2. Operators on integers follow the normal operator precedence rules of *exponentiation before multiply/divide before add/subtract*, with sequences of multiply/divides or add/subtracts evaluated left-to-right.
3. Other expressions must be parenthesized to indicate operator precedence if ambiguity is possible, but need not be if all permitted precedence orders under the type rules necessarily lead to the same result. For example, if *i*, *j* and *k* are integer variables, *i* > 0 && *j* > 0 && *k* > 0 is acceptable, but *i* > 0 && *j* > 0 || *k* > 0 is not.

E2.3.7 Conditional expressions

If *x* and *y* are two values of the same type and *t* is a value of type `boolean`, then `if t then x else y` is an expression of the same type as *x* and *y* that produces *x* if *t* is `TRUE` and *y* if *t* is `FALSE`.

E2.3.8 Operator polymorphism

Operators in pseudocode can be polymorphic, with different functionality when applied to different data types. Each resulting form of an operator has a different prototype definition. For example, the operator `+` has forms that act on various combinations of integers, reals and bitstrings.

[Table E2-1](#) summarizes the operand types valid for each unary operator and the result type. [Table E2-2](#) summarizes the operand types valid for each binary operator and the result type.

Table E2-1 Result and operand types permitted for unary operators

Operator	Operand Type	Result Type
-	integer	integer
	real	real
NOT	bits(N)	bits(N)
!	boolean	boolean

Table E2-2 Result and operand types permitted for binary operators

Operator	First operand type	Second operand type	Result type
+	bits(N)	integer	integer
		bits(N)	
==	integer	integer	boolean
	real	real	
	enumeration	enumeration	
	boolean	boolean	
!=	bits(N)	bits(N)	boolean
		integer	
<, >	integer	integer	boolean
		real	
<=, >=	real	real	

Table E2-2 Result and operand types permitted for binary operators (continued)

Operator	First operand type	Second operand type	Result type
+, -	integer	integer	integer
	real	real	real
	bits(N)	bits(N) integer	bits(N)
<<, >>	integer	integer	integer
*	integer	integer	integer
	real	real	real
	bits(N)	bits(N)	bits(N)
/	real	real	real
DIV	integer	integer	integer
MOD	integer	integer	integer
	bits(N)	integer	
&&,	boolean	boolean	boolean
AND, OR, EOR	bits(N)	bits(N)	bits(N)
^	integer	integer	integer
	real	integer	real

E2.4 Statements and control structures

This section describes the statements and program structures available in the pseudocode.

E2.4.1 Statements and Indentation

A simple statement is either an assignment, a function call, or a procedure call. Each statement must be terminated with a semicolon.

Indentation normally indicates the structure in compound statements. The statements contained in structures such as `if ... then ... else ...` or procedure and function definitions are indented more deeply than the statement structure itself. The end of a compound statement structure and their end is indicated by returning to the original indentation level or less.

Indentation is normally done by four spaces for each level. Standard indentation uses four spaces for each level of indent.

E2.4.2 Function and procedure calls

This section describes how functions and procedures are defined and called in the pseudocode.

Procedure and function definitions

A procedure definition has the form:

```
<procedure name>(<argument prototypes>)
  <statement 1>;
  <statement 2>;
  ...
  <statement n>;
```

where <argument prototypes> consists of zero or more argument definitions, separated by commas. Each argument definition consists of a type name followed by the name of the argument.

————— Note —————

This first definition line is not terminated by a semicolon. This distinguishes it from a procedure call.

A function definition is similar, but also declares the return type of the function:

```
<return type> <function name>(<argument prototypes>)
  <statement 1>;
  <statement 2>;
  ...
  <statement n>;
```

Array-like functions are similar, but are written with square brackets and have two forms. These two forms exist because reading from and writing to an array element require different functions. They are frequently used in memory operations. An array-like function definition with a return type is equivalent to reading from an array. For example:

```
<return type> <function name>[<argument prototypes>]
  <statement 1>;
  <statement 2>;
  ...
  <statement n>;
```

Its related function definition with no return type is equivalent to writing to an array. For example:

```
<function name>[<argument prototypes>] = <value prototype>
  <statement 1>;
  <statement 2>;
  ...
  <statement n>;
```

The value prototype determines what data type can be written to the array. The two related functions must share the same name, but the value prototype and return type can be different.

Procedure calls

A procedure call has the form:

```
<procedure_name>(<arguments>);
```

Return statements

A procedure return has the form:

```
return;
```

A function return has the form:

```
return <expression>;
```

where <expression> is of the type declared in the function prototype line.

E2.4.3 Conditional control structures

This section describes how conditional control structures are used in the pseudocode.

if ... then ... else ...

In addition to being a ternary operator, a multi-line if ... then ... else ... structure can act as a control structure and has the form:

```
if <boolean_expression> then
  <statement 1>;
  <statement 2>;
  ...
  <statement n>;

elseif <boolean_expression> then
  <statement a>;
  <statement b>;
  ...
  <statement z>;
else
  <statement A>;
  <statement B>;
  ...
  <statement Z>;
```

The block of lines consisting of `elseif` and its indented statements is optional, and multiple `elseif` blocks can be used.

The block of lines consisting of `else` and its indented statements is optional.

Abbreviated one-line forms can be used when the `then` part, and in the `else` part if it is present, contain only simple statements such as:

```
if <boolean_expression> then <statement 1>;
if <boolean_expression> then <statement 1>; else <statement A>;
if <boolean_expression> then <statement 1>; <statement 2>; else <statement A>;
```

———— Note ————

In these forms, `<statement 1>`, `<statement 2>` and `<statement A>` must be terminated by semicolons. This and the fact that the `else` part is optional distinguish its use as a control structure from its use as a ternary operator.

case ... of ...

A case ... of ... structure has the form:

```
case <expression> of
  when <literal values1>
    <statement 1>;
    <statement 2>;
    ...
    <statement n>;

  when <literal values2>
    <statement 1>;
    <statement 2>;
    ...
    <statement n>;

  ... more "when" groups if required ...

otherwise
  <statement A>;
  <statement B>;
  ...
  <statement Z>;
```

In this structure, <literal values1> and <literal values2> consist of literal values of the same type as <expression>, separated by commas. There can be additional when groups in the structure. Abbreviated one line forms of when and otherwise parts can be used when they contain only simple statements.

If <expression> has a bitstring type, the literal values can also include bitstring literals containing 'x' bits, known as bitmasks. For details see [Equality and non-equality on page E2-1130](#).

E2.4.4 Loop control structures

This section describes the three loop control structures used in the pseudocode.

repeat ... until ...

A repeat ... until ... structure has the form:

```
repeat
  <statement 1>;
  <statement 2>;
  ...
  <statement n>;
until <boolean_expression>;
```

It executes the statement block at least once, and the loop repeats until <boolean expression> evaluates to TRUE. Variables explicitly declared inside the loop body have scope local to that loop and might not be accessed outside the loop body.

while ... do

A while ... do structure has the form:

```
while <boolean_expression> do
  <statement 1>;
  <statement 2>;
  ...
  <statement n>;
```

It begins executing the statement block only if the Boolean expression is true. The loop then runs until the expression is false.

for ...

A for ... structure has the form:

```
for <assignable_expression> = <integer_expr1> to <integer_expr2>
  <statement 1>;
  <statement 2>;
  ...
  <statement n>;
```

The <assignable_expression> is initialized to <integer_expr1> and compared to <integer_expr2>. If <integer_expr1> is less than <integer_expr2>, the loop body is executed and the <assignable_expression> incremented by one. This repeats until <assignable expression> is more than or equal to <integer_expr2>.

There is an alternate form:

```
for <assignable_expression> = <integer_expr1> downto <integer_expr2>
```

where <integer_expr1> is decremented after the loop body executes and continues until <assignable expression> is less than or equal than <integer_expr2>.

E2.4.5 Special statements

This section describes statements with particular architecturally-defined behaviors.

UNDEFINED

This subsection describes the statement:

```
UNDEFINED;
```

This statement indicates a special case that replaces the behavior defined by the current pseudocode, apart from behavior required to determine that the special case applies. The replacement behavior is that the Undefined Instruction exception is taken.

UNPREDICTABLE

This subsection describes the statement:

```
UNPREDICTABLE;
```

This statement indicates a special case that replaces the behavior defined by the current pseudocode, apart from behavior required to determine that the special case applies. The replacement behavior is UNPREDICTABLE.

SEE...

This subsection describes the statement:

```
SEE <reference>;
```

This statement indicates a special case that replaces the behavior defined by the current pseudocode, apart from behavior required to determine that the special case applies. The replacement behavior is that nothing occurs as a result of the current pseudocode because some other piece of pseudocode defines the required behavior. The <reference> indicates where that other pseudocode can be found.

It usually refers to another instruction, but can also refer to another encoding or note of the same instruction.

IMPLEMENTATION_DEFINED

This subsection describes the statement:

```
IMPLEMENTATION_DEFINED {"<text>"};
```

This statement indicates a special case that replaces the behavior defined by the current pseudocode, apart from behavior required to determine that the special case applies. The replacement behavior is IMPLEMENTATION_DEFINED. An optional <text> field can give more information.

E2.4.6 Comments

The pseudocode supports two styles of comments:

- // starts a comment that is terminated by the end of the line.
- /* starts a comment that is terminated by */.

/**/ statements might not be nested, and the first */ ends the comment.

———— **Note** —————

Comment lines do not require a terminating semicolon.

E2.5 Built-in functions

This section describes:

- [Bitstring manipulation functions](#).
- [Arithmetic functions on page E2-1143](#).

E2.5.1 Bitstring manipulation functions

The following bitstring manipulation functions are defined:

Bitstring length

If x is a bitstring:

- The bitstring length function $\text{Len}(x)$ returns the length of x as an integer.

Bitstring concatenation and replication

If x is a bitstring and n is an integer with $n \geq 0$:

- $\text{Replicate}(x, n)$ is the bitstring of length $n \cdot \text{Len}(x)$ consisting of n copies of x concatenated together.
- $\text{Zeros}(n) = \text{Replicate}('0', n)$.
- $\text{Ones}(n) = \text{Replicate}('1', n)$.

Bitstring count

If x is a bitstring, $\text{BitCount}(x)$ is an integer result equal to the number of bits of x that are ones.

Testing a bitstring for being all zero or all ones

If x is a bitstring:

- $\text{IsZero}(x)$ produces TRUE if all of the bits of x are zeros and FALSE if any of them are ones
- $\text{IsZeroBit}(x)$ produces '1' if all of the bits of x are zeros and '0' if any of them are ones.

$\text{IsOnes}(x)$ and $\text{IsOnesBit}(x)$ work in the corresponding ways. This means:

```

IsZero(x)    = (BitCount(x) == 0)
IsOnes(x)   = (BitCount(x) == Len(x))
IsZeroBit(x) = if IsZero(x) then '1' else '0'
IsOnesBit(x) = if IsOnes(x) then '1' else '0'

```

Lowest and highest set bits of a bitstring

If x is a bitstring, and $N = \text{Len}(x)$:

- $\text{LowestSetBit}(x)$ is the minimum bit number of any of the bits of x that are ones. If all of its bits are zeros, $\text{LowestSetBit}(x) = N$.
- $\text{HighestSetBit}(x)$ is the maximum bit number of any of the bits of x that are ones. If all of its bits are zeros, $\text{HighestSetBit}(x) = -1$.
- $\text{CountLeadingZeroBits}(x)$ is the number of zero bits at the left end of x , in the range 0 to N . This means:
 $\text{CountLeadingZeroBits}(x) = N - 1 - \text{HighestSetBit}(x)$.
- $\text{CountLeadingSignBits}(x)$ is the number of copies of the sign bit of x at the left end of x , excluding the sign bit itself, and is in the range 0 to $N-1$. This means:
 $\text{CountLeadingSignBits}(x) = \text{CountLeadingZeroBits}(x \ll N-1 : 1 \gg \text{EOR } x \ll N-2 : 0 \gg)$.

Zero-extension and sign-extension of bitstrings

If x is a bitstring and i is an integer, then $\text{ZeroExtend}(x, i)$ is x extended to a length of i bits, by adding sufficient zero bits to its left. That is, if $i = \text{Len}(x)$, then $\text{ZeroExtend}(x, i) = x$, and if $i > \text{Len}(x)$, then:

```
ZeroExtend(x, i) = Replicate('0', i-Len(x)) : x
```

If x is a bitstring and i is an integer, then $\text{SignExtend}(x, i)$ is x extended to a length of i bits, by adding sufficient copies of its leftmost bit to its left. That is, if $i = \text{Len}(x)$, then $\text{SignExtend}(x, i) = x$, and if $i > \text{Len}(x)$, then:

```
SignExtend(x, i) = Replicate(TopBit(x), i-Len(x)) : x
```

It is a pseudocode error to use either $\text{ZeroExtend}(x, i)$ or $\text{SignExtend}(x, i)$ in a context where it is possible that $i < \text{Len}(x)$.

Converting bitstrings to integers

If x is a bitstring, $\text{SInt}()$ is the integer whose two's complement representation is x .

$\text{UInt}()$ is the integer whose unsigned representation is x .

$\text{Int}(x, \text{unsigned})$ returns either $\text{SInt}(x)$ or $\text{UInt}(x)$ depending on the value of its second argument.

E2.5.2 Arithmetic functions

This section defines built-in arithmetic functions.

Absolute value

If x is either of type real or integer, $\text{Abs}(x)$ returns the absolute value of x . The result is the same type as x .

Rounding and aligning

If x is a real:

- $\text{RoundDown}(x)$ produces the largest integer n such that $n \leq x$.
- $\text{RoundUp}(x)$ produces the smallest integer n such that $n \geq x$.
- $\text{RoundTowardsZero}(x)$ produces:
 - $\text{RoundDown}(x)$ if $x > 0.0$.
 - 0 if $x == 0.0$.
 - $\text{RoundUp}(x)$ if $x < 0.0$.

If x and y are both of type integer, $\text{Align}(x, y) = y * (x \text{ DIV } y)$, and is of type integer.

If x is of type bitstring and y is of type integer, $\text{Align}(x, y) = (\text{Align}(\text{UInt}(x), y)) \langle \text{Len}(x) - 1 : 0 \rangle$, and is a bitstring of the same length as x .

It is a pseudocode error to use either form of $\text{Align}(x, y)$ in any context where y can be 0. In practice, $\text{Align}(x, y)$ is only used with y a constant power of two, and the bitstring form used with $y = 2^n$ has the effect of producing its argument with its n low-order bits forced to zero.

Maximum and minimum

If x and y are integers or reals, then $\text{Max}(x, y)$ and $\text{Min}(x, y)$ are their maximum and minimum respectively. x and y must both be of type integer or of type real. The function returns a value of the same type as its operands.

E2.6 ARM pseudocode definition index

This section contains the following tables:

- [Table E2-3](#) which contains the pseudocode data types.
- [Table E2-4](#) which contains the pseudocode operators.
- [Table E2-5 on page E2-1146](#) which contains the pseudocode keywords and control structures.
- [Table E2-6 on page E2-1147](#) which contains the statements with special behaviors.

Table E2-3 Index of pseudocode data types

Keyword	Meaning
array	Type name for the array type
bit	Keyword equivalent to bits(1)
bits(N)	Type name for the bitstring of length N data type
boolean	Type name for the Boolean data type
enumeration	Keyword to define a new enumeration type
integer	Type name for the integer data type
real	Type name for the real data type
type	Keyword to define a new structure

Table E2-4 Index of pseudocode operators

Operator	Meaning
-	Unary minus on integers or reals
	Subtraction of integers, reals and bitstrings
	Used in the left-hand side of an assignment or a tuple to discard the result
+	Unary plus on integers or reals
	Addition of integers, reals and bitstrings
.	Extract named member from a list
	Extract named bit or field from a register
:	Bitstring concatenation
	Integer range in bitstring extraction operator
!	Boolean NOT
!=	Comparison for inequality
(...)	Around arguments of procedure or function
[...]	Around array index
	Around arguments of array-like function
*	Multiplication of integers, reals, and bitstrings
/	Division of reals

Table E2-4 Index of pseudocode operators (continued)

Operator	Meaning
&&	Boolean AND
<	<i>Less than</i> comparison of integers and reals
<...>	Slicing of specified bits of bitstring or integer
<<	Multiply integer by power of 2
<=	<i>Less than or equal</i> comparison of integers and reals
=	Assignment operator
==	Comparison for equality
>	<i>Greater than</i> comparison of integers and reals
>=	<i>Greater than or equal</i> comparison of integers and reals
>>	Divide integer by power of 2
	Boolean OR
^	Exponential operator
AND	Bitwise AND of bitstrings
DIV	Quotient from integer division
EOR	Bitwise EOR of bitstrings
IN	Tests membership of a certain expression in a set of values
MOD	Remainder from integer division
NOT	Bitwise inversion of bitstrings
OR	Bitwise OR of bitstrings

Table E2-5 Index of pseudocode keywords and control structures

Operator	Meaning
/*...*/	Comment delimiters
//	Introduces comment terminated by end of line
case ... of ...	Control structure for the
FALSE	One of two values a Boolean can take (other than TRUE)
for ... = ...to ...	Loop control structure, counting up from the initial value to the upper limit
for ... = ... downto ...	Loop control structure, counting down from the initial value to the lower limit
if ... then ... else ...	Condition expression selecting between two values
if ... then ... else ...	Conditional control structure
otherwise	Introduces default case in case ... of ... control structure

Table E2-5 Index of pseudocode keywords and control structures (continued)

Operator	Meaning
repeat ... until ...	Loop control structure that runs at least once until the termination condition is satisfied
return	Procedure or function return
TRUE	One of two values a Boolean can take (other than FALSE)
when	Introduces specific case in case ... of ... control structure
while ... do ...	Loop control structure that runs until the termination condition is satisfied

Table E2-6 Index of special statements

Keyword	Meaning
IMPLEMENTATION_DEFINED	Describes IMPLEMENTATION_DEFINED behavior
SEE	Points to other pseudocode to use instead
UNDEFINED	Cause Undefined Instruction exception
UNKNOWN	Unspecified value
UNPREDICTABLE	Unspecified behavior

Chapter E3

Pseudocode Specification

This chapter specifies the ARMv8-M pseudocode. It contains the following section:

- [Alphabetical pseudocode List on page E3-1150.](#)

E3.1 Alphabetical pseudocode List

E3.1.1 ALUWritePC

```
// ALUWritePC()
// =====

ALUWritePC(bits(32) address)
  BranchWritePC(address);
```

E3.1.2 ASR

```
// ASR()
// =====

bits(N) ASR(bits(N) x, integer shift)
  assert shift >= 0;
  if shift == 0 then
    result = x;
  else
    (result, -) = ASR_C(x, shift);
  return result;
```

E3.1.3 ASR_C

```
// ASR_C()
// =====

(bits(N), bit) ASR_C(bits(N) x, integer shift)
  assert shift > 0;
  extended_x = SignExtend(x, shift+N);
  result = extended_x<shift+N-1:shift>;
  carry_out = extended_x<shift-1>;
  return (result, carry_out);
```

E3.1.4 AccType

```
// Memory reference access type
enumeration AccType { AccType_NORMAL, // Normal loads and stores
  AccType_ORDERED, // Load-Acquire and Store-Release
  AccType_STACK, // HW generated stacking / unstacking operation
  AccType_LAZYFP, // HW generated stacking due to lazy
  // floating point state preservation
  AccType_IFETCH, // Instruction fetch
  AccType_VECTABLE // Vector table fetch
};
```

E3.1.5 AccessAttributes

```
// Memory access attributes

type AccessAttributes is (
    boolean iswrite, // TRUE for memory stores, FALSE for load accesses
    boolean ispriv, // TRUE if the access is privileged, FALSE if unprivileged
    AccType acctype
)

```

E3.1.6 ActivateException

```
// ActivateException()
// =====

ActivateException(integer exceptionNumber, boolean excIsSecure)
// If the exception is Secure, directly entry the Secure state.
CurrentState = if excIsSecure
    then SecurityState_Secure else SecurityState_NonSecure;
IPSR.Exception = exceptionNumber<8:0>; // Update IPSR to this exception. This also
// causes a transition to privileged handler
// mode as IPSR.Exception != 0

if HaveMainExt() then
    ITSTATE = Zeros(8); // IT/ICI bits cleared
// PRIMASK, FAULTMASK, BASEPRI unchanged on exception entry
if HaveFPEExt() then
    CONTROL.FPCA = '0'; // Floating-point Extension only
    CONTROL.S.SFPA = '0';
CONTROL.SPSEL = '0'; // Select the Main stack pointer - SP_main
// CONTROL.nPRIV unchanged

// Transition exception from pending to active
SetPending(exceptionNumber, excIsSecure, FALSE);
SetActive(exceptionNumber, excIsSecure, TRUE);

```

E3.1.7 AddWithCarry

```
// AddWithCarry()
// =====

(bits(N), bit, bit) AddWithCarry(bits(N) x, bits(N) y, bit carry_in)
unsigned_sum = UInt(x) + UInt(y) + UInt(carry_in);
signed_sum = SInt(x) + SInt(y) + UInt(carry_in);
result = unsigned_sum<N-1:0>; // same value as signed_sum<N-1:0>
carry_out = if UInt(result) == unsigned_sum then '0' else '1';
overflow = if SInt(result) == signed_sum then '0' else '1';
return (result, carry_out, overflow);

```

E3.1.8 AddressDescriptor

```
// Descriptor used to access the underlying memory array

type AddressDescriptor is (
    MemoryAttributes memattrs,
    bits(32) address, // Physical Address
    AccessAttributes accattrs
)
```

E3.1.9 BKPTInstrDebugEvent

```
// BKPTInstrDebugEvent()
// =====
// Generates a debug event based on BKPT Instruction.

BKPTInstrDebugEvent()
    if !GenerateDebugEventResponse() then
        excInfo = CreateException(HardFault, FALSE, boolean UNKNOWN);
        HandleException(excInfo);
```

E3.1.10 BLXWritePC

```
// BLXWritePC()
// =====

BLXWritePC(bits(32) address, boolean allowNonSecure)
    // If in the Secure state and transitions to the Non-secure state are allowed
    // then the target state is specified by the LSB of the target address
    if HaveSecurityExt() && allowNonSecure && IsSecure() then
        BranchToNS(address);
    else
        EPSR.T = address<0>;
        // If EPSR.T == 0 then an exception is taken on the next
        // instruction: UsageFault('Invalid State') if the Main Extension is
        // implemented; HardFault otherwise

        BranchTo(address<31:1>:'0');
```


E3.1.11 BXWritePC

```

// BXWritePC()
// =====

ExcInfo BXWritePC(bits(32) address, boolean allowNonSecure)
exc = DefaultExcInfo();
if HaveSecurityExt() && address == '1111 1110 1111 1111 1111 1111 111x' then
    // Unlike exception return, any faults raised during a FNC_RETURN
    // unstacking are raised synchronously with the instruction that triggered
    // the unstacking.
    exc = FunctionReturn();

elseif CurrentMode() == Mode_Handler && address<31:24> == '11111111' then
    // The actual exception return is performed when the
    // current instruction completes. This is because faults that occur
    // during the exception return are handled differently from faults
    // raised during the instruction execution.
    PendReturnOperation(address);

elseif HaveSecurityExt() && IsSecure() && allowNonSecure then
    // If in the Secure state and transitions to the Non-secure state are allowed
    // then the target state is specified by the LSB of the target address
    BranchToNS(address);

else
    EPSR.T = address<0>;
    // If EPSR.T == 0 then an exception is taken on the next
    // instruction: UsageFault('Invalid State') if the Main Extension is
    // implemented; HardFault otherwise
    BranchTo(address<31:1>:'0');

return exc;

```

E3.1.12 BigEndian

```

// BigEndian()
// =====

boolean BigEndian()
return (AIRCR.ENDIANNESS == '1');

```

E3.1.13 BigEndianReverse

```
// BigEndianReverse()
// =====

bits(8*N) BigEndianReverse (bits(8*N) value, integer N)
assert N == 1 || N == 2 || N == 4;
bits(8*N) result;
case N of
  when 1
    result<7:0> = value<7:0>;
  when 2
    result<15:8> = value<7:0>;
    result<7:0> = value<15:8>;
  when 4
    result<31:24> = value<7:0>;
    result<23:16> = value<15:8>;
    result<15:8> = value<23:16>;
    result<7:0> = value<31:24>;
return result;
```

E3.1.14 BranchTo

```
// BranchTo()
// =====

BranchTo(bits(32) address)
// Sets the address to fetch the next instruction from. NOTE: The current PC
// is not changed directly as this would modify the result of
// ThisInstrAddr(), which would cause the wrong return addresses to be used
// for some types of exception. The actual update of the PC is done in the
// InstructionAdvance() function after the instruction finishes executing.
_NextInstrAddr = address;
_PCChanged = TRUE;
// Clear any pending exception returns
_PendingReturnOperation = FALSE;
return;
```

E3.1.15 BranchToAndCommit

```
// BranchToAndCommit()
// =====

BranchToAndCommit(bits(32) address)
// This function directly commits the change to the PC, so ThisInstrAddr()
// and NextInstrAddr() both point to the target address. Used for exception
// returns and resets so the state is consistent before the next instruction
// (or exception) is taken.
_R[RName_PC] = address<31:1>:'0';
_PCChanged = TRUE;
_NextInstrAddr = address<31:1>:'0';
// Clear any pending exception returns
_PendingReturnOperation = FALSE;
return;
```

E3.1.16 BranchToNS

```
// BranchToNS()
// =====
// Branch to an address with an option to change from Secure to Non-secure
// state, if currently in Secure state and transition to Non-secure state is allowed.
// Transition to Non-secure state is specified by the LSB bit of target
// address (address<0>).

BranchToNS(bits(32) address)
  assert HaveSecurityExt() && IsSecure();
  EPSR.T = '1';
  if address<0> == '0' then
    CurrentState = SecurityState_NonSecure;
    if HaveFPExt() then CONTROL_S.SFPA = '0';
    BranchTo(address<31:1>:'0');
```

E3.1.17 BranchWritePC

```
// BranchWritePC()
// =====

BranchWritePC(bits(32) address)
  BranchTo(address<31:1>:'0');
```

E3.1.18 CallSupervisor

```
// CallSupervisor()
// =====

CallSupervisor()
  excInfo = CreateException(SVCall, FALSE, boolean UNKNOWN);
  HandleException(excInfo);
```

E3.1.19 CanHaltOnEvent

```
// CanHaltOnEvent()
// =====

boolean CanHaltOnEvent(boolean is_secure)
  if !HaveSecurityExt() then assert !is_secure;
  return (HaltingDebugEnabled() && DHCSR.C_DEBUGEN == '1' && DHCSR.S_HALT == '0'
    && (!is_secure || DHCSR.S_SDE == '1'));
```

E3.1.20 CanPendMonitorOnEvent

```
// CanPendMonitorOnEvent()
// =====

boolean CanPendMonitorOnEvent(boolean is_secure, boolean check_pri)
if !HaveSecurityExt() then assert !is_secure;
return (HaveMainExt() && !CanHaltOnEvent(is_secure) && DEMCR.MON_EN == '1'
    && DHCSR.S_HALT == '0' && (!is_secure || DEMCR.SDME == '1')
    && (!check_pri
    || ExceptionPriority(DebugMonitor, is_secure, TRUE) < ExecutionPriority()));
```

E3.1.21 CheckCPEnabled

```
// CheckCPEnabled()
// =====

ExcInfo CheckCPEnabled(integer cp, boolean privileged, boolean secure)
// Check Coprocessor Access Control Register for permission to use coprocessor
boolean nocpFault;
boolean forceToSecure = FALSE;

cpacr = if secure then CPACR_S else CPACR_NS;

case cpacr<(cp*2)+1:cp*2> of
    when '00'
        nocpFault = TRUE;
    when '01'
        nocpFault = !privileged;
    when '10'
        UNPREDICTABLE;
    when '11' // access permitted by CPACR
        nocpFault = FALSE;

if !nocpFault && HaveSecurityExt() then
    // Check if access is forbidden by NSACR
    if !secure && NSACR<cp> == '0' then
        nocpFault = TRUE;
        forceToSecure = TRUE;

// Check if the coprocessor state unknown flag.
if !nocpFault && CPPWR<cp*2> == '1' then
    nocpFault = TRUE;
    // Check SUS bit to determine fault target domain
    forceToSecure = CPPWR<(cp*2)+1> == '1';

if nocpFault then
    if secure || forceToSecure then
        UFSR_S.NOCP = '1';
    else
        UFSR_NS.NOCP = '1';
    excInfo = CreateException(UsageFault, TRUE, secure || forceToSecure);
else
    excInfo = DefaultExcInfo();
return excInfo;

ExcInfo CheckCPEnabled(integer cp)
return CheckCPEnabled(cp, CurrentModeIsPrivileged(), IsSecure());
```

E3.1.22 CheckPermission

```

// CheckPermission()
// =====

ExcInfo CheckPermission(Permissions perms, bits(32) address, AccType acctype,
                        boolean iswrite, boolean ispriv, boolean isSecure)
    if !perms.apValid then
        fault = TRUE;
    elseif (perms.xn == '1') && (acctype == AccType_IFETCH) then
        fault = TRUE;
    else
        case perms.ap of
            when '00' fault = !ispriv;
            when '01' fault = FALSE;
            when '10' fault = !ispriv || iswrite;
            when '11' fault = iswrite;
            otherwise UNPREDICTABLE;

// If a fault occurred generate the syndrome info and create the exception.
if fault then
    // Create and write out the syndrome info on implementations with Main Extension.
    if HaveMainExt() then
        MMFSR_Type fsr = Zeros(8);
        case acctype of
            when AccType_IFETCH
                fsr.IACCVIOL = '1';
            when AccType_STACK
                if iswrite then
                    fsr.MSTKERR = '1';
                else
                    fsr.MUNSTKERR = '1';
            when AccType_LAZYFP
                fsr.MLSPERR = '1';
            when AccType_NORMAL, AccType_ORDERED
                fsr.MMARVALID = '1';
                fsr.DACCVIOL = '1';
            otherwise
                assert(FALSE);

        // Write the syndrome information to the correct instance of banked
        // registers
        if isSecure then
            MMFSR_S = MMFSR_S OR fsr;
            if fsr.MMARVALID == '1' then
                MMFAR_S = address;
        else
            MMFSR_NS = MMFSR_NS OR fsr;
            if fsr.MMARVALID == '1' then
                MMFAR_NS = address;

        // Create the exception. NOTE: If Main Extension is not implemented the fault
        // escalates to a HardFault
        excInfo = CreateException(MemManage, TRUE, isSecure);
    else
        excInfo = DefaultExcInfo();
return excInfo;

```

E3.1.23 ClearEventRegister

```
// ClearEventRegister
// =====
// Clears the Event register

ClearEventRegister();
```

E3.1.24 ClearExclusiveByAddress

```
// ClearExclusiveByAddress
// =====
// Clear the global exclusive monitor for all PEs, except for the PE specified
// by processorid for which an address region including any of size bytes
// starting from address has had a request for an exclusive access

ClearExclusiveByAddress(bits(32) address, integer exc1processorid, integer size);
```

E3.1.25 ClearExclusiveLocal

```
// ClearExclusiveLocal()
// =====
// Clear local exclusive monitor records for the PE.

ClearExclusiveLocal(integer processorid);
```

E3.1.26 ComparePriorities

```
// ComparePriorities()
// =====

boolean ComparePriorities(integer exc0Pri, integer exc0Number, boolean exc0IsSecure,
                          integer exc1Pri, integer exc1Number, boolean exc1IsSecure)
    if exc0Pri != exc1Pri then
        takeE0 = exc0Pri < exc1Pri;
    elseif exc0Number != exc1Number then
        takeE0 = exc0Number < exc1Number;
    elseif exc0IsSecure != exc1IsSecure then
        takeE0 = exc0IsSecure;
    else
        // The two exceptions have exactly the same priority, so exception 0
        // can't be taken in preference to exception 1.
        takeE0 = FALSE;
    return takeE0;

boolean ComparePriorities(ExcInfo exc0Info, boolean groupPri,
                          integer exc1Pri, integer exc1Number, boolean exc1IsSecure)
    exc0Pri = ExceptionPriority(exc0Info.fault, exc0Info.isSecure, groupPri);
    return ComparePriorities(exc0Pri, exc0Info.fault, exc0Info.isSecure,
                             exc1Pri, exc1Number, exc1IsSecure);
```

E3.1.27 ConditionHolds

```
// ConditionHolds()
// =====

boolean ConditionHolds(bits(4) cond)

    // Evaluate base condition.
    case cond<3:1> of
        when '000' result = (APSR.Z == '1');           // EQ or NE
        when '001' result = (APSR.C == '1');           // CS or CC
        when '010' result = (APSR.N == '1');           // MI or PL
        when '011' result = (APSR.V == '1');           // VS or VC
        when '100' result = (APSR.C == '1') && (APSR.Z == '0'); // HI or LS
        when '101' result = (APSR.N == APSR.V);        // GE or LT
        when '110' result = (APSR.N == APSR.V) && (APSR.Z == '0'); // GT or LE
        when '111' result = TRUE;                       // AL

    // Condition flag values in the set '111x' indicate the instruction is always executed.
    // Otherwise, invert condition if necessary.
    if cond<0> == '1' && cond != '1111' then
        result = !result;

    return result;
```

E3.1.28 ConditionPassed

```
// ConditionPassed()
// =====

boolean ConditionPassed()
    return ConditionHolds(CurrentCond());
```

E3.1.29 ConstrainUnpredictableBool

```
// ConstrainUnpredictableBool()
// =====
// This is a wrapper for UNPREDICTABLE cases where the constrained result is
// either TRUE or FALSE.

boolean ConstrainUnpredictableBool(Unpredictable which);
```

E3.1.30 ConsumeExcStackFrame

```
// ConsumeExcStackFrame()
// =====

ConsumeExcStackFrame(bits(24) excReturn, bit fourByteAlign)
// Calculate the size of the integer part of the stack frame
toSecure = HaveSecurityExt() && excReturn<6> == '1';
if toSecure && (excReturn<0> == '0' ||
    excReturn<5> == '0') then
    framesize = 0x48;
else
    framesize = 0x20;
// Add on the size of the FP part of the stack frame if present
if HaveFPEExt() && excReturn<4> == '0' then
    if toSecure && FPCCR_S.TS == '1' then
        framesize = framesize + 0x88;
    else
        framesize = framesize + 0x48;

// Update stack pointer. NOTE: Stack pointer limit not checked on exception
// return as stack pointer guaranteed to be ascending not descending.
mode = if excReturn<3> == 1 then Mode_Thread else Mode_Handler;
spName = LookUpSP_with_security_mode(toSecure, mode);
_R[spName] = (_SP(spName) + framesize) OR ZeroExtend(fourByteAlign:'00',32);
```

E3.1.31 Coproc_Accepted

```
// Coproc_Accepted
// =====
// Check whether a coprocessor accepts an instruction.

boolean Coproc_Accepted(integer cp_num, bits(32) instr);
```

E3.1.32 Coproc_DoneLoading

```
// Coproc_DoneLoading
// =====
// Check whether enough 32-bit words have been loaded for an LDC instruction

boolean Coproc_DoneLoading(integer cp_num, bits(32) instr);
```

E3.1.33 Coproc_DoneStoring

```
// Coproc_DoneStoring
// =====
// Check whether enough 32-bit words have been stored for a STC instruction

boolean Coproc_DoneStoring(integer cp_num, bits(32) instr);
```


E3.1.34 Coproc_GetOneWord

```
// Coproc_GetOneWord
// =====
// Gets the 32-bit word for an MRC instruction from the coprocessor

bits(32) Coproc_GetOneWord(integer cp_num, bits(32) instr);
```

E3.1.35 Coproc_GetTwoWords

```
// Coproc_GetTwoWords
// =====
// Get two 32-bit words for an MRRC instruction from the coprocessor

(bits(32), bits(32)) Coproc_GetTwoWords(integer cp_num, bits(32) instr);
```

E3.1.36 Coproc_GetWordToStore

```
// Coproc_GetWordToStore
// =====
// Gets the next 32-bit word to store for an STC instruction from the coprocessor

bits(32) Coproc_GetWordToStore(integer cp_num, bits(32) instr);
```

E3.1.37 Coproc_InternalOperation

```
// Coproc_InternalOperation
// =====
// Instructs a coprocessor to perform the internal operation requested
// by a CDP instruction

Coproc_InternalOperation(integer cp_num, bits(32) instr);
```

E3.1.38 Coproc_SendLoadedWord

```
// Coproc_SendLoadedWord
// =====
// Sends a loaded 32-bit word for an LDC instruction to the coprocessor

Coproc_SendLoadedWord(bits(32) word, integer cp_num, bits(32) instr);
```

E3.1.39 Coproc_SendOneWord

```
// Coproc_SendOneWord  
// =====  
// Sends the 32-bit word for an MCR instruction to the coprocessor  
  
Coproc_SendOneWord(bits(32) word, integer cp_num, bits(32) instr);
```

E3.1.40 Coproc_SendTwoWords

```
// Coproc_SendTwoWords  
// =====  
// Send two 32-bit words for an MCRR instruction to the coprocessor.  
  
Coproc_SendTwoWords(bits(32) word2, bits(32) word1, integer cp_num, bits(32) instr);
```

E3.1.41 CreateException

```

// CreateException()
// =====

ExcInfo CreateException(integer exception, boolean forceSecurity,
                        boolean isSecure, boolean isSynchronous)

    // Work out the effective target state of the exception
    if HaveSecurityExt() then
        if !forceSecurity then
            isSecure = ExceptionTargetsSecure(exception, IsSecure());
        else
            isSecure = FALSE;

    // An implementation without Security Extensions cannot cause a fault targeting
    // Secure state
    assert HaveSecurityExt() || !isSecure;

    // Get the remaining exception details
    (escalateToHf, termInst) = ExceptionDetails(exception, isSecure, isSynchronous);

    // Fill in the default exception info
    info = DefaultExcInfo();
    info.fault = exception;
    info.termInst = termInst;
    info.origFault = exception;
    info.origFaultIsSecure = isSecure;

    // Check for HardFault escalation
    if escalateToHf && info.fault != HardFault then
        // Update the exception info with the escalation details, including
        // whether there's a change in destination Security state.
        info.fault = HardFault;
        isSecure = ExceptionTargetsSecure(HardFault, isSecure);
        (escalateToHf, -) = ExceptionDetails(HardFault, isSecure, isSynchronous);

    // If the requested exception was already a HardFault then we can't escalate
    // to a HardFault, so lockup. NOTE: Asynchronous BusFaults never cause
    // lockups, if the BusFault is disabled it escalates to a HardFault that is
    // pended.
    if escalateToHf && isSynchronous && info.fault == HardFault then
        info.lockup = TRUE;

    // Fill in the remaining exception info
    info.isSecure = isSecure;
    return info;

ExcInfo CreateException(integer exception, boolean forceSecurity, boolean isSecure)
    return CreateException(exception, forceSecurity, isSecure, TRUE);

```

E3.1.42 CurrentCond

```

// CurrentCond()
// =====
// Returns condition specifier of current instruction.

bits(4) CurrentCond();

```

E3.1.43 CurrentMode

```
// CurrentMode()  
// =====  
  
Mode CurrentMode()  
    return if IPSR == NoFault then Mode_Thread else Mode_Handler;
```

E3.1.44 CurrentModelsPrivileged

```
// CurrentModeIsPrivileged()  
// =====  
  
boolean CurrentModeIsPrivileged()  
    return CurrentModeIsPrivileged(IsSecure());  
  
boolean CurrentModeIsPrivileged(boolean isSecure)  
    nPriv = if isSecure then CONTROL_S.nPRIV else CONTROL_NS.nPRIV;  
    return (CurrentMode() == Mode_Handler || nPriv == '0');
```

E3.1.45 D

```
// D[] - assignment form  
// =====  
  
D[integer n] = bits(64) value  
    assert n >= 0 && n <= 31;  
    if n >= 16 && VFPSmallRegisterBank() then UNDEFINED;  
    _D[n] = value;  
    return;  
  
// D[] - non-assignment form  
// =====  
  
bits(64) D[integer n]  
    assert n >= 0 && n <= 31;  
    if n >= 16 && VFPSmallRegisterBank() then UNDEFINED;  
    return _D[n];
```

E3.1.46 DWT_AddressCompare

```
// DWT_AddressCompare()
// =====
// Returns a pair of values. The first result is whether the (masked) addresses are equal,
// where the access address (addr) is masked according to DWT_FUNCTION.DATASIZE and the
// comparator address (compaddr) is masked according to the access size. The second result
// is whether the (unmasked) addr is greater than the (unmasked) compaddr.

(boolean,boolean) DWT_AddressCompare(bits(32) addr, bits(32) compaddr, integer size,
                                     integer compsize)
// addr must be a multiple of size. Unaligned accesses are split into smaller accesses.
assert Align(addr, size) == addr;

// compaddr must be a multiple of compsize
if Align(compaddr, compsize) != compaddr then UNPREDICTABLE;

addrmatch = (Align(addr, compsize) == Align(compaddr, size));
addrgreater = (UInt(addr) > UInt(compaddr));
return (addrmatch,addrgreater);
```

E3.1.47 DWT_CycCountMatch

```
// DWT_CycCountMatch
// =====
// Check for DWT cycle count match. This is called for each increment of
// DWT_CYCCNT.

DWT_CycCountMatch()
boolean trigger_debug_event = FALSE;
boolean debug_event = FALSE;
N = UInt(DWT_CTRL.NUMCOMP);
if N == 0 then return; // No comparator support
secure_match = IsSecure() && DWT_CTRL.CYCDISS == '1';
for i = 0 to N-1
    if IsDWTConfigUnpredictable(i) then UNPREDICTABLE;
    if DWT_FUNCTION[i].MATCH == '0001' && DWT_ValidMatch(i, secure_match)
        && DWT_CYCCNT == DWT_COMP[i] then
        DWT_FUNCTION[i].MATCHED = '1';
        debug_event = DWT_FUNCTION[i].ACTION == '01';
        trigger_debug_event = trigger_debug_event || debug_event;

// Setting the debug event if atleast one comparator matches
if trigger_debug_event then
    debug_event = SetDWTDebugEvent(secure_match);
return;
```

E3.1.48 DWT_DataAddressMatch

```
// DWT_DataAddressMatch()
// =====
// Check for match of access at "daddr". "dsize", "read" and "NSreq" are the attributes
// for the access. Note that for a load or store instruction, "NSreq" is the current
// Security state of the PE, but this is not necessarily true for a hardware stack
// push/pop or vector table access. "NSreq" might not be the same as the "NSattr"
// attribute the PE finally uses to make the access.
// If comparators 'm' and 'm+1' form an Data Address Range comparator, then this function
// returns the range match result when N=m+1.
```

```
boolean DWT_DataAddressMatch(integer N, bits(32) daddr, integer dsize, boolean read,
                             boolean NSreq)
assert N < UInt(DWT_CTRL.NUMCOMP) && dsize IN {1,2,4} && Align(daddr, dsize) == daddr;

valid_match = DWT_ValidMatch(N, !NSreq);
valid_addr = DWT_FUNCTION[N].MATCH == 'x1xx';

if valid_match && valid_addr then
    if DWT_FUNCTION[N].ID<3> == '0' || DWT_FUNCTION[N].DATAVSZ == '11' then
        UNPREDICTABLE;

    if N != UInt(DWT_CTRL.NUMCOMP)-1 then
        if DWT_FUNCTION[N+1].MATCH == '0011' then UNPREDICTABLE;
        linked_to_addr = DWT_FUNCTION[N+1].MATCH == '0111'; // Data Address Limit
        linked_to_data = DWT_FUNCTION[N+1].MATCH == '1011'; // Linked Data Value
    else
        linked_to_addr = FALSE; linked_to_data = FALSE;

    case DWT_FUNCTION[N].MATCH<1:0> of
    when '00' match_lsc = TRUE; linked = FALSE;
    when '01' match_lsc = !read; linked = FALSE;
    when '10' match_lsc = read; linked = FALSE;
    when '11'
        // Data Address Limit: check for UNPREDICTABLE cases
        if (linked_to_addr || linked_to_data || N == 0 ||
            DWT_FUNCTION[N].ID<4> == '0' || DWT_FUNCTION[N].MATCH == '1111' ||
            DWT_FUNCTION[N-1].MATCH IN {'x0xx', 'x111'} ||
            DWT_FUNCTION[N].DATAVSZ != '00' ||
            DWT_FUNCTION[N-1].DATAVSZ != '00' ||
            UInt(DWT_COMP[N-1]) >= UInt(DWT_COMP[N])) then
            UNPREDICTABLE;

            case DWT_FUNCTION[N-1].MATCH<1:0> of
            when '00' match_lsc = TRUE; linked = TRUE;
            when '01' match_lsc = !read; linked = TRUE;
            when '10' match_lsc = read; linked = TRUE;

    if !linked_to_addr then
        vsize = 2^UInt(DWT_FUNCTION[N].DATAVSZ);
        (match_eq, match_gt) = DWT_AddressCompare(daddr, DWT_COMP[N], dsize, vsize);

        if linked then
            valid_match = DWT_ValidMatch(N-1, !NSreq);
            (lower_eq, lower_gt) = DWT_AddressCompare(daddr, DWT_COMP[N-1], dsize, 1);
            match_addr = valid_match && (lower_eq || lower_gt) && !match_gt;
        else
            match_addr = match_eq;
    else
        match_addr = FALSE;

    match = match_addr && match_lsc;
else
    match = FALSE;

return match;
```

E3.1.49 DWT_DataValueMatch

```

// DWT_DataValueMatch()
// =====
// Check for match of access of "dvalue" at "daddr". "dsize", "read" and "NSreq"
// are the attributes for the access. Note that for a load or store instruction,
// "NSreq" is the current Security state of the PE, but this is not necessarily
// true for a hardware stack push/pop or vector table access. "NSreq" might not
// be the same as the "NSattr" attribute the PE finally uses to make the access.

boolean DWT_DataValueMatch(integer N, bits(32) daddr, bits(32) dvalue, integer dsize,
                           boolean read, boolean NSreq)
  assert N < UInt(DWT_CTRL.NUMCOMP) && dsize IN {1,2,4} && Align(daddr,dsize) == daddr;

  if !HaveMainExt() then return FALSE;
  valid_match = DWT_ValidMatch(N, !NSreq);
  valid_data = DWT_FUNCTION[N].MATCH<3:2> == '10';

  if valid_match && valid_data then
    if DWT_FUNCTION[N].ID<2> == '0' || DWT_FUNCTION[N].DATAVSZ == '11' then
      UNPREDICTABLE;

    case DWT_FUNCTION[N].MATCH<1:0> of
      when '00' match_lsc = TRUE;   linked = FALSE;
      when '01' match_lsc = !read;  linked = FALSE;
      when '10' match_lsc = read;   linked = FALSE;
      when '11'
        // Linked data value: check for UNPREDICTABLE cases
        if (N == 0 || DWT_FUNCTION[N].ID<4> == '0' ||
            DWT_FUNCTION[N-1].MATCH IN {'x0xx', 'x111'} ||
            DWT_FUNCTION[N].DATAVSZ != DWT_FUNCTION[N-1].DATAVSZ) then
          UNPREDICTABLE;

        case DWT_FUNCTION[N-1].MATCH<1:0> of
          when '00' match_lsc = TRUE;   linked = TRUE;
          when '01' match_lsc = !read;  linked = TRUE;
          when '10' match_lsc = read;   linked = TRUE;

    vsize = 2^UInt(DWT_FUNCTION[N].DATAVSZ);

    // Determine which bytes of dvalue to look at in the comparison.
    if linked then
      dmask = '0000'; // Filled in below if there is
                     // an address match
      if DWT_DataAddressMatch(N-1, daddr, dsize, read, NSreq) then
        case (vsize,dsize) of
          when (1,1) dmask<0> = '1';
          when (1,2) dmask<UInt(DWT_COMP[N-1]<0>>) = '1';
          when (1,4) dmask<UInt(DWT_COMP[N-1]<1:0>>) = '1';
          when (2,2) dmask<1:0> = '11';
          when (2,4)
            dmask<UInt(DWT_COMP[N-1]<1:0>)+1:UInt(DWT_COMP[N-1]<1:0>>) = '11';
          when (4,4) dmask = '1111';
          otherwise dmask = '0000'; // vsize > dsize: no match
        else
          case dsize of
            when 1 dmask = '0001';
            when 2 dmask = '0011';
            when 4 dmask = '1111';

    // Split both values into byte lanes: DCBA and dcba
    D = dvalue<31:24>; C = dvalue<23:16>; B = dvalue<15:8>; A = dvalue<7:0>;
    d = DWT_COMP[N]<31:24>; c = DWT_COMP[N]<23:16>;
    b = DWT_COMP[N]<15:8>; a = DWT_COMP[N]<7:0>;

    // This function relies on the values being correctly replicated across DWT_COMP[N].
    if ((vsize == 1 && (d != a || c != a || b != a)) || (vsize == 2 && (d:c != b:a))) then
      UNPREDICTABLE;

```

```
// Partial results
D_d = dmask<3> == '1' && D == d;
C_c = dmask<2> == '1' && C == c;
B_b = dmask<1> == '1' && B == b;
A_a = dmask<0> == '1' && A == a;

// Combined partial results
BA_ba = B_b && A_a;
DC_dc = D_d && C_c;
DCBA_dcba = D_d && C_c && B_b && A_a;

// Generate full results
case (vsize,dsize) of
  when (1,-)      match_data = D_d || C_c || B_b || A_a;
  when (2,2), (2,4) match_data = DC_dc || BA_ba;
  when (4,4)      match_data = DCBA_dcba;
  otherwise       match_data = FALSE;

  match = match_data && match_lsc;
else
  match = FALSE;

return match;
```


E3.1.50 DWT_InstructionAddressMatch

```

// DWT_InstructionAddressMatch()
// =====
// Check for match of instruction access at "Iaddr".
// If comparators 'm' and 'm+1' form an Instruction Address Range comparator, then this
// function returns the range match when N=m+1.

boolean DWT_InstructionAddressMatch(integer N, bits(32) Iaddr)
    assert N < UInt(DWT_CTRL.NUMCOMP) && Align(Iaddr, 2) == Iaddr;

    secure_match = IsSecure();
    valid_match = DWT_ValidMatch(N, secure_match);
    valid_instr = DWT_FUNCTION[N].MATCH == '001x';

    if valid_match && valid_instr then
        if DWT_FUNCTION[N].ID<1> == '0' || DWT_FUNCTION[N].DATAVSZIE != '01' then
            UNPREDICTABLE;

        if N != UInt(DWT_CTRL.NUMCOMP)-1 then
            if DWT_FUNCTION[N+1].MATCH IN {'0111', '1011'} then UNPREDICTABLE;
            linked_to_instr = DWT_FUNCTION[N+1].MATCH == '0011';
        else
            linked_to_instr = FALSE;

        if DWT_FUNCTION[N].MATCH == '0011' then
            // Linked instruction address: check for UNPREDICTABLE cases
            if (linked_to_instr || N == 0 || DWT_FUNCTION[N].ID<4> == '0' ||
                DWT_FUNCTION[N-1].MATCH != '0010') then
                UNPREDICTABLE;
            linked = TRUE;
        else
            linked = FALSE;

        if !linked_to_instr then
            (match_eq, match_gt) = DWT_AddressCompare(Iaddr, DWT_COMP[N], 2, 2);
            if linked then
                valid_match = DWT_ValidMatch(N-1, secure_match);
                (lower_eq, lower_gt) = DWT_AddressCompare(Iaddr, DWT_COMP[N-1], 2, 2);
                match_addr = valid_match && (lower_eq || lower_gt) && !match_gt;
            else
                match_addr = match_eq;
        else
            match_addr = FALSE;
        match = match_addr;
    else
        match = FALSE;

    return match;

```

E3.1.51 DWT_ValidMatch

```
// DWT_ValidMatch ()  
// =====  
// Returns TRUE if this match is permitted by the current authentication controls.  
// Returns FALSE otherwise. That is, if TRCENA is 0 or Noninvasive debug is  
// disabled, if a debug event when halting is not allowed, or other event for a  
// "Secure match" when Secure Noninvasive debug is not allowed.  
// See DWT behavior when debug is disabled or prohibited.  
  
boolean DWT_ValidMatch(integer N, boolean secure_match)  
  if !HaveSecurityExt() then assert !secure_match;  
  if !NoninvasiveDebugAllowed() || DEMCR.TRCENA == '0' then return FALSE;  
  
  // Check for Debug event  
  if DWT_FUNCTION[N].ACTION == '01' then  
    hlt_en = CanHaltOnEvent(secure_match);  
    // Ignore priority when checking whether DebugMonitor activates DWT matches  
    mon_en = HaveMainExt() && CanPendMonitorOnEvent(secure_match, FALSE);  
    return (hlt_en || mon_en);  
  else  
    // Otherwise trace or trigger event  
    return !secure_match || SecureNoninvasiveDebugAllowed();
```

E3.1.52 DataMemoryBarrier

```
// DataMemoryBarrier()  
// =====  
// Perform a Data Memory Barrier operation  
  
DataMemoryBarrier(bits(4) option);
```

E3.1.53 DataSynchronizationBarrier

```
// DataSynchronizationBarrier  
// =====  
// Perform a data synchronization barrier operation  
  
DataSynchronizationBarrier(bits(4) option);
```

E3.1.54 Deactivate

```

// DeActivate()
// =====

DeActivate(integer returningExceptionNumber, boolean targetDomainSecure)
// To prevent the execution priority remaining negative (and therefore
// masking HardFault) when returning from NMI / HardFault with a corrupted
// IPSR value, the active bits corresponding to the execution priority are
// cleared if the raw execution priority (ie the priority before FAULTMASK
// and other priority boosting is considered) is negative.
rawPri = RawExecutionPriority();
if rawPri == -1 then
    SetActive(HardFault, AIRCR.BFHFNMINS == '0', FALSE);
elseif rawPri == -2 then
    SetActive(NMI, AIRCR.BFHFNMINS == '0', FALSE);
elseif rawPri == -3 then
    SetActive(HardFault, TRUE, FALSE);
else
    secure = HaveSecurityExt() && targetDomainSecure;
    SetActive(returningExceptionNumber, secure, FALSE);

/* PRIMASK and BASEPRI unchanged on exception exit */
if HaveMainExt() && rawPri >= 0 then
    // clear FAULTMASK for exception security domain on any return except
    // NMI and HardFault
    if HaveSecurityExt() && targetDomainSecure then
        FAULTMASK_S<0> = '0';
    else
        FAULTMASK_NS<0> = '0';
return;

```

E3.1.55 DecodeExecute

```

// DecodeExecute
// =====
// Decode instruction and execute

DecodeExecute(bits(32) instr, bits(32) pc, boolean isT16);

```

E3.1.56 DecodeImmShift

```
// DecodeImmShift()
// =====

(SRType, integer) DecodeImmShift(bits(2) sr_type, bits(5) imm5)

    case sr_type of
        when '00'
            shift_t = SRType_LSL; shift_n = UInt(imm5);
        when '01'
            shift_t = SRType_LSR; shift_n = if imm5 == '00000' then 32 else UInt(imm5);
        when '10'
            shift_t = SRType_ASR; shift_n = if imm5 == '00000' then 32 else UInt(imm5);
        when '11'
            if imm5 == '00000' then
                shift_t = SRType_RRX; shift_n = 1;
            else
                shift_t = SRType_ROR; shift_n = UInt(imm5);

    return (shift_t, shift_n);
```

E3.1.57 DecodeRegShift

```
// DecodeRegShift()
// =====

SRType DecodeRegShift(bits(2) sr_type)

    case sr_type of
        when '00' shift_t = SRType_LSL;
        when '01' shift_t = SRType_LSR;
        when '10' shift_t = SRType_ASR;
        when '11' shift_t = SRType_ROR;
    return shift_t;
```

E3.1.58 DefaultExcInfo

```
// DefaultExcInfo()
// =====

ExcInfo DefaultExcInfo()
    ExcInfo exc;

    exc.fault      = NoFault;
    exc.origFault  = NoFault;
    exc.isSecure   = TRUE;
    exc.isTerminal = FALSE;
    exc.inExcTaken = FALSE;
    exc.lockup     = FALSE;
    exc.termInst   = TRUE;
    return exc;
```

E3.1.59 DefaultMemoryAttributes

```

// DefaultMemoryAttributes()
// =====

MemoryAttributes DefaultMemoryAttributes(bits(32) address)

MemoryAttributes memattrs;

case address<31:29> of
  when '000'
    memattrs.memtype = MemType_Normal;
    memattrs.device = DeviceType_UNKNOWN;
    memattrs.innerattrs = '10';
    memattrs.shareable = FALSE;
  when '001'
    memattrs.memtype = MemType_Normal;
    memattrs.device = DeviceType_UNKNOWN;
    memattrs.innerattrs = '01';
    memattrs.shareable = FALSE;
  when '010'
    memattrs.memtype = MemType_Device;
    memattrs.device = DeviceType_nGnRE;
    memattrs.innerattrs = '00';
    memattrs.shareable = TRUE;
  when '011'
    memattrs.memtype = MemType_Normal;
    memattrs.device = DeviceType_UNKNOWN;
    memattrs.innerattrs = '01';
    memattrs.shareable = FALSE;
  when '100'
    memattrs.memtype = MemType_Normal;
    memattrs.device = DeviceType_UNKNOWN;
    memattrs.innerattrs = '10';
    memattrs.shareable = FALSE;
  when '101'
    memattrs.memtype = MemType_Device;
    memattrs.device = DeviceType_nGnRE;
    memattrs.innerattrs = '00';
    memattrs.shareable = TRUE;
  when '110'
    memattrs.memtype = MemType_Device;
    memattrs.device = DeviceType_nGnRE;
    memattrs.innerattrs = '00';
    memattrs.shareable = TRUE;
  when '111'
    if address<28:20> == '00000000' then
      memattrs.memtype = MemType_Device;
      memattrs.device = DeviceType_nGnRnE;
      memattrs.innerattrs = '00';
      memattrs.shareable = TRUE;
    else
      memattrs.memtype = MemType_Device;
      memattrs.device = DeviceType_nGnRE;
      memattrs.innerattrs = '00';
      memattrs.shareable = TRUE;

// Outer attributes are the same as the inner attributes in all cases.
memattrs.outerattrs = memattrs.innerattrs;
memattrs.outershareable = memattrs.shareable;

// Setting as UNKNOWN by default. This flag will be overwritten based on
// SAU/IDAU checking in SecurityCheck()
memattrs.NS = boolean UNKNOWN;
return memattrs;

```

E3.1.60 DefaultPermissions

```
// DefaultPermissions()  
// =====  
  
Permissions DefaultPermissions(bits(32) address)  
  
Permissions perms;  
  
perms.ap          = '01';  
perms.apValid    = TRUE;  
perms.region     = Zeros(8);  
perms.regionValid = FALSE;  
  
case address<31:29> of  
  when '000'  
    perms.xn = '0';  
  when '001'  
    perms.xn = '0';  
  when '010'  
    perms.xn = '1';  
  when '011'  
    perms.xn = '0';  
  when '100'  
    perms.xn = '0';  
  when '101'  
    perms.xn = '1';  
  when '110'  
    perms.xn = '1';  
  when '111'  
    perms.xn = '1';  
  
return perms;
```

E3.1.61 DerivedLateArrival

```

// DerivedLateArrival()
// =====

DerivedLateArrival(integer pePriority, integer peNumber, boolean peIsSecure, ExcInfo deInfo,
                   integer oeNumber, boolean oeIsSecure)
// PE: the pre-empted exception - before exception entry
// OE: the original exception - exception entry
// DE: the derived exception - fault on exception entry

// Get the priorities of the exceptions
// xePriority: the lower the value, the higher the priority
oePriority = ExceptionPriority(oeNumber, oeIsSecure, FALSE);
// NOTE: Comparison of dePriority against PE priority and possible
// escalation to HardFault has already occurred. See CreateException().

// Is the derived exception a DebugMonitor
if HaveMainExt() then
    deIsDbgMonFault = (deInfo.origFault == DebugMonitor);
else
    deIsDbgMonFault = FALSE;

// Work out which fault to take, and what the target domain is
if deInfo.isTerminal then
    // Derived exception is terminal and prevents the original exception
    // being taken (eg fault on vector fetch). As a result the derived
    // exception is treated as a HardFault.
    targetIsSecure = deInfo.isSecure;
    targetFault    = deInfo.fault;
    // If the derived fault doesn't have sufficient priority to pre-empt
    // lockup instead of taking it.
    if !ComparePriorities(deInfo, FALSE, oePriority, oeNumber, oeIsSecure) then
        ActivateException(oeNumber, oeIsSecure);
        // Since execution of original exception cannot be started, lockup
        // at the current priority level. That is the priority of the original
        // exception.
        Lockup(TRUE);
elseif deIsDbgMonFault && !ComparePriorities(deInfo, TRUE, pePriority, peNumber, peIsSecure) then
    // Ignore the DebugMonitorFault and take original exception
    SetPending(DebugMonitor, deInfo.isSecure, FALSE);
    targetFault    = oeNumber;
    targetIsSecure = oeIsSecure;
elseif ComparePriorities(deInfo, FALSE, oePriority, oeNumber, oeIsSecure) then
    // Derive exception has a higher priority (ie lower value) than the
    // original exception, so the derived exception first. Tail-chaining
    // IMPLEMENTATION DEFINED
    targetFault    = deInfo.fault;
    targetIsSecure = deInfo.isSecure;
else
    // If the derived exception caused a lockup then this must be handled
    // now as the lockup cannot be pended until the original exception
    // returns
    if deInfo.lockup then
        // Lockup at the priority of the original exception being entered.
        ActivateException(oeNumber, oeIsSecure);
        Lockup(TRUE);
    else
        // DE will be pended below, start execution of the OE
        targetFault    = oeNumber;
        targetIsSecure = oeIsSecure;

// If not of the tests above have triggered a lockup (which would have
// terminated execution of the pseudocode) then the derived exception
// must be pended and any escalation syndrome info generated
if HaveMainExt() &&
    (deInfo.fault == HardFault) &&
    (deInfo.origFault != HardFault) then

```

```
HFSR.FORCED = '1';  
SetPending(deInfo.fault, deInfo.isSecure, TRUE);  
  
// Take the target exception. NOTE: None terminal faults are ignored when  
// handling the derived exception, allowing forward progress to be made.  
excInfo = ExceptionTaken(targetFault, deInfo.inExcTaken, targetIsSecure, TRUE);  
// If trying to take the resulting exception results in another fault, then handle  
// the derived derived fault.  
if excInfo.fault != NoFault then  
    DerivedLateArrival(pePriority, peNumber, peIsSecure, excInfo, targetFault, targetIsSecure);
```

E3.1.62 DeviceType

```
// Types of memory  
  
enumeration DeviceType {DeviceType_GRE, DeviceType_nGRE, DeviceType_nGnRE, DeviceType_nGnRnE};
```

E3.1.63 EndOfInstruction

```
// EndOfInstruction  
// =====  
// Terminates the processing of current instruction.  
  
EndOfInstruction();
```

E3.1.64 EventRegistered

```
// EventRegistered  
// =====  
// Returns TRUE if PE Event Register is set to 1 and FALSE otherwise.  
  
boolean EventRegistered();
```


E3.1.65 ExclInfo

```
// Exception information

type ExclInfo is (
  integer fault,           // The ID of the resulting fault, or NoFault (ie 0)
                          // if no fault occurred
  integer origFault,      // The ID if the original fault raised before
                          // escalation is considered.
  boolean isSecure,       // TRUE if the fault targets the Secure state.
  boolean origFaultIsSecure, // TRUE if the original fault raised targeted
                          // Secure state
  boolean isTerminal,     // Set to TRUE for derived faults (eg exception on
                          // exception entry) that prevent the original
                          // exception being entered (eg a BusFault whilst
                          // fetching the exception vector address).
  boolean inExcTaken,     // TRUE if the exception occurred during ExceptionTaken()
                          // This is used to determine if the LR update and the
                          // callee stacking operations have been performed, and
                          // therefore whether the derived exception should be
                          // treated as a tail chain.
  boolean lockup,         // Set to TRUE if the exception should cause a lockup.
  boolean termInst       // Set to TRUE if the exception should cause the
                          // instruction to be terminated.
)

```

E3.1.66 ExceptionActiveBitCount

```
// ExceptionActiveBitCount()
// =====

integer ExceptionActiveBitCount()
  integer count = 0;
  for i = 0 to MaxExceptionNum
    for j = 0 to 1
      if IsActiveForState(i, j == 0) then
        count = count + 1;
  return count;

```

E3.1.67 ExceptionDetails

```
// ExceptionDetails()
// =====

(boolean, boolean) ExceptionDetails(integer exception, boolean isSecure, boolean isSynchronous)
// Is the exception subject to escalation
case exception of
  when HardFault
    termInst = TRUE;
    enabled = TRUE;
    canEscalate = TRUE;
  when MemManage
    termInst = TRUE;
    if HaveMainExt() then
      val = if isSecure then SHCSR_S else SHCSR_NS;
      enabled = val.MEMFAULTENA == '1';
    else
      enabled = FALSE;
      canEscalate = TRUE;
  when BusFault
    termInst = isSynchronous;
    enabled = if HaveMainExt()
      then SHCSR_S.BUSFAULTENA == '1' else FALSE;
    // Async BusFaults only escalate if they are disabled
    canEscalate = termInst || !enabled;
  when UsageFault
    termInst = TRUE;
    if HaveMainExt() then
      val = if isSecure then SHCSR_S else SHCSR_NS;
      enabled = val.USGFAULTENA == '1';
    else
      enabled = FALSE;
      canEscalate = TRUE;
  when SecureFault
    termInst = TRUE;
    enabled = if HaveMainExt()
      then SHCSR_S.SECUREFAULTENA == '1' else FALSE;
    canEscalate = TRUE;
  when SVCall
    termInst = FALSE;
    enabled = TRUE;
    canEscalate = TRUE;
  when DebugMonitor
    termInst = TRUE;
    enabled = if HaveMainExt()
      then DEMCR.MON_EN == '1' else FALSE;
    canEscalate = FALSE; // TRUE if fault caused by BKPT instruction
  otherwise
    termInst = FALSE;
    canEscalate = FALSE;

// If the fault can escalate then check if exception can be taken
// immediately, or whether it should escalate
escalateToHf = FALSE;
if canEscalate then
  execPri = ExecutionPriority();
  excePri = ExceptionPriority(exception, isSecure, TRUE);
  if (excePri >= execPri) || !enabled then
    escalateToHf = TRUE;

return (escalateToHf, termInst);
```

E3.1.68 ExceptionEnabled

```
// ExceptionEnabled()  
// =====  
// Checks whether the given exception is enabled.  
  
boolean ExceptionEnabled(integer exception, boolean secure);
```

E3.1.69 ExceptionEntry

```
// ExceptionEntry()  
// =====  
// Exception entry is modified according to the behavior of a derived  
// exception, see DerivedLateArrival() also.  
  
ExcInfo ExceptionEntry(integer exceptionType, boolean toSecure, boolean instExecOk)  
  
// PushStack() can abandon memory accesses if a fault occurs during the stacking  
// sequence.  
exc = PushStack(toSecure, instExecOk);  
if exc.fault == NoFault then  
    exc = ExceptionTaken(exceptionType, FALSE, toSecure, FALSE);  
return exc;
```

E3.1.70 ExceptionPriority

```

// ExceptionPriority()
// =====

integer ExceptionPriority(integer n, boolean isSecure, boolean groupPri)
  if HaveMainExt() then
    assert n >= 1 && n <= 511;
  else
    assert n >= 1 && n <= 48;

  if n == Reset then // Reset
    result = -4;
  elseif n == NMI then // NMI
    result = -2;
  elseif n == HardFault then // HardFault
    if isSecure && AIRCR.BFHFNMINS == '1' then
      result = -3;
    else
      result = -1;
  elseif HaveMainExt() && n == MemManage then // MemManage
    result = UInt(if isSecure then SHPR1_S.PRI_4 else SHPR1_NS.PRI_4);
  elseif HaveMainExt() && n == BusFault then // BusFault
    result = UInt(SHPR1_S.PRI_5);
  elseif HaveMainExt() && n == UsageFault then // UsageFault
    result = UInt(if isSecure then SHPR1_S.PRI_6 else SHPR1_NS.PRI_6);
  elseif HaveMainExt() && n == SecureFault then // SecureFault
    result = UInt(SHPR1_S.PRI_7);
  elseif n == SVCa11 then // SVCa11
    result = UInt(if isSecure then SHPR2_S.PRI_11 else SHPR2_NS.PRI_11);
  elseif HaveMainExt() && n == DebugMonitor then // DebugMonitor
    result = UInt(SHPR3_S.PRI_12);
  elseif n == PendSV then // PendSV
    result = UInt(if isSecure then SHPR3_S.PRI_14 else SHPR3_NS.PRI_14);
  elseif n == SysTick then // SysTick
    if ((HaveSysTick() == 2) ||
        (HaveSysTick() == 1 && ((ICSR_S.STTNS == '0') == isSecure))) then
      result = UInt(if isSecure then SHPR3_S.PRI_15 else SHPR3_NS.PRI_15);
  elseif n >= 16 then // External interrupt (n-16)
    r = (n - 16) DIV 4;
    v = n MOD 4;
    result = UInt(NVIC_IPR[r]<v*8+7:v*8>);
  else // Reserved exceptions
    result = 256;

  // Negative priorities (ie Reset, NMI, and HardFault) aren't effected by
  // PRIGROUP or PRIS
  if result >= 0 then
    // Include the PRIGROUP effect
    if HaveMainExt() && groupPri then
      integer subgroupshift;
      if isSecure then
        subgroupshift = UInt(AIRCR_S.PRIGROUP);
      else
        subgroupshift = UInt(AIRCR_NS.PRIGROUP);
      integer groupvalue = 2 << subgroupshift;
      integer subgroupvalue = result MOD groupvalue;
      result = result - subgroupvalue;

  // If the Main Extension is not implemented, only 2 bits of priority are present and
  // a different scheme to scale down the Non-secure priority is used if PRIS is set.
  if HaveMainExt() then
    if (AIRCR_S.PRIS == '1') && !isSecure then
      result = (result >> 1) + PriSnsPri;
  else
    // Only use the top 2 bits
    result = result >> 6;
    if (AIRCR_S.PRIS == '1') && !isSecure then

```

```
        result = result + PriSNsPri;  
else  
        result = result << 1;  
return result;
```

E3.1.71 ExceptionReturn

```
// ExceptionReturn()
// =====

ExcInfo ExceptionReturn(bits(24) excReturn)
    integer returningExceptionNumber = UInt(IPSR.Exception);

    exc = ValidateExceptionReturn(excReturn, returningExceptionNumber);
    if exc.fault != NoFault then
        return exc;

    if HaveSecurityExt() then
        excSecure = excReturn<0> == '1';
        retToSecure = excReturn<6> == '1';
    else
        excSecure = FALSE;
        retToSecure = FALSE;

    // Restore SPSEL for the Security state we are returning from.
    if excSecure then
        CONTROL_S.SPSEL = excReturn<2>;
    else
        CONTROL_NS.SPSEL = excReturn<2>;

    targetDomainSecure = excReturn<0> == '1';
    DeActivate(returningExceptionNumber, targetDomainSecure);

    // If requested, clear the scratch FP values left in the caller saved
    // registers before returning/tail chaining.
    if HaveFPEExt() && FPCCR.CLRONRET == '1' && CONTROL.FPCA == '1' then
        if FPCCR_S.LSPACT == '1' then
            SFSR.LSERR = '1';
            return CreateException(SecureFault, TRUE, TRUE);
        else
            for i = 0 to 15
                S[i] = Zeros();
            FPSCR = Zeros();

    // If TailChaining is supported, check if there is a pending exception with
    // sufficient priority to be taken now. This check is done after the
    // previous exception is deactivated so the priority of the previous
    // exception doesn't mask any pending exceptions.
    // The position of TailChain() within this function is the earliest point
    // at which an tailchain is architecturally visible. Tail-chaining from a
    // later point is permissible.
    if boolean IMPLEMENTATION_DEFINED "Tail chaining supported" then
        (takeException, exception, excIsSecure) = PendingExceptionDetails();
        if takeException then
            return TailChain(exception, excIsSecure, excReturn);

    // Check for illegal excReturn value
    if excReturn<1> != '0' then
        if HaveMainExt() then
            UFSR.INVPC = '1';
            // NOTE: This exception is raised before the Security state is
            // changed, so the UsageFault targets the state the processor was in
            // when the original exception returned.
            return CreateException(UsageFault, FALSE, boolean UNKNOWN);
        else
            UNPREDICTABLE;

    // Return to the background Security state
    if HaveSecurityExt() then
        CurrentState = if retToSecure
            then SecurityState_Secure else SecurityState_NonSecure;

    // Sleep-on-exit performs equivalent behaviour to the WFI instruction.
```

```
// The position of SleepOnExit() within this function is the earliest point
// at which it can be performed. Performing SleepOnExit from a later point
// is permissible.
if (excReturn<3> == '1' && SCR.SLEEPONEXIT == '1' &&
    ExceptionActiveBitCount() == 0) then
    SleepOnExit(); // IMPLEMENTATION DEFINED

// Pop the stack and raise any exceptions that are generated
exc = PopStack(excReturn);
if exc.fault == NoFault then
    ClearExclusiveLocal(ProcessorID());
    SetEventRegister(); // See WFE instruction for more details
    InstructionSynchronizationBarrier('1111');

return exc;
```

E3.1.72 ExceptionTaken

```

// ExceptionTaken()
// =====

ExcInfo ExceptionTaken(integer exceptionNumber, boolean doTailChain,
                       boolean excIsSecure, boolean ignStackFaults)
  assert(HaveSecurityExt() || !excIsSecure);

  // If the background code was running in the Secure state that are some
  // additional steps that might need to be taken to protect the callee saved
  // registers
  exc = DefaultExcInfo();
  if HaveSecurityExt() && LR<6> == '1' then
    if excIsSecure then // Transitioning to Secure
      // If tail chaining is from Non-secure to Secure, then the callee registers
      // are already on stack. Set excReturn.DCRS accordingly
      if doTailChain && LR<0> == '0' then
        LR<5> = '0';
      else // Transitioning to Non-secure
        // If the callee registers aren't already on the stack push them now
        if LR<5> == '1' && !(doTailChain && LR<0> == '0') then
          exc = PushCalleeStack(doTailChain);
        // Going to Non-secure exception. Set excReturn.DCRS to default
        // value
        LR<5> = '1';

  // Finalise excReturn value
  if excIsSecure then
    LR<2> = CONTROL_S.SPSEL;
    LR<0> = '1';
  else
    LR<2> = CONTROL_NS.SPSEL;
    LR<0> = '0';

  // Register clearing
  // Caller saved registers: These registers are cleared if exception targets
  // the Non-secure state, otherwise they are UNKNOWN. NOTE: The original
  // values were pushed to the stack.
  callerRegValue = if !HaveSecurityExt() || excIsSecure then bits(32) UNKNOWN else Zeros(32);
  for n = 0 to 3
    R[n] = callerRegValue;
  R[12] = callerRegValue;
  EAPSR = callerRegValue;
  // Callee saved registers: If the background code was in the Secure state
  // these registers are cleared if the exception targets the Non-secure state,
  // and UNKNOWN if it targets the Secure state and the registers have been
  // pushed to the stack (as indicated by EXC_RETURN.DCRS).
  //
  // NOTE: Callee saved registers are preserved if the background code is
  // Non-secure, of when the exception is Secure and the values haven't
  // been pushed to the stack.
  if HaveSecurityExt() && LR<6> == '1' then
    if excIsSecure then
      if LR<5> == '0' then
        for n = 4 to 11
          R[n] = bits(32) UNKNOWN;
    else
      for n = 4 to 11
        R[n] = Zeros();

  // If no errors so far (or errors that can be ignored) load the vector address
  if exc.fault == NoFault || ignStackFaults then
    (exc, start) = Vector[exceptionNumber, excIsSecure];

  // The state / mode of processor isn't updated if an exception is raised
  // during the entry sequency.
  if exc.fault == NoFault then

```



```
ActivateException(exceptionNumber, excIsSecure);
SCS_UpdateStatusRegs();
ClearExclusiveLocal(ProcessorID());
SetEventRegister(); // See WFE instruction for details
InstructionSynchronizationBarrier('1111');
// Start execution of handler
EPSR.T = start<0>;
// If EPSR.T == 0 then an exception is taken on the next
// instruction: UsageFault('Invalid State') if the Main Extension is
// implemented; HardFault otherwise
BranchTo(start<31:1>:'0');
else
    exc.inExcTaken = TRUE;
return exc;
```

E3.1.73 ExceptionTargetsSecure

```
// ExceptionTargetsSecure()
// =====

// Determine the default Security state an exception should target if the
// exception isn't force to a specific domain

boolean ExceptionTargetsSecure(integer exceptionNumber, boolean isSecure)
    if !HaveSecurityExt() then
        return FALSE;

    boolean targetSecure = FALSE;
    case exceptionNumber of
        when NMI
            targetSecure = AIRCR.BFHFNMINS == '0';

        when HardFault
            targetSecure = AIRCR.BFHFNMINS == '0' || isSecure;

        when MemManage
            targetSecure = isSecure;

        when BusFault
            targetSecure = AIRCR.BFHFNMINS == '0';

        when UsageFault
            targetSecure = isSecure;

        when SecureFault
            // SecureFault always targets Secure state
            targetSecure = TRUE;

        when SVCa11
            targetSecure = isSecure;

        when DebugMonitor
            targetSecure = DEMCR.SDME == '1';

        when PendSV
            targetSecure = isSecure;

        when SysTick
            if HaveSysTick() == 2 then
                // If there is a SysTick for each domain, then the exception
                // targets the domain associated with the SysTick instance that
                // raised the exception
                // targetSecure = <SysTick instance raising exception>
            elseif HaveSysTick() == 1 then
                // SysTick target state is configurable
                targetSecure = ICSR_S.STTNS == '0';

    otherwise
        if exceptionNumber >= 16 then
            // Interrupts target the state defined by the NVIC_ITNS register
            targetSecure = NVIC_ITNS<exceptionNumber - 16> == '0';

    return targetSecure;
```

E3.1.74 ExclusiveMonitorsPass

```
// ExclusiveMonitorsPass()
// =====

boolean ExclusiveMonitorsPass(bits(32) address, integer size)

// It is IMPLEMENTATION DEFINED whether the detection of memory aborts happens
// before or after the check on the local Exclusive Monitor. As a result a failure
// of the local monitor can occur on some implementations even if the memory
// access would give a memory abort.

if address != Align(address, size) then
    UFSR.UNALIGNED = '1';
    excInfo = CreateException(UsageFault, FALSE, boolean UNKNOWN);
else
    (excInfo, memaddrdesc) = ValidateAddress(address, AccType_NORMAL,
                                           FindPriv(), IsSecure(), TRUE);
    HandleException(excInfo);

passed = IsExclusiveLocal(memaddrdesc.paddress, ProcessorID(), size);
if memaddrdesc.memattrs.shareable then
    passed = passed && IsExclusiveGlobal(memaddrdesc.paddress, ProcessorID(), size);
if passed then
    ClearExclusiveLocal(ProcessorID());
return passed;
```

E3.1.75 ExecuteCPCheck

```
// ExecuteCPCheck()
// =====

ExecuteCPCheck(integer cp)
// Check access to coprocessor is enabled
excInfo = CheckCPEnabled(cp);
HandleException(excInfo);
```

E3.1.76 ExecuteFPCheck

```
// ExecuteFPCheck()
// =====

ExecuteFPCheck()
// Check access to FP coprocessor is enabled
excInfo = CheckCPEnabled(10);
HandleException(excInfo);

// If FP lazy context save is enabled then save state
if FPCCR_S.S == '1' then
    lspact = FPCCR_S.LSPACT;
else
    lspact = FPCCR_NS.LSPACT;
if lspact == '1' then
    PreserveFPState();

// Update the ownership of the FP context
FPCCR_S.S = if IsSecure() then '1' else '0';

// Update CONTROL.FPCA, and create new FP context
// if this has been enabled by setting FPCCR.ASPEN to 1
if FPCCR.ASPEN == '1' &&
    (CONTROL.FPCA == '0' || (IsSecure() && CONTROL_S.SFPA == '0')) then
    FPSCR = FPDSCR<31:0>;
    CONTROL.FPCA = '1';
    if IsSecure() then
        CONTROL_S.SFPA = '1';
return;
```

E3.1.77 ExecutionPriority

```

// ExecutionPriority()
// =====
// Determine the current execution priority

integer ExecutionPriority()

    boostedpri = HighestPri;      // Priority influence of BASEPRI, PRIMASK and FAULTMASK

// Calculate boosted priority effect due to BASEPRI for both Security states
if HaveMainExt() then
    if UInt(BASEPRI_NS<7:0>) != 0 then
        basepri = UInt(BASEPRI_NS<7:0>);
        // Include the PRIGROUP effect
        subgroupshift = UInt(AIRCR_NS.PRIGROUP);
        groupvalue = 2 << subgroupshift;
        subgroupvalue = basepri MOD groupvalue;
        boostedpri = basepri - subgroupvalue;
        if AIRCR_S.PRIS == '1' then
            boostedpri = (boostedpri >> 1) + PriSnsPri;

    if UInt(BASEPRI_S<7:0>) != 0 then
        basepri = UInt(BASEPRI_S<7:0>);
        // Include the PRIGROUP effect
        subgroupshift = UInt(AIRCR_S.PRIGROUP);
        groupvalue = 2 << subgroupshift;
        subgroupvalue = basepri MOD groupvalue;
        basepri = basepri - subgroupvalue;
        if boostedpri > basepri then
            boostedpri = basepri;

// Calculate boosted priority effect due to PRIMASK for both Security states
if PRIMASK_NS.PM == '1' then
    if AIRCR_S.PRIS == '0' then
        boostedpri = 0;
    else
        if boostedpri > PriSnsPri then
            boostedpri = PriSnsPri;

if PRIMASK_S.PM == '1' then
    boostedpri = 0;

// Calculate boosted priority effect due to FAULTMASK for both Security states
if HaveMainExt() then
    if FAULTMASK_NS.FM == '1' then
        if AIRCR.BFHFNMINS == '0' then
            if AIRCR_S.PRIS == '0' then
                boostedpri = 0;
            else
                if boostedpri > PriSnsPri then
                    boostedpri = PriSnsPri;
        else
            boostedpri = -1;

    if FAULTMASK_S.FM == '1' then
        boostedpri = if AIRCR.BFHFNMINS == '0' then -1 else -3;

// Finally calculate the resultant priority after boosting
rawExecPri = RawExecutionPriority();
if boostedpri < rawExecPri then
    priority = boostedpri;
else
    priority = rawExecPri;

return priority;

```

E3.1.78 FPAbs

```
// FPAbs()  
// =====  
  
bits(N) FPAbs(bits(N) operand)  
assert N IN {32,64};  
return '0' : operand<N-2:0>;
```

E3.1.79 FPAdd

```
// FPAdd()  
// =====  
  
bits(N) FPAdd(bits(N) op1, bits(N) op2, boolean fpscr_controlled)  
assert N IN {32,64};  
fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();  
(type1,sign1,value1) = FPUunpack(op1, fpscr_val);  
(type2,sign2,value2) = FPUunpack(op2, fpscr_val);  
(done,result) = FPProcessNaNs(type1, type2, op1, op2, fpscr_val);  
if !done then  
    inf1 = (type1 == FPType_Infinity); inf2 = (type2 == FPType_Infinity);  
    zero1 = (type1 == FPType_Zero); zero2 = (type2 == FPType_Zero);  
    if inf1 && inf2 && sign1 == NOT(sign2) then  
        result = FPDefaultNaN(N);  
        FPProcessException(FPExc_InvalidOp, fpscr_val);  
    elseif (inf1 && sign1 == '0') || (inf2 && sign2 == '0') then  
        result = FPInfinity('0', N);  
    elseif (inf1 && sign1 == '1') || (inf2 && sign2 == '1') then  
        result = FPInfinity('1', N);  
    elseif zero1 && zero2 && sign1 == sign2 then  
        result = FPZero(sign1, N);  
    else  
        result_value = value1 + value2;  
        if result_value == 0.0 then // Sign of exact zero result depends on rounding mode  
            result_sign = if fpscr_val<23:22> == '10' then '1' else '0';  
            result = FPZero(result_sign, N);  
        else  
            result = FPRound(result_value, N, fpscr_val);  
    return result;
```

E3.1.80 FPB_BreakpointMatch

```
// FPB_BreakpointMatch()  
// =====  
// Generates a debug event based on FP Breakpoint Match  
  
FPB_BreakpointMatch()  
i = GenerateDebugEventResponse();
```

E3.1.81 FPB_CheckBreakPoint

```
// FPB_CheckBreakPoint
// =====
// Check for Flash Patch Break point

boolean FPB_CheckBreakPoint(bits(32) iaddr, integer size, boolean is_ifetch, boolean is_secure)

    match = FPB_CheckMatchAddress(iaddr);
    if !match && size == 4 && FPB_CheckMatchAddress(iaddr + 2) then
        match = ConstrainUnpredictableBool(Unpredictable_FPBreakpoint);
    return match;
```

E3.1.82 FPB_CheckMatchAddress

```
// FPB_CheckMatchAddress
// =====
// Flash Patch breakpoint instruction address comparison

boolean FPB_CheckMatchAddress(bits(32) iaddr)

    if FP_CTRL.ENABLE == '0' then return FALSE; // FP not enabled

    // Instruction Comparator.
    num_addr_cmp = UInt(FP_CTRL.NUM_CODE);
    for N = 0 to (num_addr_cmp - 1)
        if FP_COMP[N].BE == '1' then // Breakpoint enabled
            if iaddr<31:1> == FP_COMP[N].BPADDR then
                return TRUE;
    return FALSE;
```

E3.1.83 FPCompare

```
// FPCompare()
// =====

(bit, bit, bit, bit) FPCompare(bits(N) op1, bits(N) op2, boolean quiet_nan_exc,
                               boolean fpscr_controlled)

    assert N IN {32,64};
    fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();
    (type1,-,value1) = FPUnpack(op1, fpscr_val);
    (type2,-,value2) = FPUnpack(op2, fpscr_val);
    if type1==FPTYPE_SNaN || type1==FPTYPE_QNaN || type2==FPTYPE_SNaN || type2==FPTYPE_QNaN then
        result = ('0','0','1','1');
        if type1==FPTYPE_SNaN || type2==FPTYPE_SNaN || quiet_nan_exc then
            FPProcessException(FPExc_InvalidOp, fpscr_val);
    else
        // All non-NaN cases can be evaluated on the values produced by FPUnpack()
        if value1 == value2 then
            result = ('0','1','1','0');
        elseif value1 < value2 then
            result = ('1','0','0','0');
        else // value1 > value2
            result = ('0','0','1','0');
    return result;
```

E3.1.84 FPDefaultNaN

```
// FPDefaultNaN()
// =====

bits(N) FPDefaultNaN(integer N)
  assert N IN {16,32,64};
  if N == 16 then E = 5; elsif N == 32 then E = 8; else E = 11;
  constant integer F = N - E - 1;
  sign = '0';
  exp = Ones(E);
  frac = '1':Zeros(F-1);
  return sign : exp : frac;
```

E3.1.85 FPDiv

```
// FPDiv()
// =====

bits(N) FPDiv(bits(N) op1, bits(N) op2, boolean fpscr_controlled)
  assert N IN {32,64};
  fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();
  (fp_type1,sign1,value1) = FPUnpack(op1, fpscr_val);
  (fp_type2,sign2,value2) = FPUnpack(op2, fpscr_val);
  (done,result) = FPProcessNaNs(fp_type1, fp_type2, op1, op2, fpscr_val);
  if !done then
    inf1 = (fp_type1 == FPType_Infinity); inf2 = (fp_type2 == FPType_Infinity);
    zero1 = (fp_type1 == FPType_Zero); zero2 = (fp_type2 == FPType_Zero);
    if (inf1 && inf2) || (zero1 && zero2) then
      result = FPDefaultNaN(N);
      FPProcessException(FPExc_InvalidOp, fpscr_val);
    elsif inf1 || zero2 then
      result_sign = if sign1 == sign2 then '0' else '1';
      result = FPIfinity(result_sign, N);
      if !inf1 then FPProcessException(FPExc_DivideByZero, fpscr_val);
    elsif zero1 || inf2 then
      result_sign = if sign1 == sign2 then '0' else '1';
      result = FPZero(result_sign, N);
    else
      result = FPRound(value1/value2, N, fpscr_val);
  return result;
```


E3.1.86 FPDoubleToHalf

```
// FPDoubleToHalf()
// =====
bits(16) FPDoubleToHalf(bits(64) operand, boolean fpscr_controlled)
    fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();
    (fp_type,sign,value) = FPUunpack(operand, fpscr_val);
    if fp_type == FPType_SNaN || fp_type == FPType_QNaN then
        if fpscr_val<26> == '1' then // AH bit set
            result = FPZero(sign, 16);
        elsif fpscr_val<25> == '1' then // DN bit set
            result = FPDefaultNaN(16);
        else
            result = sign : '1111 1' : operand<50:42>;
            if fp_type == FPType_SNaN || fpscr_val<26> == '1' then
                FPProcessException(FPExc_InvalidOp, fpscr_val);
    elsif fp_type == FPType_Infinity then
        if fpscr_val<26> == '1' then // AH bit set
            result = sign : Ones(15);
            FPProcessException(FPExc_InvalidOp, fpscr_val);
        else
            result = FPInfinity(sign, 16);
    elsif fp_type == FPType_Zero then
        result = FPZero(sign, 16);
    else
        result = FPRound(value, 16, fpscr_val);
    return result;
```

E3.1.87 FPDoubleToSingle

```
// FPDoubleToSingle()
// =====
bits(32) FPDoubleToSingle(bits(64) operand, boolean fpscr_controlled)
    fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();
    (fp_type,sign,value) = FPUunpack(operand, fpscr_val);
    if fp_type == FPType_SNaN || fp_type == FPType_QNaN then
        if fpscr_val<25> == '1' then // DN bit set
            result = FPDefaultNaN(32);
        else
            result = sign : '11111111 1' : operand<50:29>;
            if fp_type == FPType_SNaN then
                FPProcessException(FPExc_InvalidOp, fpscr_val);
    elsif fp_type == FPType_Infinity then
        result = FPInfinity(sign, 32);
    elsif fp_type == FPType_Zero then
        result = FPZero(sign, 32);
    else
        result = FPRound(value, 32, fpscr_val);
    return result;
```

E3.1.88 FPExc

```
// Floating point exceptions  
  
enumeration FPExc {FPExc_InvalidOp, FPExc_DivideByZero, FPExc_Overflow,  
                  FPExc_Underflow, FPExc_Inexact, FPExc_InputDenorm};
```

E3.1.89 FPHalfToDouble

```
// FPHalfToDouble()  
// =====  
  
bits(64) FPHalfToDouble(bits(16) operand, boolean fpscr_controlled)  
    fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();  
    (fp_type,sign,value) = FPUunpack(operand, fpscr_val);  
    if fp_type == FPType_SNaN || fp_type == FPType_QNaN then  
        if fpscr_val<25> == '1' then // DN bit set  
            result = FPDefaultNaN(64);  
        else  
            result = sign : '11111111 1' : operand<8:0> : Zeros(42);  
    if fp_type == FPType_SNaN then  
        FPProcessException(FPExc_InvalidOp, fpscr_val);  
    elseif fp_type == FPType_Infinity then  
        result = FPInfinity(sign, 64);  
    elseif fp_type == FPType_Zero then  
        result = FPZero(sign, 64);  
    else  
        result = FPRound(value, 64, fpscr_val); // Rounding will be exact  
    return result;
```

E3.1.90 FPHalfToSingle

```
// FPHalfToSingle()  
// =====  
  
bits(32) FPHalfToSingle(bits(16) operand, boolean fpscr_controlled)  
    fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();  
    (fp_type,sign,value) = FPUunpack(operand, fpscr_val);  
    if fp_type == FPType_SNaN || fp_type == FPType_QNaN then  
        if fpscr_val<25> == '1' then // DN bit set  
            result = FPDefaultNaN(32);  
        else  
            result = sign : '1111111 1' : operand<8:0> : Zeros(13);  
    if fp_type == FPType_SNaN then  
        FPProcessException(FPExc_InvalidOp, fpscr_val);  
    elseif fp_type == FPType_Infinity then  
        result = FPInfinity(sign, 32);  
    elseif fp_type == FPType_Zero then  
        result = FPZero(sign, 32);  
    else  
        result = FPRound(value, 32, fpscr_val); // Rounding will be exact  
    return result;
```

E3.1.91 FPInfinity

```
// FPInfinity()
// =====

bits(N) FPInfinity(bit sign, integer N)
    assert N IN {16,32,64};
    if N == 16 then E = 5; elsif N == 32 then E = 8; else E = 11;
    constant integer F = N - E - 1;
    exp = Ones(E);
    frac = Zeros(F);
    return sign : exp : frac;
```

E3.1.92 FPMax

```
// FPMax()
// =====

bits(N) FPMax(bits(N) op1, bits(N) op2, boolean fpscr_controlled)
    assert N IN {32,64};
    fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();
    (fp_type1,sign1,value1) = FPUnpack(op1, fpscr_val);
    (fp_type2,sign2,value2) = FPUnpack(op2, fpscr_val);
    (done,result) = FPProcessNaNs(fp_type1, fp_type2, op1, op2, fpscr_val);
    if !done then
        if value1 > value2 then
            (fp_type,sign,value) = (fp_type1,sign1,value1);
        else
            (fp_type,sign,value) = (fp_type2,sign2,value2);
        if fp_type == FPType_Infinity then
            result = FPInfinity(sign, N);
        elsif fp_type == FPType_Zero then
            sign = sign1 AND sign2; // Use most positive sign
            result = FPZero(sign, N);
        else
            result = FPRound(value, N, fpscr_val);
    return result;
```

E3.1.93 FPMaxNormal

```
// FPMaxNormal()
// =====

bits(N) FPMaxNormal(bit sign, integer N)
    assert N IN {16,32,64};
    if N == 16 then E = 5; elsif N == 32 then E = 8; else E = 11;
    constant integer F = N - E - 1;
    exp = Ones(E-1):'0';
    frac = Ones(F);
    return sign : exp : frac;
```

E3.1.94 FPMaXNum

```
// FPMaXNum()
// =====

bits(N) FPMaXNum(bits(N) op1, bits(N) op2)
    assert N IN {32,64};

    (type1,-,-) = FPUncpack(op1, FPSCR);
    (type2,-,-) = FPUncpack(op2, FPSCR);

    // treat a single quiet-NaN as -Infinity
    if type1 == FPType_QNaN && type2 != FPType_QNaN then
        op1 = FPIInfinity('1', N);
    elsif type1 != FPType_QNaN && type2 == FPType_QNaN then
        op2 = FPIInfinity('1', N);

    return FPMaX(op1, op2, TRUE);
```

E3.1.95 FPMin

```
// FPMin()
// =====

bits(N) FPMin(bits(N) op1, bits(N) op2, boolean fpscr_controlled)
    assert N IN {32,64};
    fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();
    (fp_type1,sign1,value1) = FPUncpack(op1, fpscr_val);
    (fp_type2,sign2,value2) = FPUncpack(op2, fpscr_val);
    (done,result) = FPProcessNaNs(fp_type1, fp_type2, op1, op2, fpscr_val);
    if !done then
        if value1 < value2 then
            (fp_type,sign,value) = (fp_type1,sign1,value1);
        else
            (fp_type,sign,value) = (fp_type2,sign2,value2);
        if fp_type == FPType_Infinity then
            result = FPIInfinity(sign, N);
        elsif fp_type == FPType_Zero then
            sign = sign1 OR sign2; // Use most negative sign
            result = FPZero(sign, N);
        else
            result = FPRound(value, N, fpscr_val);
    return result;
```

E3.1.96 FPMinNum

```

// FPMinNum()
// =====

bits(N) FPMinNum(bits(N) op1, bits(N) op2)
    assert N IN {32,64};

    (fp_type1,-,-) = FPUnpack(op1, FPSCR);
    (fp_type2,-,-) = FPUnpack(op2, FPSCR);

    // Treat a single quiet-NaN as +Infinity
    if fp_type1 == FPType_QNaN && fp_type2 != FPType_QNaN then
        op1 = FPInfinity('0', N);
    elsif fp_type1 != FPType_QNaN && fp_type2 == FPType_QNaN then
        op2 = FPInfinity('0', N);

    return FPMin(op1, op2, TRUE);

```

E3.1.97 FPMul

```

// FPMul()
// =====

bits(N) FPMul(bits(N) op1, bits(N) op2, boolean fpscr_controlled)
    assert N IN {32,64};
    fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();
    (type1,sign1,value1) = FPUnpack(op1, fpscr_val);
    (type2,sign2,value2) = FPUnpack(op2, fpscr_val);
    (done,result) = FPProcessNaNs(type1, type2, op1, op2, fpscr_val);
    if !done then
        inf1 = (type1 == FPType_Infinity); inf2 = (type2 == FPType_Infinity);
        zero1 = (type1 == FPType_Zero); zero2 = (type2 == FPType_Zero);
        if (inf1 && zero2) || (zero1 && inf2) then
            result = FPDefaultNaN(N);
            FPProcessException(FPExc_InvalidOp, fpscr_val);
        elsif inf1 || inf2 then
            result_sign = if sign1 == sign2 then '0' else '1';
            result = FPInfinity(result_sign, N);
        elsif zero1 || zero2 then
            result_sign = if sign1 == sign2 then '0' else '1';
            result = FPZero(result_sign, N);
        else
            result = FPRound(value1*value2, N, fpscr_val);
    return result;

```

E3.1.98 FPMulAdd

```
// FPMulAdd()
// =====
// Calculates addend + op1*op2 with a single rounding.

bits(N) FPMulAdd(bits(N) addend, bits(N) op1, bits(N) op2,
                 boolean fpscr_controlled)
    assert N IN {32,64};
    fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();
    (typeA,signA,valueA) = FPUunpack(addend, fpscr_val);
    (type1,sign1,value1) = FPUunpack(op1, fpscr_val);
    (type2,sign2,value2) = FPUunpack(op2, fpscr_val);
    inf1 = (type1 == FPType_Infinity); zero1 = (type1 == FPType_Zero);
    inf2 = (type2 == FPType_Infinity); zero2 = (type2 == FPType_Zero);
    (done,result) = FPProcessNaNs3(typeA, type1, type2, addend, op1, op2, fpscr_val);

    if typeA == FPType_QNaN && ((inf1 && zero2) || (zero1 && inf2)) then
        result = FPDefaultNaN(N);
        FPProcessException(FPExc_InvalidOp, fpscr_val);

    if !done then
        infA = (typeA == FPType_Infinity); zeroA = (typeA == FPType_Zero);

        // Determine sign and type product will have if it does not cause an Invalid
        // Operation.
        signP = if sign1 == sign2 then '0' else '1';
        infP = inf1 || inf2;
        zeroP = zero1 || zero2;

        // Non SNaN-generated Invalid Operation cases are multiplies of zero by infinity and
        // additions of opposite-signed infinities.
        if (inf1 && zero2) || (zero1 && inf2) || (infA && infP && signA == NOT(signP)) then
            result = FPDefaultNaN(N);
            FPProcessException(FPExc_InvalidOp, fpscr_val);

        // Other cases involving infinities produce an infinity of the same sign.
        elseif (infA && signA == '0') || (infP && signP == '0') then
            result = FPIInfinity('0', N);
        elseif (infA && signA == '1') || (infP && signP == '1') then
            result = FPIInfinity('1', N);

        // Cases where the result is exactly zero and its sign is not determined by the
        // rounding mode are additions of same-signed zeros.
        elseif zeroA && zeroP && signA == signP then
            result = FPZero(signA, N);

        // Otherwise calculate numerical result and round it.
        else
            result_value = valueA + (value1 * value2);
            if result_value == 0.0 then // Sign of exact zero result depends on rounding mode
                result_sign = if fpscr_val<23:22> == '10' then '1' else '0';
                result = FPZero(result_sign, N);
            else
                result = FPRound(result_value, N, fpscr_val);

    return result;
```

E3.1.99 FPNeg

```
// FPNeg()
// =====

bits(N) FPNeg(bits(N) operand)
  assert N IN {32,64};
  return NOT(operand<N-1>) : operand<N-2:0>;
```

E3.1.100 FPProcessException

```
// FPProcessException()
// =====
// The 'fpscr_val' argument supplies FPSCR control bits. Status information is
// updated directly in the FPSCR where appropriate.

FPProcessException(FPExc exception, bits(32) fpscr_val)
  // Get appropriate FPSCR bit numbers
  case exception of
    when FPExc_InvalidOp   enable = 8;   cumul = 0;
    when FPExc_DivideByZero enable = 9;   cumul = 1;
    when FPExc_Overflow    enable = 10;  cumul = 2;
    when FPExc_Underflow   enable = 11;  cumul = 3;
    when FPExc_Inexact     enable = 12;  cumul = 4;
    when FPExc_InputDenorm enable = 15;  cumul = 7;
  if fpscr_val<enable> == '1' then
    IMPLEMENTATION_DEFINED "floating-point trap handling";
  else
    FPSCR<cumul> = '1';
  return;
```

E3.1.101 FPProcessNaN

```
// FPProcessNaN()
// =====
// The 'fpscr_val' argument supplies FPSCR control bits. Status information is
// updated directly in the FPSCR where appropriate.

bits(N) FPProcessNaN(FPType fp_type, bits(N) operand, bits(32) fpscr_val)
  assert N IN {32,64};
  topfrac = if N == 32 then 22 else 51;
  result = operand;
  if fp_type == FPType_SNaN then
    result<topfrac> = '1';
    FPProcessException(FPExc_InvalidOp, fpscr_val);
  if fpscr_val<25> == '1' then // DefaultNaN requested
    result = FPDefaultNaN(N);
  return result;
```

E3.1.102 FPProcessNaNs

```
// FPProcessNaNs()
// =====
// The boolean part of the return value says whether a NaN has been found and
// processed. The bits(N) part is only relevant if it has and supplies the
// result of the operation.
//
// The 'fpscr_val' argument supplies FPSCR control bits. Status information is
// updated directly in the FPSCR where appropriate.

(boolean, bits(N)) FPProcessNaNs(FPType type1, FPType type2,
                                bits(N) op1, bits(N) op2,
                                bits(32) fpscr_val)

assert N IN {32,64};
if type1 == FPType_SNaN then
    done = TRUE; result = FPProcessNaN(type1, op1, fpscr_val);
elseif type2 == FPType_SNaN then
    done = TRUE; result = FPProcessNaN(type2, op2, fpscr_val);
elseif type1 == FPType_QNaN then
    done = TRUE; result = FPProcessNaN(type1, op1, fpscr_val);
elseif type2 == FPType_QNaN then
    done = TRUE; result = FPProcessNaN(type2, op2, fpscr_val);
else
    done = FALSE; result = Zeros(N); // 'Don't care' result
return (done, result);
```

E3.1.103 FPProcessNaNs3

```
// FPProcessNaNs3()
// =====
// The boolean part of the return value says whether a NaN has been found and
// processed. The bits(N) part is only relevant if it has and supplies the
// result of the operation.
//
// The 'fpscr_val' argument supplies FPSCR control bits. Status information is
// updated directly in the FPSCR where appropriate.

(boolean, bits(N)) FPProcessNaNs3(FPType type1, FPType type2, FPType type3,
                                  bits(N) op1, bits(N) op2, bits(N) op3,
                                  bits(32) fpscr_val)

assert N IN {32,64};
if type1 == FPType_SNaN then
    done = TRUE; result = FPProcessNaN(type1, op1, fpscr_val);
elseif type2 == FPType_SNaN then
    done = TRUE; result = FPProcessNaN(type2, op2, fpscr_val);
elseif type3 == FPType_SNaN then
    done = TRUE; result = FPProcessNaN(type3, op3, fpscr_val);
elseif type1 == FPType_QNaN then
    done = TRUE; result = FPProcessNaN(type1, op1, fpscr_val);
elseif type2 == FPType_QNaN then
    done = TRUE; result = FPProcessNaN(type2, op2, fpscr_val);
elseif type3 == FPType_QNaN then
    done = TRUE; result = FPProcessNaN(type3, op3, fpscr_val);
else
    done = FALSE; result = Zeros(N); // 'Don't care' result
return (done, result);
```


E3.1.104 FPRound

```

// FPRound()
// =====
// The 'fpscr_val' argument supplies FPSCR control bits. Status information is
// updated directly in the FPSCR where appropriate.

bits(N) FPRound(real value, integer N, bits(32) fpscr_val)
    assert N IN {16,32,64};
    assert value != 0.0;

    // Obtain format parameters - minimum exponent, numbers of exponent and fraction bits.
    if N == 16 then E = 5; elsif N == 32 then E = 8; else E = 11;
    minimum_exp = 2 - 2E-1;
    constant integer F = N - E - 1;

    // Split value into sign, unrounded mantissa and exponent.
    if value < 0.0 then
        sign = '1'; mantissa = -value;
    else
        sign = '0'; mantissa = value;
    exponent = 0;
    while mantissa < 1.0 do
        mantissa = mantissa * 2.0; exponent = exponent - 1;
    while mantissa >= 2.0 do
        mantissa = mantissa / 2.0; exponent = exponent + 1;

    // Deal with flush-to-zero.
    if fpscr_val<24> == '1' && N != 16 && exponent < minimum_exp then
        result = FPZero(sign, N);
        FPSCR.UFC = '1'; // Flush-to-zero never generates a trapped exception
    else

        // Start creating the exponent value for the result. Start by biasing the actual exponent
        // so that the minimum exponent becomes 1, lower values 0 (indicating possible underflow).
        biased_exp = Max(exponent - minimum_exp + 1, 0);
        if biased_exp == 0 then mantissa = mantissa / 2.0(minimum_exp - exponent);

        // Get the unrounded mantissa as an integer, and the "units in last place" rounding error.
        int_mant = RoundDown(mantissa * 2.0F); // < 2.0F if biased_exp == 0, >= 2.0F if not
        error = mantissa * 2.0F - Real(int_mant);

        // Underflow occurs if exponent is too small before rounding, and result is inexact or
        // the Underflow exception is trapped.
        if biased_exp == 0 && (error != 0.0 || fpscr_val<11> == '1') then
            FPProcessException(FPExc_Underflow, fpscr_val);

        // Round result according to rounding mode.
        case fpscr_val<23:22> of
            when '00' // Round to Nearest (rounding to even if exactly halfway)
                round_up = (error > 0.5 || (error == 0.5 && int_mant<0> == '1'));
                overflow_to_inf = TRUE;
            when '01' // Round towards Plus Infinity
                round_up = (error != 0.0 && sign == '0');
                overflow_to_inf = (sign == '0');
            when '10' // Round towards Minus Infinity
                round_up = (error != 0.0 && sign == '1');
                overflow_to_inf = (sign == '1');
            when '11' // Round towards Zero
                round_up = FALSE;
                overflow_to_inf = FALSE;
        if round_up then
            int_mant = int_mant + 1;
            if int_mant == 2F then // Rounded up from denormalized to normalized
                biased_exp = 1;
            if int_mant == 2(F+1) then // Rounded up to next exponent
                biased_exp = biased_exp + 1; int_mant = int_mant DIV 2;

```

```
// Deal with overflow and generate result.
if N != 16 || fpscr_val<26> == '0' then // Single, double or IEEE half precision
  if biased_exp >= 2^E - 1 then
    result = if overflow_to_inf then FPInfinity(sign, N) else FPMaxNormal(sign, N);
    FPProcessException(FPExc_Overflow, fpscr_val);
    error = 1.0; // Ensure that an Inexact exception occurs
  else
    result = sign : biased_exp<E-1:0> : int_mant<F-1:0>;
else // Alternative half precision
  if biased_exp >= 2^E then
    result = sign : Ones(N-1);
    FPProcessException(FPExc_InvalidOp, fpscr_val);
    error = 0.0; // Ensure that an Inexact exception does not occur
  else
    result = sign : biased_exp<E-1:0> : int_mant<F-1:0>;

// Deal with Inexact exception.
if error != 0.0 then
  FPProcessException(FPExc_Inexact, fpscr_val);

return result;
```

E3.1.105 FPRoundInt

```

// FPRoundInt()
// =====
// Round floating-point value to nearest integral floating point value
// using given rounding mode. If exact is TRUE, set inexact flag if result
// is not numerically equal to given value.

bits(N) FPRoundInt(bits(N) op, bits(2) rmode, boolean away, boolean exact)
  assert N IN {32,64};

  // Unpack using FPSCR to determine if subnormals are flushed-to-zero
  (fp_type,sign,value) = FPUntpack(op, FPSCR);

  if fp_type == FPTYPE_SNaN || fp_type == FPTYPE_QNaN then
    result = FPProcessNaN(fp_type, op, FPSCR);
  elseif fp_type == FPTYPE_Infinity then
    result = FPInfinity(sign, N);
  elseif fp_type == FPTYPE_Zero then
    result = FPZero(sign, N);
  else
    // extract integer component
    int_result = RoundDown(value);
    error = value - Real(int_result);

    // Determine whether supplied rounding mode requires an increment
    case rmode of
      when '00' // Round to nearest, ties to even
        round_up = (error > 0.5 || (error == 0.5 && int_result<0 == '1'));
      when '01' // Round towards Plus Infinity
        round_up = (error != 0.0);
      when '10' // Round towards Minus Infinity
        round_up = FALSE;
      when '11' // Round towards Zero
        round_up = (error != 0.0 && int_result < 0);

    if away then // Round towards Zero, ties away
      round_up = (error > 0.5 || (error == 0.5 && int_result >= 0));

    if round_up then int_result = int_result + 1;

    // Convert integer value into an equivalent real value
    real_result = Real(int_result);

    // Re-encode as a floating-point value, result is always exact
    if real_result == 0.0 then
      result = FPZero(sign, N);
    else
      result = FPRound(real_result, N, FPSCR);

    // Generate inexact exceptions
    if error != 0.0 && exact then
      FPProcessException(FPExc_Inexact, FPSCR);

  return result;

```

E3.1.106 FPSingleToDouble

```
// FPSingleToDouble()
// =====

bits(64) FPSingleToDouble(bits(32) operand, boolean fpscr_controlled)
    fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();
    (fp_type,sign,value) = FPUnpack(operand, fpscr_val);
    if fp_type == FPType_SNaN || fp_type == FPType_QNaN then
        if fpscr_val<25> == '1' then // DN bit set
            result = FPDefaultNaN(64);
        else
            result = sign : '1111111111 1' : operand<21:0> : Zeros(29);
            if fp_type == FPType_SNaN then
                FPProcessException(FPExc_InvalidOp, fpscr_val);
            elsif fp_type == FPType_Infinity then
                result = FPInfinity(sign, 64);
            elsif fp_type == FPType_Zero then
                result = FPZero(sign, 64);
            else
                result = FPRound(value, 64, fpscr_val); // Rounding will be exact
    return result;
```

E3.1.107 FPSingleToHalf

```
// FPSingleToHalf()
// =====

bits(16) FPSingleToHalf(bits(32) operand, boolean fpscr_controlled)
    fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();
    (fp_type,sign,value) = FPUnpack(operand, fpscr_val);
    if fp_type == FPType_SNaN || fp_type == FPType_QNaN then
        if fpscr_val<26> == '1' then // AH bit set
            result = FPZero(sign, 16);
        elsif fpscr_val<25> == '1' then // DN bit set
            result = FPDefaultNaN(16);
        else
            result = sign : '11111 1' : operand<21:13>;
            if fp_type == FPType_SNaN || fpscr_val<26> == '1' then
                FPProcessException(FPExc_InvalidOp, fpscr_val);
            elsif fp_type == FPType_Infinity then
                if fpscr_val<26> == '1' then // AH bit set
                    result = sign : Ones(15);
                    FPProcessException(FPExc_InvalidOp, fpscr_val);
                else
                    result = FPInfinity(sign, 16);
            elsif fp_type == FPType_Zero then
                result = FPZero(sign, 16);
            else
                result = FPRound(value, 16, fpscr_val);
    return result;
```

E3.1.108 FPSqrt

```

// FPSqrt()
// =====

bits(N) FPSqrt(bits(N) operand)
  assert N IN {32,64};
  (fp_type,sign,value) = FPUnpack(operand, FPSCR);
  if fp_type == FPType_SNaN || fp_type == FPType_QNaN then
    result = FPProcessNaN(fp_type, operand, FPSCR);
  elsif fp_type == FPType_Zero then
    result = FPZero(sign, N);
  elsif fp_type == FPType_Infinity && sign == '0' then
    result = FPInfinity(sign, N);
  elsif sign == '1' then
    result = FPDefaultNaN(N);
    FPProcessException(FPExc_InvalidOp, FPSCR);
  else
    result = FPRound(Sqrt(value), N, FPSCR);
  return result;

```

E3.1.109 FPSub

```

// FPSub()
// =====

bits(N) FPSub(bits(N) op1, bits(N) op2, boolean fpscr_controlled)
  assert N IN {32,64};
  fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();
  (fp_type1,sign1,value1) = FPUnpack(op1, fpscr_val);
  (fp_type2,sign2,value2) = FPUnpack(op2, fpscr_val);
  (done,result) = FPProcessNaNs(fp_type1, fp_type2, op1, op2, fpscr_val);
  if !done then
    inf1 = (fp_type1 == FPType_Infinity); inf2 = (fp_type2 == FPType_Infinity);
    zero1 = (fp_type1 == FPType_Zero); zero2 = (fp_type2 == FPType_Zero);
    if inf1 && inf2 && sign1 == sign2 then
      result = FPDefaultNaN(N);
      FPProcessException(FPExc_InvalidOp, fpscr_val);
    elsif (inf1 && sign1 == '0') || (inf2 && sign2 == '1') then
      result = FPInfinity('0', N);
    elsif (inf1 && sign1 == '1') || (inf2 && sign2 == '0') then
      result = FPInfinity('1', N);
    elsif zero1 && zero2 && sign1 == NOT(sign2) then
      result = FPZero(sign1, N);
    else
      result_value = value1 - value2;
      if result_value == 0.0 then // Sign of exact zero result depends on rounding mode
        result_sign = if fpscr_val<23:22> == '10' then '1' else '0';
        result = FPZero(result_sign, N);
      else
        result = FPRound(result_value, N, fpscr_val);
  return result;

```

E3.1.110 FPToFixed

```
// FPToFixed()
// =====

bits(M) FPToFixed(bits(N) operand, integer M, integer fraction_bits, boolean unsigned,
                  boolean round_towards_zero, boolean fpscr_controlled)
    assert N IN {32,64};
    fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();
    if round_towards_zero then fpscr_val<23:22> = '11';
    (fp_type,-,value) = FPUunpack(operand, fpscr_val);

    // For NaNs and infinities, FPUunpack() has produced a value that will round to the
    // required result of the conversion. Also, the value produced for infinities will
    // cause the conversion to overflow and signal an Invalid Operation floating-point
    // exception as required. NaNs must also generate such a floating-point exception.
    if fp_type == FPType_SNaN || fp_type == FPType_QNaN then
        FPProcessException(FPExc_InvalidOp, fpscr_val);

    // Scale value by specified number of fraction bits, then start rounding to an integer
    // and determine the rounding error.
    value = value * 2.0^fraction_bits;
    int_result = RoundDown(value);
    error = value - Real(int_result);

    // Apply the specified rounding mode.
    case fpscr_val<23:22> of
        when '00' // Round to Nearest (rounding to even if exactly halfway)
            round_up = (error > 0.5 || (error == 0.5 && int_result<0> == '1'));
        when '01' // Round towards Plus Infinity
            round_up = (error != 0.0);
        when '10' // Round towards Minus Infinity
            round_up = FALSE;
        when '11' // Round towards Zero
            round_up = (error != 0.0 && int_result < 0);
    if round_up then int_result = int_result + 1;

    // Bitstring result is the integer result saturated to the destination size, with
    // saturation indicating overflow of the conversion (signaled as an Invalid
    // Operation floating-point exception).
    (result, overflow) = SatQ(int_result, M, unsigned);
    if overflow then
        FPProcessException(FPExc_InvalidOp, fpscr_val);
    elsif error != 0.0 then
        FPProcessException(FPExc_Inexact, fpscr_val);

    return result;
```

E3.1.111 FPToFixedDirected

```

// FPToFixedDirected()
// =====

bits(M) FPToFixedDirected(bits(N) op, integer fbits, boolean unsigned,
                           bits(2) round_mode, boolean fpscr_controlled)
  assert N IN {32,64};

  fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();

  // Unpack using FPSCR to determine if subnormals are flushed-to-zero
  (fp_type,-,value) = FPUntpack(op, fpscr_val);

  // If NaN, set cumulative flag or take exception
  if fp_type == FPType_SNaN || fp_type == FPType_QNaN then
    FPProcessException(FPExc_InvalidOp, FPSCR);

  // Scale by fractional bits and produce integer rounded towards
  // minus-infinity
  value = value * 2.0^fbits;
  int_result = RoundDown(value);
  error = value - Real(int_result);

  // Determine whether supplied rounding mode requires an increment
  case round_mode of
    when '00' // ties away
      round_up = (error > 0.5 || (error == 0.5 && int_result >= 0));
    when '01' // nearest even
      round_up = (error > 0.5 || (error == 0.5 && int_result < 0));
    when '10' // plus infinity
      round_up = (error != 0.0);
    when '11' // neg infinity
      round_up = FALSE;

  if round_up then int_result = int_result + 1;

  // Generate saturated result and exceptions
  (result, overflow) = SatQ(int_result, M, unsigned);

  if overflow then
    FPProcessException(FPExc_InvalidOp, fpscr_val);
  elseif error != 0.0 then
    FPProcessException(FPExc_Inexact, fpscr_val);
  return result;

```

E3.1.112 FPType

```

// Type of floating-point value. Floating-point values are categorized into one
// of the following type during unpacking.

enumeration FPType {FPType_Nonzero, FPType_Zero, FPType_Infinity, FPType_QNaN, FPType_SNaN};

```

E3.1.113 FPUnpack

```

// FPUnpack()
// =====
//
// Unpack a floating-point number into its type, sign bit and the real number
// that it represents. The real number result has the correct sign for numbers
// and infinities, is very large in magnitude for infinities, and is 0.0 for
// NaNs. (These values are chosen to simplify the description of comparisons
// and conversions.)
//
// The 'fpscr_val' argument supplies FPSCR control bits. Status information is
// updated directly in the FPSCR where appropriate.

(FPType, bit, real) FPUnpack(bits(N) fpval, bits(32) fpscr_val)
    assert N IN {16,32,64};

    if N == 16 then
        sign = fpval<15>;
        exp16 = fpval<14:10>;
        frac16 = fpval<9:0>;
        if IsZero(exp16) then
            // Produce zero if value is zero
            if IsZero(frac16) then
                fp_type = FPType_Zero; value = 0.0;
            else
                fp_type = FPType_Nonzero; value = 2.0-14 * (Real(UInt(frac16)) * 2.0-10);
        elsif IsOnes(exp16) && fpscr_val<26> == '0' then // Infinity or NaN in IEEE format
            if IsZero(frac16) then
                fp_type = FPType_Infinity; value = 2.01000000;
            else
                fp_type = if frac16<9> == '1' then FPType_QNaN else FPType_SNaN;
                value = 0.0;
        else
            fp_type = FPType_Nonzero;
            value = 2.0(UInt(exp16)-15) * (1.0 + Real(UInt(frac16)) * 2.0-10);

    elsif N == 32 then

        sign = fpval<31>;
        exp32 = fpval<30:23>;
        frac32 = fpval<22:0>;
        if IsZero(exp32) then
            // Produce zero if value is zero or flush-to-zero is selected.
            if IsZero(frac32) || fpscr_val<24> == '1' then
                fp_type = FPType_Zero; value = 0.0;
            if !IsZero(frac32) then // Denormalized input flushed to zero
                FPProcessException(FPExc_InputDenorm, fpscr_val);
            else
                fp_type = FPType_Nonzero; value = 2.0-126 * (Real(UInt(frac32)) * 2.0-23);
        elsif IsOnes(exp32) then
            if IsZero(frac32) then
                fp_type = FPType_Infinity; value = 2.01000000;
            else
                fp_type = if frac32<22> == '1' then FPType_QNaN else FPType_SNaN;
                value = 0.0;
        else
            fp_type = FPType_Nonzero;
            value = 2.0(UInt(exp32)-127) * (1.0 + Real(UInt(frac32)) * 2.0-23);

    else // N == 64

        sign = fpval<63>;
        exp64 = fpval<62:52>;
        frac64 = fpval<51:0>;
        if IsZero(exp64) then
            // Produce zero if value is zero or flush-to-zero is selected.
            if IsZero(frac64) || fpscr_val<24> == '1' then

```



```

        fp_type = FPType_Zero; value = 0.0;
        if !IsZero(frac64) then // Denormalized input flushed to zero
            FProcessException(FPExc_InputDenorm, fpscr_val);
        else
            fp_type = FPType_Nonzero; value = 2.0-1022 * (Real(UInt(frac64)) * 2.0-52);
    elseif IsOnes(exp64) then
        if IsZero(frac64) then
            fp_type = FPType_Infinity; value = 2.01000000;
        else
            fp_type = if frac64<51> == '1' then FPType_QNaN else FPType_SNaN;
            value = 0.0;
    else
        fp_type = FPType_Nonzero;
        value = 2.0(UInt(exp64)-1023) * (1.0 + Real(UInt(frac64)) * 2.0-52);

    if sign == '1' then value = -value;
    return (fp_type, sign, value);

```

E3.1.114 FPZero

```

// FPZero()
// =====

bits(N) FPZero(bit sign, integer N)
    assert N IN {16,32,64};
    if N == 16 then E = 5; elseif N == 32 then E = 8; else E = 11;
    constant integer F = N - E - 1;
    exp = Zeros(E);
    frac = Zeros(F);
    return sign : exp : frac;

```

E3.1.115 FetchInstr

```

// FetchInstr()
// =====

(bits(32), boolean) FetchInstr(bits(32) addr)
// NOTE: It is CONSTRAINED UNPREDICTABLE whether otherwise valid sequential
// instruction fetches that cross from Non-secure to Secure memory
// generate a INVEP SecureFault, or transition normally.
sgOpcode = 0xE97FE97F<31:0>;

// Fetch the a T16 instruction, or the first half of a T32.
hw1Instr = MemI[addr];
hw1Attr = SecurityCheck(addr, TRUE, IsSecure());

// If the T bit is clear then the instruction can't be decoded
if EPCR.T == '0' then
    // Attempted NS->S domain crossings with the T bit clear raise an INVEP
    // SecureFault
    if !IsSecure() && !hw1Attr.ns then
        SFSR.INVEP = '1';
        excInfo = CreateException(SecureFault, TRUE, TRUE);
    else
        UFSR.INVSTATE = '1';
        excInfo = CreateException(UsageFault, FALSE, boolean UNKNOWN);
        HandleException(excInfo);

// Implementations are permitted to terminate the fetch process early if a
// domain crossing is being attempted and the first 16bits of the opcode
// isn't the first part of the SG instruction.
if boolean IMPLEMENTATION_DEFINED "Early SG check" then
    if !IsSecure() && !hw1Attr.ns && (hw1Instr != sgOpcode<31:16>) then
        SFSR.INVEP = '1';
        excInfo = CreateException(SecureFault, TRUE, TRUE);
        HandleException(excInfo);

// NOTE: Implementations are also permitted to terminate the fetch process
// at this point with an UNDEFINSTR UsageFault if the first 16bit is
// an undefined T32 prefix.

// If the data fetched is the top half of a T32 instruction fetch the bottom
// 16 bits
isT16 = UInt(hw1Instr<15:11>) < UInt('11101');
if isT16 then
    instr = Zeros(16) : hw1Instr;
else
    instr = hw1Instr : MemI[addr+2];
    hw2Attr = SecurityCheck(addr+2, TRUE, IsSecure());

// The following test covers 2 possible fault conditions:-
// 1) NS code branching to a T32 instruction where the first half is in
// NS memory, and the second half is in S memory.
// 2) NS code branching to a T32 instruction in S & NSC memory, but
// where the second half of the instruction is in NS memory.
if !IsSecure() && (hw1Attr.ns != hw2Attr.ns) then
    SFSR.INVEP = '1';
    excInfo = CreateException(SecureFault, TRUE, TRUE);
    HandleException(excInfo);

// Raise a fault if an otherwise valid NS->S transition that doesn't land on
// an SG instruction.
if !IsSecure() && !hw1Attr.ns && (instr != sgOpcode) then
    SFSR.INVEP = '1';
    excInfo = CreateException(SecureFault, TRUE, TRUE);
    HandleException(excInfo);
return (instr, isT16);

```

E3.1.116 FindPriv

```
// FindPriv()
// =====

boolean FindPriv()
    return CurrentModeIsPrivileged();
```

E3.1.117 FixedToFP

```
// FixedToFP()
// =====

bits(N) FixedToFP(bits(M) operand, integer N, integer fraction_bits, boolean unsigned,
    boolean round_to_nearest, boolean fpscr_controlled)
    assert N IN {32,64};
    fpscr_val = if fpscr_controlled then FPSCR else StandardFPSCRValue();
    if round_to_nearest then fpscr_val<23:22> = '00';
    int_operand = if unsigned then UInt(operand) else SInt(operand);
    real_operand = Real(int_operand) / 2.0^fraction_bits;
    if real_operand == 0.0 then
        result = FPZero('0', N);
    else
        result = FPRound(real_operand, N, fpscr_val);
    return result;
```

E3.1.118 FunctionReturn

```

// FunctionReturn()
// =====

ExcInfo FunctionReturn()
    exc = DefaultExcInfo();

    // Pull the return address and IPSR off the Secure stack
    mode    = CurrentMode();
    spName  = LookUpSP_with_security_mode(TRUE, mode);
    framePtr = _SP(spName);
    if !IsAligned(framePtr, 8) then UNPREDICTABLE;
    // Only stack locations, not the load order are architected
    RETPSR_Type newPSR;
    if exc.fault == NoFault then (exc, newPSR) = Stack(framePtr, 4, spName, mode);
    if exc.fault == NoFault then (exc, newPC) = Stack(framePtr, 0, spName, mode);

    // Check the IPSR value that's been unstacked is consistent with the current
    // mode, and being originally called from the Secure state.
    // NOTE: It is IMPLEMENTATION DEFINED whether this check is performed before
    //       or after the load of the return address above.
    if (exc.fault == NoFault) &&
        !(((IPSR.Exception == 0<8:0>) && (newPSR.Exception == 0<8:0>)) ||
          ((IPSR.Exception == 1<8:0>) && (newPSR.Exception != 0<8:0>))) then
        if HaveMainExt() then
            UFSR_S.INVPC = '1';
            // Create the exception. NOTE: If Main Extension not implemented then the fault
            // always escalates to a HardFault
            exc = CreateException(UsageFault, TRUE, TRUE);
        // The behaviour is UNPREDICTABLE if the IPSR values isn't supported by the PE
        excNum = UInt(newPSR.Exception);
        validIPSR = excNum IN {0, 1, NMI, HardFault, SVCall, PendSV, SysTick};
        if !validIPSR && HaveMainExt() then
            validIPSR = excNum IN {MemManage, BusFault, UsageFault, SecureFault, DebugMonitor};
        if !validIPSR && !IsIrqValid(excNum) then UNPREDICTABLE;

    // Only consume the function return stack frame and update the XPSR/PC if no
    // faults occurred.
    if exc.fault == NoFault then
        // Transition to the Secure state
        CurrentState = SecurityState_Secure;
        // Update stack pointer. NOTE: Stack pointer limit not checked on function
        // return as stack pointer guaranteed to be ascending not descending.
        _R[spName] = framePtr + 8;
        IPSR.Exception = newPSR.Exception;
        CONTROL_S.SFPA = newPSR.SFPA;
        // IT/ICI bits cleared to prevent Non-secure code interfering with
        // Secure execution
        if HaveMainExt() then
            ITSTATE.IT = Zeros(8);
            // if EPSR.T == 0, a UsageFault('Invalid State') or a HardFault is taken
            // on the next instruction depending on whether the Main Extension is
            // is implemented or not.
            EPSR.T = newPC<0>;
            BranchTo(newPC<31:1>:'0');
    return exc;

```

E3.1.119 GenerateCoproprocessorException

```
// GenerateCoproprocessorException()
// =====

GenerateCoproprocessorException()
    UFSR.UNDEFINSTR = '1';
    excInfo = CreateException(UsageFault, FALSE, boolean UNKNOWN);
    HandleException(excInfo);
```

E3.1.120 GenerateDebugEventResponse

```
// GenerateDebugEventResponse()
// =====
// Generate a debug event response based on the PE configuration.

boolean GenerateDebugEventResponse()
    if CanHaltOnEvent(IsSecure()) then
        DFSR.BKPT = '1';
        DHCSR.C_HALT = '1';
        return TRUE;
    elseif HaveMainExt() && CanPendMonitorOnEvent(IsSecure(), TRUE) then
        DFSR.BKPT = '1';
        DEMCR.MON_PEND = '1';
        excInfo = CreateException(DebugMonitor, FALSE, boolean UNKNOWN);
        HandleException(excInfo);
        return TRUE;
    else
        return FALSE;
```

E3.1.121 GenerateIntegerZeroDivide

```
// GenerateIntegerZeroDivide()
// =====

GenerateIntegerZeroDivide()
    UFSR.DIVBYZERO = '1';
    excInfo = CreateException(UsageFault, FALSE, boolean UNKNOWN);
    HandleException(excInfo);
```

E3.1.122 Halted

```
// Halted()
// =====

boolean Halted()
    return DHCSR.S_HALT == '1';
```

E3.1.123 HaltingDebugAllowed

```
// HaltingDebugAllowed()
// =====

boolean HaltingDebugAllowed()
    return DBGEN == HIGH || Halted();
```

E3.1.124 HandleException

```
// HandleException()
// =====

HandleException(ExcInfo excInfo)
    if excInfo.fault != NoFault then
        if excInfo.lockup then
            Lockup(excInfo.termInst);
        else
            // If the fault escalated to a HardFault update the syndrome info
            if HaveMainExt() &&
                (excInfo.fault == HardFault) &&
                (excInfo.origFault != HardFault) then
                HFSR.FORCED = '1';
            // If the exception doesn't cause a lockup set the exception pending
            // and potentially terminate execution of the current instruction
            SetPending(excInfo.fault, excInfo.isSecure, TRUE);
            if excInfo.termInst then
                EndOfInstruction();
```

E3.1.125 HaveDSPExt

```
// HaveDSPExt()
// =====
// Check whether DSP Extension is implemented.

boolean HaveDSPExt();
```

E3.1.126 HaveDebugMonitor

```
// HaveDebugMonitor()
//=====

boolean HaveDebugMonitor()
    return HaveMainExt();
```

E3.1.127 HaveFPEExt

```
// HaveFPEExt()  
// =====  
// Check whether Floating Point Extension is implemented.  
  
boolean HaveFPEExt();
```

E3.1.128 HaveMainExt

```
// HaveMainExt()  
// =====  
// Check whether Main Extension is implemented.  
  
boolean HaveMainExt();
```

E3.1.129 HaveSPFPOnly

```
// HaveSPFPOnly()  
// =====  
// Check whether Floating Point Extension only implements single-precision.  
  
boolean HaveSPFPOnly();
```

E3.1.130 HaveSecurityExt

```
// HaveSecurityExt()  
// =====  
// Check whether the implementation have Security Extensions.  
  
boolean HaveSecurityExt();
```

E3.1.131 HaveSysTick

```
// HaveSysTick()  
// =====  
// Returns the number of SysTick instances (0, 1 or 2).  
  
integer HaveSysTick();
```

E3.1.132 Hint_Debug

```
// Hint_Debug  
// =====  
// Generate a hint to the debug system.  
  
Hint_Debug(bits(4) option);
```

E3.1.133 Hint_PreloadData

```
// Hint_PreloadData
// =====
// Performs a preload data hint

Hint_PreloadData(bits(32) address);
```

E3.1.134 Hint_PreloadInstr

```
// Hint_PreloadInstr
// =====
// Performs a preload instructions hint

Hint_PreloadInstr(bits(32) address);
```

E3.1.135 Hint_Yield

```
// Hint_Yield
// =====
// Performs a Yield hint

Hint_Yield();
```

E3.1.136 IDAUCheck

```
// IDAUCheck
// =====
// Query IDAU(Implementation Defined Attribution Unit) for attribution information

(boolean, boolean, boolean, bits(8), boolean) IDAUCheck(bits(32) address);
```

E3.1.137 ITAdvance

```
// ITAdvance()
// =====

ITAdvance()
  if ITSTATE<2:0> == '000' then
    ITSTATE.IT = '00000000';
  else
    ITSTATE.IT<4:0> = LSL(ITSTATE.IT<4:0>, 1);
```


E3.1.138 ITSTATE

```
// ITSTATE
// =====

ITSTATEType ITSTATE
    return ThisInstrITState();

ITSTATE = ITSTATEType value
    // Writes to ITSTATE don't take effect immediately, instead they change the
    // value returned by NextInstrITState().
    _NextInstrITState = value.IT;
    _ITStateChanged = TRUE;
```

E3.1.139 InITBlock

```
// InITBlock()
// =====

boolean InITBlock()
    return (ITSTATE.IT<3:0> != '0000');
```

E3.1.140 InstructionAdvance

```

// InstructionAdvance()
// =====

InstructionAdvance(boolean instExecOk)
// Check for, and process any exception returns that were requested. This
// must be done after the instruction has completed so any exceptions
// raised during the exception return do not interfere with the execution of
// the instruction that cause the exception return (eg a POP causing an
// excReturn value to be written to the PC must adjust SP even if the
// exception return caused by the POP raises a fault).
excRetFault = FALSE;
if _PendingReturnOperation then
    _PendingReturnOperation = FALSE;
    nextAddr = NextInstrAddr();
    excInfo = ExceptionReturn(nextAddr<23:0>);
    // Handle any faults raised during exception return
    if excInfo.fault != NoFault then
        excRetFault = TRUE;
        // Either lockup, or pend the fault if it can be taken
        if excInfo.lockup then
            // Check if the fault occurred on exception return, or whether it
            // occurred during a tail chained exception entry. This is
            // because Lockups on exception return have to be handled
            // differently.
            if !excInfo.inExcTaken then
                // If the fault occurred during exception return then the
                // register state is UNKNOWN. This is due to the fact that
                // an unknown amount of the exception stack frame might have
                // been restored.
                for n = 0 to 12
                    R[n] = bits(32) UNKNOWN;
                LR = bits(32) UNKNOWN;
                XPSR = bits(32) UNKNOWN;
                if HaveFPExt() then
                    for n = 0 to 31
                        S[n] = bits(32) UNKNOWN;
                FPSCR = bits(32) UNKNOWN;
                // If lockup is entered as a result of an exception return
                // fault the original exception is deactivated. Therefore
                // the stack pointer must be updated to consume the
                // exception stack frame to keep the stack depth consistent
                // with the number of active exceptions. NOTE: The xPSR SP
                // alignment flag is UNKNOWN, assume it was zero.
                ConsumeExcStackFrame(nextAddr<23:0>, '0');
                // IPSR from stack is UNKNOWN, set IPSR based on mode
                // specified in EXC_RETURN.
                IPSR.Exception = (if nextAddr<3> == 1 then NoFault else HardFault)<8:0>;
                if HaveFPExt() then
                    CONTROL.FPCA = NOT(nextAddr<4>);
            Lockup(FALSE);
        else
            // Set syndrome if fault escalated to a HardFault
            if HaveMainExt() &&
                (excInfo.fault == HardFault) &&
                (excInfo.origFault != HardFault) then
                HFSR.FORCED = '1';
                SetPending(excInfo.fault, excInfo.isSecure, TRUE);

// If there's a pending exception with sufficient priority take it now. This
// is done before we commit PC and ITSTATE changes caused by the previous
// instruction so that calls to ThisInstrAddr(), NextInstrAddr(),
// ThisInstrITState(), NextInstrITState() represent the context the
// instruction was executed in. IE so the correct context is pushed to the
// stack
(takeException, exception, excIsSecure) = PendingExceptionDetails();
if takeException then

```

```

// If a fault occurred during an exception return then the exception
// stack frame will already be on the stack, as a result entry to the
// next exception is treated as if it were a tail chain.
pePriority = ExecutionPriority();
peException = UInt(IPSR.Exception);
peIsSecure = IsSecure();
if excRetFault then
    // If the fault occurred during ExceptionTaken() then LR will have
    // been updated with the new exception return value. To excReturn
    // consistent with the state of the exception stack frame we need to
    // use the updated version in this case. If no updates have occurred
    // then the excReturn value from the previous exception return is
    // used.
    excRet = if excInfo.inExcTaken then LR else nextAddr;
    excInfo = TailChain(exception, excIsSecure, excRet<23:0>);
else
    excInfo = ExceptionEntry(exception, excIsSecure, instExecOk);
// Handle any derived faults that have occurred
if excInfo.fault != NoFault then
    DerivedLateArrival(pePriority, peException, peIsSecure, excInfo,
        exception, excIsSecure);

// If the PC has moved away from the lockup address (eg because an NMI
// has been taken) leave the lockup state.
if DHCSR.S_LOCKUP == '1' && NextInstrAddr() != 0xEFFFFFFE<31:0> then
    DHCSR.S_LOCKUP = '0';
// Only advance the PC and ITSTATE if not locked up.
if DHCSR.S_LOCKUP != '1' then
    // Commit PC and ITSTATE changes ready for the next instruction.
    _R[RName_PC] = NextInstrAddr();
    _PCChanged = FALSE;
    if HaveMainExt() then
        EPSR.IT = NextInstrITState();
        _ITStateChanged = FALSE;

```

E3.1.141 InstructionSynchronizationBarrier

```

// InstructionSynchronizationBarrier
// =====
// Perform an instruction synchronization barrier operation

InstructionSynchronizationBarrier(bits(4) option);

```

E3.1.142 Int

```

// Int()
// =====

integer Int(bits(N) x, boolean unsigned)
result = if unsigned then UInt(x) else SInt(x);
return result;

```

E3.1.143 IntegerZeroDivideTrappingEnabled

```
// IntegerZeroDivideTrappingEnabled()
// =====

boolean IntegerZeroDivideTrappingEnabled()
// DIV_0_TRP bit in CCR is RAZ/WI if Main Extension is not implemented
return CCR.DIV_0_TRP == '1';
```

E3.1.144 IsAccessible

```
// IsAccessible()
// =====

(bit, bit, bits(8), boolean) IsAccessible(bits(32) address, boolean forceunpriv,
boolean isSecure)

bit write;
bit read;

// Work out which privilege level the current mode in the Non-secure state
// is subject to
if forceunpriv then
    isPrivileged = FALSE;
else
    isPrivileged = (CurrentMode() == Mode_Handler) || (if isSecure then
        CONTROL_S.nPRIV == '0' else CONTROL_NS.nPRIV == '0');
(-, perms) = MPUCheck(address, AccType_NORMAL, isPrivileged, isSecure);
if !perms.apValid then
    write = '0';
    read = '0';
else
    case perms.ap of
        when '00' (write, read) = if isPrivileged then ('1','1') else ('0','0');
        when '01' (write, read) = ('1','1');
        when '10' (write, read) = if isPrivileged then ('0','1') else ('0','0');
        when '11' (write, read) = ('0','1');
    return (write, read, perms.region, perms.regionValid);
```

E3.1.145 IsActiveForState

```
// IsActiveForState()
// =====

boolean IsActiveForState(integer exception, boolean isSecure)
if !HaveSecurityExt() then
    isSecure = FALSE;
// If the exception is configurable then we need to check which domain it
// currently targets. If its not configurable then the active flags can be
// used directly.
if IsExceptionTargetConfigurable(exception) then
    active = ((ExceptionActive[exception] != '00') &&
        (ExceptionTargetsSecure(exception, isSecure) == isSecure));
else
    idx = if isSecure then 0 else 1;
    active = ExceptionActive[exception]<idx> == '1';
return active;
```

E3.1.146 IsAligned

```
// IsAligned()
// =====

boolean IsAligned(bits(32) address, integer size)
    assert size IN {1,2,4,8};
    mask = (size-1)<31:0>; // integer to bit string conversion
    return IsZero(address AND mask);
```

E3.1.147 IsExceptionTargetConfigurable

```
// IsExceptionTargetConfigurable()
// =====

boolean IsExceptionTargetConfigurable(integer e)
    if HaveSecurityExt() then
        case e of
            when NMI
                configurable = TRUE;
            when BusFault
                configurable = TRUE;
            when DebugMonitor
                configurable = TRUE;
            when SysTick
                // If there is only 1 SysTick instance then the target domain is
                // configurable.
                configurable = HaveSysTick() == 1;
            otherwise
                // Interrupts are configurable, exceptions less than 16 that
                // aren't listed above aren't.
                configurable = e >= 16;
        else
            configurable = FALSE;
    return configurable;
```

E3.1.148 IsExclusiveGlobal

```
// IsExclusiveGlobal
// =====
// Checks if PE has marked in a global record an address range as "exclusive access
// requested" that covers at least the size bytes from address

boolean IsExclusiveGlobal(bits(32) address, integer processorid, integer size);
```

E3.1.149 IsExclusiveLocal

```
// IsExclusiveLocal
// =====
// Checks if PE has marked in a local record an address range as "exclusive access
// requested" that covers at least the size bytes from address

boolean IsExclusiveLocal(bits(32) address, integer processorid, integer size);
```

E3.1.150 IsIrqValid

```
// IsIrqValid()
// =====
// Check whether given exception number denotes a valid external interrupt
// implemented by PE.

boolean IsIrqValid(integer e);
```

E3.1.151 IsReqExcPriNeg

```
// IsReqExcPriNeg()
// =====

boolean IsReqExcPriNeg(boolean secure)
// This function checks if the requested execution priority is negative for
// the specified security domain. That is, NMI or HardFault is active, or
// FAULTMASK is set. It does not take account of AIRCR.PRIS so returns TRUE
// if FAULTMASK_NS is set even if PRIS is set to restrict Non-secure priorities
// to the range 0x80-0x7E

neg = (IsActiveForState(NMI, secure) || IsActiveForState(HardFault, secure));
if HaveMainExt() then
    faultmask = if secure then FAULTMASK_S else FAULTMASK_NS;
    if faultmask.FM == '1' then
        neg = TRUE;
return neg;
```

E3.1.152 IsSecure

```
// IsSecure()
// =====

boolean IsSecure()
return HaveSecurityExt() && CurrentState == SecurityState_Secure;
```

E3.1.153 LR

```
// LR - assignment form
// =====
LR = bits(32) value
R[14] = value;

// LR - non-assignment form
// =====
bits(32) LR
return R[14];
```

E3.1.154 LSL

```
// LSL()
// =====

bits(N) LSL(bits(N) x, integer shift)
  assert shift >= 0;
  if shift == 0 then
    result = x;
  else
    (result, -) = LSL_C(x, shift);
  return result;
```

E3.1.155 LSL_C

```
// LSL_C()
// =====

(bits(N), bit) LSL_C(bits(N) x, integer shift)
  assert shift > 0;
  extended_x = x : Zeros(shift);
  result = extended_x<N-1:0>;
  carry_out = extended_x<N>;
  return (result, carry_out);
```

E3.1.156 LSR

```
// LSR()
// =====

bits(N) LSR(bits(N) x, integer shift)
  assert shift >= 0;
  if shift == 0 then
    result = x;
  else
    (result, -) = LSR_C(x, shift);
  return result;
```

E3.1.157 LSR_C

```
// LSR_C()
// =====

(bits(N), bit) LSR_C(bits(N) x, integer shift)
  assert shift > 0;
  extended_x = ZeroExtend(x, shift+N);
  result = extended_x<shift+N-1:shift>;
  carry_out = extended_x<shift-1>;
  return (result, carry_out);
```

E3.1.158 LastInITBlock

```
// LastInITBlock()
// =====

boolean LastInITBlock()
    return (ITSTATE.IT<3:0> == '1000');
```

E3.1.159 LoadWritePC

```
// LoadWritePC()
// =====

LoadWritePC(bits(32) address, integer baseReg, bits(32) baseRegVal, boolean baseRegUpdate,
            boolean splimCheck)

    if baseRegUpdate then
        regName = LookUpRName(baseReg);
        oldBaseVal = R[baseReg];
        if splimCheck then
            RSPCheck[baseReg] = baseRegVal;
        else
            R[baseReg] = baseRegVal;

    // Attempt to update the PC, which may result in a fault
    excInfo = BXWritePC(address, FALSE);

    if baseRegUpdate && excInfo.fault != NoFault then
        // Restore the previous base reg value, SP limit checking is not performed
        _R[regName] = oldBaseVal;

    HandleException(excInfo);
```

E3.1.160 Lockup

```
// Lockup()
// =====

Lockup(boolean termInst)
    DHCSR.S_LOCKUP = '1';
    // Branch to the lockup address.
    BranchToAndCommit(0xEFFFFFFE<31:0>);
    if termInst then
        EndOfInstruction();
```


E3.1.161 LookUpRName

```
// LookUpRName()
// =====

RName LookUpRName(integer n)
  assert n >= 0 && n <= 15;
  case n of
    when 0 result = RName0;
    when 1 result = RName1;
    when 2 result = RName2;
    when 3 result = RName3;
    when 4 result = RName4;
    when 5 result = RName5;
    when 6 result = RName6;
    when 7 result = RName7;
    when 8 result = RName8;
    when 9 result = RName9;
    when 10 result = RName10;
    when 11 result = RName11;
    when 12 result = RName12;
    when 13 result = LookUpSP();
    when 14 result = RName_LR;
    when 15 result = RName_PC;
  return result;
```

E3.1.162 LookUpSP

```
// LookUpSP()
// =====

RName LookUpSP()
  return LookUpSP_with_security_mode(IsSecure(), CurrentMode());
```

E3.1.163 LookUpSPLim

```
// LookUpSPLim()
// =====

(bits(32), boolean) LookUpSPLim(RName spreg)
  case spreg of
    when RNameSP_Main_Secure    limit = MSPLIM_S.LIMIT:'000';
    when RNameSP_Process_Secure limit = PSPLIM_S.LIMIT:'000';
    when RNameSP_Main_NonSecure
      limit = if HaveMainExt() then MSPLIM_NS.LIMIT:'000' else Zeros(32);
    when RNameSP_Process_NonSecure
      limit = if HaveMainExt() then PSPLIM_NS.LIMIT:'000' else Zeros(32);
    otherwise
      assert (FALSE);

  // Check CCR.STKOFHFMIGN to determine if the limit should actually be
  // applied. When checking if CCR.STKOFHFMIGN should apply the requested
  // execution priority is considered, and AIRCR.PRIS is ignored.
  secure = ((spreg == RNameSP_Main_Secure) ||
            (spreg == RNameSP_Process_Secure));
  assert (!secure || HaveSecurityExt());
  if HaveMainExt() && IsReqExcPriNeg(secure) then
    ignLimit = if secure then CCR_S.STKOFHFMIGN else CCR_NS.STKOFHFMIGN;
    applyLimit = (ignLimit == '0');
  else
    applyLimit = TRUE;

  return (limit, applyLimit);
```

E3.1.164 LookUpSP_with_security_mode

```
// LookUpSP_with_security_mode()
// =====

RName LookUpSP_with_security_mode(boolean isSecure, Mode mode)
  RName sp;
  bit spSel;

  // Get the SPSEL bit corresponding to the Security state requested
  if isSecure then
    spSel = CONTROL_S.SPSEL;
  else
    spSel = CONTROL_NS.SPSEL;

  // Should we be using the process or main stack pointers
  if spSel == '1' && mode==Mode_Thread then
    if isSecure then
      sp = RNameSP_Process_Secure;
    else
      sp = RNameSP_Process_NonSecure;
  else
    if isSecure then
      sp = RNameSP_Main_Secure;
    else
      sp = RNameSP_Main_NonSecure;
  return sp;
```

E3.1.165 MAIRDecode

```

// MAIRDecode()
// =====

MemoryAttributes MAIRDecode(bits(8) attrfield, bits(2) sh)
// Converts the MAIR attributes to orthogonal attribute and
// hint fields.
MemoryAttributes memattrs;
// Decoding MAIR0/MAIR1 Registers
if attrfield<7:4> == '0000' then
    unpackinner = FALSE;
    memattrs.memtype = MemType_Device;
    memattrs.shareable = TRUE;
    memattrs.outershareable = TRUE;
    memattrs.innerattrs = bits(2) UNKNOWN;
    memattrs.outerattrs = bits(2) UNKNOWN;
    memattrs.innerhints = bits(2) UNKNOWN;
    memattrs.outerhints = bits(2) UNKNOWN;
    memattrs.innertransient = boolean UNKNOWN;
    memattrs.outertransient = boolean UNKNOWN;
    case attrfield<3:0> of
        when '0000' memattrs.device = DeviceType_nGnRnE;
        when '0100' memattrs.device = DeviceType_nGnRE;
        when '1000' memattrs.device = DeviceType_nGRE;
        when '1100' memattrs.device = DeviceType_GRE;
    if attrfield<1:0> != '00' then UNPREDICTABLE;
else
    unpackinner = TRUE;
    memattrs.memtype = MemType_Normal;
    memattrs.device = DeviceType UNKNOWN;
    memattrs.outerhints = attrfield<5:4>;
    memattrs.shareable = sh<1> == '1';
    memattrs.outershareable = sh == '10';
    if sh == '01' then UNPREDICTABLE;

    if attrfield<7:6> == '00' then
        memattrs.outerattrs = '10';
        memattrs.outertransient = TRUE;
    elsif attrfield<7:6> == '01' then
        if attrfield<5:4> == '00' then
            memattrs.outerattrs = '00';
            memattrs.outertransient = FALSE;
        else
            memattrs.outerattrs = '11';
            memattrs.outertransient = TRUE;
    else
        memattrs.outerattrs = attrfield<7:6>;
        memattrs.outertransient = FALSE;
if unpackinner then
    if attrfield<3:0> == '0000' then UNPREDICTABLE;
    else
        if attrfield<3:2> == '00' then
            memattrs.innerattrs = '10';
            memattrs.innerhints = attrfield<1:0>;
            memattrs.innertransient = TRUE;
        elsif attrfield<3:2> == '01' then
            memattrs.innerhints = attrfield<1:0>;
            if attrfield<1:0> == '00' then
                memattrs.innerattrs = '00';
                memattrs.innertransient = FALSE;
            else
                memattrs.innerattrs = '11';
                memattrs.innertransient = TRUE;
        elsif attrfield<3:2> == '10' then
            memattrs.innerhints = attrfield<1:0>;
            memattrs.innerattrs = '10';
            memattrs.innertransient = FALSE;

```

```
    elsif attrfield<3:2> == '11' then
        memattrs.innerhints = attrfield<1:0>;
        memattrs.innerattrs = '11';
        memattrs.innertransient = FALSE;
    else UNPREDICTABLE;
return memattrs;
```

E3.1.166 MPUCheck

```

// MPUCheck()
// =====

(MemoryAttributes, Permissions) MPUCheck(bits(32) address, AccType acctype,
    boolean ispriv, boolean secure)

assert(HaveSecurityExt() || !secure);
MemoryAttributes attributes;
Permissions perms;
attributes = DefaultMemoryAttributes(address);
perms = DefaultPermissions(address);
// assume no valid MPU region and not using default memory map
hit = FALSE;
isPPBaccess = (address<31:20> == '11100000000');

// Get the MPU registers for the correct security domain
if secure then
    mpu_ctrl = MPU_CTRL_S;
    mpu_type = MPU_TYPE_S;
    mair = MPU_MAIR1_S:MPU_MAIR0_S;
else
    mpu_ctrl = MPU_CTRL_NS;
    mpu_type = MPU_TYPE_NS;
    mair = MPU_MAIR1_NS:MPU_MAIR0_NS;

// Pre-compute if the execution priority is negative, as this can affect the
// MPU permissions used. NOTE: If Non-secure FAULTMASK is set this is also
// considered to be a negative priority for the purpose of the Non-secure
// MPU permissions regardless of how Non-secure exceptions are prioritised
// with respect to the Secure state.
// If the access is due to lazy FP state preservation the FPCCR flag
// indicating whether a HardFault could be taken is used to determine if the
// priority should be considered to be negative rather than the current
// execution priority.
if acctype == AccType_LAZYFP then
    negativePri = FPCCR_S.HFRDY == '0';
else
    negativePri = IsReqExcPriNeg(secure);

// Determine what MPU permissions should apply based on access type and MPU
// configuration
if (acctype == AccType_VECTABLE) || isPPBaccess then
    hit = TRUE; // use default map for PPB and vector table lookups
elseif mpu_ctrl.ENABLE == '0' then
    if mpu_ctrl.HFNMIENA == '1' then UNPREDICTABLE;
    else hit = TRUE; // always use default map if MPU disabled
elseif mpu_ctrl.HFNMIENA == '0' && negativePri then
    hit = TRUE; // optionally use default for HardFault, NMI and FAULTMASK.
else // MPU is enabled so check each individual region
    if (mpu_ctrl.PRIVDEFENA == '1') && ispriv then
        hit = TRUE; // optional default as background for Privileged accesses

regionMatched = FALSE;
for r = 0 to (UInt(mpu_type.DREGION) - 1)

    if secure then
        rbar = __MPU_RBAR_S[r];
        rlar = __MPU_RLAR_S[r];
    else
        rbar = __MPU_RBAR_NS[r];
        rlar = __MPU_RLAR_NS[r];

// MPU region enabled so perform checks
if rlar.EN == '1' then
    if ((UInt(address) >= UInt(rbar.BASE : '00000')) &&
        (UInt(address) <= UInt(rlar.LIMIT : '11111'))) then

```

```
// flag error if multiple regions match
if regionMatched then
    perms.regionValid = FALSE;
    perms.region      = Zeros(8);
    hit               = FALSE;
else
    regionMatched = TRUE;
    perms.ap      = rbar.AP;
    perms.xn      = rbar.XN;
    perms.region  = r<7:0>;
    perms.regionValid = TRUE;
    hit           = TRUE;
    sh           = rbar.SH;

// parsing MAIR0/1 Register fields
index      = UInt(r1ar.AttrIdx);
attrfield  = mair<8*index+7:8*index>;
// decoding MAIR0/1 field and populating memory attributes
attributes = MAIRDecode(attrfield, sh);

if address<31:29> == '111' then // enforce System space execute never
    perms.xn = '1';
if !hit then // Access not allowed if no MPU match and use of default not enabled
    perms.apValid = FALSE;
return (attributes, perms);
```

E3.1.167 MarkExclusiveGlobal

```
// MarkExclusiveGlobal
// =====
// Records in a global record that PE has requested "exclusive access" covering
// at least size bytes from the address

MarkExclusiveGlobal(bits(32) address, integer processorid, integer size);
```

E3.1.168 MarkExclusiveLocal

```
// MarkExclusiveLocal
// =====
// Records in a local record that PE has requested "exclusive access" covering
// at least size bytes from the address.

MarkExclusiveLocal(bits(32) address, integer processorid, integer size);
```

E3.1.169 MemA

```
// MemA[]  
// =====  
  
bits(8*size) MemA[bits(32) address, integer size]  
return MemA_with_priv[address, size, FindPriv()];  
  
MemA[bits(32) address, integer size] = bits(8*size) value  
MemA_with_priv[address, size, FindPriv()] = value;  
return;
```

E3.1.170 MemA_with_priv

```
// MemA_with_priv[]  
// =====  
  
// Non-assignment form  
  
bits(8*size) MemA_with_priv[bits(32) address, integer size, boolean privileged]  
(excInfo, value) = MemA_with_priv_security(address, size, AccType_NORMAL,  
privileged, IsSecure());  
HandleException(excInfo);  
return value;  
  
// Assignment form  
  
MemA_with_priv[bits(32) address, integer size, boolean privileged] = bits(8*size) value  
excInfo = MemA_with_priv_security(address, size, AccType_NORMAL, privileged,  
IsSecure(), value);  
HandleException(excInfo);
```

E3.1.171 MemA_with_priv_security

```

// MemA_with_priv_security()
// =====

// Non-assignment form

(ExcInfo, bits(8*size)) MemA_with_priv_security(bits(32) address, integer size,
                                                AccType acctype, boolean privileged,
                                                boolean secure)

// Check alignment
excInfo = DefaultExcInfo();
if !IsAligned(address, size) then
    if HaveMainExt() then
        UFSR.UNALIGNED = '1';
    // Create the exception. NOTE: If Main Extension is not implemented the fault
    // always escalates to a HardFault
    excInfo = CreateException(UsageFault, TRUE, secure);

// Check permissions and get attributes
if excInfo.fault == NoFault then
    (excInfo, memaddrdesc) = ValidateAddress(address, acctype, privileged, secure, FALSE);

if excInfo.fault == NoFault then
    // Memory array access, and sort out endianness
    (error, value) = _Mem(memaddrdesc, size);

    // Check if a synchronous BusFault occurred, async BusFaults are handled
    // in RaiseAsyncBusFault()
    if error then
        value = bits(8*size) UNKNOWN;
        if HaveMainExt() then
            if acctype == AccType_STACK then
                BFSR.UNSTKERR = '1';
            elseif acctype IN {AccType_NORMAL, AccType_ORDERED} then
                BFAR.ADDRESS = address;
                BFSR.BFARVALID = '1';
                BFSR.PRECISERR = '1';

        // Generate BusFault exception if it cannot be ignored.
        if !IsReqExcPriNeg(secure) || (CCR.BFHFNMIGN == '0') then
            // Create the exception. NOTE: If Main Extension is not implemented
            // the fault always escalates to a HardFault
            excInfo = CreateException(BusFault, FALSE, boolean UNKNOWN);
        // PPB (0xE0000000 to 0xE0100000) is always little endian
        elseif AIRCR.ENDIANNESS == '1' && UInt(address<31:20>) != 0xE00 then
            value = BigEndianReverse(value, size);

    // Check for Watch Point Match
    if IsDWTEnabled() then
        bits(32) dvalue = ZeroExtend(value);
        DWT_DataMatch(address, size, dvalue, TRUE, secure);

return (excInfo, value);

// Assignment form

ExcInfo MemA_with_priv_security(bits(32) address, integer size, AccType acctype,
                                boolean privileged, boolean secure, bits(8*size) value)

// Check alignment
excInfo = DefaultExcInfo();
if !IsAligned(address, size) then
    if HaveMainExt() then
        UFSR.UNALIGNED = '1';
    // Create the exception. NOTE: If Main Extension is not implemented the fault
    // always escalates to a HardFault
    excInfo = CreateException(UsageFault, TRUE, secure);

```



```

// Check permissions and get attributes
if excInfo.fault == NoFault then
    (excInfo, memaddrdesc) = ValidateAddress(address, acctype, privileged, secure, TRUE);

if excInfo.fault == NoFault then
    // Effect on exclusives
    if memaddrdesc.memattrs.shareable then
        ClearExclusiveByAddress(memaddrdesc.paddress,
                                ProcessorID(), size);    // see Note

    // Check for Watch Point Match
    if IsDWTEnabled() then
        bits(32) dvalue = ZeroExtend(value);
        DWT_DataMatch(address, size, dvalue, FALSE, secure);

    // Sort out endianness, then memory array access
    // PPB (0xE0000000 to 0xE0100000) is always little endian
    if AIRCR.ENDIANNESS == '1' && UInt(address<31:20>) != 0xE00 then
        value = BigEndianReverse(value, size);

if _Mem(memaddrdesc, size, value) then
    // Synchronous BusFault occurred. NOTE: async BusFaults are handled
    // in RaiseAsyncBusFault()

    // Check whether the execution priority is negative.
    // If the access is due to lazy FP state preservation the FPCCR flag
    // indicating whether a HardFault could be taken is used to determine if the
    // priority should be considered to be negative rather than the current
    // execution priority.
    if acctype == AccType_LAZYFP then
        negativePri = FPCCR.S.HFRDY == '0';
    else
        negativePri = IsReqExcPriNeg(secure);

if HaveMainExt() then
    if acctype == AccType_STACK then
        BFSR.STKERR = '1';
    elseif acctype == AccType_LAZYFP then
        BFSR.LSPERR = '1';
    elseif acctype IN {AccType_NORMAL, AccType_ORDERED} then
        BFAR.ADDRESS = address;
        BFSR.BFARVALID = '1';
        BFSR.PRECISERR = '1';

    // Generate BusFault exception if it cannot be ignored.
    if !negativePri || (CCR.BFHFMIGN == '0') then
        // Create the exception. NOTE: If Main Extension is not implemented
        // the fault always escalates to a HardFault
        excInfo = CreateException(BusFault, FALSE, boolean UNKNOWN);
return excInfo;

```

E3.1.172 MemI

```
// MemI()
// =====

bits(16) MemI[bits(32) address]
// Check permissions and get attributes
// NOTE: The privilege flag passed to ValidateAddress may be overridden if
//       the security of the memory is different from the current security
//       state, eg when performing a Non-secure to Secure function call.
(excInfo, memaddrdesc) = ValidateAddress(address, AccType_IFETCH, FindPriv(), IsSecure(), FALSE);
if excInfo.fault == NoFault then
    (error, value) = _Mem(memaddrdesc, 2);
    if error then
        value = bits(16) UNKNOWN;
        BFSR.IBUSERR = '1';
        // Create the exception. NOTE: If Main Extension is not implemented the fault
        // always escalates to a HardFault
        excInfo = CreateException(BusFault, FALSE, boolean UNKNOWN);
        HandleException(excInfo);
    if IsDWTEnabled() then DWT_InstructionMatch(address);
    return value;
```

E3.1.173 MemO

```
// MemO[] - non-assignment form
// =====

bits(8*size) MemO[bits(32) address, integer size]
    (excInfo, value) = MemA_with_priv_security(address, size, AccType_ORDERED,
                                             FindPriv(), IsSecure());
    HandleException(excInfo);
    return value;

// MemO[] - assignment form
// =====

MemO[bits(32) address, integer size] = bits(8*size) value
    excInfo = MemA_with_priv_security(address, size, AccType_ORDERED, FindPriv(),
                                     IsSecure(), value);
    HandleException(excInfo);
```

E3.1.174 MemType

```
// Types of memory

enumeration MemType {MemType_Normal, MemType_Device};
```

E3.1.175 MemU

```
// MemU[]  
// =====  
  
// Non-assignment form, used for memory reads  
// =====  
  
bits(8*size) MemU[bits(32) address, integer size]  
  if HaveMainExt() then  
    return MemU_with_priv[address, size, FindPriv()];  
  else  
    return MemA[address, size];  
  
// Assignment form, used for memory writes  
// =====  
  
MemU[bits(32) address, integer size] = bits(8*size) value  
  if HaveMainExt() then  
    MemU_with_priv[address, size, FindPriv()] = value;  
  else  
    MemA[address, size] = value;  
  return;
```

E3.1.176 MemU_unpriv

```
// MemU_unpriv[]  
// =====  
  
bits(8*size) MemU_unpriv[bits(32) address, integer size]  
  return MemU_with_priv[address, size, FALSE];  
  
MemU_unpriv[bits(32) address, integer size] = bits(8*size) value  
  MemU_with_priv[address, size, FALSE] = value;  
  return;
```

E3.1.177 MemU_with_priv

```
// MemU_with_priv[]
// =====
// Due to single-copy atomicity constraints, the aligned accesses are distinguished from
// the unaligned accesses:
// * aligned accesses are performed at their size
// * unaligned accesses are expressed as a set of bytes.

// Non-assignment form

bits(8*size) MemU_with_priv[bits(32) address, integer size, boolean privileged]

bits(8*size) value;
// Do aligned access, take alignment fault, or do sequence of bytes
if address == Align(address, size) then
    value = MemA_with_priv[address, size, privileged];
elseif CCR.UNALIGN_TRP == '1' then
    UFSR.UNALIGNED = '1';
    excInfo = CreateException(UsageFault, FALSE, boolean UNKNOWN);
    HandleException(excInfo);
else // if unaligned access
    for i = 0 to size-1
        value<8*i+7:8*i> = MemA_with_priv[address+i, 1, privileged];
    // PPB (0xE0000000 to 0xE0100000) is always little endian
    if AIRCR.ENDIANNESS == '1' && UInt(address<31:20>) != 0xE00 then
        value = BigEndianReverse(value, size);

return value;

// Assignment form

MemU_with_priv[bits(32) address, integer size, boolean privileged] = bits(8*size) value

// Do aligned access, take alignment fault, or do sequence of bytes
if address == Align(address, size) then
    MemA_with_priv[address, size, privileged] = value;
elseif CCR.UNALIGN_TRP == '1' then
    UFSR.UNALIGNED = '1';
    excInfo = CreateException(UsageFault, FALSE, boolean UNKNOWN);
    HandleException(excInfo);
else // if unaligned access
    // PPB (0xE0000000 to 0xE0100000) is always little endian
    if AIRCR.ENDIANNESS == '1' && UInt(address<31:20>) != 0xE00 then
        value = BigEndianReverse(value, size);
    for i = 0 to size-1
        MemA_with_priv[address+i, 1, privileged] = value<8*i+7:8*i>;

return;
```

E3.1.178 MemoryAttributes

```
// v8-M Memory Attributes
type MemoryAttributes is (
  MemType memtype,
  DeviceType device, // For Device memory
  bits(2) innerattrs, // The possible encodings for each attributes field are as follows:
  bits(2) outerattrs, // '00' = Non-cacheable; '10' = Write-Through
  // '11' = Write-Back; '01' = RESERVED
  bits(2) innerhints, // The possible encodings for the hints are as follows
  bits(2) outerhints, // '00' = No-Allocate; '01' = Write-Allocate
  // '10' = Read-Allocate; ;'11' = Read-Allocate and Write-Allocate
  boolean NS, // TRUE if Non-secure, else FALSE
  boolean innertransient,
  boolean outertransient,
  boolean shareable,
  boolean outershareable
)
```

E3.1.179 MergeExcInfo

```
// MergeExcInfo()
// =====

ExcInfo MergeExcInfo(ExcInfo a, ExcInfo b)
// The ExcInfo structure is used to determine which exception should be
// taken, and how it should be handled (mainly in the case of derived
// exceptions). As such when multiple ExcInfo structures are present it is
// sufficient to pick the most serious fault.
if (b.fault == NoFault) || (a.isTerminal && !b.isTerminal) then
  exc = a;
elseif (a.fault == NoFault) || (b.isTerminal && !a.isTerminal) then
  exc = b;
else
  // Propagate the fault with the highest priority (lowest numerical
  // value).
  aPri = ExceptionPriority(a.fault, a.isSecure, FALSE);
  bPri = ExceptionPriority(b.fault, b.isSecure, FALSE);
  exc = if aPri < bPri then a else b;
return exc;
```

E3.1.180 Mode_M

```
// The M-profile execution modes.

enumeration Mode {Mode_Thread, Mode_Handler};
```

E3.1.181 NextInstrAddr

```
// NextInstrAddr()
// =====

bits(32) NextInstrAddr()
  if _PCChanged then
    return _NextInstrAddr;
  else
    return ThisInstrAddr() + ThisInstrLength();
```

E3.1.182 NextInstrITState

```
// NextInstrITState()
// =====

ITSTATETYPE NextInstrITState()
  if HaveMainExt() then
    // If the IT state has been directly modified return that value as the
    // next state, otherwise advance the IT state normally.
    if _ITStateChanged then
      nextState = _NextInstrITState;
    else
      nextState = ThisInstrITState();
      if nextState<2:0> == '000' then
        nextState = '00000000';
      else
        nextState<4:0> = LSL(nextState<4:0>, 1);
  else
    nextState = Zeros(8);
  return nextState;
```

E3.1.183 NoninvasiveDebugAllowed

```
// NoninvasiveDebugAllowed()
// =====

boolean NoninvasiveDebugAllowed()
  return NIDEN == HIGH || HaltingDebugAllowed();
```

E3.1.184 PC

```
// PC - non-assignment form
// =====

bits(32) PC
  return R[15];
```

E3.1.185 PendReturnOperation

```
// PendReturnOperation()
// =====

PendReturnOperation(bits(32) returnValue)
    _NextInstrAddr = returnValue;
    _PCChanged     = TRUE;
    _PendingReturnOperation = TRUE;
    return;
```

E3.1.186 PendingExceptionDetails

```
// PendingExceptionDetails
// =====
// Determines whether to take a pending exception or not. This is done based
// on current execution priority and the priority of pending exceptions that
// are not masked by DHCSR.C_MASKINTS.
// Returns whether any pending exception is to be taken, and, if so, the
// exception number for the highest priority unmasked exception, and
// whether this exception is Secure.

(boolean, integer, boolean) PendingExceptionDetails();
```

E3.1.187 Permissions

```
// Access permissions descriptor

type Permissions is (
    boolean apValid, // TRUE when ap is valid, else FALSE
    bits(2) ap,      // Access Permission bits, if valid
    bit xn,          // Execute Never bit
    boolean regionValid, // TRUE if the region number is valid, else FALSE
    bits(8) region    // The MPU region number, if valid
)
```

E3.1.188 PopStack

```

// PopStack()
// =====

ExcInfo PopStack(bits(24) excReturn)
// NOTE: All stack accesses are performed as Unprivileged accesses if
// returning to thread mode and CONTROL.nPRIV is 1 for the destination
// Security state.
mode = if excReturn<3> == '1' then Mode_Thread else Mode_Handler;
toSecure = HaveSecurityExt() && excReturn<6> == '1';
spName = LookUpSP_with_security_mode(toSecure, mode);
frameptr = _SP(spName);
if !IsAligned(frameptr, 8) then UNPREDICTABLE;

// only stack locations, not the load order, are architected

// Pop the callee saved registers, when returning from a Non-secure exception
// or a Secure one that followed a Non-secure one and therefore still has
// the callee register state on the stack.
if toSecure && (excReturn<0> == '0' ||
excReturn<5> == '0') then
    // Check the integrity signature, and if so is it correct
    expectedSig = 0xFEFA125B<31:0>;
    if HaveFPEExt() then
        expectedSig<0> = excReturn<4>;
        (exc, integritySig) = Stack(frameptr, 0x0, spName, mode);
        if exc.fault == NoFault && integritySig != expectedSig then
            if HaveMainExt() then
                SFSR.INVIS = '1';
            // Create the exception. NOTE: If Main Extension is not implemented the fault
            // always escalates to a HardFault
            return CreateException(SecureFault, TRUE, TRUE);

    if exc.fault == NoFault then (exc, R[4] ) = Stack(frameptr, 0x8, spName, mode);
    if exc.fault == NoFault then (exc, R[5] ) = Stack(frameptr, 0xC, spName, mode);
    if exc.fault == NoFault then (exc, R[6] ) = Stack(frameptr, 0x10, spName, mode);
    if exc.fault == NoFault then (exc, R[7] ) = Stack(frameptr, 0x14, spName, mode);
    if exc.fault == NoFault then (exc, R[8] ) = Stack(frameptr, 0x18, spName, mode);
    if exc.fault == NoFault then (exc, R[9] ) = Stack(frameptr, 0x1C, spName, mode);
    if exc.fault == NoFault then (exc, R[10] ) = Stack(frameptr, 0x20, spName, mode);
    if exc.fault == NoFault then (exc, R[11] ) = Stack(frameptr, 0x24, spName, mode);
    frameptr = frameptr + 0x28;

// Unstack the caller saved regs, possibly including the FP regs
RETPSR_Type psr;
if exc.fault == NoFault then (exc, R[0] ) = Stack(frameptr, 0x0, spName, mode);
if exc.fault == NoFault then (exc, R[1] ) = Stack(frameptr, 0x4, spName, mode);
if exc.fault == NoFault then (exc, R[2] ) = Stack(frameptr, 0x8, spName, mode);
if exc.fault == NoFault then (exc, R[3] ) = Stack(frameptr, 0xC, spName, mode);
if exc.fault == NoFault then (exc, R[12] ) = Stack(frameptr, 0x10, spName, mode);
if exc.fault == NoFault then (exc, LR ) = Stack(frameptr, 0x14, spName, mode);
if exc.fault == NoFault then (exc, pc ) = Stack(frameptr, 0x18, spName, mode);
if exc.fault == NoFault then (exc, psr ) = Stack(frameptr, 0x1C, spName, mode);
BranchToAndCommit(pc);

// Check the xpsr value that's been unstacked is consistent with the mode
// being returned to
excNum = UInt(psr.Exception);
if (exc.fault == NoFault) &&
((mode == Mode_Handler) == (excNum == 0)) then
    if HaveMainExt() then
        UFSR.INVPC = '1';
    // Create the exception. NOTE: If Main Extension is not implemented the fault
    // always escalates to a HardFault
    return CreateException(UsageFault, FALSE, boolean UNKNOWN);
// The behaviour is UNPREDICTABLE if the IPSR values isn't supported by the PE
validIPSR = excNum IN {0, 1, NMI, HardFault, SVCall, PendSV, SysTick};

```



```

if !validIPSR && HaveMainExt() then
    validIPSR = excNum IN {MemManage, BusFault, UsageFault, SecureFault, DebugMonitor};

// Check also whether excNum is an external interrupt supported by PE
if !validIPSR && !IsIrqValid(excNum) then UNPREDICTABLE;

if HaveFPEExt() then
    if excReturn<4> == '0' then
        // Raise a fault and skip FP operations if requested to expose
        // Secure FP state to the Non-secure code.
        if !toSecure && FPCCR_S.LSPACT == '1' then
            SFSR.LSERR = '1';
            exc = CreateException(SecureFault, TRUE, TRUE);
        else
            lspact = if toSecure then FPCCR_S.LSPACT else FPCCR_NS.LSPACT;
            if lspact == '1' then // state in FP is still valid
                if toSecure then
                    FPCCR_S.LSPACT = '0';
                else
                    FPCCR_NS.LSPACT = '0';
            else
                if exc.fault == NoFault then
                    nPriv = if toSecure then CONTROL_S.nPRIV else CONTROL_NS.nPRIV;
                    isPriv = mode == Mode_Handler || nPriv == '0';
                    exc = CheckCPEEnabled(10, isPriv, toSecure);

                // If an implementation abandons the unstacking of the FP
                // registers and to tail chain into a fault or late arriving
                // interrupt it must clear any floating point registers that
                // would have been unstacked.
                // NOTE: The requirement to clear the registers only applies
                // to implementations that include the Security Extensions.
                // The FP registers that would have been unstack become
                // UNKNOWN in implementations that don't include the
                // Security Extensions.
                if exc.fault == NoFault then
                    for i = 0 to 15
                        if exc.fault == NoFault then
                            offset = 0x20+(4*i);
                            (exc, S[i]) = Stack(frameptr, offset, spName, mode);
                        if exc.fault == NoFault then
                            (exc, FPSCR) = Stack(frameptr, 0x60, spName, mode);
                    if toSecure && FPCCR_S.TS == '1' then
                        for i = 0 to 15
                            if exc.fault == NoFault then
                                offset = 0x68+(4*i);
                                (exc, S[i+16]) = Stack(frameptr, offset, spName, mode);
                            if exc.fault != NoFault then
                                for i = 16 to 31
                                    S[i] = if HaveSecurityExt() then Zeros(32) else bits(32) UNKNOWN;
                        if exc.fault != NoFault then
                            for i = 0 to 15
                                S[i] = if HaveSecurityExt() then Zeros(32) else bits(32) UNKNOWN;
                                FPSCR = if HaveSecurityExt() then Zeros(32) else bits(32) UNKNOWN;

                CONTROL.FPCA = NOT(excReturn<4>);

// If there wasn't a fault then move the stack pointer to consume the
// exception stack frame. NOTE: If a exception return fault occurs and
// results in a lockup the stack pointer is updated. This special case is
// handled at the point lockup is entered and not here.
if exc.fault == NoFault then
    ConsumeExcStackFrame(excReturn, psr.SPALIGN);

if HaveDSPEExt() then
    APSR.GE = psr.GE;

if IsSecure() then

```

```
CONTROL_S.SFPA = psr.SFPA;

IPSR.Exception = psr.Exception;           // Load valid IPSR bits from memory
EPSR.T         = psr.T;                   // Load valid EPSR bits from memory
if HaveMainExt() then
    APSR<31:27> = psr<31:27>;             // Load valid APSR bits from memory
    SetITSTATEAndCommit(psr.IT);         // Load valid ITSTATE from memory
else
    APSR<31:28> = psr<31:28>;             // Load valid APSR bits from memory
return exc;
```

E3.1.189 PreserveFPState

```

// PreserveFPState()
// =====

PreserveFPState()
// Preserve FP state using address, privilege and relative
// priorities recorded during original stacking. Derived
// exceptions are handled by TakePreserveFPException().

// The checks usually performed for stacking using ValidateAddress()
// are performed, with the value of ExecutionPriority()
// overridden by -1 if FPCCR.HFRDY == '0'.

isSecure = FPCCR_S.S == '1';
if isSecure then
    ispriv = FPCCR_S.USER == '0';
    splimviol = FPCCR_S.SPLIMVIOL == '1';
    fpcar = FPCAR_S;
else
    ispriv = FPCCR_NS.USER == '0';
    splimviol = FPCCR_NS.SPLIMVIOL == '1';
    fpcar = FPCAR_NS;

// Check if the background context had access to the FPU
excInfo = CheckCPEEnabled(10, ispriv, isSecure);

// Only perform the memory accesses if the stack limit hasn't been violated
if !splimviol then

    // Whether these stores are interruptible is IMPLEMENTATION DEFINED.
    for i = 0 to 15
        if excInfo.fault == NoFault then
            addr = fpcar + (4*i);
            excInfo = MemA_with_priv_security(addr,4,AccType_LAZYFP, ispriv, isSecure, S[i]);

        if excInfo.fault == NoFault then
            addr = fpcar + 0x40;
            excInfo = MemA_with_priv_security(addr,4,AccType_LAZYFP, ispriv, isSecure, FPSCR);

        if isSecure && FPCCR_S.TS == '1' then
            for i = 0 to 15
                if excInfo.fault == NoFault then
                    addr = fpcar + (4*i) + 0x48;
                    excInfo = MemA_with_priv_security(addr,4,AccType_LAZYFP, ispriv, TRUE, S[i+16]);

// If a fault was raised handle it now. This function may call
// EndOfInstruction(), as a result any code after this call may not execute.
if excInfo.fault != NoFault then
    TakePreserveFPException(excInfo);

// If the stores are interrupted, the register content and LSPACT remain unchanged.

// If exception with sufficient priority to pre-empt current instruction execution
// is raised during FP state preserve, then TakePreserveFPException() will terminate
// the current instruction by calling EndOfInstruction().
// If the exception results in a lockup state, then TakePreserveFPException() will
// enter the lockup state by calling Lockup().
// In both above cases where execution of current instruction is not completed, either
// by taking exception straight away or by entering lockup state, below code is not
// executed and LSPACT is not cleared.
// In case of NoFault or, on successful return from TakePreserveFPException(), the current
// instruction execution continues and FPCCR.LSPACT will be cleared.

if isSecure then
    FPCCR_S.LSPACT = '0';
else
    FPCCR_NS.LSPACT = '0';

```

```
// If the FP state is being treated as Secure then the registers are zeroed
if isSecure && FPCCR_S.TS == '1' then
    for i = 0 to 31
        S[i] = Zeros(32);
    FPSCR = Zeros(32);
else
    for i = 0 to 15
        S[i] = bits(32) UNKNOWN;
    FPSCR = bits(32) UNKNOWN;

return;
```

E3.1.190 ProcessorID

```
// ProcessorID
// =====
// Returns an integer that uniquely identifies the executing PE in the system.

integer ProcessorID();
```

E3.1.191 PushCalleeStack

```

// PushCalleeStack()
// =====

ExcInfo PushCalleeStack(boolean doTailChain)
// allocate space of the correct stack. NOTE: If we are tail chaining we
// look at LR instead of CONTROL.SPSEL to work out which stack to use, as
// SPSEL can report the wrong stack in tail chaining cases
if doTailChain then
    if LR<3> == '0' then
        mode = Mode_Handler;
        spName = RNameSP_Main_Secure;
    else
        mode = Mode_Thread;
        spName = if LR<2> == '1' then RNameSP_Process_Secure else RNameSP_Main_Secure;
else
    spName = LookUpSP();
    mode = CurrentMode();

// Calculate the address of the base of the callee frame
bits(32) frameptr = _SP(spName) - 0x28;

/* only the stack locations, not the store order, are architected */
// Write out integrity signature
integritySig = if HaveFPExt() then 0xFEFA125A<31:1> : LR<4> else 0xFEFA125B<31:0>;
exc = Stack(frameptr, 0x0, spName, mode, integritySig);
// Stack callee registers
if exc.fault == NoFault then exc = Stack(frameptr, 0x8, spName, mode, R[4]);
if exc.fault == NoFault then exc = Stack(frameptr, 0xC, spName, mode, R[5]);
if exc.fault == NoFault then exc = Stack(frameptr, 0x10, spName, mode, R[6]);
if exc.fault == NoFault then exc = Stack(frameptr, 0x14, spName, mode, R[7]);
if exc.fault == NoFault then exc = Stack(frameptr, 0x18, spName, mode, R[8]);
if exc.fault == NoFault then exc = Stack(frameptr, 0x1C, spName, mode, R[9]);
if exc.fault == NoFault then exc = Stack(frameptr, 0x20, spName, mode, R[10]);
if exc.fault == NoFault then exc = Stack(frameptr, 0x24, spName, mode, R[11]);

// Update the stack pointer
spExc = _SP(spName, TRUE, frameptr);
return MergeExcInfo(exc, spExc);

```

E3.1.192 PushStack

```

// PushStack()
// =====

ExcInfo PushStack(boolean secureException, boolean instExecOk)
    integer framesize;
    if HaveFPEExt() && CONTROL.FPCA == '1' && (IsSecure() || NSACR.CP10 == '1') then
        if IsSecure() && FPCCR.S.TS == '1' then
            framesize = 0xA8;
        else
            framesize = 0x68;
    else
        framesize = 0x20;

    /* allocate space on the correct stack */
    bits(1) frameptralign;
    frameptralign = SP<2>;
    frameptr      = (SP - framesize) AND NOT(ZeroExtend('100',32));
    spName        = LookUpSP();

    /* only the stack locations, not the store order, are architected */
    (retaddr, itstate) = ReturnState(instExecOk);
    RETPSR_Type retpsr = XPSR<31:0>;
    retpsr.IT          = itstate.IT; // see ReturnState() in-line note for information on xPSR.IT bits
    retpsr.SPREALIGN  = frameptralign;
    retpsr.SFPA       = if IsSecure() then CONTROL.S.SFPA else '0';

    mode              = CurrentMode();
    exc                = Stack(frameptr, 0x0,  spName, mode, R[0]);
    if exc.fault == NoFault then exc = Stack(frameptr, 0x4,  spName, mode, R[1]);
    if exc.fault == NoFault then exc = Stack(frameptr, 0x8,  spName, mode, R[2]);
    if exc.fault == NoFault then exc = Stack(frameptr, 0xC,  spName, mode, R[3]);
    if exc.fault == NoFault then exc = Stack(frameptr, 0x10, spName, mode, R[12]);
    if exc.fault == NoFault then exc = Stack(frameptr, 0x14, spName, mode, LR);
    if exc.fault == NoFault then exc = Stack(frameptr, 0x18, spName, mode, retaddr);
    if exc.fault == NoFault then exc = Stack(frameptr, 0x1C, spName, mode, retpsr);

    if HaveFPEExt() && CONTROL.FPCA == '1' then
        // LSPACT should not be active at the same time as CONTROL.FPCA. This
        // is a possible attack senario so raise a SecureFault.
        lspact = if FPCCR.S.S == '1' then FPCCR.S.LSPACT else FPCCR_NS.LSPACT;
        if HaveSecurityExt() && lspact == '1' then
            SFSR.LSERR = '1';
            exc        = CreateException(SecureFault, TRUE, TRUE);
        elseif !IsSecure() && NSACR.CP10 == '0' then
            UFSR_S.NOCP = '1';
            exc        = CreateException(UsageFault, TRUE, TRUE);
        else
            if FPCCR.LSPEN == '0' then
                if exc.fault == NoFault then
                    exc = CheckCPEnabled(10);
                for i = 0 to 15
                    if exc.fault == NoFault then
                        exc = Stack(frameptr, 0x20+(4*i), spName, mode, S[i]);
                if exc.fault == NoFault then
                    exc = Stack(frameptr, 0x60, spName, mode, FPSCR);
                if framesize == 0xA8 then
                    for i = 0 to 15
                        if exc.fault == NoFault then
                            exc = Stack(frameptr, 0x68+(4*i), spName, mode, S[i+16]);
                            S[i+16] = Zeros(32);
                            S[i]    = Zeros(32);
                            FPSCR = Zeros(32);
            else
                for i = 0 to 15
                    S[i] = bits(32) UNKNOWN;
                    FPSCR = bits(32) UNKNOWN;

```

```
    else
        UpdateFPCCR(frameptr + 0x20, TRUE);

    // Set the stack pointer to be at the bottom of the new stack frame
    spExc = _SP(spName, TRUE, frameptr);
    exc = MergeExcInfo(exc, spExc);

    bit isSecure = if IsSecure()      then '1' else '0';
    bit isThread = if mode==Mode_Thread then '1' else '0';
    // Some excReturn bits (eg ES, SPSEL) are set by ExceptionTaken
    if HaveFPExt() then
        LR = Ones(25):isSecure:'1':NOT(CONTROL.FPCA):isThread:'000';
    else
        LR = Ones(25):isSecure:'11':isThread:'000';
    return exc;
```

E3.1.193 R

```
// R[] - assignment form
// =====

R[integer n] = bits(32) value
assert n >= 0 && n <= 14;
RName regName;
case n of
  when 0 _R[RName0] = value;
  when 1 _R[RName1] = value;
  when 2 _R[RName2] = value;
  when 3 _R[RName3] = value;
  when 4 _R[RName4] = value;
  when 5 _R[RName5] = value;
  when 6 _R[RName6] = value;
  when 7 _R[RName7] = value;
  when 8 _R[RName8] = value;
  when 9 _R[RName9] = value;
  when 10 _R[RName10] = value;
  when 11 _R[RName11] = value;
  when 12 _R[RName12] = value;
  when 13
    // It is IMPLEMENTATION DEFINED whether stack pointer limit checking
    // is performed for instructions that were previously UNPREDICTABLE
    // when modifying the stack pointer.
    if boolean IMPLEMENTATION_DEFINED "SPLim check UNPRED instructions" then
      - = _SP(LookUpSP(), FALSE, value);
    else
      _R[LookUpSP()] = value<31:2>:'00';
  when 14 _R[RName_LR] = value;
return;

// R[] - non-assignment form
// =====

bits(32) R[integer n]
assert n >= 0 && n <= 15;
bits(32) result;
case n of
  when 0 result = _R[RName0];
  when 1 result = _R[RName1];
  when 2 result = _R[RName2];
  when 3 result = _R[RName3];
  when 4 result = _R[RName4];
  when 5 result = _R[RName5];
  when 6 result = _R[RName6];
  when 7 result = _R[RName7];
  when 8 result = _R[RName8];
  when 9 result = _R[RName9];
  when 10 result = _R[RName10];
  when 11 result = _R[RName11];
  when 12 result = _R[RName12];
  when 13 result = _R[LookUpSP()]<31:2>:'00';
  when 14 result = _R[RName_LR];
  when 15 result = _R[RName_PC] + 4;
return result;
```


E3.1.194 RName

// The names of the core registers. SP is a Banked register.

```
enumeration RName {RName0, RName1, RName2, RName3, RName4, RName5, RName6,
                  RName7, RName8, RName9, RName10, RName11, RName12,
                  RNameSP_Main_NonSecure, RNameSP_Process_NonSecure, RName_LR, RName_PC,
                  RNameSP_Main_Secure, RNameSP_Process_Secure};
```

E3.1.195 ROR

// ROR()
// =====

```
bits(N) ROR(bits(N) x, integer shift)
  if shift == 0 then
    result = x;
  else
    (result, -) = ROR_C(x, shift);
  return result;
```

E3.1.196 ROR_C

// ROR_C()
// =====

```
(bits(N), bit) ROR_C(bits(N) x, integer shift)
  assert shift != 0;
  m = shift MOD N;
  result = LSR(x,m) OR LSL(x,N-m);
  carry_out = result<N-1>;
  return (result, carry_out);
```

E3.1.197 RRX

// RRX()
// =====

```
bits(N) RRX(bits(N) x, bit carry_in)
  (result, -) = ROR_C(x, carry_in);
  return result;
```

E3.1.198 RRX_C

```
// RRX_C()
// =====

(bits(N), bit) RRX_C(bits(N) x, bit carry_in)
    result = carry_in : x<N-1:1>;
    carry_out = x<0>;
    return (result, carry_out);
```

E3.1.199 RSPCheck

```
// RSPCheck[] - assignment form
// =====

RSPCheck[integer n] = bits(32) value
    if n == 13 then
        - = _SP(LookUpSP(), FALSE, value);
    else
        R[n] = value;
    return;
```

E3.1.200 RaiseAsyncBusFault

```
RaiseAsyncBusFault()
    if HaveMainExt() then
        BFSR.IMPRECISERR = '1';

    excInfo = CreateException(BusFault, FALSE, boolean UNKNOWN, FALSE);
    HandleException(excInfo);
```

E3.1.201 RawExecutionPriority

```
// RawExecutionPriority()
// =====

// Determine the current execution priority without the effect of priority boosting

integer RawExecutionPriority()
    execPri = HighestPri;
    for i = 2 to MaxExceptionNum // IPSR values of the exception handlers
        for j = 0 to 1 // Check both Non-secure and Secure exceptions
            secure = (j == 0);
            if IsActiveForState(i, secure) then
                // PRIGROUP effect applied in ExceptionPriority
                effectivePriority = ExceptionPriority(i, secure, TRUE);
                if effectivePriority < execPri then
                    execPri = effectivePriority;
    return execPri;
```

E3.1.202 ReturnState

```

// ReturnState()
// =====

(bits(32), ITSTATETYPE) ReturnState(boolean instExecOk)

// Whether the return address (and associated IT state) point to the current
// instruction or the next instruction only depends on whether the
// instruction executed correctly, and not the type of exception.
//
// For trivial cases this behaviour matches the following expectation:-
// * Faults (eg MemManage, UsageFault, etc) result in the return address
//   pointing to the instruction that caused the fault.
// * Interrupts and SVC's result in the return address pointing to the next
//   instruction.
//
// However it is important to realise that the behaviour can differ from the
// expectation above in complex cases. The following examples illustrate how
// and why the behaviour can be different:-
// 1) A MemManage fault occurring at the same time as a higher priority
//     interrupt. The interrupt is taken first due to its priority, but the
//     return address is set to the current instruction because it didn't
//     execute successfully. This ensures the return state is correct for
//     when the pending MemManage fault is taken (which may occur by tail
//     chaining after the interrupt handler returns).
// 2) The architecture states:-
//     "A fault that is escalated to the priority of a HardFault
//     retains the return address value of the original fault."
//     So a SVC that escalates to a HardFault has the return address of the
//     instruction after SVC (because the SVC succeeded is setting an
//     exception pending).
// 3) The BusFault exception is disabled when a BusFault occurs during
//     lazy FP state preservation. The fault remains pending until a store
//     instruction re-enables the BusFault by writing to the SHCSR
//     register, at which point the exception can be taken. However because
//     the store instruction didn't cause the fault, it just allowed it to
//     be taken the return address points to the instruction after the
//     store.
//
// NOTE: Asynchronous faults (eg async BusFault) deviate from this rule and
//       have a return address set to the next instruction. Due to their
//       asynchronous nature the address of the actual instruction that
//       caused the fault is not known.

// Returns the following values based on the exception cause
// NOTE: ReturnAddress() is always halfword aligned, meaning bit<0> is always zero
//       If present the xPSR.IT bits saved to the stack are consistent with
//       ReturnAddress()
if instExecOk then
    return (NextInstrAddr(), NextInstrITState());
else
    return (ThisInstrAddr(), ThisInstrITState());

```

E3.1.203 S

```
// S[] - assignment form
// =====

S[integer n] = bits(32) value
assert n >= 0 && n <= 31;
if (n MOD 2) == 0 then
    D[n DIV 2]<31:0> = value;
else
    D[n DIV 2]<63:32> = value;
return;

// S[] - non-assignment form
// =====

bits(32) S[integer n]
assert n >= 0 && n <= 31;
if (n MOD 2) == 0 then
    result = D[n DIV 2]<31:0>;
else
    result = D[n DIV 2]<63:32>;
return result;
```

E3.1.204 SAttributes

```
// Security attributes associated with an address

type SAttributes is (
    boolean nsc,           // Non-secure callability of an address. FALSE = not
                          // callable from the Non-secure state
    boolean ns,           // Security of an address FALSE = Secure, TRUE = Non-secure
    bits(8) sregion,     // The SAU region number
    boolean srvalid,     // Set to 1 if the SAU region number is valid
    bits(8) iregion,     // The IDAU region number
    boolean irvalid      // Set to 1 if the IDAU region number is valid
)
```

E3.1.205 SCS_UpdateStatusRegs

```
// SCS_UpdateStatusRegs()
// =====
// Update status registers in the System Control Space (SCS)

SCS_UpdateStatusRegs();
```

E3.1.206 SP

```
// SP - assignment form
// =====
SP = bits(32) value
    RSPCheck[13] = value;

// SP - non-assignment form
// =====
bits(32) SP
    return R[13];
```

E3.1.207 SP_Main

```
// SP_Main - assignment form
// =====
SP_Main = bits(32) value
    if IsSecure() then
        SP_Main_Secure = value;
    else
        SP_Main_NonSecure = value;

// SP_Main - non-assignment form
// =====
bits(32) SP_Main
    value = if IsSecure() then SP_Main_Secure else SP_Main_NonSecure;
    return value;
```

E3.1.208 SP_Main_NonSecure

```
// SP_Main_NonSecure - assignment form
// =====
SP_Main_NonSecure = bits(32) value
    - = _SP(RNameSP_Main_NonSecure, FALSE, value);

// SP_Main_NonSecure - non-assignment form
// =====
bits(32) SP_Main_NonSecure
    return _SP(RNameSP_Main_NonSecure);
```

E3.1.209 SP_Main_Secure

```
// SP_Main_Secure - assignment form
// =====
SP_Main_Secure = bits(32) value
    - = _SP(RNameSP_Main_Secure, FALSE, value);

// SP_Main_Secure - non-assignment form
// =====
bits(32) SP_Main_Secure
    return _SP(RNameSP_Main_Secure);
```

E3.1.210 SP_Process

```
// SP_Process - assignment form
// =====
SP_Process = bits(32) value
    if IsSecure() then
        SP_Process_Secure = value;
    else
        SP_Process_NonSecure = value;

// SP_Process - non-assignment form
// =====
bits(32) SP_Process
    value = if IsSecure()
        then SP_Process_Secure else SP_Process_NonSecure;
    return value;
```

E3.1.211 SP_Process_NonSecure

```
// SP_Process_NonSecure - assignment form
// =====
SP_Process_NonSecure = bits(32) value
    - = _SP(RNameSP_Process_NonSecure, FALSE, value);

// SP_Process_NonSecure - non-assignment form
// =====
bits(32) SP_Process_NonSecure
    return _SP(RNameSP_Process_NonSecure);
```

E3.1.212 SP_Process_Secure

```
// SP_Process_Secure - assignment form
// =====
SP_Process_Secure = bits(32) value
    - = _SP(RNameSP_Process_Secure, FALSE, value);

// SP_Process_Secure - non-assignment form
// =====
bits(32) SP_Process_Secure
    return _SP(RNameSP_Process_Secure);
```

E3.1.213 SRType

```
// Different types of shift and rotate operations
enumeration SRType {SRType_LSL, SRType_LSR, SRType_ASR, SRType_ROR, SRType_RRX};
```

E3.1.214 Sat

```
// Sat()
// =====

bits(N) Sat(integer i, integer N, boolean unsigned)
    result = if unsigned then UnsignedSat(i, N) else SignedSat(i, N);
    return result;
```

E3.1.215 SatQ

```
// SatQ()
// =====

(bits(N), boolean) SatQ(integer i, integer N, boolean unsigned)
    (result, sat) = if unsigned then UnsignedSatQ(i, N) else SignedSatQ(i, N);
    return (result, sat);
```

E3.1.216 SecureDebugMonitorAllowed

```
// SecureDebugMonitorAllowed()
// =====

boolean SecureDebugMonitorAllowed()
    if DAUTHCTRL.SPIDENSEL == '1' then
        return DAUTHCTRL.INTSPIDEN == '1';
    else
        return SPIDEN == HIGH;
```

E3.1.217 SecureHaltingDebugAllowed

```
// SecureHaltingDebugAllowed()
// =====

boolean SecureHaltingDebugAllowed()
  if HaltingDebugAllowed() == FALSE then
    return FALSE;
  elseif DAUTHCTRL.SPIDENSEL == '1' then
    return DAUTHCTRL.INTSPIDEN == '1';
  else
    return SPIDEN == HIGH;
```

E3.1.218 SecureNoninvasiveDebugAllowed

```
// SecureNoninvasiveDebugAllowed()
// =====

boolean SecureNoninvasiveDebugAllowed()
  if !NoninvasiveDebugAllowed() then
    return FALSE;
  elseif DHCSR.S_SDE == '1' then
    return TRUE;
  elseif DAUTHCTRL.SPNIDENSEL == '1' then
    return DAUTHCTRL.INTSPIDEN == '1';
  else
    return SPNIDEN == HIGH;
```


E3.1.219 SecurityCheck

```

// SecurityCheck()
// =====

SAttributes SecurityCheck(bits(32) address, boolean isinstrfetch, boolean isSecure)
SAttributes result;
addr = UInt(address);

// Setup default attributes
result.ns      = FALSE;
result.nsc     = FALSE;
result.sregion = Zeros(8);
result.srvalid = FALSE;
result.iregion = Zeros(8);
result.irvalid = FALSE;
idauExempt    = FALSE;
idauNs        = TRUE;
idauNsc       = TRUE;

// If an IMPLEMENTATION_DEFINED memory security attribution unit is present
// query it and override defaults set above. The IDAU is subject to the same
// 32byte minimum region granularity as the SAU/MPU.
// NOTE: The defaults above are set such that the IDAU has no effect on the
// SAU.
if boolean IMPLEMENTATION_DEFINED "IDAU present" then
    (idauExempt,
     idauNs,
     idauNsc,
     result.iregion,
     result.irvalid) = IDAUCheck(address<31:5>:'00000');

// The 0xF0000000 -> 0xFFFFFFFF is always Secure for instruction fetches
if isinstrfetch && (address<31:28> == '1111') then
    // Use default attributes defined above

// Check if the address is exempt from SAU/IDAU checking.
elseif idauExempt || // IDAU specified exemption
    (isinstrfetch && (address<31:28> == '1110')) || // Whole 0xExxxxxxx range exempt for IFetch
    ((addr >= 0xE0000000) && (addr <= 0xE0002FFF)) || // ITM, DWT, FPB
    ((addr >= 0xE000E000) && (addr <= 0xE000EFFF)) || // SCS
    ((addr >= 0xE002E000) && (addr <= 0xE002EFFF)) || // SCS NS alias
    ((addr >= 0xE0040000) && (addr <= 0xE0041FFF)) || // TPIU, ETM
    ((addr >= 0xE00FF000) && (addr <= 0xE00FFFFF)) then // ROM table
    // memory security reported as NS-Req, and no region information is supplied.
    result.ns      = !isSecure;
    result.irvalid = FALSE;

else
    // If the SAU is enabled check its regions
    if SAU_CTRL.ENABLE == '1' then
        boolean multiRegionHit = FALSE;
        for r = 0 to (UInt(SAU_TYPE.SREGION) - 1)
            if SAU_REGION[r].ENABLE == '1' then
                // SAU region enabled so perform checks
                bits(32) base_address = SAU_REGION[r].BADDR:'00000';
                bits(32) limit_address = SAU_REGION[r].LADDR:'11111';
                if ((UInt(base_address) <= addr) &&
                    (UInt(limit_address) >= addr)) then
                    if result.srvalid then
                        multiRegionHit = TRUE;
                    else
                        result.ns      = SAU_REGION[r].NSC == '0';
                        result.nsc     = SAU_REGION[r].NSC == '1';
                        result.srvalid = TRUE;
                        result.sregion = r<7:0>;

// If multiple regions are hit then report memory as Secure and not

```

```
// Non-secure callable. Also don't report any region number
// information.
if multiRegionHit then
    result.ns      = FALSE;
    result.nsc     = FALSE;
    result.sregion = Zeros(8);
    result.srvalid = FALSE;

// SAU disabled, check if whole address space should be marked as
// Non-secure
elseif SAU_CTRL.ALLNS == '1' then
    result.ns = TRUE;

// Override the internal setting if the external attribution unit
// reports more restrictive attributes.
if !idauNs then
    if result.ns || (!idauNsc && result.nsc) then
        result.ns = FALSE;
        result.nsc = idauNsc;

return result;
```

E3.1.220 SecurityState

```
// Type and definition of the current Security state of PE

enumeration SecurityState {SecurityState_NonSecure, SecurityState_Secure};
SecurityState CurrentState;
```

E3.1.221 SendEvent

```
// SendEvent
// =====
// Performs a send event by setting the Event Register of every PE in multiprocessor system

SendEvent();
```

E3.1.222 SerializeVFP

```
// SerializeVFP
// =====
// Ensures that any exceptional conditions in previous floating-point
// instructions have been detected

SerializeVFP();
```

E3.1.223 SetActive

```
// SetActive()
// =====

SetActive(integer exception, boolean isSecure, boolean setNotClear)
  if !HaveSecurityExt() then
    isSecure = FALSE;
    // If the exception target state is configurable there is only one active
    // bit. To represent this the Non-secure and Secure instances of the active
    // flags in the array are always set to the same value.
    if IsExceptionTargetConfigurable(exception) then
      if ExceptionTargetsSecure(exception, boolean UNKNOWN) == isSecure then
        ExceptionActive[exception] = if setNotClear then '11' else '00';
    else
      idx = if isSecure then 0 else 1;
      ExceptionActive[exception]<idx> = if setNotClear then '1' else '0';
```

E3.1.224 SetEventRegister

```
// SetEventRegister()
// =====
// Set the Event Register of the current PE

SetEventRegister();
```

E3.1.225 SetExclusiveMonitors

```
// SetExclusiveMonitors()
// =====

SetExclusiveMonitors(bits(32) address, integer size)
  boolean isSecure = CurrentState == SecurityState_Secure;
  (excInfo, memaddrdesc) = ValidateAddress(address, AccType_NORMAL, FindPriv(),
                                          isSecure, FALSE);
  HandleException(excInfo);

  if memaddrdesc.memattrs.shareable then
    MarkExclusiveGlobal(memaddrdesc.paddress, ProcessorID(), size);

  MarkExclusiveLocal(memaddrdesc.paddress, ProcessorID(), size);
```

E3.1.226 SetITSTATEAndCommit

```
// SetITSTATEAndCommit()
// =====

SetITSTATEAndCommit(ITSTATEType it)
// This function directly commits the change to the ITSTATE, so ThisInstrITSTATE()
// and NextInstrITSTATE() both point to the target address.
_NextInstrITState = it;
_ITStateChanged   = TRUE;
EPSR.IT           = it;
return;
```

E3.1.227 SetPending

```
// SetPending()
// =====

SetPending(integer exception, boolean isSecure, boolean setNotClear)
if !HaveSecurityExt() then
    isSecure = FALSE;
// If the exception target state is configurable there is only one pending
// bit. To represent this, the Non-secure and Secure instances of the pending
// flags in the array are always set to the same value.
if IsExceptionTargetConfigurable(exception) then
    ExceptionPending[exception] = if setNotClear then '11' else '00';
else
    idx = if isSecure then 0 else 1;
    ExceptionPending[exception]<idx> = if setNotClear then '1' else '0';
```

E3.1.228 SetThisInstrDetails

```
// SetThisInstrDetails
// =====
// Set the details of current instruction

SetThisInstrDetails(bits(32) opcode, integer len, bits(4) defaultCond);
```

E3.1.229 Shift

```
// Shift()
// =====

bits(N) Shift(bits(N) value, SRTYPE sr_type, integer amount, bit carry_in)
(result, -) = Shift_C(value, sr_type, amount, carry_in);
return result;
```

E3.1.230 Shift_C

```
// Shift_C()
// =====

(bits(N), bit) Shift_C(bits(N) value, SType sr_type, integer amount, bit carry_in)
    assert !(sr_type == SType_RRX && amount != 1);

    if amount == 0 then
        (result, carry_out) = (value, carry_in);
    else
        case sr_type of
            when SType_LSL
                (result, carry_out) = LSL_C(value, amount);
            when SType_LSR
                (result, carry_out) = LSR_C(value, amount);
            when SType_ASR
                (result, carry_out) = ASR_C(value, amount);
            when SType_ROR
                (result, carry_out) = ROR_C(value, amount);
            when SType_RRX
                (result, carry_out) = RRX_C(value, carry_in);

        return (result, carry_out);
```

E3.1.231 SignedSat

```
// SignedSat()
// =====

(bits(N)) SignedSat(integer i, integer N)
    (result, -) = SignedSatQ(i, N);
    return result;
```

E3.1.232 SignedSatQ

```
// SignedSatQ()
// =====

(bits(N), boolean) SignedSatQ(integer i, integer N)
    if i > 2(N-1) - 1 then
        result = 2(N-1) - 1; saturated = TRUE;
    elsif i < -(2(N-1)) then
        result = -(2(N-1)); saturated = TRUE;
    else
        result = i; saturated = FALSE;
    return (result<N-1:0>, saturated);
```

E3.1.233 SleepOnExit

```
// SleepOnExit()  
// =====  
// Optionally returns PE to a power-saving mode on return from the only  
// active exception  
  
SleepOnExit();
```

E3.1.234 Stack

```

// Stack
// =====

// Assignment form

ExcInfo Stack(bits(32) frameptr, integer offset, RName spreg, Mode mode, bits(32) value)
// This function is used to perform register stacking operations that are
// done around exception handling. If the stack pointer is below the stack
// pointer limit but the access itself is above the limit it is
// IMPLEMENTATION DEFINED whether the write is performed. If the
// address of access is below the limit the access is not performed
// regardless of the stack pointer value.
(limit, applylimit) = LookUpSPLim(spreg);
if !applylimit || (UInt(frameptr) >= UInt(limit)) then
    doAccess = TRUE;
else
    doAccess = boolean IMPLEMENTATION_DEFINED "Push non-violating locations";

address = frameptr + offset;
if doAccess && (!applylimit || ((UInt(address) >= UInt(limit)))) then
    secure = ((spreg == RNameSP_Main_Secure) ||
              (spreg == RNameSP_Process_Secure));
    // Work out if the stack operations should be privileged or not
    if secure then
        isPriv = CONTROL_S.nPRIV == '0';
    else
        isPriv = CONTROL_NS.nPRIV == '0';
    isPriv = isPriv || (mode == Mode_Handler);
    // Finally perform the memory operations
    excInfo = MemA_with_priv_security(address,4,AccType_STACK,isPriv,secure,value);
else
    excInfo = DefaultExcInfo();
return excInfo;

// Non-assignment form

(ExcInfo, bits(32)) Stack(bits(32) frameptr, integer offset, RName spreg, Mode mode)
secure = ((spreg == RNameSP_Main_Secure) ||
          (spreg == RNameSP_Process_Secure));
// Work out if the stack operations should be privileged or not
if secure then
    isPriv = CONTROL_S.nPRIV == '0';
else
    isPriv = CONTROL_NS.nPRIV == '0';
isPriv = isPriv || (mode == Mode_Handler);
// Finally perform the memory operations
address = frameptr + offset;
(excInfo, value) = MemA_with_priv_security(address,4,AccType_STACK,isPriv,secure);
return (excInfo, value);

```

E3.1.235 StandardFPSCRValue

```

// StandardFPSCRValue()
// =====

bits(32) StandardFPSCRValue()
return '00000' : FPSCR<26> : '11000000000000000000000000000000';

```

E3.1.236 T32ExpandImm

```
// T32ExpandImm()  
// =====  
  
bits(32) T32ExpandImm(bits(12) imm12)  
  
// APSR.C argument to following function call does not affect the imm32 result.  
(imm32, -) = T32ExpandImm_C(imm12, APSR.C);  
  
return imm32;
```

E3.1.237 T32ExpandImm_C

```
// T32ExpandImm_C()  
// =====  
  
(bits(32), bit) T32ExpandImm_C(bits(12) imm12, bit carry_in)  
  
if imm12<11:10> == '00' then  
  
    case imm12<9:8> of  
        when '00'  
            imm32 = ZeroExtend(imm12<7:0>, 32);  
        when '01'  
            if imm12<7:0> == '00000000' then UNPREDICTABLE;  
            imm32 = '00000000' : imm12<7:0> : '00000000' : imm12<7:0>;  
        when '10'  
            if imm12<7:0> == '00000000' then UNPREDICTABLE;  
            imm32 = imm12<7:0> : '00000000' : imm12<7:0> : '00000000';  
        when '11'  
            if imm12<7:0> == '00000000' then UNPREDICTABLE;  
            imm32 = imm12<7:0> : imm12<7:0> : imm12<7:0> : imm12<7:0>;  
        carry_out = carry_in;  
  
    else  
  
        unrotated_value = ZeroExtend('1':imm12<6:0>, 32);  
        (imm32, carry_out) = ROR_C(unrotated_value, UInt(imm12<11:7>));  
  
    return (imm32, carry_out);
```


E3.1.238 TTResp

```

// TTResp()
// =====

bits(32) TTResp(bits(32) address, boolean alt, boolean forceunpriv)
    TT_RESP_Type resp = Zeros();

    // Only allow security checks if currently in Secure state
    if IsSecure() then
        sAttributes = SecurityCheck(address, FALSE, IsSecure());
        if sAttributes.srvalid then
            resp.SREGION = sAttributes.sregion;
            resp.SRVALID = '1';
        if sAttributes.irvalid then
            resp.IREGION = sAttributes.iregion;
            resp.IRVALID = '1';
        addrSecure = if sAttributes.ns then '0' else '1';
        resp.S      = addrSecure;

    // MPU region information only available when privileged or when
    // inspecting the other MPU state.
    other_domain = (alt != IsSecure());
    if CurrentModeIsPrivileged() || alt then
        (write, read, region, hit) = IsAccessible(address, forceunpriv, other_domain);
        if hit then
            resp.MREGION = region;
            resp.MRVALID = '1';
        resp.R = read;
        resp.RW = write;
        if IsSecure() then
            resp.NSR = read AND NOT addrSecure;
            resp.NSRW = write AND NOT addrSecure;

    return resp;

```

E3.1.239 TailChain

```

// TailChain()
// =====

ExcInfo TailChain(integer exceptionNumber, boolean excIsSecure, bits(24) excReturn)
    // Refresh LR with the excReturn value, ready for the next exception
    LR = Ones(8):excReturn;
    if !HaveFPExt() then
        LR<4> = '1';

    return ExceptionTaken(exceptionNumber, TRUE, excIsSecure, FALSE);

```

E3.1.240 TakePreserveFPEException

```
// TakePreserveFPEException()
// =====

TakePreserveFPEException(ExcInfo excInfo)
    assert HaveFPExt();
    assert excInfo.origFault IN {DebugMonitor, SecureFault, MemManage, BusFault, UsageFault};

    exception = excInfo.origFault;
    isSecure = excInfo.origFaultIsSecure;
    fpccr = if isSecure then FPCCR_S else FPCCR_NS;

    if FPCCR_S.MONRDY == '1' && FPCCR_S.HFRDY == '0' then UNPREDICTABLE;
    if FPCCR_S.BFRDY == '1' && FPCCR_S.HFRDY == '0' then UNPREDICTABLE;
    if FPCCR_S.SFRDY == '1' && FPCCR_S.HFRDY == '0' then UNPREDICTABLE;
    if fpccr.UFRDY == '1' && FPCCR_S.HFRDY == '0' then UNPREDICTABLE;
    if fpccr.MMRDY == '1' && FPCCR_S.HFRDY == '0' then UNPREDICTABLE;
    if exception == DebugMonitor && FPCCR_S.MONRDY == '0' then
        // ignore DebugMonitor exception
        return;

    // Handle exception specific details like escalation and syndrome information
    case exception of
        when MemManage
            escalate = fpccr.MMRDY == '0';
        when UsageFault
            escalate = fpccr.UFRDY == '0';
        when BusFault
            escalate = FPCCR_S.BFRDY == '0';
        when SecureFault
            escalate = FPCCR_S.SFRDY == '0';
        otherwise
            escalate = FALSE;
    if escalate then
        exception = HardFault;
        // Faults that originally targeted the Secure domain still target the
        // Secure domain even if HardFault normally targets Non-secure.
        isSecure = isSecure || ExceptionTargetsSecure(HardFault, isSecure);

    // Check if the exception is enabled and has sufficient priority to
    // pre-empt and be taken straight away.
    if (ExceptionPriority(exception, isSecure, TRUE) < ExecutionPriority()) &&
        ExceptionEnabled(exception, isSecure) then
        if escalate then
            HFSR.FORCED = '1';
            // Set the exception pending and terminate the current instruction. This
            // leaves FP disabled (i.e. CONTROL.FPCA set to 0) and prevents the
            // pre-empting exception entry reserving space for a redundant FP state.
            SetPending(exception, isSecure, TRUE);
            EndOfInstruction();
        else
            // If the reason the exception can't pre-empt is due to the fact that
            // HardFault couldn't be entered by the context the FP state belongs to
            // then enter the lockup state.
            if FPCCR_S.HFRDY == '0' then
                Lockup(TRUE); // Lockup at current priority, lock-up address = 0xEFFFFFFE
            else
                if escalate then
                    HFSR.FORCED = '1';
                    // Set the exception pending so it will be taken after the current
                    // handler returns.
                    SetPending(exception, isSecure, TRUE);
    return;
```

E3.1.241 TakeReset

```

// TakeReset()
// =====

TakeReset()
// If the Security Extension is implemented the PE resets into Secure state.
// If the Security Extension is not implemented the PE resets into Non-secure state.
CurrentState = if HaveSecurityExt() then SecurityState_Secure else SecurityState_NonSecure;

ResetSCSRegs(); // Catch-all function for System Control Space reset
APSR = bits(32) UNKNOWN; // Flags UNPREDICTABLE from reset
IPSR.Exception = Zeros(9); // Exception number cleared at reset
if HaveMainExt() then
    LR = Ones(32); // Preset to an illegal exception return value
    SetITSTATEAndCommit(Zeros(8)); // IT/ICI bits cleared
else
    LR = bits(32) UNKNOWN; // Value must be initialised by software

// Reset priority boosting
PRIMASK_NS<0> = '0'; // priority mask cleared at reset
if HaveSecurityExt() then
    PRIMASK_S<0> = '0';
if HaveMainExt() then
    FAULTMASK_NS<0> = '0'; // Fault mask cleared at reset
    BASEPRI_NS<7:0> = Zeros(8); // Base priority disabled at reset
    if HaveSecurityExt() then
        FAULTMASK_S<0> = '0';
        BASEPRI_S<7:0> = Zeros(8);

// Initialize the Floating Point Extn
if HaveFPEExt() then
    CONTROL.FPCA = '0'; // FP inactive
    FPDSCR_NS.AHP = '0';
    FPDSCR_NS.DN = '0';
    FPDSCR_NS.FZ = '0';
    FPDSCR_NS.RMode = '00';
    FPCCR.LSPEN = '1';
    FPCCR_NS.ASPEN = '1';
    FPCCR_NS.LSPACT = '0';
    FPCAR_NS = bits(32) UNKNOWN;
    if HaveSecurityExt() then
        CONTROL_S.SFPA = '0';
        FPDSCR_S.AHP = '0';
        FPDSCR_S.DN = '0';
        FPDSCR_S.FZ = '0';
        FPDSCR_S.RMode = '00';
        FPCCR.LSPENS = '0';
        FPCCR_S.ASPEN = '1';
        FPCCR_S.LSPACT = '0';
        FPCAR_S = bits(32) UNKNOWN;
    for i = 0 to 31
        S[i] = bits(32) UNKNOWN;

// Thread is privileged, current stack is Main
CONTROL_NS.SPSEL = '0';
CONTROL_NS.nPRIV = '0';
if HaveSecurityExt() then
    CONTROL_S.SPSEL = '0';
    CONTROL_S.nPRIV = '0';

for i = 0 to MaxExceptionNum // All exceptions Inactive
    ExceptionActive[i] = '00';
ClearExclusiveLocal(ProcessorID()); // Synchronization (LDREX* / STREX*) monitor support
ClearEventRegister(); // See WFE instruction for more information
for i = 0 to 12
    R[i] = bits(32) UNKNOWN;

```

```
// Stack limit registers. It is IMPLEMENTATION DEFINED how many bits of
// these registers are writable. The following writes only affect the
// bits that an implementation defines as writable
if HaveMainExt() then
    MSPLIM_NS = Zeros(32);
    PSPLIM_NS = Zeros(32);
if HaveSecurityExt() then
    MSPLIM_S = Zeros(32);
    PSPLIM_S = Zeros(32);

// Load the initial value of the stack pointer and the reset value from the
// vector table. The order of the loads is IMPLEMENTATION DEFINED
(excSp, sp) = Vector[0, HaveSecurityExt()];
(excRst, start) = Vector[Reset, HaveSecurityExt()];
if excSp.fault != NoFault || excRst.fault != NoFault then
    Lockup(TRUE);

// Initialize the stack pointers and start execution at the reset vector
if HaveSecurityExt() then
    SP_Main_Secure = sp;
    SP_Main_NonSecure = ((bits(30) UNKNOWN):'00');
    SP_Process_Secure = ((bits(30) UNKNOWN):'00');
else
    SP_Main_NonSecure = sp;
    SP_Process_NonSecure = ((bits(30) UNKNOWN):'00');
    EPSR.T = start<0>;
    BranchToAndCommit(start<31:1>:'0');
```

E3.1.242 ThisInstr

```
// ThisInstr
// =====
// Returns a 32-bit value which contain the bitstring encoding of current instruction.
// In case of 16-bit instructions, the instruction is packed into the bottom 16-bits
// with upper 16-bits zeroed. In case of 32-bit instructions, the instruction is
// treated as two halfwords, with the first halfword of the instruction in the
// top 16-bits and second halfword in bottom 16-bits.

bits(32) ThisInstr();
```

E3.1.243 ThisInstrAddr

```
// ThisInstrAddr()
// =====

bits(32) ThisInstrAddr()
    return _R[RName_PC];
```

E3.1.244 ThisInstrITState

```
// ThisInstrITState()
// =====

ITSTATEType ThisInstrITState()
    if HaveMainExt() then
        value = EPSR.IT;
    else
        value = Zeros(8);
    return value;
```

E3.1.245 ThisInstrLength

```
// ThisInstrLength
// =====
// Returns the length of the current instruction in bytes

integer ThisInstrLength();
```

E3.1.246 TopLevel

```

// TopLevel()
// =====

// This function is called once per tick if the processor isn't in a sleep
// state. It handles all instruction processing, including fetching the opcode,
// decode and execute. It also handles pausing execution when in the lockup
// state.
TopLevel()
// If we're locked up then abort execution of this instruction. We also set
// the length of the current instruction to 0 so NextInstrAddr() reports the
// correct lockup address.
ok = DHCSR.S_LOCKUP != '1';
if !ok then
    SetThisInstrDetails(Zeros(32), 0, Ones(4));
else
    // Check for stepping debug for current instruction fetch.
    mon_step_active = SteppingDebug();
    UpdateSecureDebugEnable();
    pc = ThisInstrAddr();

    try
        // Not locked up, so attempt to fetch the instruction
        (instr, is16bit) = FetchInstr(pc);

        // Setup the details of the instruction. NOTE: The default condition
        // is based on the ITSTATE, however this is overridden in the decode
        // stage by instructions that have explicit condition codes.
        len = if is16bit then 2 else 4;

        defaultCond = if ITSTATE<3:0> == 0 then 0xE<3:0> else ITSTATE<7:4>;
        SetThisInstrDetails(instr, len, defaultCond);

        // Checking for FP Break point on Instructions
        if FPB_CheckBreakPoint(pc, len, TRUE, IsSecure()) then
            FPB_BreakpointMatch();

        // Finally try and execute the instruction
        DecodeExecute(instr, pc, is16bit);

        // Check for Monitor Step
        SetMonStep(mon_step_active);

        // Check for DWT match.
        if IsDWTEnabled() then DWT_InstructionMatch(pc);

    catch exn
        when IsSEE(exn) || IsUNDEFINED(exn)
            if ConditionHolds(CurrentCond()) then
                ok = FALSE;
                if HaveMainExt() then
                    UFSR.UNDEFINSTR = '1';
                    // If Main Extension is not implemented the fault will escalate to a
                    // HardFault.
                    excInfo = CreateException(UsageFault, FALSE, boolean UNKNOWN);
                    // Prevent EndOfInstruction() being called in
                    // HandleException() as the instruction has already been
                    // terminated so there is no need to throw the exception
                    // again.
                    excInfo.termInst = FALSE;
                    HandleException(excInfo);
                when IsExceptionTaken(exn)
                    ok = FALSE;
            // Do not catch UNPREDICTABLE or internal errors

// If there is a reset pending do that, otherwise process the normal
// instruction advance.

```

```

try
  if ExceptionPending[Reset] != '00' then
    ExceptionPending[Reset] = '00';
    TakeReset();
  else
    // Call instruction advance for exception handling and PC/ITSTATE
    // advance.
    InstructionAdvance(ok);
catch exn
  // Do not catch UNPREDICTABLE or internal errors
  when IsExceptionTaken(exn)
    // The correct architectural behaviour for any exceptions is
    // performed inside TakeReset() and InstructionAdvance(). So no
    // additional actions are required in this catch block.

```

E3.1.247 UnsignedSat

```

// UnsignedSat()
// =====

bits(N) UnsignedSat(integer i, integer N)
  (result, -) = UnsignedSatQ(i, N);
  return result;

```

E3.1.248 UnsignedSatQ

```

// UnsignedSatQ()
// =====

(bits(N), boolean) UnsignedSatQ(integer i, integer N)
  if i > 2N - 1 then
    result = 2N - 1; saturated = TRUE;
  elsif i < 0 then
    result = 0; saturated = TRUE;
  else
    result = i; saturated = FALSE;
  return (result<N-1:0>, saturated);

```

E3.1.249 UpdateFPCCR

```
// UpdateFPCCR()
// =====

UpdateFPCCR(bits(32) frameptr, boolean applySpLim)
    assert(HaveFPExt());

    FPCAR.ADDRESS = frameptr<31:3>;
    // Flag if the context address violates the stack pointer limit. If the
    // limit has been violated PreserveFPState() will zero the registers if
    // required, but will not save the context to the stack.
    (limit, limitValid) = LookUpSPLim(LookUpSP());
    if applySpLim && limitValid && (UInt(frameptr) < UInt(limit)) then
        FPCCR.SPLIMVIOL = '1';
    else
        FPCCR.SPLIMVIOL = '0';
    FPCCR.LSPACT = '1';

    execPri = ExecutionPriority();
    isSecure = IsSecure();
    FPCCR_S.S = if isSecure then '1' else '0';
    if CurrentModeIsPrivileged() then
        FPCCR.USER = '0';
    else
        FPCCR.USER = '1';
    if CurrentMode() == Mode_Thread then
        FPCCR.THREAD = '1';
    else
        FPCCR.THREAD = '0';
    if execPri > -1 then
        FPCCR_S.HFRDY = '1';
    else
        FPCCR_S.HFRDY = '0';
    busfaultpri = ExceptionPriority(BusFault, isSecure, FALSE);
    if SHCSR_S.BUSFAULTENA == '1' && execPri > busfaultpri then
        FPCCR_S.BFRDY = '1';
    else
        FPCCR_S.BFRDY = '0';
    memfaultpri = ExceptionPriority(MemManage, isSecure, FALSE);
    if SHCSR_S.MEMFAULTENA == '1' && execPri > memfaultpri then
        FPCCR.MMRDY = '1';
    else
        FPCCR.MMRDY = '0';
    usagefaultpri = ExceptionPriority(UsageFault, FALSE, FALSE);
    if SHCSR_NS.USGFAULTENA == '1' && execPri > usagefaultpri then
        FPCCR_NS.UFRDY = '1';
    else
        FPCCR_NS.UFRDY = '0';
    usagefaultpri = ExceptionPriority(UsageFault, TRUE, FALSE);
    if SHCSR_S.USGFAULTENA == '1' && execPri > usagefaultpri then
        FPCCR_S.UFRDY = '1';
    else
        FPCCR_S.UFRDY = '0';
    if HaveSecurityExt() then
        securefaultpri = ExceptionPriority(SecureFault, isSecure, FALSE);
        if SHCSR_S.SECUREFAULTENA == '1' && execPri > securefaultpri then
            FPCCR_S.SFRDY = '1';
        else
            FPCCR_S.SFRDY = '0';
    monpri = ExceptionPriority(DebugMonitor, DEMCR.SDME == '1', FALSE);
    if DEMCR.MON_EN == '1' && execPri > monpri then
        FPCCR_S.MONRDY = '1';
    else
        FPCCR_S.MONRDY = '0';
    return;
```


E3.1.250 UpdateSecureDebugEnable

```
// UpdateSecureDebugEnable()
// =====

UpdateSecureDebugEnable()
  if DHCSR.S_HALT == '0' then
    sde = (DBGEN == HIGH && SecureHaltingDebugAllowed());
    DHCSR.S_SDE = if sde then '1' else '0';
  if HaveDebugMonitor() && ExceptionActive[DebugMonitor] == '00' && DEMCR.MON_PEND == '0'
    then DEMCR.SDME = if SecureDebugMonitorAllowed() then '1' else '0';
```

E3.1.251 VFPExcBarrier

```
// VFPExcBarrier
// =====
// Ensures that all floating-point exception processing has completed

VFPExcBarrier();
```

E3.1.252 VFPExpandImm

```
// VFPExpandImm()
// =====

bits(N) VFPExpandImm(bits(8) imm8, integer N)
  assert N IN {32,64};
  if N == 32 then E = 8; else E = 11;
  constant integer F = N - E - 1;
  sign = imm8<7>;
  exp = NOT(imm8<6>):Replicate(imm8<6>,E-3);
  frac = imm8<5:0>:Zeros(F-4);
  return sign : exp : frac;
```

E3.1.253 VFPNegMul

```
// Different types of floating-point multiply and negate operations

enumeration VFPNegMul {VFPNegMul_VNMLA, VFPNegMul_VNMLS, VFPNegMul_VNMUL};
```

E3.1.254 VFPSmallRegisterBank

```
// VFPSmallRegisterBank  
// =====  
// Returns TRUE if Floating Point implementation provides access only to  
// 16 double-precision registers  
  
boolean VFPSmallRegisterBank();
```

E3.1.255 ValidateAddress

```

// ValidateAddress()
// =====

(ExcInfo, AddressDescriptor) ValidateAddress(bits(32) address, AccType acctype,
                                             boolean ispriv, boolean secure,
                                             boolean iswrite)

AddressDescriptor result;
Permissions perms;
ns = boolean UNKNOWN;
excInfo = DefaultExcInfo();

// Security checking and MPU bank selection if Security Extensions are
// present
if HaveSecurityExt() then
    // Before we check the MPU, check the SAU/IDAU.
    isinstrfetch = acctype == AccType_IFETCH;
    sAttrib = SecurityCheck(address, isinstrfetch, secure);

    // Now we have the attributes details of the address, check if the access is
    // valid
    if isinstrfetch then
        ns = sAttrib.ns;
        secureMpu = !sAttrib.ns;

        // NOTE: Override the privilege flag supplied with the a value based
        // on the privilege associated with the current mode and the
        // Security state of the MPU being queried. This can be
        // different from value this function is called with because
        // CONTROL.nPRIV is banked between the Security states.
        ispriv = CurrentModeIsPrivileged(secureMpu);

        // Check for possible fetch faults, eg fetching Non-secure
        // instructions when in Secure state.
        if secure then
            if sAttrib.ns then
                // Invalid exit from the Secure state
                SFSR.INVTRAN = '1';
                excInfo = CreateException(SecureFault, TRUE, TRUE);
            else
                if !sAttrib.ns && !sAttrib.nsc then
                    // Invalid entry to the Secure state
                    SFSR.INVEP = '1';
                    excInfo = CreateException(SecureFault, TRUE, TRUE);
        else
            ns = !secure || sAttrib.ns;
            secureMpu = secure;
            // Check if there is a SAU/IDAU violation and raise a fault if there is
            if !secure && !sAttrib.ns then
                // NOTE: Vector table faults don't generate SFAR/SFSR syndrome
                // info. They are reported via HFSR.VECTTBL which is set elsewhere.
                if HaveMainExt() && acctype != AccType_VECTABLE then
                    if acctype == AccType_LAZYFP then
                        SFSR.LSPERR = '1';
                    else
                        SFSR.AUVIOL = '1';
                        SFSR.SFARVALID = '1';
                        SFAR = address;
                // Create the exception. NOTE: If Main Extension is not implemented the
                // fault always escalates to a HardFault
                excInfo = CreateException(SecureFault, TRUE, TRUE);
            else
                ns = TRUE;
                secureMpu = FALSE;

// setup the remaining access attributes
result.paddress = address;

```

```
result.accattrs.iswrite      = iswrite;
result.accattrs.ispriv      = ispriv;
result.accattrs.acctype     = acctype;

// Finally do the MPU lookup and permissions check
if excInfo.fault == NoFault then
    // Getting memory attribute information from MPU. Note that NS information
    // in the memory attribute is set by SAU/IDAU and is updated after
    // getting attribute values from MPU.
    (result.memattrs, perms) = MPUCheck(address, acctype, ispriv, secureMpu);
    // Updating NS information got from SAU/IDAU in memory attributes
    result.memattrs.NS = ns;

    excInfo = CheckPermission(perms, address, acctype, iswrite, ispriv, secureMpu);

return (excInfo, result);
```

E3.1.256 ValidateExceptionReturn

```

// ValidateExceptionReturn()
// =====

ExcInfo ValidateExceptionReturn(bits(24) excReturn, integer returningExceptionNumber)
    boolean error = FALSE;

    assert CurrentMode() == Mode_Handler;
    if !IsOnes(excReturn<23:7>) then
        UNPREDICTABLE;
    if !HaveFPExt() && excReturn<4> == '0' then
        UNPREDICTABLE;

    // Security specific validation
    targetDomainSecure = excReturn<0> == '1';
    if HaveSecurityExt() then
        // The state of the exception is considered to be Non-secure if
        // returning from the Non-secure state (returns from Secure exceptions
        // whilst in the Non-secure state are not permitted), or if
        // excReturn.ES == 0. This is to deal with Non-secure exceptions that
        // function chain to a Secure function when returning (that is, pass
        // excReturn in LR to a Secure function).
        excStateNonSecure = CurrentState == SecurityState_NonSecure || !targetDomainSecure;

        // Check DCRS bit not used in Non-secure state, also check that this
        // isn't an attempt to retire a Secure exception from the Non-secure
        // state
        if excStateNonSecure && (excReturn<5> == '0' || targetDomainSecure) then
            // excReturn.ES is used below to control which exception to
            // deactivate, and which CONTROL.SPSEL to update. Force it to the
            // correct value so the code below functions correctly even if the
            // Non-secure state returned an invalid excReturn value.
            targetDomainSecure = FALSE;
            error = TRUE;
            if HaveMainExt() then
                SFSR.INVER = '1';
                exceptionNumber = SecureFault;
        else
            excStateNonSecure = TRUE;

    // check returning from an inactive handler
    if !error then
        if !IsActiveForState(returningExceptionNumber, targetDomainSecure) then
            error = TRUE;
            if HaveMainExt() then
                UFSR.INVPC = '1';
                exceptionNumber = UsageFault;
            else
                exceptionNumber = HardFault;

    if error then
        DeActivate(returningExceptionNumber, targetDomainSecure);
        if HaveSecurityExt() && targetDomainSecure then
            CONTROL_S.SPSEL = excReturn<2>;
        else
            CONTROL_NS.SPSEL = excReturn<2>;
        // Escalates to HardFault if requested fault is disabled, or has
        // insufficient priority, or if Main Extension is not implemented
        excInfo = CreateException(exceptionNumber, FALSE, boolean UNKNOWN);
    else
        excInfo = DefaultExcInfo();
    return excInfo;

```

E3.1.257 Vector

```
// Vector[]
// =====

(ExcInfo, bits(32)) Vector[integer exceptionNumber, boolean isSecure]
// Calculate the address of the entry in the vector table
vtor = if isSecure then VTOR_S else VTOR_NS;
addr = (vtor.TBLOFF:'0000000') + 4 * exceptionNumber;
// Fetch the vector with the correct privilege and security
(exc, vector) = MemA_with_priv_security(addr,4,AccType_VECTABLE,TRUE,isSecure);
// Faults that prevent the vector being fetched are terminal and prevent
// the exception being entered. They are therefore treated as HardFaults
if exc.fault != NoFault then
    exc.isTerminal = TRUE;
    exc.fault      = HardFault;
    exc.isSecure   = exc.isSecure || AIRCR.BFHFNMINS == '0';
    HFSR.VECTTBL  = '1';
return (exc, vector);
```

E3.1.258 WaitForEvent

```
// WaitForEvent
// =====
// Optionally suspends execution until a WFE wakeup event or reset occurs,
// or until some earlier time if the implementation chooses

WaitForEvent();
```

E3.1.259 WaitForInterrupt

```
// WaitForInterrupt
// =====
// Optionally suspends execution until a WFI wakeup event or reset occurs, or
// until some earlier time if the implementation chooses

WaitForInterrupt();
```

E3.1.260 _D

```
// The 32-bit extension register bank for the FP extension.

array bits(64) _D[0..15];
```

E3.1.261 _ITStateChanged

```
// Indicates a write to ITSTATE

boolean _ITStateChanged;
```

E3.1.262 **_Mem**

```
// _Mem[] - non-assignment (read) form
// =====
// Perform single-copy atomic, aligned, little-endian read from physical memory

(boolean, bits(8*size)) _Mem(AddressDescriptor memaddrdesc, integer size)
    assert size == 1 || size == 2 || size == 4;

// _Mem[] - assignment (write) form
// =====
// Perform single-copy atomic, aligned, little-endian write to physical memory

boolean _Mem(AddressDescriptor memaddrdesc, integer size, bits(8*size) value)
    assert size == 1 || size == 2 || size == 4;
```

E3.1.263 **_NextInstrAddr**

```
// Address of next instruction to be fetched in case of branch type operation

bits(32) _NextInstrAddr;
```

E3.1.264 **_NextInstrITState**

```
// Updated ITSTATE for next instruction

ITSTATETYPE _NextInstrITState;
```

E3.1.265 **_PCChanged**

```
// Indicates a change in instruction fetch address due to branch type operations

boolean _PCChanged;
```

E3.1.266 **_PendingReturnOperation**

```
// Indicate any pending exception returns

boolean _PendingReturnOperation;
```

E3.1.267 **_R**

```
// The physical array of core registers.
// _R[RName_PC] is defined to be the address of the current instruction.
// The offset of 4 bytes is applied to it by the register access functions.

array bits(32) _R[RName];
```

E3.1.268 `_SP`

```
// _SP() - assignment form
// =====

ExcInfo _SP(RName spreg, boolean excEntry, bits(32) value)
excInfo = DefaultExcInfo();
(limit, applylimit) = LookUpSPLim(spreg);
if applylimit && (UInt(value) < UInt(limit)) then
    // If the stack limit is violated during exception entry then the stack
    // pointer is set to the limit value. This both prevents violations and
    // ensures that the stack pointer is 8 byte aligned.
    if excEntry then
        _R[spreg] = limit;

    // Raise the appropriate exception and syndrome information
    if HaveMainExt() then
        UFSR.STKOF = '1';
    // Create the exception. NOTE: If Main Extension is not implemented the fault always
    // escalates to HardFault.
    excInfo = CreateException(UsageFault, FALSE, boolean UNKNOWN);
    if !excEntry then
        HandleException(excInfo);
else
    // Stack pointer only updated normally if limit not violated
    _R[spreg] = value<31:2>:'00';
return excInfo;

// _SP() - non-assignment form
// =====

bits(32) _SP(RName spreg)
assert ( (spreg == RNameSP_Main_NonSecure) ||
         ((spreg == RNameSP_Main_Secure) && HaveSecurityExt()) ||
         (spreg == RNameSP_Process_NonSecure) ||
         ((spreg == RNameSP_Process_Secure) && HaveSecurityExt()) );

return _R[spreg]<31:2>:'00';
```


E3.1.269 common

```

// Abs()
// =====

__overloaded integer Abs(integer x)
    return if x >= 0 then x else -x;

__overloaded real Abs(real x)
    return if x >= 0.0 then x else -x;

// Align()
// =====

integer Align(integer x, integer y)
    return y * (x DIV y);

bits(N) Align(bits(N) x, integer y)
    return Align(UInt(x), y)<N-1:0>;

// BitCount()
// =====

integer BitCount(bits(N) x)
    integer result = 0;
    for i = 0 to N-1
        if x<i> == '1' then
            result = result + 1;
    return result;

// CountLeadingSignBits()
// =====

integer CountLeadingSignBits(bits(N) x)
    return CountLeadingZeroBits(x<N-1:1> EOR x<N-2:0>);

// CountLeadingZeroBits()
// =====

integer CountLeadingZeroBits(bits(N) x)
    return N - 1 - HighestSetBit(x);

// HighestSetBit()
// =====

integer HighestSetBit(bits(N) x)
    for i = N-1 downto 0
        if x<i> == '1' then return i;
    return -1;

// IsOnes()
// =====

boolean IsOnes(bits(N) x)
    return x == Ones(N);

```

```
// IsZero()
// =====

boolean IsZero(bits(N) x)
    return x == Zeros(N);

// IsZeroBit()
// =====

bit IsZeroBit(bits(N) x)
    return if IsZero(x) then '1' else '0';

// LowestSetBit()
// =====

integer LowestSetBit(bits(N) x)
    for i = 0 to N-1
        if x<i> == '1' then return i;
    return N;

// Max()
// =====

__overloaded integer Max(integer a, integer b)
    return if a >= b then a else b;

__overloaded real Max(real a, real b)
    return if a >= b then a else b;

// Min()
// =====

__overloaded integer Min(integer a, integer b)
    return if a <= b then a else b;

__overloaded real Min(real a, real b)
    return if a <= b then a else b;

// Ones()
// =====

bits(N) Ones(integer N)
    return Replicate('1',N);

bits(N) Ones()
    return Ones(N);

// Replicate()
// =====

bits(M*N) Replicate(bits(M) x, integer N);

bits(N) Replicate(bits(M) x)
    assert N MOD M == 0;
    return Replicate(x, N DIV M);
```

```
// RoundDown()  
// =====
```

```
integer RoundDown(real x);
```

```
// RoundTowardsZero()  
// =====
```

```
integer RoundTowardsZero(real x)  
    return if x == 0.0 then 0 else if x > 0.0 then RoundDown(x) else RoundUp(x);
```

```
// RoundUp()  
// =====
```

```
integer RoundUp(real x);
```

```
// SignExtend()  
// =====
```

```
bits(N) SignExtend(bits(M) x, integer N)  
    assert N >= M;  
    return Replicate(x<M-1>, N-M) : x;
```

```
bits(N) SignExtend(bits(M) x)  
    return SignExtend(x, N);
```

```
// ZeroExtend()  
// =====
```

```
bits(N) ZeroExtend(bits(M) x, integer N)  
    assert N >= M;  
    return Zeros(N-M) : x;
```

```
bits(N) ZeroExtend(bits(M) x)  
    return ZeroExtend(x, N);
```

```
// Zeros()  
// =====
```

```
bits(N) Zeros(integer N)  
    return Replicate('0', N);
```

```
bits(N) Zeros()  
    return Zeros(N);
```


Part F

Debug Packet Protocols

Chapter F1

ITM and DWT Packet Protocol Specification

This chapter describes the protocol for packets used to send the data generated by the ITM and DWT to an external debugger. It contains the following sections:

- [About the ITM and DWT packets on page F1-1288.](#)
- [Alphabetical list of DWT and ITM packets on page F1-1291.](#)

F1.1 About the ITM and DWT packets

The following sections give an overview of the ITM and DWT packets and how the TPIU transmits them:

- [Uses of ITM and DWT packets](#)
- [ITM and DWT protocol packet headers on page F1-1289](#)
- [Packet transmission by the trace sink on page F1-1289](#)

———— Note —————

This chapter describes packet transmission by a trace sink such as a TPIU. The ITM can send packets to any suitable trace sink. Regardless of the actual trace sink used, the ITM formats the packets as described in this chapter.

F1.1.1 Uses of ITM and DWT packets

The ITM sends a packet to the trace sink when:

- Software writes to a stimulus register. This generates a [Instrumentation packet](#).
- The hardware generates a Protocol packet. Protocol packets include timestamps and synchronization packets.
- It receives a packet from the DWT, for forwarding to the trace sink.

The DWT sends a packet to the ITM for forwarding to the trace sink when:

- A DWT comparator matches and generates one or more Data Trace packets.
- It samples the PC.
- One of the performance profile counters wraps.

This chapter describes the packet protocol used.

F1.1.2 ITM and DWT protocol packet headers

Table F1-1 8-bit header encodings

[7]	[6]	[5]	[4]	[3]	[2]	[1]	[0]	Description
0	0	0	0	0	0	0	0	<i>Synchronization packet on page F1-1311</i>
0	1	1	1	0	0	0	0	<i>Overflow packet on page F1-1309</i>
0	≠ 0b000 && ≠ 0b111			0	0	0	0	<i>Local Timestamp 2 packet on page F1-1308</i>
1	0	0	1	0	1	0	0	<i>Global Timestamp 1 packet on page F1-1300</i>
1	0	1	1	0	1	0	0	<i>Global Timestamp 2 packet on page F1-1303</i>
1	1	x	x	0	0	0	0	<i>Local Timestamp 1 packet on page F1-1306</i>
x	x	x	x	1	x	0	0	<i>Extension packet on page F1-1298</i>
0	0	0	0	0	1	0	1	<i>Event Counter packet on page F1-1296</i>
0	1	x	x	0	1	0	1	<i>Data Trace Match packet on page F1-1294</i>
0	0	0	0	1	1	1	0	<i>Exception Trace packet on page F1-1297</i>
0	1	x	x	0	1	≠ 0b00		<i>Data Trace PC Value packet on page F1-1294</i>
0	1	x	x	1	1	≠ 0b00		<i>Data Trace Data Address packet on page F1-1291</i>
1	0	x	x	x	1	≠ 0b00		<i>Data Trace Data Value packet on page F1-1292</i>
x	x	x	x	x	0	≠ 0b00		<i>Instrumentation packet on page F1-1305</i>
0	0	0	1	0	1	x	1	<i>Periodic PC Sample packet on page F1-1310</i>

F1.1.3 Packet transmission by the trace sink

The trace sink either:

- Forms the packets into frames, as required by the *ARM® CoreSight™ Architecture Specification*.
- Transmits the packets over a serial port.

For each packet, the trace sink transmits:

- The header byte first, followed by any payload bytes.
- Each byte of the packet *least significant bit* (LSB) first.

Figures in this chapter show each packet as a sequence of bytes, with the LSB of each byte to the right and the *most significant bit* (MSB) to the left. [Figure F1-1 on page F1-1290](#) shows this convention, and how it relates to data transmission for a packet with a header byte and two payload bytes.

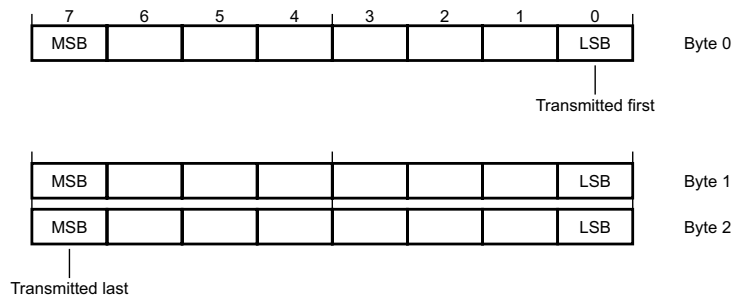


Figure F1-1 Convention for packet descriptions

In some sections, the figures are split into separate figures for the header byte and payload bytes. For instance, where the number of payload bytes varies according to a field in the header.

The ITM merges the packets from the ITM and DWT with the Local and Global timestamp, Synchronization, and other Protocol packets, and forwards them to the trace sink as a single data stream. The trace sink then merges this data stream with the data from the ETM, if implemented.

F1.2 Alphabetical list of DWT and ITM packets

F1.2.1 Data Trace Data Address packet

The Data Trace Data Address packet characteristics are:


Purpose Indicates a DWT comparator generated a match, and the address that matched. Data Address packets are only generated for Data Address range comparator pairs. The address might be compressed. However, it is not required that Short and Medium packets are generated when the address bits match.

Attributes Multi-part Hardware source packet comprising:

- 8-bit header.
- 8, 16, or 32-bit payload.

Data Trace Data Address packet header

The Data Trace Data Address packet header bit assignments are:



ID[4:3,0], byte 0 bits [7:6,3]

Hardware Source packet type. Bits [7:3] discriminate between Hardware Source packet types. The possible values of this field are:

01xx1 Data Trace Data Address packet.

This field reads as 0b011.

CMPN, byte 0 bits [5:4]

DWT comparator index. Defines which comparator generated a match. Data Trace Data Address packets can be compressed relative to the value in [DWT_COMP<n><CMPN>](#). The number of traced bits is indicated by the SS field. The remainder of the address bits comes from [DWT_COMP<n><CMPN>](#). Either comparator in a Data Address range comparator pair can be used.

SH, byte 0 bit [2]

Source. The possible values of this bit are:

1 Hardware source packet.

This bit reads as 0b1.

SS, byte 0 bits [1:0]

Size. The possible values of this field are:

01 Short Data Address packet.


10 Medium Data Address packet.

11 Long Data Address packet.


The value 0b00 encodes a Protocol packet.

Data Trace Data Address packet payload


When Long Data Address packet, SS == 0b11, the Data Trace Data Address packet payload bit assignments are:

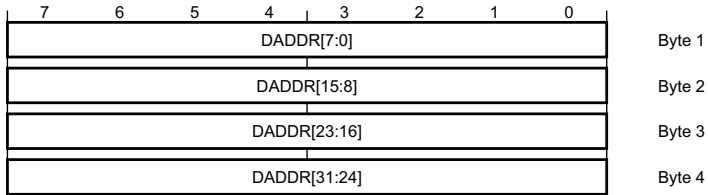

When Medium Data Address packet, SS == 0b10, the Data Trace Data Address packet payload bit assignments are:



When Short Data Address packet, SS == 0b01, the Data Trace Data Address packet payload bit assignments are:



DADDR[31:0], bytes <4:1>, when Long Data Address packet, SS == 0b11

Data address.

DADDR[15:0], bytes <2:1>, when Medium Data Address packet, SS == 0b10

Data address. DADDR[31:16] == DWT_COMP<n><CMPN>[31:16].

DADDR[7:0], byte <1>, when Short Data Address packet, SS == 0b01

Data address. DADDR[31:8] == DWT_COMP<n><CMPN>[31:8].

F1.2.2 Data Trace Data Value packet

The Data Trace Data Value packet characteristics are:


Purpose Indicates a DWT comparator generated a match, and the value that matched.

Attributes Multi-part Hardware source packet comprising:

- 8-bit header.
- 8, 16, or 32-bit payload.

Data Trace Data Value packet header

The Data Trace Data Value packet header bit assignments are:



ID[4:3], byte 0 bits [7:6]

Hardware Source packet type. Bits [7:3] discriminate between Hardware Source packet types. The possible values of this field are:

10xxx Data Trace Data Value packet.

This field reads as 0b10.

CMPN, byte 0 bits [5:4]

DWT comparator index. Defines which comparator generated a match.

WnR, byte 0 bit [3]

Write-not-read. The possible values of this bit are:

0 Read.

1 Write.

SH, byte 0 bit [2]

Source. The possible values of this bit are:

1 Hardware source packet.

This bit reads as 0b1.

SS, byte 0 bits [1:0]

Size. The possible values of this field are:

01 Byte Data Value packet.


10 Halfword Data Value packet.

11 Word Data Value packet.


The value 0b00 encodes a Protocol packet.

Data Trace Data Value packet payload


When Byte Data Value packet, SS == 0b01, the Data Trace Data Value packet payload bit assignments are:



When Halfword Data Value packet, SS == 0b10, the Data Trace Data Value packet payload bit assignments are:



When Word Data Value packet, SS == 0b11, the Data Trace Data Value packet payload bit assignments are:

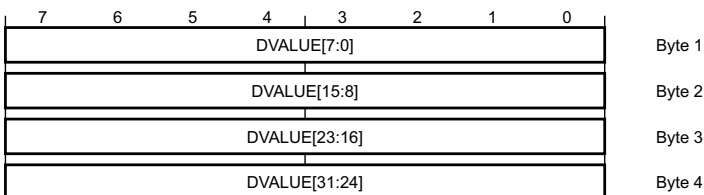

DVALUE[31:0], bytes <4:1>, when Word Data Value packet, SS == 0b11

Data value.

DVALUE[15:0], byte 1 bits [15:0], when Halfword Data Value packet, SS == 0b10

Data value.

DVALUE[7:0], byte <1>, when Byte Data Value packet, SS == 0b01

Data value.


F1.2.3 Data Trace Match packet

The Data Trace Match packet characteristics are:

Purpose Indicates a DWT comparator generated a match.

Attributes 16-bit Hardware source packet.

The Data Trace Match packet bit assignments are:

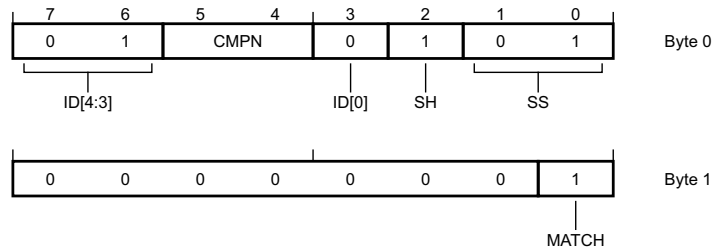

Byte 1 bits [7:1]

This field reads as 0b0000000.

MATCH, byte 1 bit [0]

Data Trace Match packet. Discriminates between the [Data Trace PC Value packet](#) and the Data Trace Match packet. The possible values of this bit are:

1 Data Trace Match packet.

This bit reads as one.

ID[4:3,0], byte 0 bits [7:6,3]

Hardware Source packet type. Bits [7:3] discriminate between Hardware Source packet types. The possible values of this field are:

01xx0 [Data Trace PC Value packet](#) or Data Trace Match packet.

Bit [0] of byte 1 discriminates between the [Data Trace PC Value packet](#) and the Data Trace Match packet.

This field reads as 0b010.

CMPN, byte 0 bits [5:4]

DWT comparator index. Defines which comparator generated a match.

SH, byte 0 bit [2]

Source. The possible values of this bit are:

1 Hardware source packet.

This bit reads as 0b1.

SS, byte 0 bits [1:0]

Size. The possible values of this field are:

01 Source packet, 1-byte payload, 2-byte packet.

The value 0b00 encodes a Protocol packet. All other values are reserved. This field reads as 0b01.

F1.2.4 Data Trace PC Value packet

The Data Trace PC Value packet characteristics are:


Purpose Indicates a DWT comparator generated a match, and the address of the instruction that matched. The address might be compressed. However, it is not required that Short and Medium packets are generated when the address bits match.

Attributes Multi-part Hardware source packet comprising:

- 8-bit header.
- 8, 16, or 32-bit payload.

Data Trace PC Value packet header

The Data Trace PC Value packet header bit assignments are:



ID[4:3,0], byte 0 bits [7:6,3]

Hardware Source packet type. Bits [7:3] discriminate between Hardware Source packet types. The possible values of this field are:

01xx0 Data Trace PC Value packet or [Data Trace Match packet](#).

Bit [0] of byte 1 discriminates between the Data Trace PC Value packet and the [Data Trace Match packet](#).

This field reads as 0b010.

CMPN, byte 0 bits [5:4]

DWT comparator index. Defines which comparator generated a match. Data Trace PC Value packets can be compressed relative to the value in [DWT_COMP<n><CMPN>](#). The number of traced bits is indicated by the SS field. The remainder of the address bits comes from [DWT_COMP<n><CMPN>](#). Either comparator in an Instruction Address range comparator pair can be used.

Byte 0 bit [3]

This bit reads as 0b0.

SH, byte 0 bit [2]

Source. The possible values of this bit are:

1 Hardware source packet.

This bit reads as 0b1.

SS, byte 0 bits [1:0]

Size. The possible values of this field are:

01 Short PC Value packet.


10 Medium PC Value packet.

11 Long PC Value packet.


The value 0b00 encodes a Protocol packet.

Data Trace PC Value packet payload


When Long PC Value packet, SS == 0b11, the Data Trace PC Value packet payload bit assignments are:

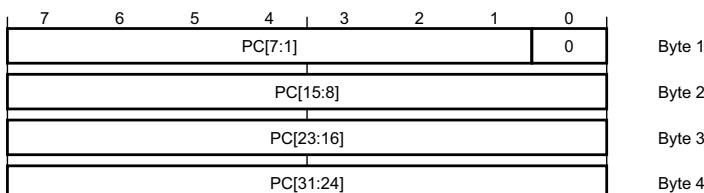

When Medium PC Value packet, SS == 0b10, the Data Trace PC Value packet payload bit assignments are:



When Short PC Value packet, SS == 0b01, the Data Trace PC Value packet payload bit assignments are:



PC[31:1], bytes <4:2>, byte 1 bits [7:1], when Long PC Value packet, SS == 0b11

Instruction address.

PC[15:1], byte <2>, byte 1 bits [7:1], when Medium PC Value packet, SS == 0b10

Instruction address. PC[31:16] == DWT_COMP<n><CMPN>[31:16].

PC[7:1], byte 1 bits [7:1], when Short PC Value packet, SS == 0b01

Instruction address. PC[31:8] == DWT_COMP<n><CMPN>[31:8].

MATCH, byte 1 bit [0]

[Data Trace Match packet](#). Discriminates between the Data Trace PC Value packet and the [Data Trace Match packet](#). The possible values of this bit are:

0 Data Trace PC Value packet.

This bit reads as zero.


F1.2.5 Event Counter packet

The Event Counter packet characteristics are:

Purpose Indicates one or more DWT counters wraps through zero.

Attributes 16-bit Hardware source packet.

The Event Counter packet bit assignments are:

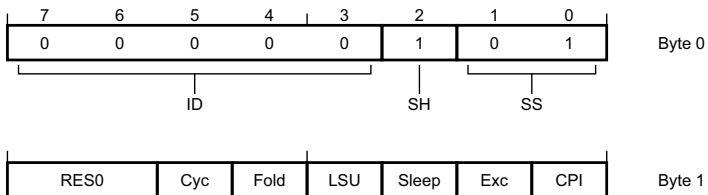

Byte 1 bits [7:6]

Reserved. This field is RES0.

Cyc, byte 1 bit [5]

POSTCNT timer decremented to zero. See [DWT_CTRL](#) for more information on the POSTCNT timer.

Fold, byte 1 bit [4]

[DWT_FOLDCNT](#) counter wrapped from 0xFF to zero.

LSU, byte 1 bit [3]

[DWT_LSUCNT](#) counter wrapped from 0xFF to zero.

Sleep, byte 1 bit [2]

DWT_SLEEP_CNT counter wrapped from 0xFF to zero.

Exc, byte 1 bit [1]

DWT_EXC_CNT counter wrapped from 0xFF to zero.

CPI, byte 1 bit [0]

DWT_CPI_CNT counter wrapped from 0xFF to zero.

ID, byte 0 bits [7:3]

Hardware Source packet type. Bits [7:3] discriminate between Hardware Source packet types. The possible values of this field are:

0b00000 Event Counter packet.

This field reads as 0b00000.

SH, byte 0 bit [2]

Source. The possible values of this bit are:

1 Hardware source packet.

This bit reads as 0b1.

SS, byte 0 bits [1:0]

Size. The possible values of this field are:

01 Source packet, 1-byte payload, 2-byte packet.

The value 0b00 encodes a Protocol packet. All other values are reserved. This field reads as 0b01.


F1.2.6 Exception Trace packet

The Exception Trace packet characteristics are:

Purpose Indicates the PE has entered, exited or returned to an exception.

Attributes 24-bit Hardware source packet.

The Exception Trace packet bit assignments are:

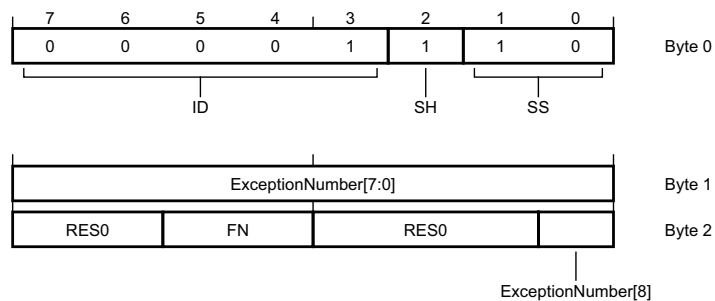

Byte 2 bits [7:6,3:1]

Reserved. This field is RES0.

FN, byte 2 bits [5:4]

Function. The possible values of this field are:

0b01 Entered exception indicated by ExceptionNumber.

0b10 Exited exception indicated by ExceptionNumber.

0b11 Returned to exception indicated by ExceptionNumber.

All other values are reserved.

ExceptionNumber, byte 2 bit [0], byte <1>

The exception number.

ID, byte 0 bits [7:3]

Hardware Source packet type. Bits [7:3] discriminate between Hardware Source packet types. The possible values of this field are:

0b00001 Exception Trace packet.

This field reads as 0b00001.

SH, byte 0 bit [2]

Source. The possible values of this bit are:

1 Hardware source packet.

This bit reads as 0b1.

SS, byte 0 bits [1:0]

Size. The possible values of this field are:

10 Source packet, 2-byte payload, 3-byte packet.

The value 0b00 encodes a Protocol packet. All other values are reserved. This field reads as 0b10.


F1.2.7 Extension packet

The Extension packet characteristics are:


Purpose An Extension packet provides additional information about the identified source. The amount of information required determines the number of payload bytes, 0-4. The architecture only defines one use of the Extension packet, to provide a Stimulus port page number. For this use, SH == 0, and a single byte Extension packet is emitted.

Attributes 8, 16, 24, 32, or 40-bit Protocol packet.


When 1-byte packet, the Extension packet bit assignments are:




When 2-byte packet, the Extension packet bit assignments are:

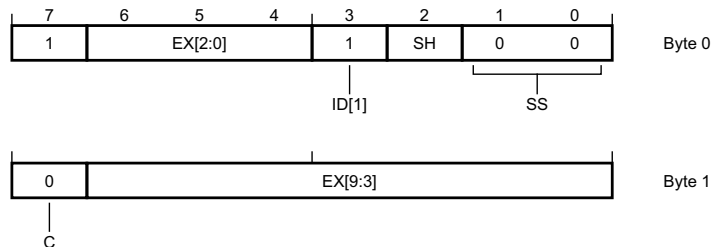


When 3-byte packet, the Extension packet bit assignments are:

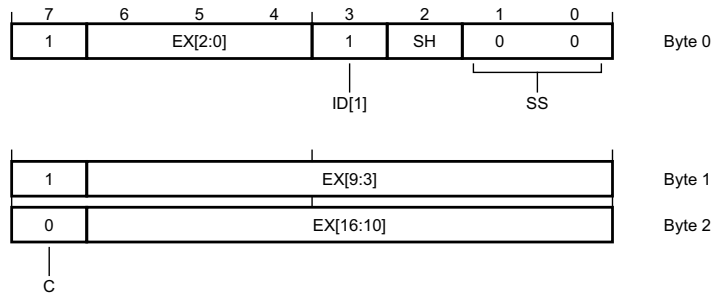

When 4-byte packet, the Extension packet bit assignments are:

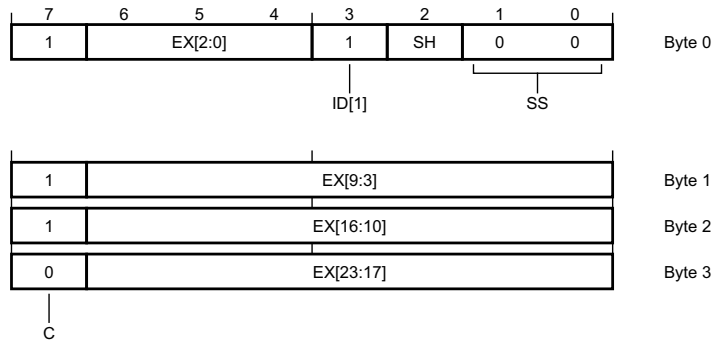

When 5-byte packet, the Extension packet bit assignments are:

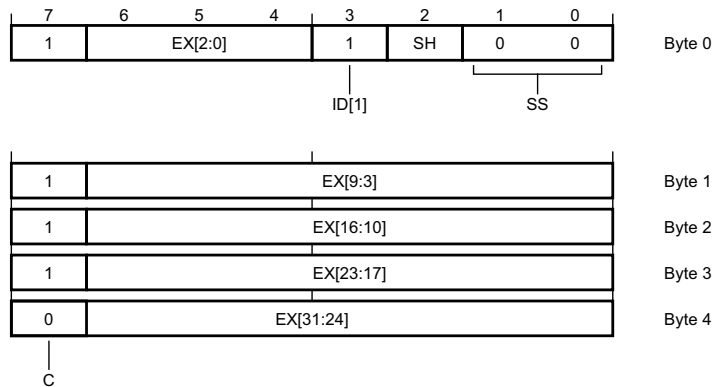

C, byte 4 bit [7]

Continuation bit. This bit reads as zero.

EX[31:3], byte <4>, byte 3 bits [6:0], byte 2 bits [6:0], byte 1 bits [6:0], when 5-byte packet

Extension information.

C, byte 3 bit [7]

Continuation bit. The possible values of this bit are:

- 0 4-byte packet.
- 1 5-byte packet.

EX[23:3], byte 3 bits [6:0], byte 2 bits [6:0], byte 1 bits [6:0], when 4-byte packet

Extension information.

C, byte 2 bit [7]

Continuation bit. The possible values of this bit are:

- 0 3-byte packet.
- 1 At least 4-byte packet.

EX[17:3], byte 2 bits [6:0], byte 1 bits [6:0], when 3-byte packet

Extension information.

C, byte 1 bit [7]

Continuation bit. The possible values of this bit are:

- 0 2-byte packet.
- 1 At least 3-byte packet.

EX[9:3], byte 1 bits [6:0], when 2-byte packet

Extension information.

C, byte 0 bit [7]

Continuation bit. The possible values of this bit are:

- 0 1-byte packet.
- 1 At least 2-byte packet.

EX[2:0], byte 0 bits [6:4]

Extension information.

———— Note ————

If SH == 1, then EX defines PAGE, the Stimulus port page number.

ID[1], byte 0 bit [3]

Protocol packet type. Bits [6:2] discriminate between Protocol packet types. The possible values of this bit are:

- xxx1x Extension packet.

This bit reads as one.

SH, byte 0 bit [2]

Source. The possible values of this bit are:

- 0 Extension packet for [Instrumentation packet](#).
- 1 Extension packet for Hardware source packet.

SS, byte 0 bits [1:0]

Packet type. The possible values of this field are:

- 00 Protocol packet.

Other values encode different sizes of Hardware and Software source packets. This field reads as 0b00.

F1.2.8 Global Timestamp 1 packet


The Global Timestamp 1 packet characteristics are:

Purpose Contains the least significant bits of the global timestamp value. The ITM might compress this value if it is not generating a full timestamp by omitting significant bits if they are unchanged from the previous timestamp value.

- Attributes** Multi-part Protocol packet comprising:
- 8-bit header.
 - 8, 16, 24, or 32-bit payload.

Global Timestamp 1 packet header

The Global Timestamp 1 packet header bit assignments are:



C, byte 0 bit [7]

Continuation bit. This bit reads as one.

ID[4,2:0], byte 0 bits [6,4:2]

Protocol packet type. Bits [6:2] discriminate between Protocol packet types. The possible values of this field are:

0101 Global Timestamp packet.

This field reads as 0b0101.

T, byte 0 bit [5]

Global Timestamp packet type. The possible values of this bit are:

0 Global Timestamp 1 packet.

This bit reads as 0b0.

SS, byte 0 bits [1:0]


Packet type. The possible values of this field are:

00 Protocol packet.


Other values encode different sizes of Hardware and Software source packets. This field reads as 0b00.

Global Timestamp 1 packet payload


When 7-bit timestamp, the Global Timestamp 1 packet payload bit assignments are:




When 14-bit timestamp, the Global Timestamp 1 packet payload bit assignments are:

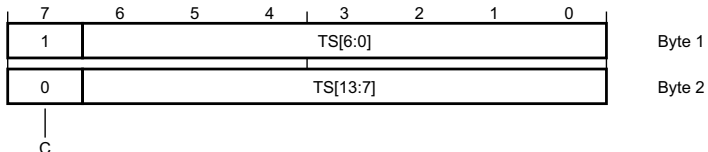

When 21-bit timestamp, the Global Timestamp 1 packet payload bit assignments are:

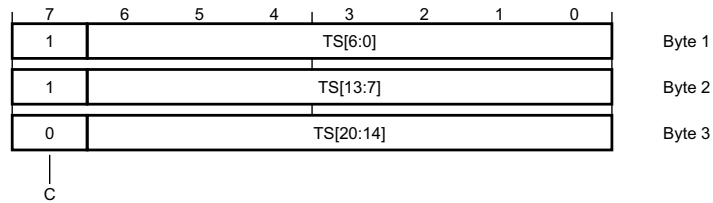

When 26-bit or full timestamp, the Global Timestamp 1 packet payload bit assignments are:

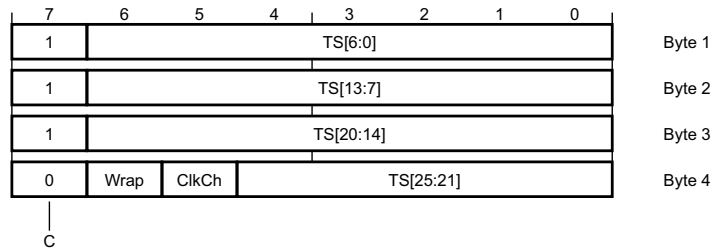

C, byte 4 bit [7]

Continuation bit. This bit reads as zero.

Wrap, byte 4 bit [6], when 26-bit or full timestamp

Wrapped. The possible values of this bit are:

- 0 The value of global timestamp bits TS[47:26] or TS[63:26] have not changed since the last [Global Timestamp 2 packet](#) output by the ITM.
- 1 The value of global timestamp bits TS[47:26] or TS[63:26] have changed since the last [Global Timestamp 2 packet](#) output by the ITM.

ClkCh, byte 4 bit [5], when 26-bit or full timestamp

Clock change. The possible values of this bit are:

- 0 The system has not asserted the clock change input to the processor since the last time the ITM generated a Global Timestamp packet.
- 1 The system has asserted the clock change input to the processor since the last time the ITM generated a Global Timestamp packet.

Note

When the clock change input to the processor is asserted, the ITM must output a full 48-bit or 64-bit global timestamp value.

TS[25:0], byte 4 bits [4:0], byte 3 bits [6:0], byte 2 bits [6:0], byte 1 bits [6:0], when 26-bit or full timestamp

Global Timestamp.

C, byte 3 bit [7]

Continuation bit. The possible values of this bit are:

- 0 21-bit timestamp.
- 1 26-bit or full timestamp.

TS[20:0], byte 3 bits [6:0], byte 2 bits [6:0], byte 1 bits [6:0], when 21-bit timestamp

Global Timestamp. TS[47:21] or TS[63:21] are unchanged.

C, byte 2 bit [7]

Continuation bit. The possible values of this bit are:

- 0 14-bit timestamp.
- 1 At least 21-bit timestamp.

TS[13:0], byte 2 bits [6:0], byte 1 bits [6:0], when 14-bit timestamp

Global Timestamp. TS[47:14] or TS[63:14] are unchanged.

C, byte 1 bit [7]

Continuation bit. The possible values of this bit are:

- 0 7-bit timestamp.
- 1 At least 14-bit timestamp.

TS[6:0], byte 1 bits [6:0], when 7-bit timestamp

Global Timestamp. TS[47:7] or TS[63:7] are unchanged.

F1.2.9 Global Timestamp 2 packet

The Global Timestamp 2 packet characteristics are:


Purpose Provides the most significant bits of a full 48 or 64-bit timestamp.

Attributes Multi-part Protocol packet comprising:

- 8-bit header.
- 32 or 48-bit payload.

Global Timestamp 2 packet header

The Global Timestamp 2 packet header bit assignments are:



C, byte 0 bit [7]

Continuation bit. This bit reads as one.

ID[4,2:0], byte 0 bits [6,4:2]

Protocol packet type. Bits [6:2] discriminate between Protocol packet types. The possible values of this field are:

0x101 Global Timestamp packet.

This field reads as 0b0101.

T, byte 0 bit [5]

Global Timestamp packet type. The possible values of this bit are:

1 Global Timestamp 2 packet.

This bit reads as 0b1.

SS, byte 0 bits [1:0]


Packet type. The possible values of this field are:

00 Protocol packet.


Other values encode different sizes of Hardware and Software source packets. This field reads as 0b00.

Global Timestamp 2 packet payload

When 48-bit Global Timestamp 2 packet, the Global Timestamp 2 packet payload bit assignments are:

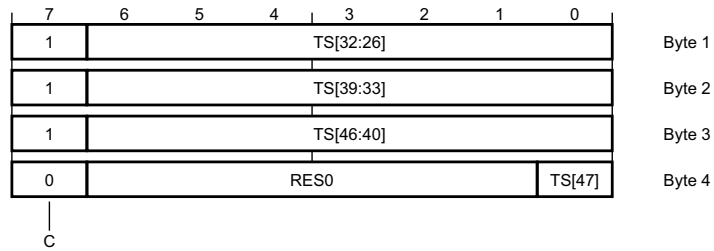

When 64-bit Global Timestamp 2 packet, the Global Timestamp 2 packet payload bit assignments are:

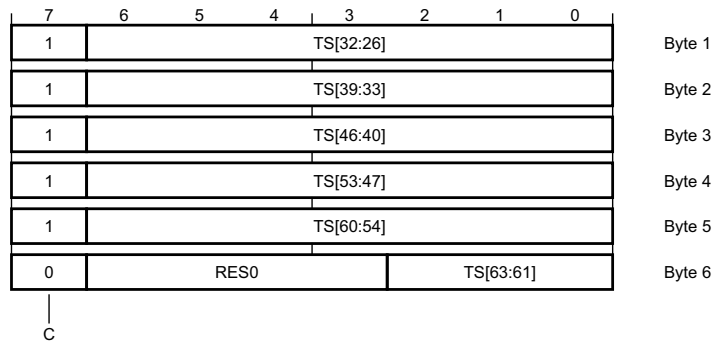

C, byte 6 bit [7]

Continuation bit. This bit reads as zero.

Byte 6 bits [6:3], when 64-bit Global Timestamp 2 packet

Reserved. This field is RES0.

TS[63:26], byte 6 bits [2:0], byte 5 bits [6:0], byte 4 bits [6:0], byte 3 bits [6:0], byte 2 bits [6:0], byte 1 bits [6:0], when 64-bit Global Timestamp 2 packet

Most significant bits of the Global Timestamp.

Byte 5 bit [7], byte 3 bit [7], byte 2 bit [7], byte 1 bit [7]

Continuation bits. This field is RAO.

C, byte 4 bit [7]

Continuation bit. The possible values of this bit are:

- 0 The packet is 5 bytes long. 48-bit timestamp is implemented.
- 1 The packet is 7 bytes long. 64-bit timestamp is implemented.

Byte 4 bits [6:1], when 48-bit Global Timestamp 2 packet

Reserved. This field is RES0.

TS[47:26], byte 4 bit [0], byte 3 bits [6:0], byte 2 bits [6:0], byte 1 bits [6:0], when 48-bit Global Timestamp 2 packet

Most significant bits of the Global Timestamp.

F1.2.10 Instrumentation packet

The Instrumentation packet characteristics are:


Purpose A software write to an ITM stimulus port generates an Instrumentation packet.

Attributes Multi-part Software source packet comprising:

- 8-bit header.
- 8, 16, or 32-bit payload.

Instrumentation packet header

The Instrumentation packet header bit assignments are:



A, byte 0 bits [7:3]

Port number, 0-31.

SH, byte 0 bit [2]

Source. The possible values of this bit are:

0 Instrumentation packet (Software source).

This bit reads as 0b0.

SS, byte 0 bits [1:0]

Size. The possible values of this field are:

01 Byte Instrumentation packet.


10 Halfword Instrumentation packet.

11 Word Instrumentation packet.


The value 0b00 encodes a Protocol packet.

Instrumentation packet payload


When Byte Instrumentation packet, SS == 0b01, the Instrumentation packet payload bit assignments are:



When Halfword Instrumentation packet, SS == 0b10, the Instrumentation packet payload bit assignments are:



When Word Instrumentation packet, SS == 0b11, the Instrumentation packet payload bit assignments are:

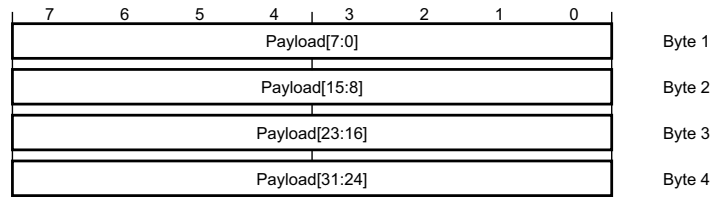

Payload[31:0], bytes <4:1>, when Word Instrumentation packet, SS == 0b11

Payload value.

Payload[15:0], byte 1 bits [15:0], when Halfword Instrumentation packet, SS == 0b10

Payload value.

Payload[7:0], byte <1>, when Byte Instrumentation packet, SS == 0b01

Payload value.

F1.2.11 Local Timestamp 1 packet

The Local Timestamp 1 packet characteristics are:

Purpose A Local Timestamp 1 packet encodes timestamp information, for generic control and synchronization, based on a timestamp counter in the ITM. To reduce the trace bandwidth:

- The local timestamping scheme uses delta timestamps, meaning each local timestamp value gives the interval since the generation of the previous Local timestamp packet.
- The Local timestamp packet length, 1-5 bytes, depends on the required timestamp value.


Whenever the ITM outputs a Local timestamp packet, it clears its timestamp counter to zero. Provides the most significant bits of a full 48 or 64-bit timestamp. If the ITM outputs the Local Timestamp synchronously to the corresponding ITM or DWT data, and the required timestamp value is in the range 1-6, it uses the [Local Timestamp 2 packet](#).

Attributes Multi-part Protocol packet comprising:

- 8-bit header.
- 8, 16, 24, or 32-bit payload.

Local Timestamp 1 packet header

The Local Timestamp 1 packet header bit assignments are:



C, byte 0 bit [7]

Continuation bit. This bit reads as one.

ID[4,1:0], byte 0 bits [6,3:2]

Protocol packet type. Bits [6:2] discriminate between Protocol packet types. The possible values of this field are:

1xx00 Local Timestamp 1 packet.

This field reads as 0b100.

TC, byte 0 bits [5:4]

Indicates the relationship between the generation of the Local timestamp packet and the corresponding ITM or DWT data packet. The possible values of this field are:

- 00 The local timestamp value is synchronous to the corresponding ITM or DWT data. The value in the TS field is the timestamp counter value when the ITM or DWT packet is generated.
- 01 The local timestamp value is delayed relative to the ITM or DWT data. The value in the TS field is the timestamp counter value when the Local timestamp packet is generated.

———— **Note** —————

The local timestamp value corresponding to the previous ITM or DWT packet is UNKNOWN, but must be between the previous and current local timestamp values.

- 10 Output of the ITM or DWT packet corresponding to this Local timestamp packet is delayed relative to the associated event. The value in the TS field is the timestamp counter value when the ITM or DWT packets is generated. This encoding indicates that the ITM or DWT packet was delayed relative to other trace output packets.
- 11 Output of the ITM or DWT packet corresponding to this Local timestamp packet is delayed relative to the associated event, and this Local timestamp packet is delayed relative to the ITM or DWT data. This is a combination of the conditions indicated by values 0b01 and 0b10.

SS, byte 0 bits [1:0]


Packet type. The possible values of this field are:

- 00 Protocol packet.


Other values encode different sizes of Hardware and Software source packets. This field reads as 0b00.

Local Timestamp 1 packet payload


When 7-bit timestamp, the Local Timestamp 1 packet payload bit assignments are:




When 14-bit timestamp, the Local Timestamp 1 packet payload bit assignments are:

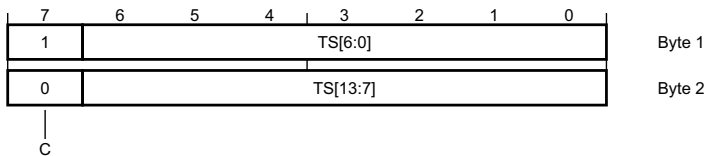

When 21-bit timestamp, the Local Timestamp 1 packet payload bit assignments are:

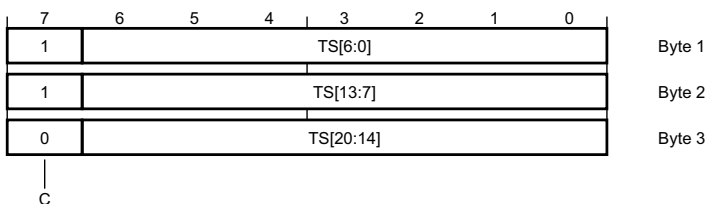

When 28-bit timestamp, the Local Timestamp 1 packet payload bit assignments are:

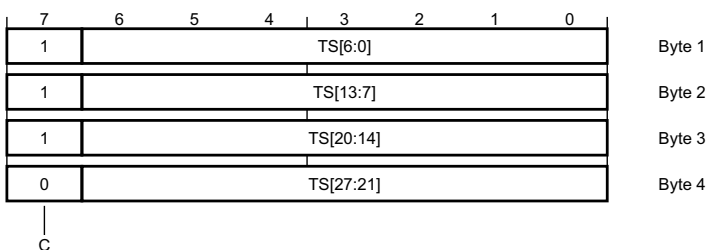

C, byte 4 bit [7]

Continuation bit. This bit reads as zero.

TS[27:0], byte 4 bits [6:0], byte 3 bits [6:0], byte 2 bits [6:0], byte 1 bits [6:0], when 28-bit timestamp

Local Timestamp.

C, byte 3 bit [7]

Continuation bit. The possible values of this bit are:

- 0 21-bit timestamp.
- 1 28-bit timestamp.

TS[20:0], byte 3 bits [6:0], byte 2 bits [6:0], byte 1 bits [6:0], when 21-bit timestamp

Local Timestamp. TS[27:21] are zero.

C, byte 2 bit [7]

Continuation bit. The possible values of this bit are:

- 0 14-bit timestamp.
- 1 At least 21-bit timestamp.

TS[13:0], byte 2 bits [6:0], byte 1 bits [6:0], when 14-bit timestamp

Local Timestamp. TS[27:14] are zero.

C, byte 1 bit [7]

Continuation bit. The possible values of this bit are:

- 0 7-bit timestamp.
- 1 At least 14-bit timestamp.

TS[6:0], byte 1 bits [6:0], when 7-bit timestamp


Local Timestamp. TS[27:7] are zero.

F1.2.12 Local Timestamp 2 packet

The Local Timestamp 2 packet characteristics are:

- Purpose** If the ITM outputs the Local Timestamp synchronously to the corresponding ITM or DWT data, and the required timestamp value is in the range 1-6, it uses the Local Timestamp 2 packet. For more information, see [Local Timestamp 1 packet](#).
- Attributes** 8-bit Protocol packet.

The Local Timestamp 2 packet bit assignments are:



C, byte 0 bit [7]

Continuation bit. This bit reads as zero.

TS, byte 0 bits [6:4]

Local timestamp value, in the range 0b001 to 0b110. The value 0b000 encodes a [Synchronization packet](#) and the value 0b111 encodes an [Overflow packet](#).

ID[1:0], byte 0 bits [3:2]

Protocol packet type. Bits [6:2] discriminate between Protocol packet types. The possible values of this field are:

xxx00 Local Timestamp 2 packet.

This field reads as 0b00.

SS, byte 0 bits [1:0]

Packet type. The possible values of this field are:

00 Protocol packet.

Other values encode different sizes of Hardware and Software source packets. This field reads as 0b00.

F1.2.13 Overflow packet

The Overflow packet characteristics are:

Purpose

The ITM outputs an Overflow packet if:


- Software writes to a Stimulus Port register when the stimulus port output buffer is full.
- The DWT attempts to generate a Hardware source packet when the DWT output buffer is full.
- The Local timestamp counter overflows.

The Overflow packet comprises a header with no payload.

Attributes

8-bit Protocol packet.

The Overflow packet bit assignments are:



C, byte 0 bit [7]

Continuation bit. This bit reads as zero.

ID, byte 0 bits [6:2]

Protocol packet type. Bits [6:2] discriminate between Protocol packet types. The possible values of this field are:

11100 Overflow packet.

This field reads as 0b11100.

SS, byte 0 bits [1:0]

Packet type. The possible values of this field are:

00 Protocol packet.

Other values encode different sizes of Hardware and Software source packets. This field reads as 0b00.

F1.2.14 Periodic PC Sample packet

The Periodic PC Sample packet characteristics are:


Purpose The DWT unit generates PC samples at fixed time intervals, with an accuracy of one clock cycle. The POSTCNT counter period determines the PC sampling interval. Software configures the DWT_CTRL.CYCTAP and DWT_CTRL.POSTINIT fields to determine how POSTCNT relates to DWT_CYCCNT. The DWT_CTRL.PCSAMPLENA bit enables PC sampling.

Attributes Multi-part Hardware source packet comprising:

- 8-bit header.
- 8 or 32-bit payload.

Periodic PC Sample packet header

The Periodic PC Sample packet header bit assignments are:



ID, byte 0 bits [7:3]

Discriminator ID. The possible values of this field are:

0b00010 Periodic PC Sample packet.

This field reads as 0b00010.

SH, byte 0 bit [2]

Source. The possible values of this bit are:

1 Hardware source packet.

This bit reads as 0b1.

SS, byte 0 bits [1:0]

Size. The possible values of this field are:

01 Source packet, 1-byte payload, 2-byte packet.

11 Source packet, 4-byte payload, 5-byte packet.


SS == 0b10 is invalid for a Periodic PC Sample packet.

The value 0b00 encodes a Protocol packet.


This field reads as 0bx1.

Periodic PC Sample packet payload


When Allowed and not sleeping, $SS == 0b11$, the Periodic PC Sample packet payload bit assignments are:

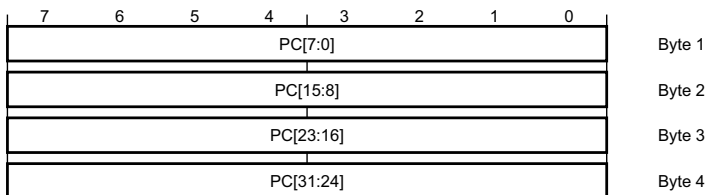

When Allowed and sleeping, $SS == 0b01$, the Periodic PC Sample packet payload bit assignments are:



When Prohibited, $SS == 0b01$, the Periodic PC Sample packet payload bit assignments are:



PC, bytes <4:1>, when Allowed and not sleeping, $SS == 0b11$

Periodic PC sample value.

Byte <1>, when Allowed and sleeping, $SS == 0b01$

This field reads as 0b00000000.

Byte <1>, when Prohibited, $SS == 0b01$

This field reads as 0b11111111.


F1.2.15 Synchronization packet

The Synchronization packet characteristics are:

Purpose A Synchronization packet provides a unique pattern in the bit stream. Trace capture hardware can identify this pattern and use it to identify the alignment of packet bytes in the bitstream.

Attributes 48-bit Protocol packet.
 A Synchronization packet is at least forty-seven 0 bits followed by single 1 bit. This section describes the smallest possible Synchronization packet.

The Synchronization packet bit assignments are:

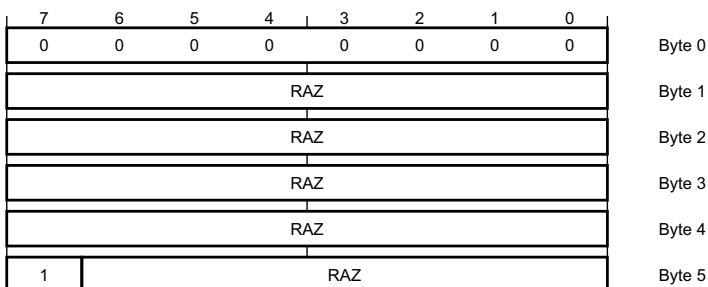

Byte 5 bit [7]

Indicates the end of the Synchronization packet. This bit reads as one.

Byte 5 bits [6:0], bytes <4:1>

This field is RAZ.

Byte <0>

This field reads as 0b00000000.