



# **AMD64 Technology**

## **AMD64 Architecture**

### **Programmer's Manual**

#### **Volume 4:**

#### **128-Bit Media Instructions**

Publication No.	Revision	Date
<b>26568</b>	<b>3.04</b>	<b>April 2003</b>

© 2002, 2003 Advanced Micro Devices, Inc. All rights reserved.

The contents of this document are provided in connection with Advanced Micro Devices, Inc. ("AMD") products. AMD makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this publication. Except as set forth in AMD's Standard Terms and Conditions of Sale, AMD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.

AMD's products are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or in any other application in which the failure of AMD's product could create a situation where personal injury, death, or severe property or environmental damage may occur. AMD reserves the right to discontinue or make changes to its products at any time without notice.

**Trademarks**

AMD, the AMD arrow logo, AMD Athlon, AMD Duron, and combinations thereof, and 3DNow! are trademarks, and Am486, Am5<sup>x</sup>86, and AMD-K6 are registered trademarks of Advanced Micro Devices, Inc.

MMX is a trademark and Pentium is a registered trademark of Intel Corporation.

Windows NT is a registered trademark of Microsoft Corporation.

Other product names used in this publication are for identification purposes only and may be trademarks of their respective companies.

---

# Contents

---

<b>Figures</b> .....	<b>vii</b>
<b>Tables</b> .....	<b>ix</b>
<b>Revision History</b> .....	<b>xi</b>
<b>Preface</b> .....	<b>xiii</b>
About This Book .....	xiii
Audience .....	xiii
Contact Information .....	xiii
Organization .....	xiii
Definitions .....	xiv
Related Documents .....	xxv
<b>1 128-Bit Media Instruction Reference</b> .....	<b>1</b>
ADDPD .....	4
ADDPS .....	7
ADDSD .....	10
ADDSS .....	12
ANDNPD .....	15
ANDNPS .....	17
ANDPD .....	19
ANDPS .....	21
CMPPD .....	23
CMPPS .....	27
CMPSD .....	30
CMPSS .....	33
COMISD .....	36
COMISS .....	39
CVTDQ2PD .....	42
CVTDQ2PS .....	44
CVTPD2DQ .....	46
CVTPD2PI .....	49
CVTPD2PS .....	52
CVTPI2PD .....	55
CVTPI2PS .....	57
CVTPS2DQ .....	59
CVTPS2PD .....	62
CVTPS2PI .....	64
CVTSD2SI .....	67
CVTSD2SS .....	70
CVTSI2SD .....	73
CVTSI2SS .....	76
CVTSS2SD .....	79

CVTSS2SI	81
CVTTPD2DQ	84
CVTTPD2PI	87
CVTTPS2DQ	90
CVTTPS2PI	93
CVTTSD2SI	96
CVTTSS2SI	99
DIVPD	102
DIVPS	105
DIVSD	108
DIVSS	110
FXRSTOR	113
FXSAVE	115
LDMXCSR	117
MASKMOVDQU	119
MAXPD	121
MAXPS	123
MAXSD	126
MAXSS	128
MINPD	130
MINPS	132
MINSD	135
MINSS	137
MOVAPD	139
MOVAPS	141
MOVD	144
MOVDQ2Q	147
MOVDQA	149
MOVDQU	151
MOVHLPS	153
MOVHPD	155
MOVHPS	157
MOVLHPS	159
MOVLPD	161
MOVLPS	163
MOVMSKPD	165
MOVMSKPS	167
MOVNTDQ	169
MOVNTPD	171
MOVNTPS	173
MOVQ	175
MOVQ2DQ	177
MOVSD	179
MOVSS	182
MOVUPD	185
MOVUPS	187
MULPD	189

MULPS	192
MULSD	195
MULSS	198
ORPD	201
ORPS	203
PACKSSDW	205
PACKSSWB	207
PACKUSWB	209
PADDB	211
PADDD	213
PADDQ	215
PADDSB	217
PADDSW	219
PADDUSB	221
PADDUSW	223
PADDW	225
PAND	227
PANDN	229
PAVGB	231
PAVGW	233
PCMPEQB	235
PCMPEQD	237
PCMPEQW	239
PCMPGTB	241
PCMPGTD	243
PCMPGTW	245
PEXTRW	247
PINSRW	249
PMADDWD	252
PMAXSW	254
PMAXUB	256
PMINSW	258
PMINUB	260
PMOVMSKB	262
PMULHUW	264
PMULHW	266
PMULLW	268
PMULUDQ	270
POR	272
PSADBW	274
PSHUFD	276
PSHUFHW	279
PSHUFLW	282
PSLLD	285
PSLLDQ	287
PSLLQ	289
PSLLW	291

PSRAD	293
PSRAW	296
PSRLD	299
PSRLDQ	301
PSRLQ	303
PSRLW	305
PSUBB	308
PSUBD	310
PSUBQ	312
PSUBSB	314
PSUBSW	316
PSUBUSB	318
PSUBUSW	320
PSUBW	322
PUNPCKHBW	324
PUNPCKHDQ	326
PUNPCKHQDQ	328
PUNPCKHWD	330
PUNPCKLBW	332
PUNPCKLDQ	334
PUNPCKLQDQ	336
PUNPCKLWD	338
PXOR	340
RCPPS	342
RCPSS	344
RSQRTPS	346
RSQRTSS	348
SHUFPD	350
SHUFPS	353
SQRTPD	356
SQRTPS	359
SQRTSD	362
SQRTSS	364
STMXCSR	367
SUBPD	369
SUBPS	372
SUBSD	375
SUBSS	378
UCOMISD	381
UCOMISS	384
UNPCKHPD	387
UNPCKHPS	389
UNPCKLPD	391
UNPCKLPS	393
XORPD	395
XORPS	397
<b>Index</b>	<b>399</b>

---

## Figures

---

Figure 1-1. Diagram Conventions for 128-Bit Media Instructions . . . . . 2





## Tables

---

Table 1-1.	Immediate Operand Values for Compare Operations . . . . .	24
Table 1-2.	Immediate-Byte Operand Encoding for 128-Bit PEXTRW . . .	247
Table 1-3.	Immediate-Byte Operand Encoding for 128-Bit PINSRW . . .	250
Table 1-4.	Immediate-Byte Operand Encoding for PSHUFD . . . . .	277
Table 1-5.	Immediate-Byte Operand Encoding for PSHUFHW . . . . .	280
Table 1-6.	Immediate-Byte Operand Encoding for PSHUFLW . . . . .	283
Table 1-7.	Immediate-Byte Operand Encoding for SHUFPD . . . . .	351
Table 1-8.	Immediate-Byte Operand Encoding for SHUFPS . . . . .	354



## Revision History

---

Date	Revision	Description
April 2003	3.04	Made minor corrections.



## Preface

---

### About This Book

This book is part of a multivolume work entitled the *AMD64 Architecture Programmer's Manual*. This table lists each volume and its order number.

Title	Order No.
Volume 1, <i>Application Programming</i>	24592
Volume 2, <i>System Programming</i>	24593
Volume 3, <i>General-Purpose and System Instructions</i>	24594
Volume 4, <i>128-Bit Media Instructions</i>	26568
Volume 5, <i>64-Bit Media and x87 Floating-Point Instructions</i>	26569

### Audience

This volume (Volume 4) is intended for all programmers writing application or system software for processors that implement the AMD64 architecture.

### Contact Information

To submit questions or comments concerning this document, contact our technical documentation staff at [AMD64.Feedback@amd.com](mailto:AMD64.Feedback@amd.com).

### Organization

Volumes 3, 4, and 5 describe the AMD64 architecture's instruction set in detail. Together, they cover each instruction's mnemonic syntax, opcodes, functions, affected flags, and possible exceptions.

The AMD64 instruction set is divided into five subsets:

- General-purpose instructions
- System instructions
- 128-bit media instructions

- 64-bit media instructions
- x87 floating-point instructions

Several instructions belong to—and are described identically in—multiple instruction subsets.

This volume describes the 128-bit media instructions. The index at the end cross-references topics within this volume. For other topics relating to the AMD64 architecture, and for information on instructions in other subsets, see the tables of contents and indexes of the other volumes.

## Definitions

Many of the following definitions assume an in-depth knowledge of the legacy x86 architecture. See “Related Documents” on page xxv for descriptions of the legacy x86 architecture.

## Terms and Notation

In addition to the notation described below, “Opcode-Syntax Notation” in Volume 3 describes notation relating specifically to opcodes.

### *1011b*

A binary value—in this example, a 4-bit value.

### *F0EAh*

A hexadecimal value—in this example a 2-byte value.

### *[1,2)*

A range that includes the left-most value (in this case, 1) but excludes the right-most value (in this case, 2).

### *7–4*

A bit range, from bit 7 to 4, inclusive. The high-order bit is shown first.

### *128-bit media instructions*

Instructions that use the 128-bit XMM registers. These are a combination of the SSE and SSE2 instruction sets.

### *64-bit media instructions*

Instructions that use the 64-bit MMX™ registers. These are primarily a combination of MMX and 3DNow!™ instruction

sets, with some additional instructions from the SSE and SSE2 instruction sets.

*16-bit mode*

Legacy mode or compatibility mode in which a 16-bit address size is active. See *legacy mode* and *compatibility mode*.

*32-bit mode*

Legacy mode or compatibility mode in which a 32-bit address size is active. See *legacy mode* and *compatibility mode*.

*64-bit mode*

A submode of *long mode*. In 64-bit mode, the default address size is 64 bits and new features, such as register extensions, are supported for system and application software.

*#GP(0)*

Notation indicating a general-protection exception (#GP) with error code of 0.

*absolute*

Said of a displacement that references the base of a code segment rather than an instruction pointer. Contrast with *relative*.

*biased exponent*

The sum of a floating-point value's exponent and a constant bias for a particular floating-point data type. The bias makes the range of the biased exponent always positive, which allows reciprocation without overflow.

*byte*

Eight bits.

*clear*

To write a bit value of 0. Compare *set*.

*compatibility mode*

A submode of *long mode*. In compatibility mode, the default address size is 32 bits, and legacy 16-bit and 32-bit applications run without modification.

*commit*

To irreversibly write, in program order, an instruction's result to software-visible storage, such as a register (including flags), the data cache, an internal write buffer, or memory.

*CPL*

Current privilege level.

*CR0–CR4*

A register range, from register CR0 through CR4, inclusive, with the low-order register first.

*CR0.PE = 1*

Notation indicating that the PE bit of the CR0 register has a value of 1.

*direct*

Referencing a memory location whose address is included in the instruction's syntax as an immediate operand. The address may be an absolute or relative address. Compare *indirect*.

*dirty data*

Data held in the processor's caches or internal buffers that is more recent than the copy held in main memory.

*displacement*

A signed value that is added to the base of a segment (absolute addressing) or an instruction pointer (relative addressing). Same as *offset*.

*doubleword*

Two words, or four bytes, or 32 bits.

*double quadword*

Eight words, or 16 bytes, or 128 bits. Also called *octword*.

*DS:rSI*

The contents of a memory location whose segment address is in the DS register and whose offset relative to that segment is in the rSI register.



*EFER.LME = 0*

Notation indicating that the LME bit of the EFER register has a value of 0.

*effective address size*

The address size for the current instruction after accounting for the default address size and any address-size override prefix.

*effective operand size*

The operand size for the current instruction after accounting for the default operand size and any operand-size override prefix.

*element*

See *vector*.

*exception*

An abnormal condition that occurs as the result of executing an instruction. The processor's response to an exception depends on the type of the exception. For all exceptions except 128-bit media SIMD floating-point exceptions and x87 floating-point exceptions, control is transferred to the handler (or service routine) for that exception, as defined by the exception's vector. For floating-point exceptions defined by the IEEE 754 standard, there are both masked and unmasked responses. When unmasked, the exception handler is called, and when masked, a default response is provided instead of calling the handler.

*FF /0*

Notation indicating that FF is the first byte of an opcode, and a subfield in the second byte has a value of 0.

*flush*

An often ambiguous term meaning (1) writeback, if modified, and invalidate, as in “flush the cache line,” or (2) invalidate, as in “flush the pipeline,” or (3) change a value, as in “flush to zero.”

*GDT*

Global descriptor table.

*IDT*

Interrupt descriptor table.

**IGN**

Ignore. Field is ignored.

**indirect**

Referencing a memory location whose address is in a register or other memory location. The address may be an absolute or relative address. Compare *direct*.

**IRB**

The virtual-8086 mode interrupt-redirection bitmap.

**IST**

The long-mode interrupt-stack table.

**IVT**

The real-address mode interrupt-vector table.

**LDT**

Local descriptor table.

**legacy x86**

The legacy x86 architecture. See “Related Documents” on page xxv for descriptions of the legacy x86 architecture.

**legacy mode**

An operating mode of the AMD64 architecture in which existing 16-bit and 32-bit applications and operating systems run without modification. A processor implementation of the AMD64 architecture can run in either *long mode* or *legacy mode*. Legacy mode has three submodes, *real mode*, *protected mode*, and *virtual-8086 mode*.

**long mode**

An operating mode unique to the AMD64 architecture. A processor implementation of the AMD64 architecture can run in either *long mode* or *legacy mode*. Long mode has two submodes, *64-bit mode* and *compatibility mode*.

**lsb**

Least-significant bit.

**LSB**

Least-significant byte.

*main memory*

Physical memory, such as RAM and ROM (but not cache memory) that is installed in a particular computer system.

*mask*

(1) A control bit that prevents the occurrence of a floating-point exception from invoking an exception-handling routine. (2) A field of bits used for a control purpose.

*MBZ*

Must be zero. If software attempts to set an MBZ bit to 1, a general-protection exception (#GP) occurs.

*memory*

Unless otherwise specified, *main memory*.

*ModRM*

A byte following an instruction opcode that specifies address calculation based on mode (Mod), register (R), and memory (M) variables.

*moffset*

A direct memory offset. In other words, a displacement that is added to the base of a code segment (for absolute addressing) or to an instruction pointer (for addressing relative to the instruction pointer, as in RIP-relative addressing).

*msb*

Most-significant bit.

*MSB*

Most-significant byte.

*multimedia instructions*

A combination of *128-bit media instructions* and *64-bit media instructions*.

*octword*

Same as *double quadword*.

*offset*

Same as *displacement*.

*overflow*

The condition in which a floating-point number is larger in magnitude than the largest, finite, positive or negative number that can be represented in the data-type format being used.

*packed*

See *vector*.

*PAE*

Physical-address extensions.

*physical memory*

Actual memory, consisting of *main memory* and cache.

*probe*

A check for an address in a processor's caches or internal buffers. *External probes* originate outside the processor, and *internal probes* originate within the processor.

*protected mode*

A submode of *legacy mode*.

*quadword*

Four words, or eight bytes, or 64 bits.

*RAZ*

Read as zero (0), regardless of what is written.

*real-address mode*

See *real mode*.

*real mode*

A short name for *real-address mode*, a submode of *legacy mode*.

*relative*

Referencing with a displacement (also called offset) from an instruction pointer rather than the base of a code segment. Contrast with *absolute*.

*REX*

An instruction prefix that specifies a 64-bit operand size and provides access to additional registers.

*RIP-relative addressing*

Addressing relative to the 64-bit RIP instruction pointer. Compare *moffset*.

*set*

To write a bit value of 1. Compare *clear*.

*SIB*

A byte following an instruction opcode that specifies address calculation based on scale (S), index (I), and base (B).

*SIMD*

Single instruction, multiple data. See *vector*.

*SSE*

Streaming SIMD extensions instruction set. See *128-bit media instructions* and *64-bit media instructions*.

*SSE2*

Extensions to the SSE instruction set. See *128-bit media instructions* and *64-bit media instructions*.

*sticky bit*

A bit that is set or cleared by hardware and that remains in that state until explicitly changed by software.

*TOP*

The x87 top-of-stack pointer.

*TPR*

Task-priority register (CR8).

*TSS*

Task-state segment.

*underflow*

The condition in which a floating-point number is smaller in magnitude than the smallest nonzero, positive or negative number that can be represented in the data-type format being used.

*vector*

(1) A set of integer or floating-point values, called *elements*, that are packed into a single operand. Most of the 128-bit

and 64-bit media instructions use vectors as operands. Vectors are also called *packed* or *SIMD* (single-instruction multiple-data) operands.

(2) An index into an interrupt descriptor table (IDT), used to access exception handlers. Compare *exception*.

#### *virtual-8086 mode*

A submode of *legacy mode*.

#### *word*

Two bytes, or 16 bits.

#### *x86*

See *legacy x86*.

## Registers

In the following list of registers, the names are used to refer either to a given register or to the contents of that register:

#### *AH–DH*

The high 8-bit AH, BH, CH, and DH registers. Compare *AL–DL*.

#### *AL–DL*

The low 8-bit AL, BL, CL, and DL registers. Compare *AH–DH*.

#### *AL–r15B*

The low 8-bit AL, BL, CL, DL, SIL, DIL, BPL, SPL, and R8B–R15B registers, available in 64-bit mode.

#### *BP*

Base pointer register.

#### *CR<sub>n</sub>*

Control register number *n*.

#### *CS*

Code segment register.

#### *eAX–eSP*

The 16-bit AX, BX, CX, DX, DI, SI, BP, and SP registers or the 32-bit EAX, EBX, ECX, EDX, EDI, ESI, EBP, and ESP registers. Compare *rAX–rSP*.

#### *EBP*

Extended base pointer register.

*EFER*

Extended features enable register.

*eFLAGS*

16-bit or 32-bit flags register. Compare *rFLAGS*.

*EFLAGS*

32-bit (extended) flags register.

*eIP*

16-bit or 32-bit instruction-pointer register. Compare *rIP*.

*EIP*

32-bit (extended) instruction-pointer register.

*FLAGS*

16-bit flags register.

*GDTR*

Global descriptor table register.

*GPRs*

General-purpose registers. For the 16-bit data size, these are AX, BX, CX, DX, DI, SI, BP, and SP. For the 32-bit data size, these are EAX, EBX, ECX, EDX, EDI, ESI, EBP, and ESP. For the 64-bit data size, these include RAX, RBX, RCX, RDX, RDI, RSI, RBP, RSP, and R8–R15.

*IDTR*

Interrupt descriptor table register.

*IP*

16-bit instruction-pointer register.

*LDTR*

Local descriptor table register.

*MSR*

Model-specific register.

*r8–r15*

The 8-bit R8B–R15B registers, or the 16-bit R8W–R15W registers, or the 32-bit R8D–R15D registers, or the 64-bit R8–R15 registers.

*rAX–rSP*

The 16-bit AX, BX, CX, DX, DI, SI, BP, and SP registers, or the 32-bit EAX, EBX, ECX, EDX, EDI, ESI, EBP, and ESP registers, or the 64-bit RAX, RBX, RCX, RDX, RDI, RSI, RBP, and RSP registers. Replace the placeholder *r* with nothing for 16-bit size, “E” for 32-bit size, or “R” for 64-bit size.

*RAX*

64-bit version of the EAX register.

*RBP*

64-bit version of the EBP register.

*RBX*

64-bit version of the EBX register.

*RCX*

64-bit version of the ECX register.

*RDI*

64-bit version of the EDI register.

*RDX*

64-bit version of the EDX register.

*rFLAGS*

16-bit, 32-bit, or 64-bit flags register. Compare *RFLAGS*.

*RFLAGS*

64-bit flags register. Compare *rFLAGS*.

*rIP*

16-bit, 32-bit, or 64-bit instruction-pointer register. Compare *RIP*.

*RIP*

64-bit instruction-pointer register.

*RSI*

64-bit version of the ESI register.

*RSP*

64-bit version of the ESP register.



**SP**

Stack pointer register.

**SS**

Stack segment register.

**TPR**

Task priority register, a new register introduced in the AMD64 architecture to speed interrupt management.

**TR**

Task register.

**Endian Order**

The x86 and AMD64 architectures address memory using little-endian byte-ordering. Multibyte values are stored with their least-significant byte at the lowest byte address, and they are illustrated with their least significant byte at the right side. Strings are illustrated in reverse order, because the addresses of their bytes increase from right to left.

**Related Documents**

- Peter Abel, *IBM PC Assembly Language and Programming*, Prentice-Hall, Englewood Cliffs, NJ, 1995.
- Rakesh Agarwal, *80x86 Architecture & Programming: Volume II*, Prentice-Hall, Englewood Cliffs, NJ, 1991.
- AMD, *AMD-K6™ MMX™ Enhanced Processor Multimedia Technology*, Sunnyvale, CA, 2000.
- AMD, *3DNow!™ Technology Manual*, Sunnyvale, CA, 2000.
- AMD, *AMD Extensions to the 3DNow!™ and MMX™ Instruction Sets*, Sunnyvale, CA, 2000.
- Don Anderson and Tom Shanley, *Pentium Processor System Architecture*, Addison-Wesley, New York, 1995.
- Nabajyoti Barkakati and Randall Hyde, *Microsoft Macro Assembler Bible*, Sams, Carmel, Indiana, 1992.
- Barry B. Brey, *8086/8088, 80286, 80386, and 80486 Assembly Language Programming*, Macmillan Publishing Co., New York, 1994.
- Barry B. Brey, *Programming the 80286, 80386, 80486, and Pentium Based Personal Computer*, Prentice-Hall, Englewood Cliffs, NJ, 1995.

- Ralf Brown and Jim Kyle, *PC Interrupts*, Addison-Wesley, New York, 1994.
- Penn Brumm and Don Brumm, *80386/80486 Assembly Language Programming*, Windcrest McGraw-Hill, 1993.
- Geoff Chappell, *DOS Internals*, Addison-Wesley, New York, 1994.
- Chips and Technologies, Inc. *Super386 DX Programmer's Reference Manual*, Chips and Technologies, Inc., San Jose, 1992.
- John Crawford and Patrick Gelsinger, *Programming the 80386*, Sybex, San Francisco, 1987.
- Cyrix Corporation, *5x86 Processor BIOS Writer's Guide*, Cyrix Corporation, Richardson, TX, 1995.
- Cyrix Corporation, *M1 Processor Data Book*, Cyrix Corporation, Richardson, TX, 1996.
- Cyrix Corporation, *MX Processor MMX Extension Opcode Table*, Cyrix Corporation, Richardson, TX, 1996.
- Cyrix Corporation, *MX Processor Data Book*, Cyrix Corporation, Richardson, TX, 1997.
- Jeffrey P. Doyer, *Introduction to Protected Mode Programming*, course materials for an onsite class, 1992.
- Ray Duncan, *Extending DOS: A Programmer's Guide to Protected-Mode DOS*, Addison Wesley, NY, 1991.
- William B. Giles, *Assembly Language Programming for the Intel 80xxx Family*, Macmillan, New York, 1991.
- Frank van Gilluwe, *The Undocumented PC*, Addison-Wesley, New York, 1994.
- John L. Hennessy and David A. Patterson, *Computer Architecture*, Morgan Kaufmann Publishers, San Mateo, CA, 1996.
- Thom Hogan, *The Programmer's PC Sourcebook*, Microsoft Press, Redmond, WA, 1991.
- Hal Katircioglu, *Inside the 486, Pentium, and Pentium Pro*, Peer-to-Peer Communications, Menlo Park, CA, 1997.
- IBM Corporation, *486SLC Microprocessor Data Sheet*, IBM Corporation, Essex Junction, VT, 1993.
- IBM Corporation, *486SLC2 Microprocessor Data Sheet*, IBM Corporation, Essex Junction, VT, 1993.

- IBM Corporation, *80486DX2 Processor Floating Point Instructions*, IBM Corporation, Essex Junction, VT, 1995.
- IBM Corporation, *80486DX2 Processor BIOS Writer's Guide*, IBM Corporation, Essex Junction, VT, 1995.
- IBM Corporation, *Blue Lightning 486DX2 Data Book*, IBM Corporation, Essex Junction, VT, 1994.
- Institute of Electrical and Electronics Engineers, *IEEE Standard for Binary Floating-Point Arithmetic*, ANSI/IEEE Std 754-1985.
- Institute of Electrical and Electronics Engineers, *IEEE Standard for Radix-Independent Floating-Point Arithmetic*, ANSI/IEEE Std 854-1987.
- Muhammad Ali Mazidi and Janice Gillispie Mazidi, *80X86 IBM PC and Compatible Computers*, Prentice-Hall, Englewood Cliffs, NJ, 1997.
- Hans-Peter Messmer, *The Indispensable Pentium Book*, Addison-Wesley, New York, 1995.
- Karen Miller, *An Assembly Language Introduction to Computer Architecture: Using the Intel Pentium*, Oxford University Press, New York, 1999.
- Stephen Morse, Eric Isaacson, and Douglas Albert, *The 80386/387 Architecture*, John Wiley & Sons, New York, 1987.
- NexGen Inc., *Nx586 Processor Data Book*, NexGen Inc., Milpitas, CA, 1993.
- NexGen Inc., *Nx686 Processor Data Book*, NexGen Inc., Milpitas, CA, 1994.
- Bipin Patwardhan, *Introduction to the Streaming SIMD Extensions in the Pentium III*, [www.x86.org/articles/sse\\_pt1/simd1.htm](http://www.x86.org/articles/sse_pt1/simd1.htm), June, 2000.
- Peter Norton, Peter Aitken, and Richard Wilton, *PC Programmer's Bible*, Microsoft Press, Redmond, WA, 1993.
- *PharLap 386\ASM Reference Manual*, Pharlap, Cambridge MA, 1993.
- *PharLap TNT DOS-Extender Reference Manual*, Pharlap, Cambridge MA, 1995.
- Sen-Cuo Ro and Sheau-Chuen Her, *i386/i486 Advanced Programming*, Van Nostrand Reinhold, New York, 1993.
- Tom Shanley, *Protected Mode System Architecture*, Addison Wesley, NY, 1996.

- SGS-Thomson Corporation, *80486DX Processor SMM Programming Manual*, SGS-Thomson Corporation, 1995.
- Walter A. Triebel, *The 80386DX Microprocessor*, Prentice-Hall, Englewood Cliffs, NJ, 1992.
- John Wharton, *The Complete x86*, MicroDesign Resources, Sebastopol, California, 1994.
- Web sites and newsgroups:
  - [www.amd.com](http://www.amd.com)
  - [news.comp.arch](http://news.comp.arch)
  - [news.comp.lang.asm.x86](http://news.comp.lang.asm.x86)
  - [news.intel.microprocessors](http://news.intel.microprocessors)
  - [news.microsoft](http://news.microsoft)

---


# 1 128-Bit Media Instruction Reference

---

This chapter describes the function, mnemonic syntax, opcodes, affected flags of the 128-bit media instructions and the possible exceptions they generate. These instructions load, store, or operate on data located in 128-bit XMM registers. Most of the instructions operate in parallel on sets of packed elements called *vectors*, although a few operate on scalars. These instructions define both integer and floating-point operations. They include the legacy SSE and SSE2 instructions.

Each instruction that performs a vector (packed) operation is illustrated with a diagram. Figure 1-1 on page 2 shows the conventions used in these diagrams. The particular diagram shows the PSSLW (packed shift left logical words) instruction.

Arrowheads going to a source operand indicate the writing of the result. In this case, the result is written to the first source operand, which is also the destination operand.

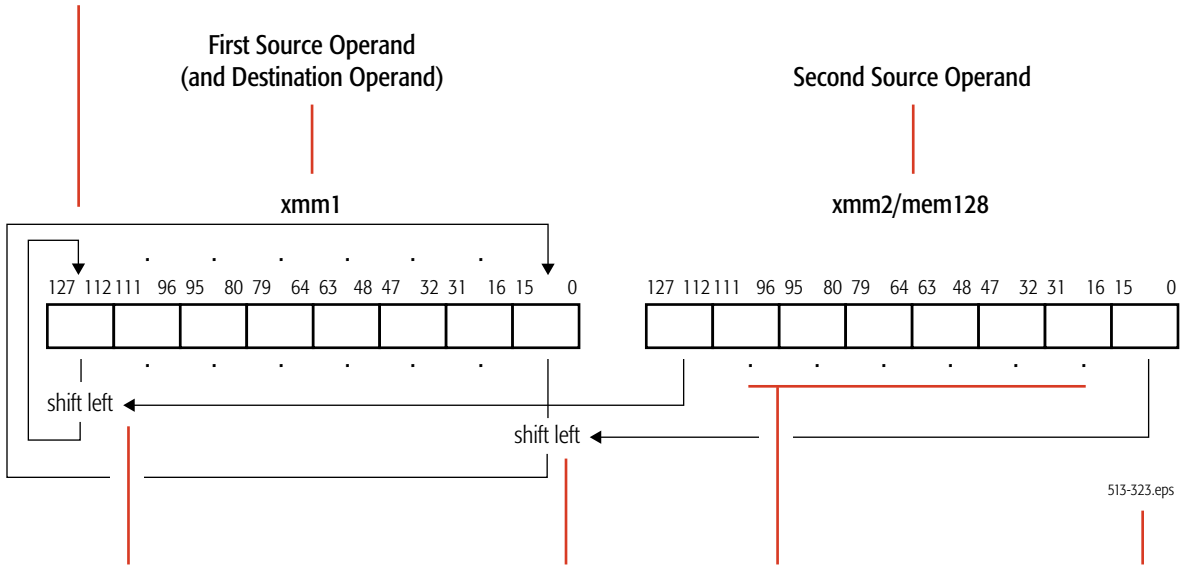

Arrowheads coming from a source operand indicate that the source operand provides a *control function*. In this case, the second source operand specifies the *number* of bits to shift, and the first source operand specifies the *data* to be shifted.

Operation. In this case, a bitwise shift-left.

Ellipses indicate that the operation is repeated for each element of the source vectors. In this case, there are 8 elements in each source vector, so the operation is performed 8 times, in parallel.

File name of this figure (for documentation control)

513-323.eps

**Figure 1-1. Diagram Conventions for 128-Bit Media Instructions**

Gray areas in diagrams indicate unmodified operand bits.

The 128-bit media instructions are useful in high-performance applications that operate on blocks of data. Because each instruction can independently and simultaneously perform a single operation on multiple elements of a vector, the instructions are classified as *single-instruction, multiple-data* (SIMD) instructions. A few 128-bit media instructions convert operands in XMM registers to operands in GPR, MMX™, or x87 registers (or vice versa), or save or restore XMM state.

Hardware support for a specific 128-bit media instruction depends on the presence of at least one of the following CPUID functions:

- FXSAVE and FXRSTOR, indicated by bit 24 of CPUID standard function 1 and extended function 8000\_0001h.
- SSE, indicated by bit 25 of CPUID standard function 1.
- SSE2, indicated by bit 26 of CPUID standard function 1.

The 128-bit media instructions can be used in legacy mode or long mode. Their use in long mode is available if the following CPUID function is set:

- Long Mode, indicated by bit 29 of CPUID extended function 8000\_0001h.

Compilation of 128-bit media programs for execution in 64-bit mode offers four primary advantages: access to the eight extended XMM registers (for a register set consisting of XMM0–XMM15), access to the eight extended, 64-bit general-purpose registers (for a register set consisting of GPR0–GPR15), access to the 64-bit virtual address space, and access to the RIP-relative addressing mode.


For further information, see:

- “128-Bit Media and Scientific Programming” in Volume 1.
- “Summary of Registers and Data Types” in Volume 3.
- “Notation” in Volume 3.
- “Instruction Prefixes” in Volume 3.

## ADDPD Add Packed Double-Precision Floating-Point

Adds each packed double-precision floating-point value in the first source operand to the corresponding packed double-precision floating-point value in the second source operand and writes the result of each addition in the corresponding quadword of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
ADDPD <i>xmm1, xmm2/mem128</i>	66 0F 58 /r	Adds two packed double-precision floating-point values in an XMM register and another XMM register or 128-bit memory location and writes the result in the destination XMM register.

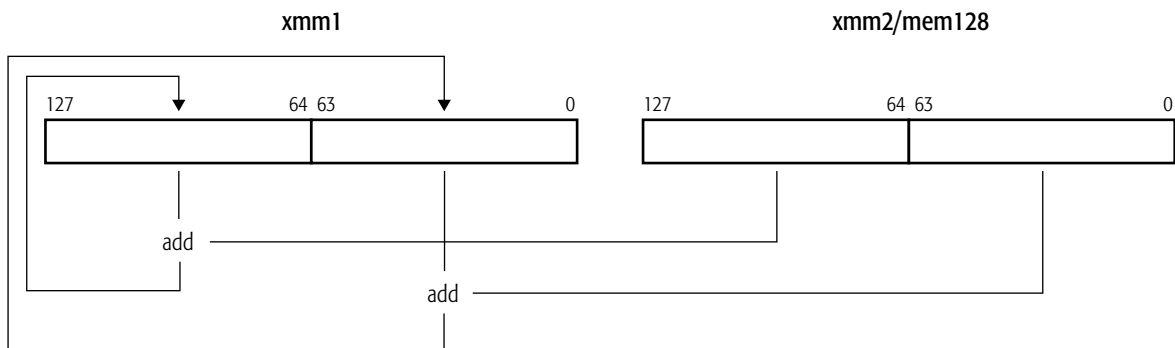

addpd.eps

### Related Instructions

ADDPS, ADDSD, ADDSS

### rFLAGS Affected

None



**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M		M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> below for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	+infinity was added to -infinity.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

## ADDPS Add Packed Single-Precision Floating-Point

Adds each packed single-precision floating-point value in the first source operand to the corresponding packed single-precision floating-point value in the second source operand and writes the result of each addition in the corresponding quadword of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
ADDPS <i>xmm1, xmm2/mem128</i>	OF 58 /r	Adds four packed single-precision floating-point values in an XMM register and another XMM register or 128-bit memory location and writes the result in the destination XMM register.

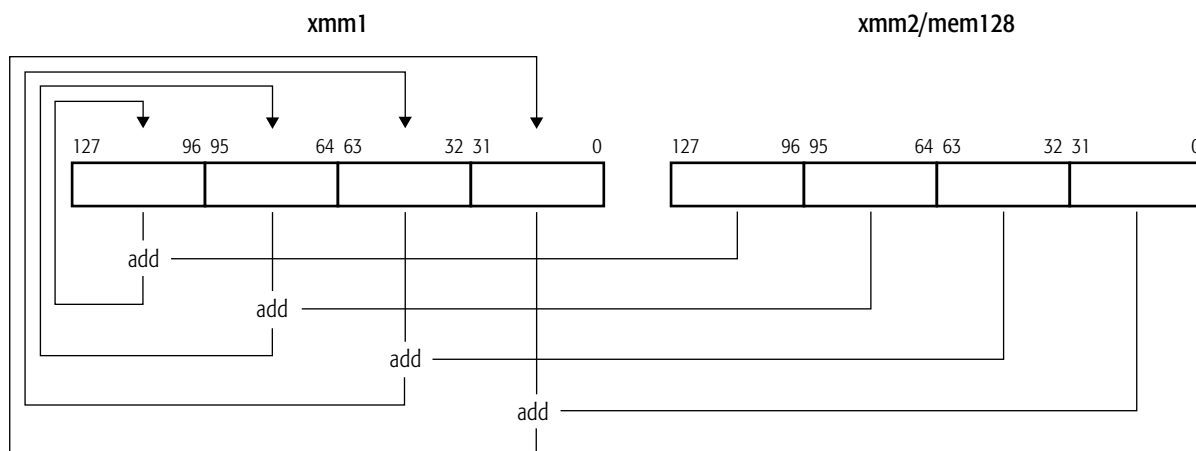

addps.eps

### Related Instructions

ADDPD, ADDSD, ADDSS

### rFLAGS Affected

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M		M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

*Note:*  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	+infinity was added to -infinity.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

## ADDSD Add Scalar Double-Precision Floating-Point

Adds the double-precision floating-point value in the low-order quadword of the first source operand to the double-precision floating-point value in the low-order quadword of the second source operand and writes the result in the low-order quadword of the destination (first source). The high-order quadword of the destination is not modified. The first source/destination operand is an XMM register. The second source operand is another XMM register or 64-bit memory location.

Mnemonic	Opcode	Description
ADDSD <i>xmm1, xmm2/mem64</i>	F2 0F 58 /r	Adds low-order double-precision floating-point values in an XMM register and another XMM register or 64-bit memory location and writes the result in the destination XMM register.

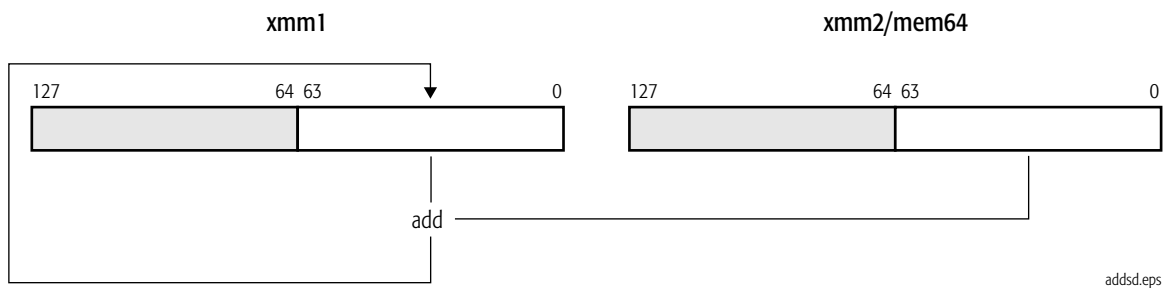

### Related Instructions

ADDPD, ADDPS, ADDSS

### rFLAGS Affected

None

### MXCSR Flags Affected

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M		M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**

A flag that can be set to one or zero is *M* (modified). Unaffected flags are blank.


## Exceptions

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	+infinity was added to -infinity.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

## ADDSS Add Scalar Single-Precision Floating-Point

Adds the single-precision floating-point value in the low-order doubleword of the first source operand to the single-precision floating-point value in the low-order doubleword of the second source operand and writes the result in the low-order doubleword of the destination (first source). The three high-order doublewords of the destination are not modified. The first source/destination operand is an XMM register. The second source operand is another XMM register or 32-bit memory location.

Mnemonic	Opcode	Description
ADDSS <i>xmm1, xmm2/mem32</i>	F3 0F 58 /r	Adds low-order single-precision floating-point values in an XMM register and another XMM register or 32-bit memory location and writes the result in the destination XMM register.

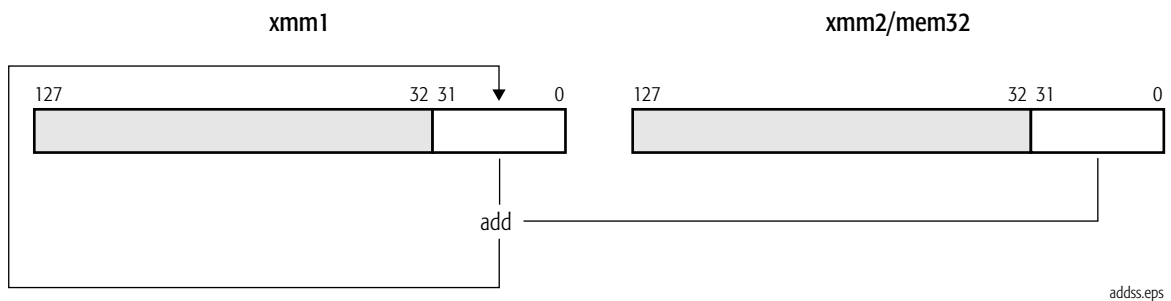

### Related Instructions

ADDPD, ADDPS, ADDSD

### rFLAGS Affected

None



**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M		M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	+infinity was added to -infinity.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**ANDNPD****Logical Bitwise AND NOT  
Packed Double-Precision Floating-Point**

Performs a bitwise logical AND of the two packed double-precision floating-point values in the second source operand and the one's-complement of the corresponding two packed double-precision floating-point values in the first source operand and writes the result in the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
ANDNPD <i>xmm1, xmm2/mem128</i>	66 0F 55 /r	Performs bitwise logical AND NOT of two packed double-precision floating-point values in an XMM register and another XMM register or 128-bit memory location and writes the result in the destination XMM register.

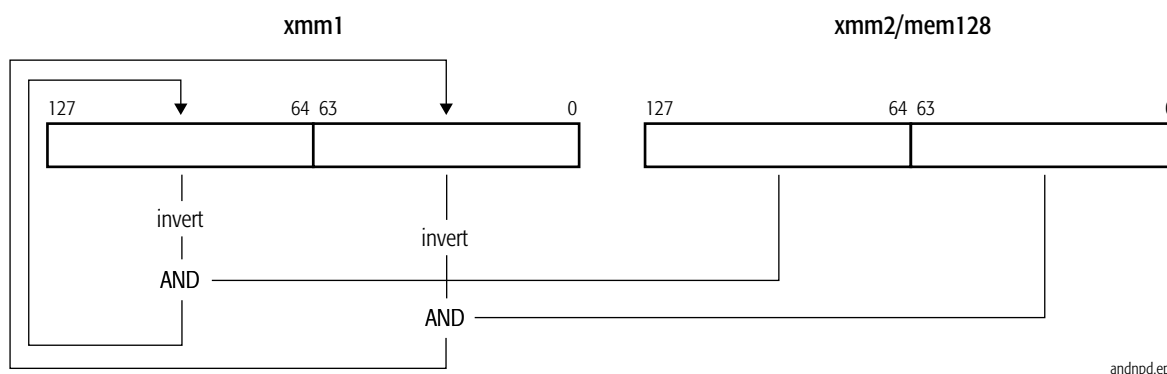**Related Instructions**

ANDNPS, ANDPD, ANDPS, ORPD, ORPS, XORPD, XORPS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**ANDNPS****Logical Bitwise AND NOT  
Packed Single-Precision Floating-Point**

Performs a bitwise logical AND of the four packed single-precision floating-point values in the second source operand and the one's-complement of the corresponding four packed single-precision floating-point values in the first source operand and writes the result in the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
ANDNPS <i>xmm1, xmm2/mem128</i>	0F 55 /r	Performs bitwise logical AND NOT of four packed single-precision floating-point values in an XMM register and in another XMM register or 128-bit memory location and writes the result in the destination XMM register.

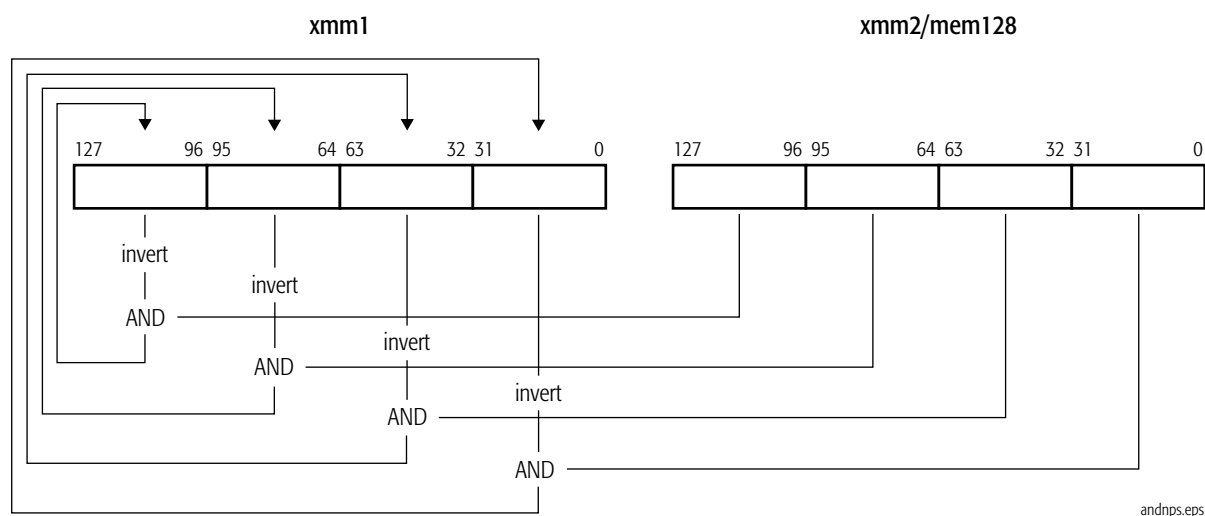**Related Instructions**

ANDNPD, ANDPD, ANDPS, ORPD, ORPS, XORPD, XORPS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**ANDPD****Logical Bitwise AND  
Packed Double-Precision Floating-Point**

Performs a bitwise logical AND of the two packed double-precision floating-point values in the first source operand and the corresponding two packed double-precision floating-point values in the second source operand and writes the result in the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
ANDPD <i>xmm1, xmm2/mem128</i>	66 0F 54 /r	Performs bitwise logical AND of two packed double-precision floating-point values in an XMM register and in another XMM register or 128-bit memory location and writes the result in the destination XMM register.

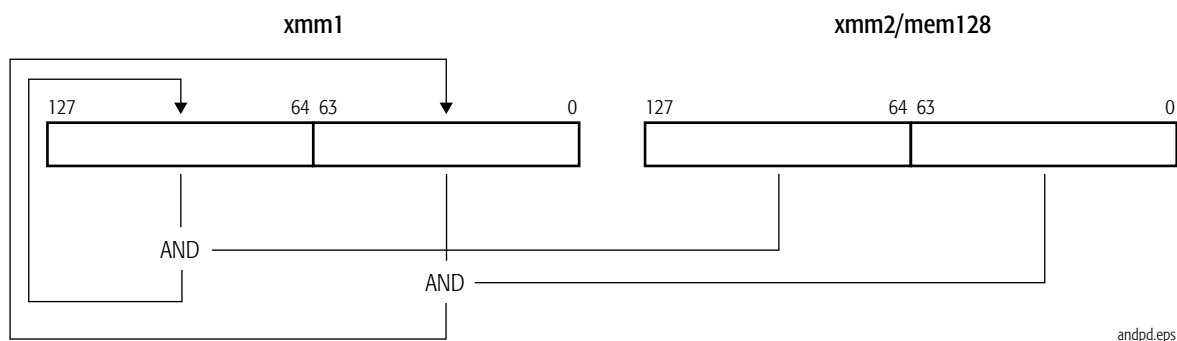**Related Instructions**

ANDNPD, ANDNPS, ANDPS, ORPD, ORPS, XORPD, XORPS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.



**ANDPS****Logical Bitwise AND  
Packed Single-Precision Floating-Point**

Performs a bitwise logical AND of the four packed single-precision floating-point values in the first source operand and the corresponding four packed single-precision floating-point values in the second source operand and writes the result in the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
ANDPS <i>xmm1, xmm2/mem128</i>	OF 54/ <i>r</i>	Performs bitwise logical AND of four packed single-precision floating-point values in an XMM register and in another XMM register or 128-bit memory location and writes the result in the destination XMM register.

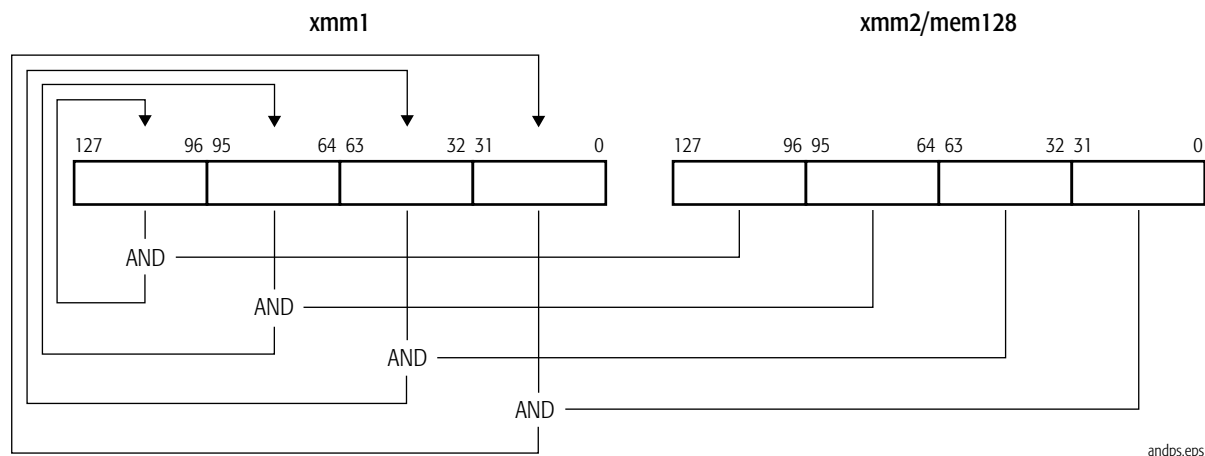**Related Instructions**

ANDNPD, ANDNPS, ANDPD, ORPD, ORPS, XORPD, XORPS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**CMPPD****Compare Packed Double-Precision Floating-Point**

Compares each of the two packed double-precision floating-point values in the first source operand with the corresponding packed double-precision floating-point value in the second source operand and writes the result of each comparison in the corresponding 64 bits of the destination (first source). The type of comparison is specified by the three low-order bits of the immediate-byte operand, as shown in Table 1-1. The result of each compare is a 64-bit value of all 1s (TRUE) or all 0s (FALSE). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

**Mnemonic**


CMPPD *xmm1, xmm2/mem128, imm8*

**Opcode**

66 0F C2 /r ib

**Description**

Compares two pairs of packed double-precision floating-point values in an XMM register and an XMM register or 128-bit memory location.

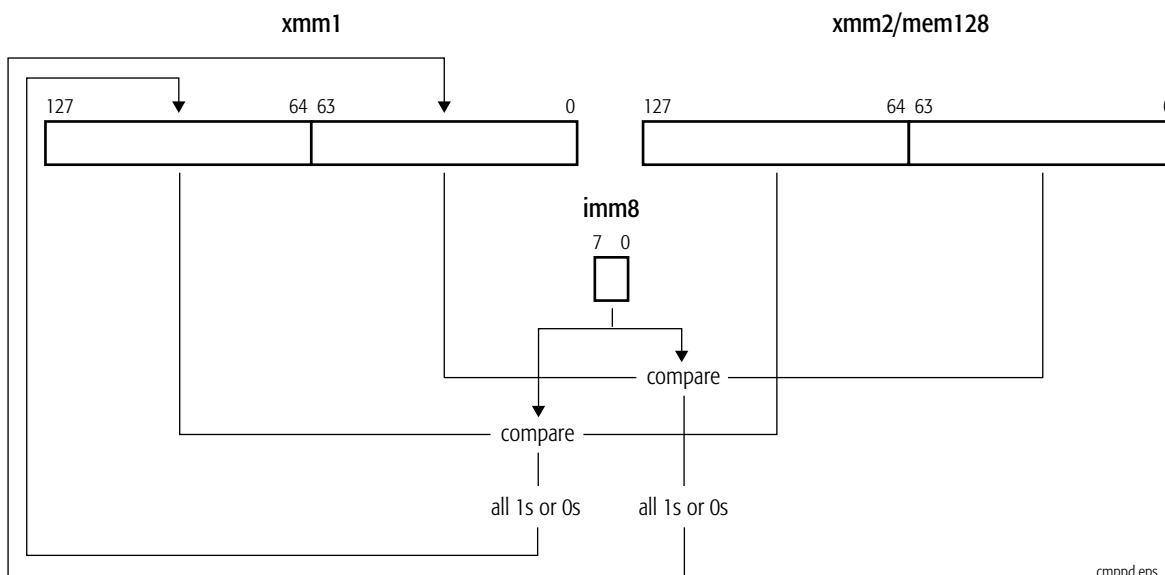

cmppd.eps

Some compare operations that are not directly supported by the immediate-byte encodings can be implemented by swapping the contents of the source and destination operands and then executing the appropriate compare instruction using the swapped values. These additional compare operations are shown, together with

the directly supported compare operations, in Table 1-1. When swapping operands, the first source XMM register is overwritten by the result.

**Table 1-1. Immediate Operand Values for Compare Operations**

Immediate-Byte Value (bits 2–0)	Compare Operation	Result If NaN Operand	QNaN Operand Causes Invalid Operation Exception
000	Equal	FALSE	No
001	Less than	FALSE	Yes
	Greater than or equal to (uses swapped operands)	FALSE	Yes
010	Less than or equal	FALSE	Yes
	Greater than (uses swapped operands)	FALSE	Yes
011	Unordered	TRUE	No
100	Not equal	TRUE	No
101	Not less than	TRUE	Yes
	Not greater than (uses swapped operands)	TRUE	Yes
110	Not less than or equal	TRUE	Yes
	Not greater than or equal (uses swapped operands)	TRUE	Yes
111	Ordered	FALSE	No

### Related Instructions

CMPPS, CMPSD, CMPSS, COMISD, COMISS, UCOMISD, UCOMISS

### rFLAGS Affected

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.


Exception	Real	Virtual 8086	Protected	Cause of Exception
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	A source operand was a QNaN value, and the comparison does not allow QNaN values (refer to Table 1-1 on page 24).
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

**CMPPS****Compare Packed Single-Precision Floating-Point**

Compares each of the four packed single-precision floating-point values in the first source operand with the corresponding packed single-precision floating-point value in the second source operand and writes the result of each comparison in the corresponding 32 bits of the destination (first source). The type of comparison is specified by the three low-order bits of the immediate-byte operand, as shown in Table 1-1 on page 24. The result of each compare is a 32-bit value of all 1s (TRUE) or all 0s (FALSE). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

**Mnemonic**CMPPS *xmm1, xmm2/mem128, imm8***Opcode**0F C2 /r *ib***Description**

Compares four pairs of packed single-precision floating-point values in an XMM register and an XMM register or 64-bit memory location.

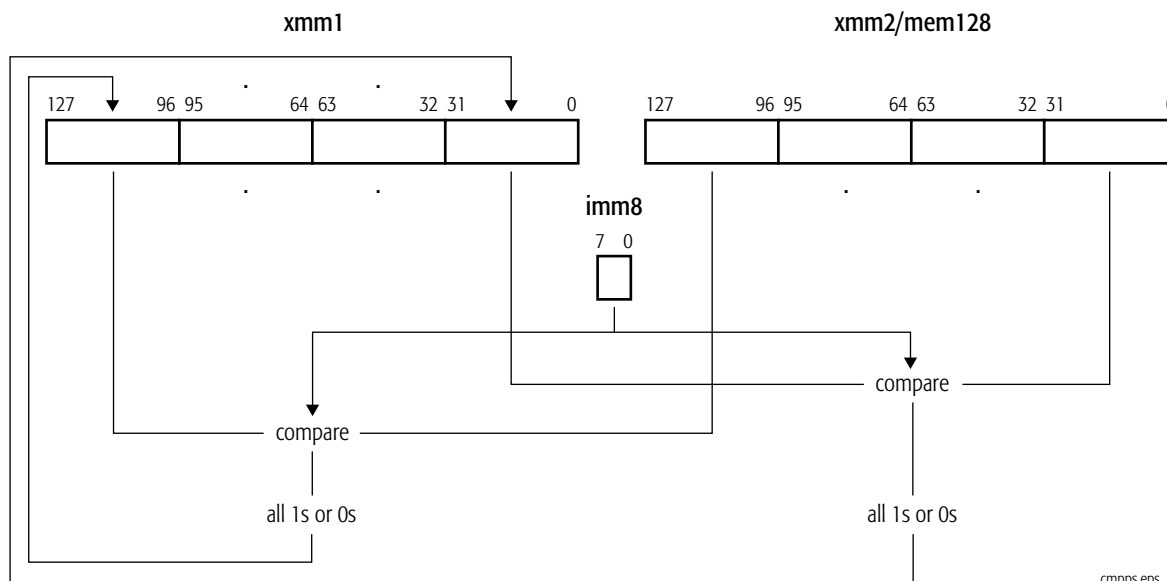

cmpps.eps

Some compare operations that are not directly supported by the immediate-byte encodings can be implemented by swapping the contents of the source and destination operands and then executing the appropriate compare instruction using the swapped values. These additional compare operations are shown in Table 1-1 on

page 24. When swapping operands, the first source XMM register is overwritten by the result.

**Related Instructions**

CMPPD, CMPSD, CMPSS, COMISD, COMISS, UCOMISD, UCOMISS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

*Note:*  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.




Exception	Real	Virtual 8086	Protected	Cause of Exception
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	A source operand was a QNaN value, and the comparison does not allow QNaN values (refer to Table 1-1 on page 24).
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

**CMPSD****Compare Scalar Double-Precision Floating-Point**

Compares the double-precision floating-point value in the low-order 64 bits of the first source operand with the double-precision floating-point value in the low-order 64 bits of the second source operand and writes the result in the low-order 64 bits of the destination (first source). The type of comparison is specified by the three low-order bits of the immediate-byte operand, as shown in Table 1-1 on page 24. The result of the compare is a 64-bit value of all 1s (TRUE) or all 0s (FALSE). The first source/destination operand is an XMM register. The second source operand is another XMM register or 64-bit memory location. The high-order 64 bits of the destination XMM register are not modified.

**Mnemonic**CMPSD *xmm1, xmm2/mem64, imm8***Opcode**F2 0F C2 /r *ib***Description**

Compares double-precision floating-point values in an XMM register and an XMM register or 64-bit memory location.

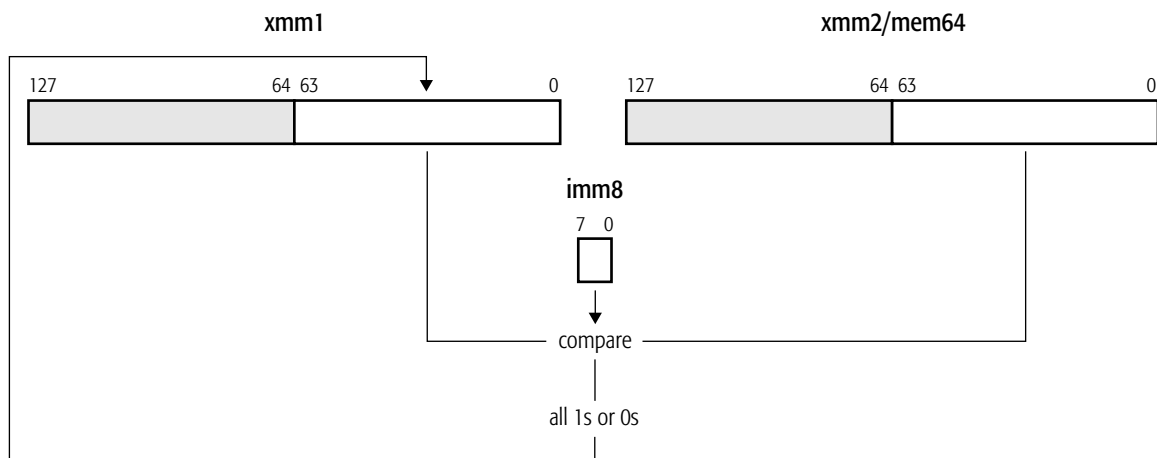

cmpsd.eps

Some compare operations that are not directly supported by the immediate-byte encodings can be implemented by swapping the contents of the source and destination operands and then executing the appropriate compare instruction using the swapped values. These additional compare operations are shown in Table 1-1 on page 24. When swapping operands, the first source XMM register is overwritten by the result.

This CMPSD instruction should not be confused with the same-mnemonic CMPSD (compare strings by doubleword) instruction in the general-purpose instruction set. Assemblers can distinguish the instructions by the number and type of operands.

### Related Instructions

CMPPD, CMPPS, CMPSS, COMISD, COMISS, UCOMISD, UCOMISS

### rFLAGS Affected

None

### MXCSR Flags Affected

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

### Exceptions

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical..
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.


Exception	Real	Virtual 8086	Protected	Cause of Exception
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	A source operand was a QNaN value, and the comparison does not allow QNaN values (refer to Table 1-1 on page 24).
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

**CMPSS****Compare Scalar Single-Precision Floating-Point**

Compares the single-precision floating-point value in the low-order 32 bits of the first source operand with the single-precision floating-point value in the low-order 32 bits of the second source operand and writes the result in the low-order 32 bits of the destination (first source). The type of comparison is specified by the three low-order bits of the immediate-byte operand, as shown in Table 1-1 on page 24. The result of the compare is a 32-bit value of all 1s (TRUE) or all 0s (FALSE). The first source/destination operand is an XMM register. The second source operand is another XMM register or 32-bit memory location. The three high-order doublewords of the destination XMM register are not modified.

**Mnemonic**CMPSS *xmm1, xmm2/mem32, imm8***Opcode**F3 0F C2 /r *ib***Description**

Compares single-precision floating-point values in an XMM register and an XMM register or 32-bit memory location.

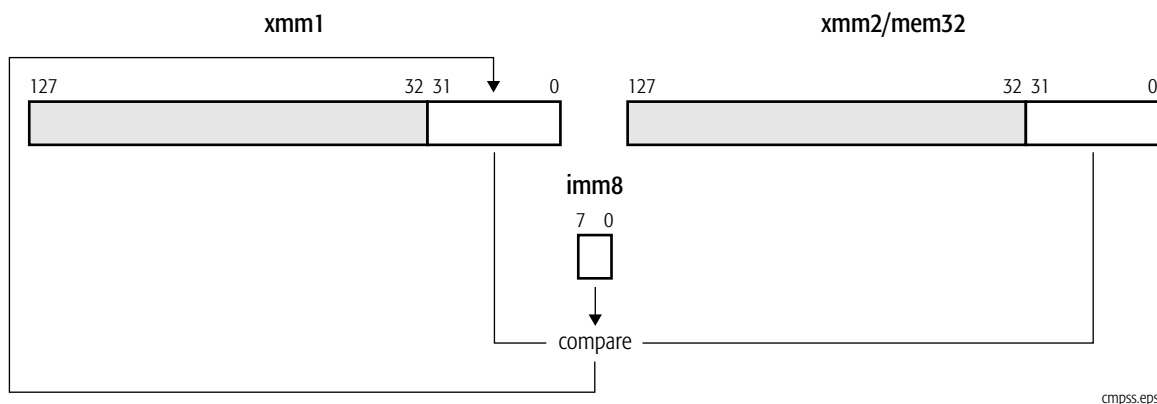

Some compare operations that are not directly supported by the immediate-byte encodings can be implemented by swapping the contents of the source and destination operands and then executing the appropriate compare instruction using the swapped values. These additional compare operations are shown in Table 1-1 on page 24. When swapping operands, the first source XMM register is overwritten by the result.

**Related Instructions**

CMPPD, CMPPS, CMPSD, COMISD, COMISS, UCOMISD, UCOMISS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.


Exception	Real	Virtual 8086	Protected	Cause of Exception
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	A source operand was a QNaN value, and the comparison does not allow QNaN values (refer to Table 1-1 on page 24).
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

## COMISD Compare Ordered Scalar Double-Precision Floating-Point

Compares the double-precision floating-point value in the low-order 64 bits of an XMM register with the double-precision floating-point value in the low-order 64 bits of another XMM register or a 64-bit memory location and sets the ZF, PF, and CF bits in the rFLAGS register to reflect the result of the comparison. The result is unordered if one or both of the operand values is a NaN. The OF, AF, and SF bits in rFLAGS are set to zero.

If the instruction causes an unmasked SIMD floating-point exception (#XF), the rFLAGS bits are not updated.

Mnemonic	Opcode	Description
COMISD <i>xmm1, xmm2/mem64</i>	66 0F 2F /r	Compares double-precision floating-point values in an XMM register and an XMM register or 64-bit memory location and sets rFLAGS.

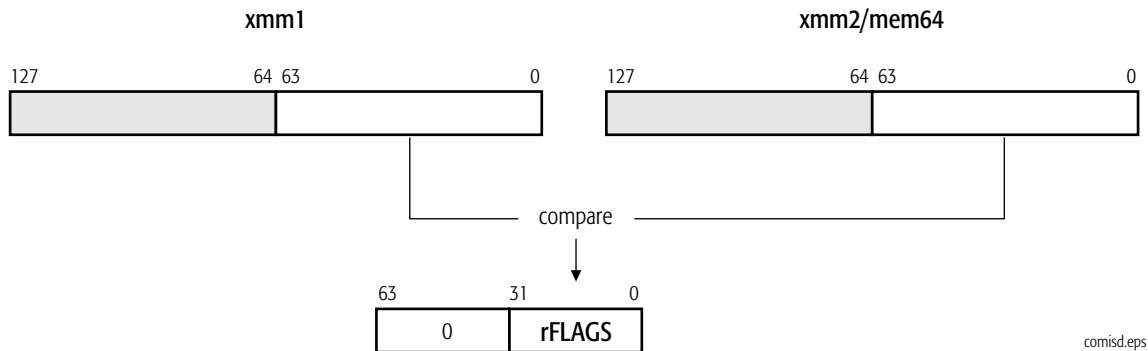

Result of Compare	ZF	PF	CF
Unordered	1	1	1
Greater Than	0	0	0
Less Than	0	0	1
Equal	1	0	0



**Related Instructions**

CMPPD, CMPPS, CMPSD, CMPSS, COMISS, UCOMISD, UCOMISS

**rFLAGS Affected**

ID	VIP	VIF	AC	VM	RF	NT	IOPL	OF	DF	IF	TF	SF	ZF	AF	PF	CF
								0				0	M	0	M	M
21	20	19	18	17	16	14	13–12	11	10	9	8	7	6	4	2	0

**Note:**

Bits 31–22, 15, 5, 3, and 1 are reserved. A flag set to 1 or cleared to 0 is M (modified). Unaffected flags are blank.  
If the instruction causes an unmasked SIMD floating-point exception (#XF), the rFLAGS bits are not updated.

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**

A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.


Exception	Real	Virtual 8086	Protected	Cause of Exception
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN or QNaN value.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

## COMISS Compare Ordered Scalar Single-Precision Floating-Point

Performs an ordered comparison of the single-precision floating-point value in the low-order 32 bits of an XMM register with the single-precision floating-point value in the low-order 32 bits of another XMM register or a 32-bit memory location and sets the ZF, PF, and CF bits in the rFLAGS register to reflect the result of the comparison. The result is unordered if one or both of the operand values is a NaN. The OF, AF, and SF bits in rFLAGS are set to zero.

If the instruction causes an unmasked SIMD floating-point exception (#XF), the rFLAGS bits are not updated.

Mnemonic	Opcode	Description
COMISS <i>xmm1, xmm2/mem32</i>	OF 2F/r	Compares single-precision floating-point values in an XMM register and an XMM register or 32-bit memory location. Sets rFLAGS.

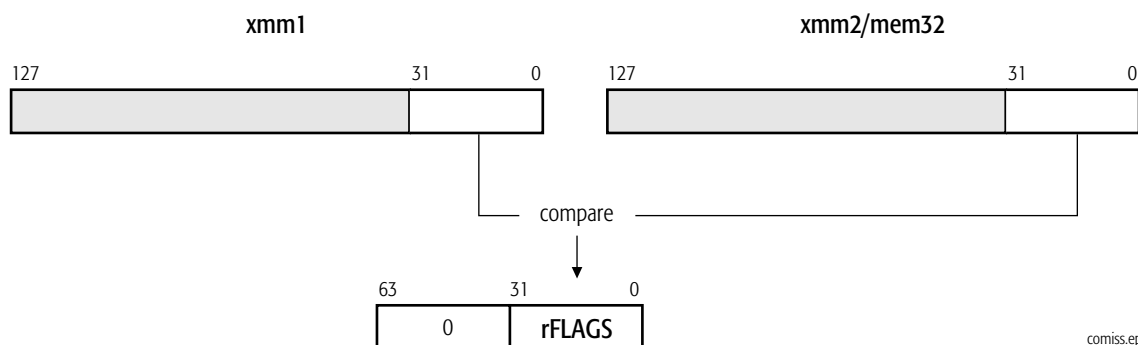

Result of Compare	ZF	PF	CF
Unordered	1	1	1
Greater Than	0	0	0
Less Than	0	0	1
Equal	1	0	0

**Related Instructions**

CMPPD, CMPPS, CMPSD, CMPSS, COMISD, UCOMISD, UCOMISS

**rFLAGS Affected**

ID	VIP	VIF	AC	VM	RF	NT	IOPL	OF	DF	IF	TF	SF	ZF	AF	PF	CF
								0				0	M	0	M	M
21	20	19	18	17	16	14	13–12	11	10	9	8	7	6	4	2	0

**Note:**

Bits 31–22, 15, 5, 3, and 1 are reserved. A flag set to 1 or cleared to 0 is M (modified). Unaffected flags are blank. If the instruction causes an unmasked SIMD floating-point exception (#XF), the rFLAGS bits are not updated.

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**

A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.

Exception	Real	Virtual 8086	Protected	Cause of Exception
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical..
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN or QNaN value.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

**CVTDQ2PD****Convert Packed Doubleword Integers to Packed Double-Precision Floating-Point**

Converts two packed 32-bit signed integer values in the low-order 64 bits of an XMM register or a 64-bit memory location to two packed double-precision floating-point values and writes the converted values in another XMM register.

Mnemonic	Opcode	Description
CVTDQ2PD <i>xmm1, xmm2/mem64</i>	F3 0F E6 /r	Converts packed doubleword signed integers in an XMM register or 64-bit memory location to double-precision floating-point values in the destination XMM register.

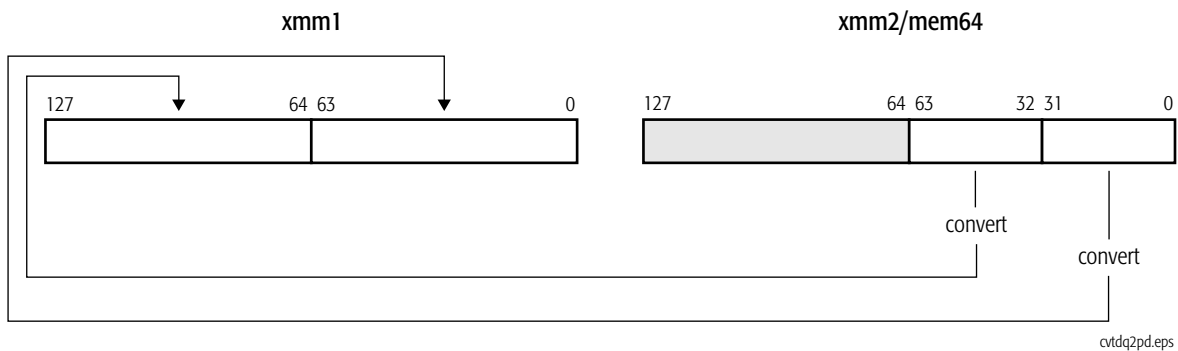**Related Instructions**

CVTPD2DQ, CVTPD2PI, CVTPI2PD, CVTSD2SI, CVTSI2SD, CVTTPD2DQ, CVTTPD2PI, CVTTSD2SI

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.

**CVTDQ2PS****Convert Packed Doubleword Integers to Packed Single-Precision Floating-Point**

Converts four packed 32-bit signed integer values in an XMM register or a 128-bit memory location to four packed single-precision floating-point values and writes the converted values in another XMM register. If the result of the conversion is an inexact value, the value is rounded as specified by the rounding control bits (RC) in the MXCSR register.

Mnemonic	Opcode	Description
CVTDQ2PS <i>xmm1, xmm2/mem128</i>	0F 5B/r	Converts packed doubleword integer values in an XMM register or 128-bit memory location to packed single-precision floating-point values in the destination XMM register.

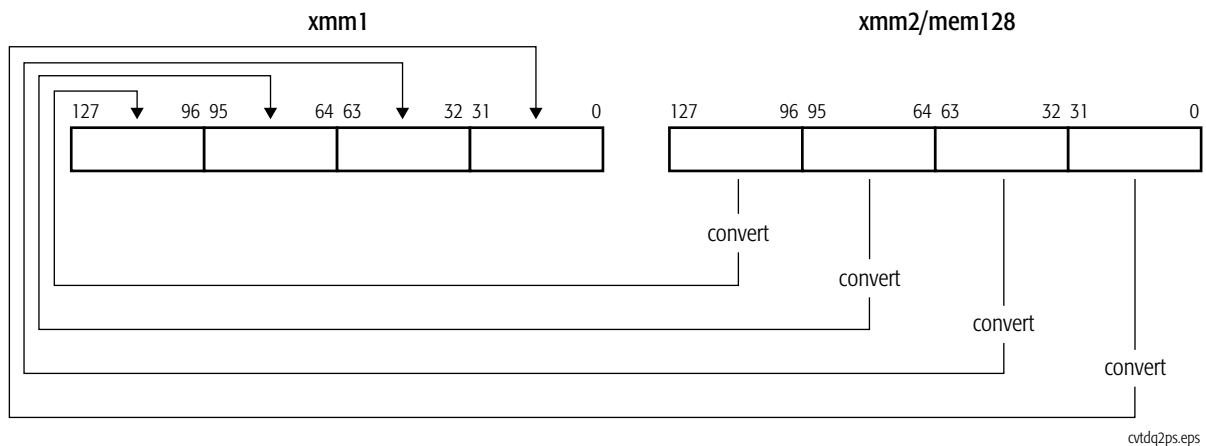**Related Instructions**

CVTPI2PS, CVTPS2DQ, CVTPS2PI, CVTSI2SS, CVTSS2SI, CVTTPS2DQ, CVTTPS2PI, CVTTSS2SI

**rFLAGS Affected**

None



**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**CVTPD2DQ****Convert Packed Double-Precision Floating-Point to Packed Doubleword Integers**

Converts two packed double-precision floating-point values in an XMM register or a 128-bit memory location to two packed 32-bit signed integers and writes the converted values in the low-order 64 bits of another XMM register. The high-order 64 bits in the destination XMM register are cleared to all 0s.

Mnemonic	Opcode	Description
CVTPD2DQ <i>xmm1, xmm2/mem128</i>	F2 0F E6 /r	Converts packed double-precision floating-point values in an XMM register or 128-bit memory location to packed doubleword integers in the destination XMM register.

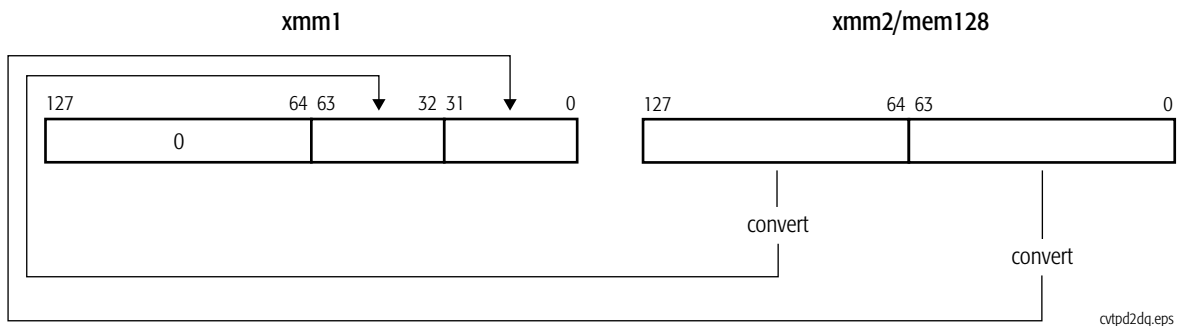

If the result of the conversion is an inexact value, the value is rounded as specified by the rounding control bits (RC) in the MXCSR register. If the floating-point value is a NaN, infinity, or if the result of the conversion is larger than the maximum signed doubleword ( $-2^{31}$  to  $+2^{31} - 1$ ), the instruction returns the 32-bit indefinite integer value (8000\_0000h) when the invalid-operation exception (IE) is masked.

**Related Instructions**

CVTDQ2PD, CVTPD2PI, CVTPI2PD, CVTSD2SI, CVTSI2SD, CVTTPD2DQ, CVTTPD2PI, CVTTSD2SI

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.

Exception	Real	Virtual 8086	Protected	Cause of Exception
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value, a QNaN value, or $\pm$ infinity.
	X	X	X	A source operand was too large to fit in the destination format.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**CVTPD2PI****Convert Packed Double-Precision Floating-Point to Packed Doubleword Integers**

Converts two packed double-precision floating-point values in an XMM register or a 128-bit memory location to two packed 32-bit signed integer values and writes the converted values in an MMX register.

Mnemonic	Opcode	Description
CVTPD2PI <i>mmx, xmm2/mem128</i>	66 0F 2D /r	Converts packed double-precision floating-point values in an XMM register or 128-bit memory location to packed doubleword integers values in the destination MMX™ register.

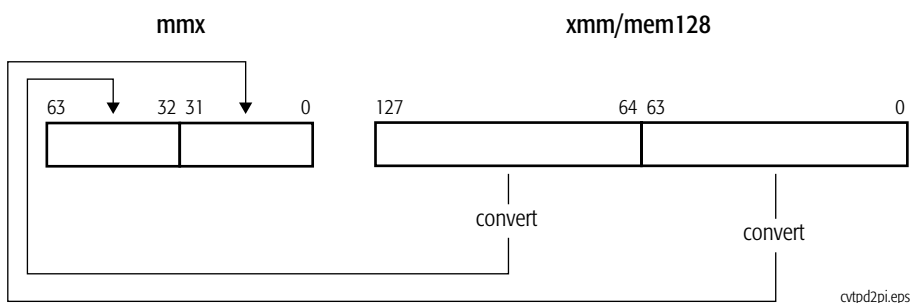

If the result of the conversion is an inexact value, the value is rounded as specified by the rounding control bits (RC) in the MXCSR register. If the floating-point value is a NaN, infinity, or if the result of the conversion is larger than the maximum signed doubleword ( $-2^{31}$  to  $+2^{31} - 1$ ), the instruction returns the 32-bit indefinite integer value (8000\_0000h) when the invalid-operation exception (IE) is masked.

**Related Instructions**

CVTDQ2PD, CVTPD2DQ, CVTPI2PD, CVTSD2SI, CVTSI2SD, CVTTPD2DQ, CVTTPD2PI, CVTTSD2SI

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
x87 floating-point exception pending, #MF	X	X	X	An exception is pending due to an x87 floating-point instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.

Exception	Real	Virtual 8086	Protected	Cause of Exception
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value, a QNaN value, or $\pm$ infinity.
	X	X	X	A source operand was too large to fit in the destination format.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**CVTPD2PS****Convert Packed Double-Precision Floating-Point to Packed Single-Precision Floating-Point**

Converts two packed double-precision floating-point values in an XMM register or a 128-bit memory location to two packed single-precision floating-point values and writes the converted values in the low-order 64 bits of another XMM register. The high-order 64 bits in the destination XMM register are cleared to all 0s.

Mnemonic	Opcode	Description
CVTPD2PS <i>xmm1, xmm2/mem128</i>	66 0F 5A/ <i>r</i>	Converts packed double-precision floating-point values in an XMM register or 128-bit memory location to packed single-precision floating-point values in the destination XMM register.

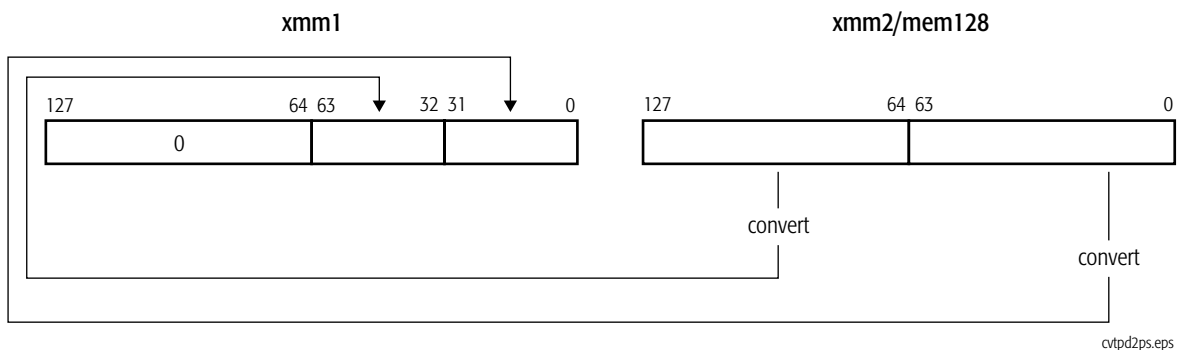

If the result of the conversion is an inexact value, the value is rounded as specified by the rounding control bits (RC) in the MXCSR register.

**Related Instructions**

CVTTPS2PD, CVTSD2SS, CVTSS2SD

**rFLAGS Affected**

None



**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M		M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**CVTPI2PD****Convert Packed Doubleword Integers to Packed Double-Precision Floating-Point**

Converts two packed 32-bit signed integer values in an MMX register or a 64-bit memory location to two double-precision floating-point values and writes the converted values in an XMM register.

Mnemonic	Opcode	Description
CVTPI2PD <i>xmm, mmx/mem64</i>	66 0F 2A/r	Converts two packed doubleword integer values in an MMX™ register or 64-bit memory location to two packed double-precision floating-point values in the destination XMM register.

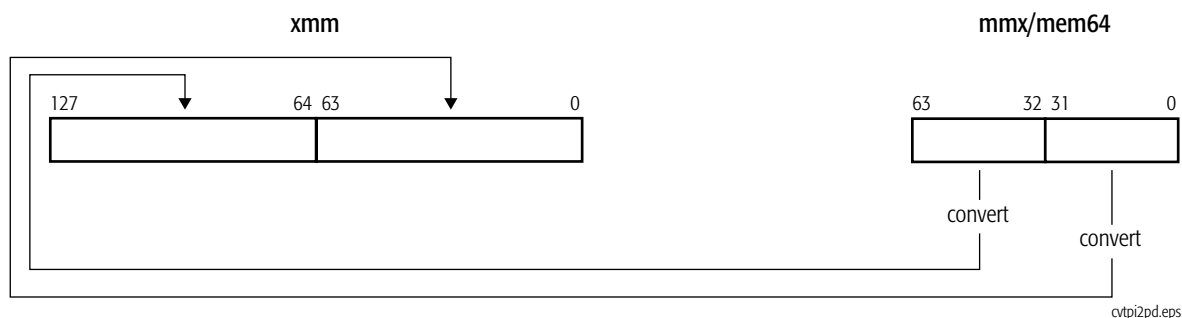**Related Instructions**

CVTDQ2PD, CVTPD2DQ, CVTPD2PI, CVTSD2SI, CVTSI2SD, CVTTPD2DQ, CVTTPD2PI, CVTTSD2SI

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
x87 floating-point exception pending, #MF	X	X	X	An exception was pending due to an x87 floating-point instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.

**CVTPI2PS****Convert Packed Doubleword Integers to Packed Single-Precision Floating-Point**

Converts two packed 32-bit signed integer values in an MMX register or a 64-bit memory location to two single-precision floating-point values and writes the converted values in the low-order 64 bits of an XMM register. The high-order 64 bits of the XMM register are not modified.

Mnemonic	Opcode	Description
CVTPI2PS <i>xmm, mmx/mem64</i>	0F 2A/r	Converts packed doubleword integer values in an MMX™ register or 64-bit memory location to single-precision floating-point values in the destination XMM register.

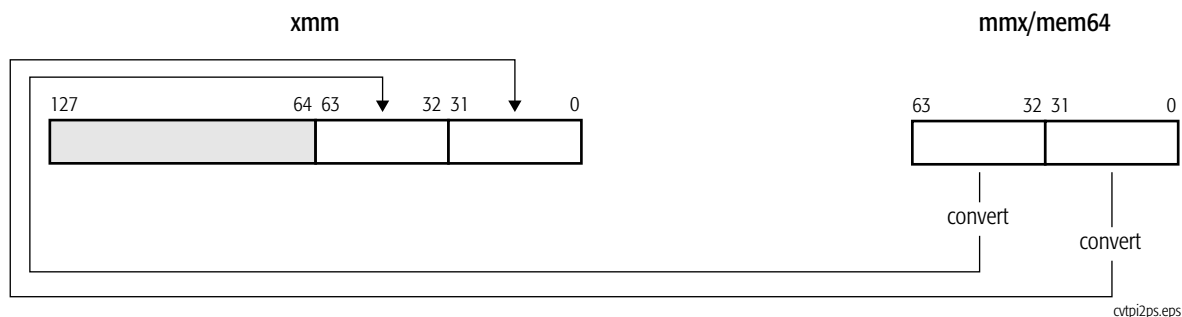**Related Instructions**

CVTDQ2PS, CVTPS2DQ, CVTPS2PI, CVTSI2SS, CVTSS2SI, CVTTPS2DQ, CVTTPS2PI, CVTTSS2SI

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory..
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
x87 floating-point exception pending, #MF	X	X	X	An exception was pending due to an x87 floating-point instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**CVTPS2DQ****Convert Packed Single-Precision Floating-Point to Packed Doubleword Integers**

Converts four packed single-precision floating-point values in an XMM register or a 128-bit memory location to four packed 32-bit signed integer values and writes the converted values in another XMM register.

Mnemonic	Opcode	Description
CVTPS2DQ <i>xmm1, xmm2/mem128</i>	66 0F 5B /r	Converts four packed single-precision floating-point values in an XMM register or 128-bit memory location to four packed doubleword integers in the destination XMM register.

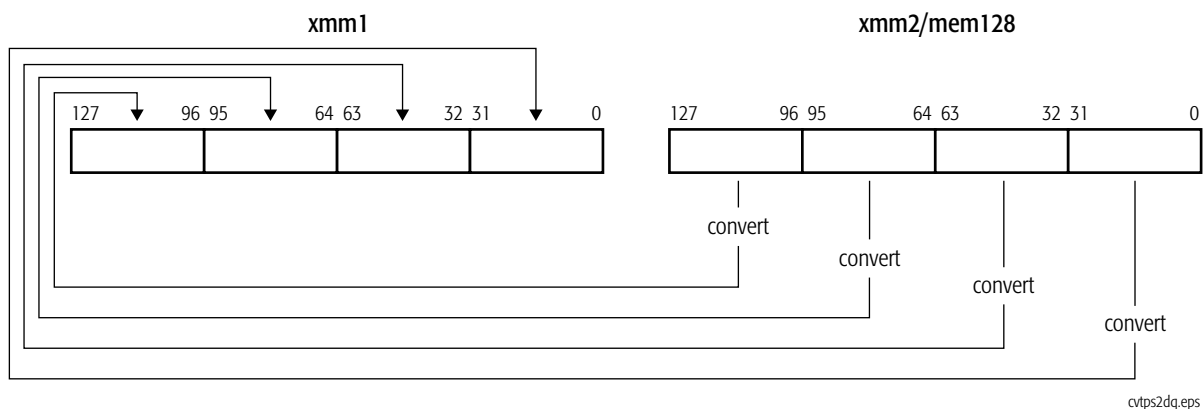

If the result of the conversion is an inexact value, the value is rounded as specified by the rounding control bits (RC) in the MXCSR register. If the floating-point value is a NaN, infinity, or if the result of the conversion is larger than the maximum signed doubleword ( $-2^{31}$  to  $+2^{31} - 1$ ), the instruction returns the 32-bit indefinite integer value (8000\_0000h) when the invalid-operation exception (IE) is masked.

**Related Instructions**

CVTDQ2PS, CVTPI2PS, CVTPS2PI, CVTSI2SS, CVTSS2SI, CVTTPS2DQ, CVTTPS2PI, CVTTSS2SI

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

*Note:*  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.




Exception	Real	Virtual 8086	Protected	Cause of Exception
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value, a QNaN value, or $\pm$ infinity.
	X	X	X	A source operand was too large to fit in the destination format.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

## CVTSP2PD

### Convert Packed Single-Precision Floating-Point to Packed Double-Precision Floating-Point

Converts two packed single-precision floating-point values in the low-order 64 bits of an XMM register or a 64-bit memory location to two packed double-precision floating-point values and writes the converted values in another XMM register.

Mnemonic	Opcode	Description
CVTSP2PD <i>xmm1, xmm2/mem64</i>	0F 5A/r	Converts packed single-precision floating-point values in an XMM register or 64-bit memory location to packed double-precision floating-point values in the destination XMM register.

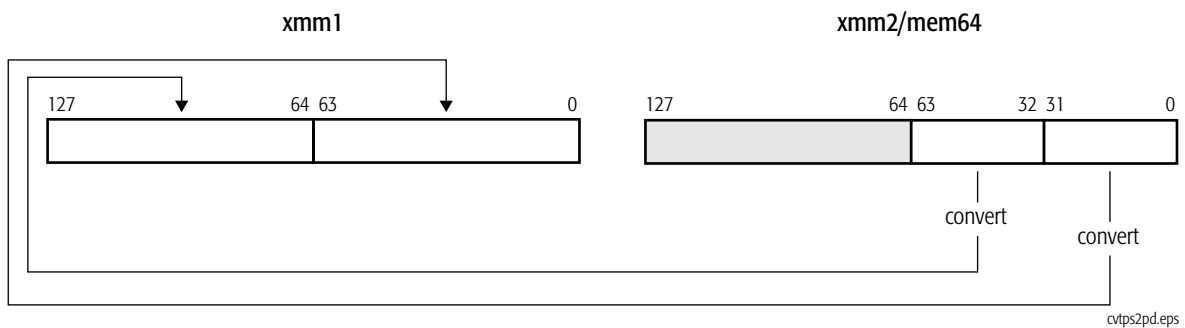

#### Related Instructions

CVTPD2PS, CVTSD2SS, CVTSS2SD

#### rFLAGS Affected

None

#### MXCSR Flags Affected

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**

A flag that can be set to one or zero is M (modified). Unaffected flags are blank.


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

**CVTSP2PI****Convert Packed Single-Precision Floating-Point to Packed Doubleword Integers**

Converts two packed single-precision floating-point values in the low-order 64 bits of an XMM register or a 64-bit memory location to two packed 32-bit signed integers and writes the converted values in an MMX register.

Mnemonic	Opcode	Description
CVTSP2PI <i>mmx, xmm/mem64</i>	0F 2D /r	Converts packed single-precision floating-point values in an XMM register or 64-bit memory location to packed doubleword integers in the destination MMX™ register.

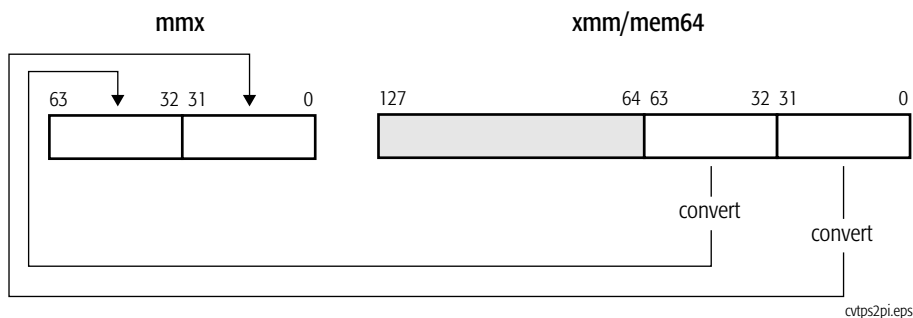

If the result of the conversion is an inexact value, the value is rounded as specified by the rounding control bits (RC) in the MXCSR register. If the floating-point value is a NaN, infinity, or if the result of the conversion is larger than the maximum signed doubleword ( $-2^{31}$  to  $+2^{31} - 1$ ), the instruction returns the 32-bit indefinite integer value (8000\_0000h) when the invalid-operation exception (IE) is masked.

**Related Instructions**

CVTDQ2PS, CVTPI2PS, CVTSP2DQ, CVTSI2SS, CVTSS2SI, CVTTPS2DQ, CVTTPS2PI, CVTTSS2SI

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
x87 floating-point exception pending, #MF	X	X	X	An exception was pending due to an x87 floating-point instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.

Exception	Real	Virtual 8086	Protected	Cause of Exception
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value, a QNaN value, or $\pm$ infinity.
	X	X	X	A source operand was too large to fit in the destination format.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**CVTSD2SI****Convert Scalar Double-Precision Floating-Point to Signed Doubleword or Quadword Integer**

Converts a scalar double-precision floating-point value in the low-order 64 bits of an XMM register or a 64-bit memory location to a 32-bit or 64-bit signed integer and writes the converted value in a general-purpose register.

Mnemonic	Opcode	Description
CVTSD2SI <i>reg32, xmm/mem64</i>	F2 0F 2D /r	Converts a packed double-precision floating-point value in an XMM register or 64-bit memory location to a doubleword integer in a general-purpose register.
CVTSD2SI <i>reg64, xmm/mem64</i>	F2 0F 2D /r	Converts a packed double-precision floating-point value in an XMM register or 64-bit memory location to a quadword integer in a general-purpose register.

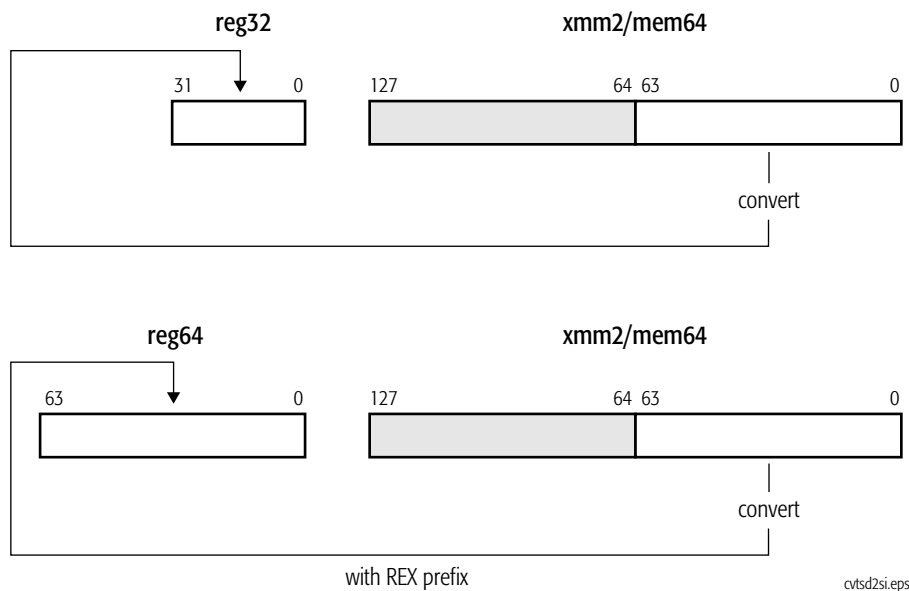

If the result of the conversion is an inexact value, the value is rounded as specified by the rounding control bits (RC) in the MXCSR register. If the floating-point value is a NaN, infinity, or if the result of the conversion is larger than the maximum signed doubleword ( $-2^{31}$  to  $+2^{31} - 1$ ) or quadword value ( $-2^{63}$  to  $+2^{63} - 1$ ), the instruction returns the indefinite integer value (8000\_0000h for 32-bit integers,

8000\_0000\_0000\_0000h for 64-bit integers) when the invalid-operation exception (IE) is masked.

**Related Instructions**

CVTDQ2PD, CVTPD2DQ, CVTPD2PI, CVTPI2PD, CVTSI2SD, CVTTPD2DQ, CVTTPD2PI, CVTTSD2SI

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

*Note:*  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.




Exception	Real	Virtual 8086	Protected	Cause of Exception
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value, a QNaN value, or $\pm$ infinity.
	X	X	X	A source operand was too large to fit in the destination format.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**CVTSD2SS****Convert Scalar Double-Precision Floating-Point to Scalar Single-Precision Floating-Point**

Converts a scalar double-precision floating-point value in the low-order 64 bits of an XMM register or a 64-bit memory location to a single-precision floating-point value and writes the converted value in the low-order 32 bits of another XMM register. The three high-order doublewords in the destination XMM register are not modified. If the result of the conversion is an inexact value, the value is rounded as specified by the rounding control bits (RC) in the MXCSR register.

Mnemonic	Opcode	Description
CVTSD2SS <i>xmm1, xmm2/mem64</i>	F2 0F 5A/r	Converts a scalar double-precision floating-point value in an XMM register or 64-bit memory location to a scalar single-precision floating-point value in the destination XMM register.

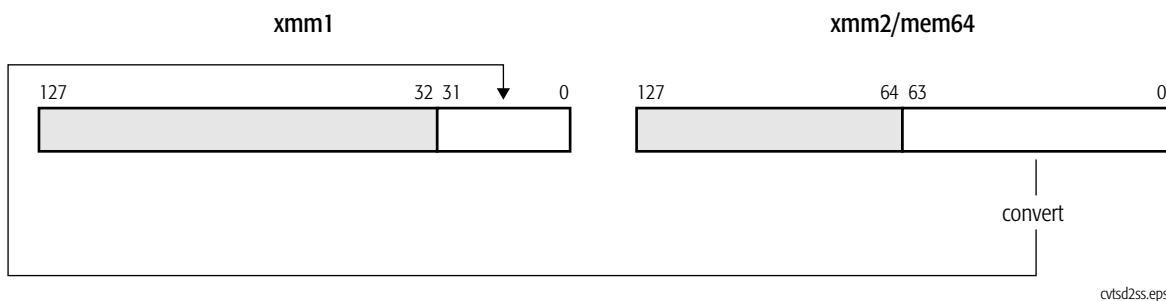

cvtsd2ss.eps

**Related Instructions**

CVTPD2PS, CVTPS2PD, CVTSS2SD

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M		M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**CVTSI2SD****Convert Signed Doubleword or Quadword Integer to Scalar Double-Precision Floating-Point**

Converts a 32-bit or 64-bit signed integer value in a general-purpose register or memory location to a double-precision floating-point value and writes the converted value in the low-order 64 bits of an XMM register. The high-order 64 bits in the destination XMM register are not modified.

Mnemonic	Opcode	Description
CVTSI2SD <i>xmm, reg/mem32</i>	F2 0F 2A /r	Converts a doubleword integer in a general-purpose register or 32-bit memory location to a double-precision floating-point value in the destination XMM register.
CVTSI2SD <i>xmm, reg/mem64</i>	F2 0F 2A /r	Converts a quadword integer in a general-purpose register or 64-bit memory location to a double-precision floating-point value in the destination XMM register.

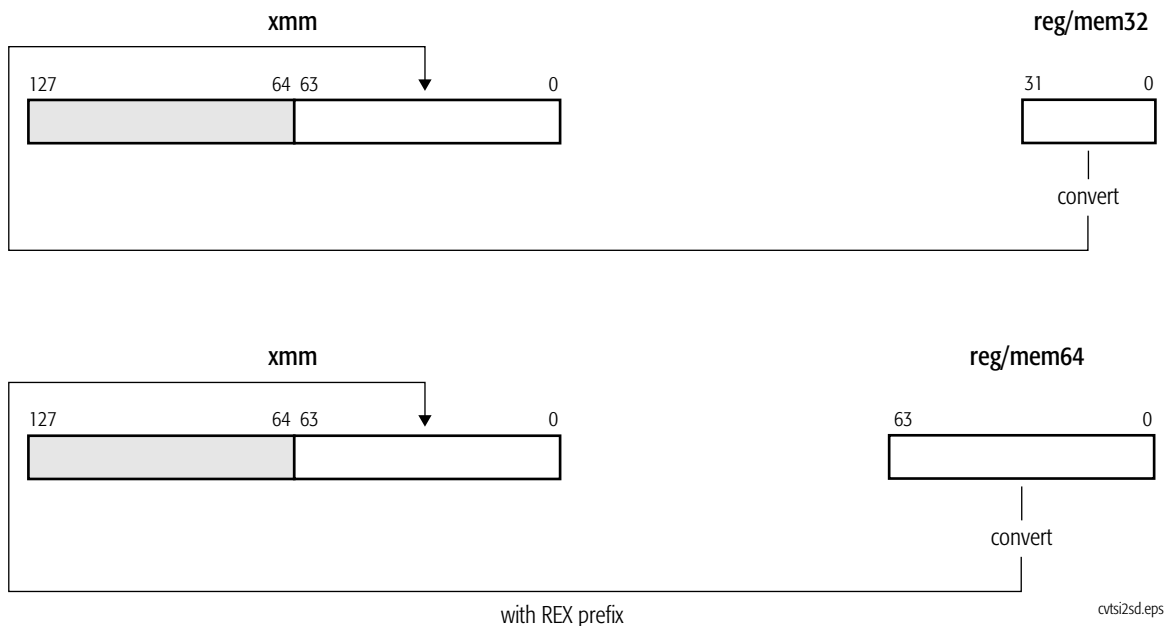

If the result of the conversion is an inexact value, the value is rounded as specified by the rounding control bits (RC) in the MXCSR register.

**Related Instructions**

CVTDQ2PD, CVTPD2DQ, CVTPD2PI, CVTPI2PD, CVTSD2SI, CVTTPD2DQ, CVTTPD2PI, CVTTSD2SI

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

*Note:*  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.

Exception	Real	Virtual 8086	Protected	Cause of Exception
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
SIMD Floating-Point Exceptions				
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

## CVTSI2SS Convert Signed Doubleword or Quadword Integer to Scalar Single-Precision Floating-Point

Converts a 32-bit or 64-bit signed integer value in a general-purpose register or memory location to a single-precision floating-point value and writes the converted value in the low-order 32 bits of an XMM register. The three high-order doublewords in the destination XMM register are not modified.

Mnemonic	Opcode	Description
<code>CVTSI2SS <i>xmm, reg/mem32</i></code>	F3 0F 2A/r	Converts a doubleword integer in a general-purpose register or 32-bit memory location to a single-precision floating-point value in the destination XMM register.
<code>CVTSI2SS <i>xmm, reg/mem64</i></code>	F3 0F 2A/r	Converts a quadword integer in a general-purpose register or 64-bit memory location to a single-precision floating-point value in the destination XMM register.

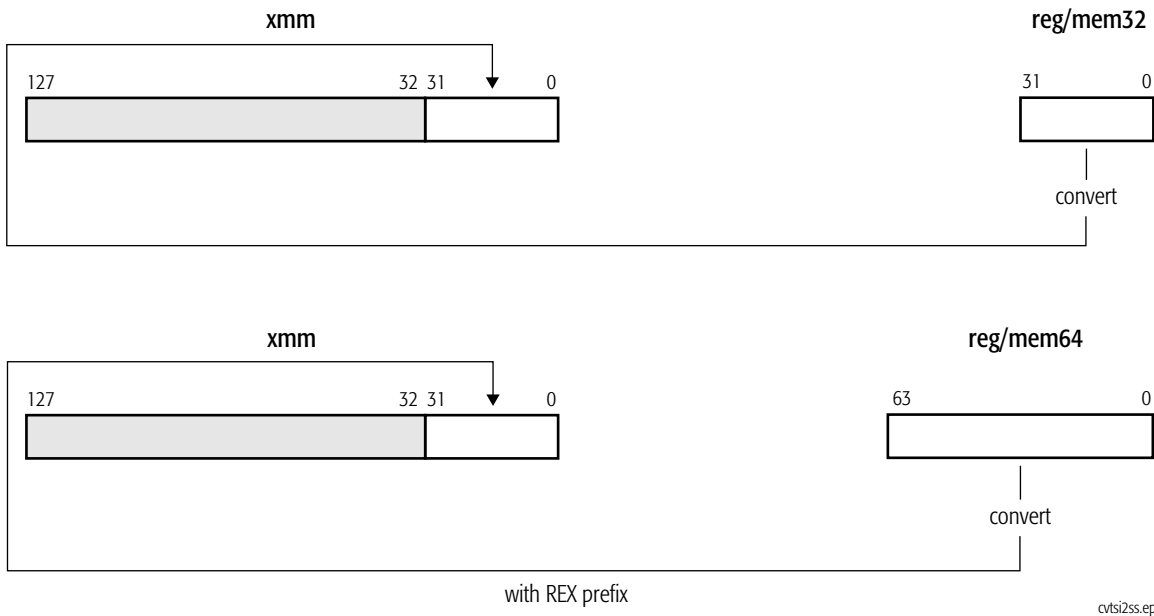

If the result of the conversion is an inexact value, the value is rounded as specified by the rounding control bits (RC) in the MXCSR register.



**Related Instructions**

CVTDQ2PS, CVTPI2PS, CVTPS2DQ, CVTPS2PI, CVTSS2SI, CVTTPS2DQ, CVTTPS2PI, CVTTSS2SI

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.

Exception	Real	Virtual 8086	Protected	Cause of Exception
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**CVTSS2SD****Convert Scalar Single-Precision Floating-Point to Scalar Double-Precision Floating-Point**


Converts a single-precision floating-point value in the low-order 32 bits of an XMM register or a 32-bit memory location to a double-precision floating-point value and writes the converted value in the low-order 64 bits of another XMM register. The high-order 64 bits in the destination XMM register are not modified.

**Mnemonic**CVTSS2SD *xmm1, xmm2/mem32***Opcode**

F3 0F 5A/r

**Description**

Converts scalar single-precision floating-point value in an XMM register or 32-bit memory location to double-precision floating-point value in the destination XMM register.

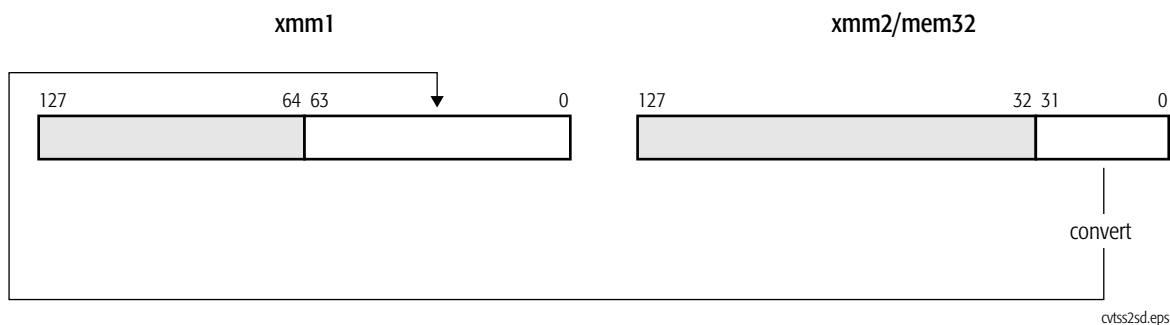**Related Instructions**

CVTPD2PS, CVTPS2PD, CVTSD2SS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**

A flag that can be set to one or zero is M (modified). Unaffected flags are blank.


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

**CVTSS2SI****Convert Scalar Single-Precision Floating-Point to Signed Doubleword or Quadword Integer**

The CVTSS2SI instruction converts a single-precision floating-point value in the low-order 32 bits of an XMM register or a 32-bit memory location to a 32-bit or 64-bit signed integer value and writes the converted value in a general-purpose register.

Mnemonic	Opcode	Description
CVTSS2SI <i>reg32, xmm2/mem32</i>	F3 0F 2D /r	Converts a single-precision floating-point value in an XMM register or 32-bit memory location to a doubleword integer value in a general-purpose register.
CVTSS2SI <i>reg64, xmm2/mem32</i>	F3 0F 2D /r	Converts a single-precision floating-point value in an XMM register or 32-bit memory location to a quadword integer value in a general-purpose register.

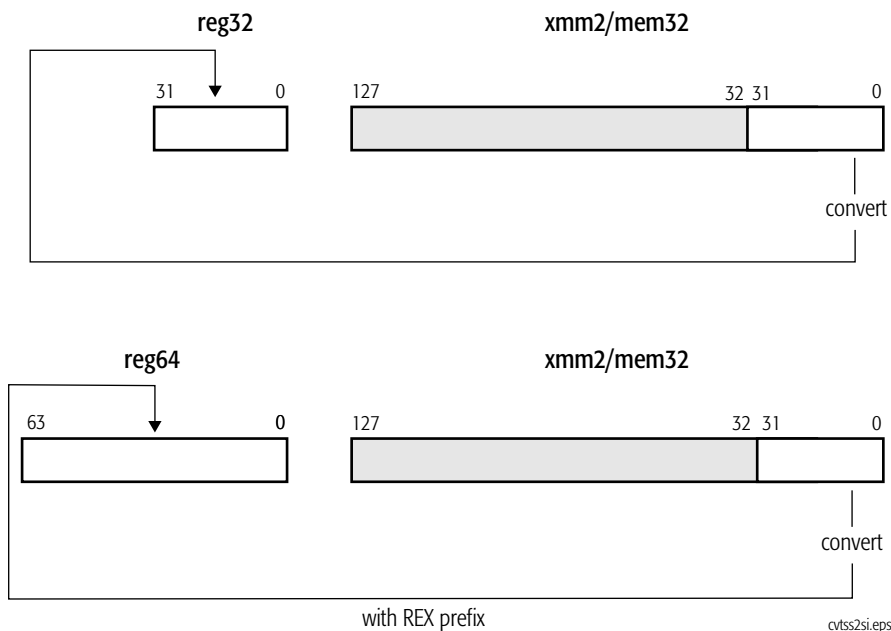

If the result of the conversion is an inexact value, the value is rounded as specified by the rounding control bits (RC) in the MXCSR register. If the floating-point value is a NaN, infinity, or if the result of the conversion is larger than the maximum signed doubleword ( $-2^{31}$  to  $+2^{31} - 1$ ) or quadword value ( $-2^{63}$  to  $+2^{63} - 1$ ), the instruction returns the indefinite integer value (8000\_0000h for 32-bit integers,

8000\_0000\_0000\_0000h for 64-bit integers) when the invalid-operation exception (IE) is masked.

### Related Instructions

CVTDQ2PS, CVTPI2PS, CVTPS2DQ, CVTPS2PI, CVTSI2SS, CVTTPS2DQ, CVTTPS2PI, CVTTSS2SI

### rFLAGS Affected

None

### MXCSR Flags Affected

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

### Exceptions


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

Exception	Real	Virtual 8086	Protected	Cause of Exception
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value, a QNaN value, or $\pm$ infinity.
	X	X	X	A source operand was too large to fit in the destination format.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**CVTTPD2DQ****Convert Packed Double-Precision Floating-Point to Packed Doubleword Integers, Truncated**

Converts two packed double-precision floating-point values in an XMM register or a 128-bit memory location to two packed 32-bit signed integer values and writes the converted values in the low-order 64 bits of another XMM register. The high-order 64 bits of the destination XMM register are cleared to all 0s.

Mnemonic	Opcode	Description
CVTTPD2DQ <i>xmm1, xmm2/mem128</i>	66 0F E6 /r	Converts packed double-precision floating-point values in an XMM register or 128-bit memory location to packed doubleword integer values in the destination XMM register. Inexact results are truncated.

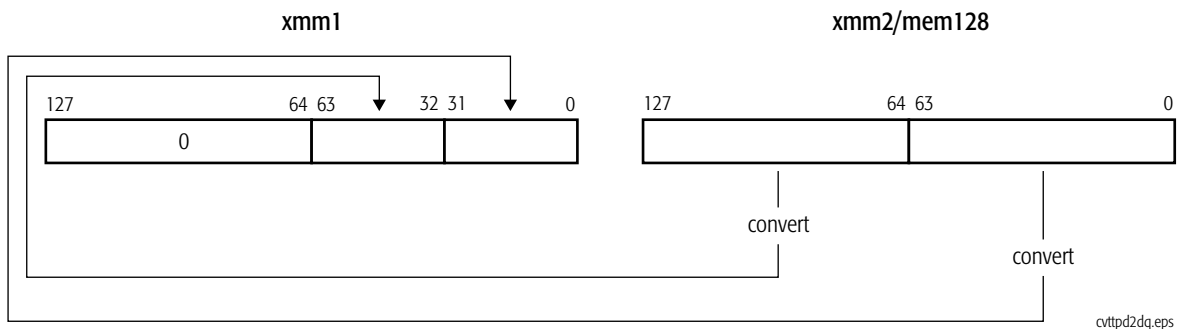

If the result of the conversion is an inexact value, the value is truncated (rounded toward zero). If the floating-point value is a NaN, infinity, or if the result of the conversion is larger than the maximum signed doubleword ( $-2^{31}$  to  $+2^{31} - 1$ ), the instruction returns the 32-bit indefinite integer value (8000\_0000h) when the invalid-operation exception (IE) is masked.

**Related Instructions**

CVTDQ2PD, CVTPD2DQ, CVTPD2PI, CVTPI2PD, CVTSD2SI, CVTSI2SD, CVTTPD2PI, CVTTSD2SI

**rFLAGS Affected**

None



**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.

Exception	Real	Virtual 8086	Protected	Cause of Exception
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value, a QNaN value, or $\pm$ infinity.
	X	X	X	A source operand was too large to fit in the destination format.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**CVTTPD2PI****Convert Packed Double-Precision Floating-Point to Packed Doubleword Integers, Truncated**

Converts two packed double-precision floating-point values in an XMM register or a 128-bit memory location to two packed 32-bit signed integer values and writes the converted values in an MMX register.

Mnemonic	Opcode	Description
CVTTPD2PI <i>mmx, xmm/mem128</i>	66 0F 2C /r	Converts packed double-precision floating-point values in an XMM register or 128-bit memory location to packed doubleword integer values in the destination MMX™ register. Inexact results are truncated.

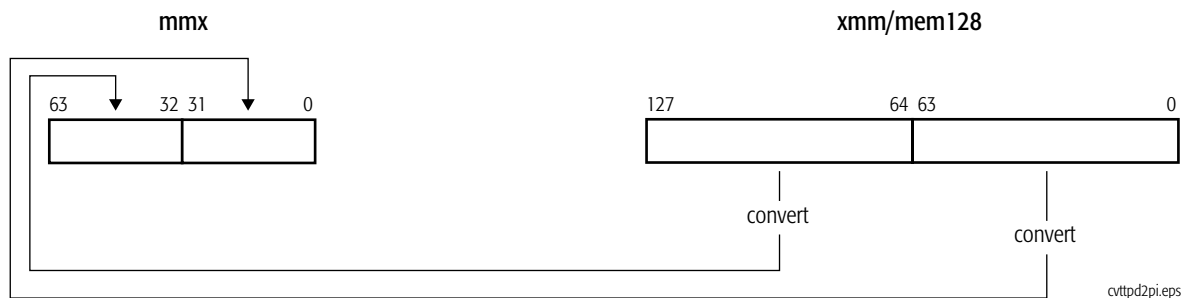

If the result of the conversion is an inexact value, the value is truncated (rounded toward zero). If the floating-point value is a NaN, infinity, or if the result of the conversion is larger than the maximum signed doubleword ( $-2^{31}$  to  $+2^{31} - 1$ ), the instruction returns the 32-bit indefinite integer value (8000\_0000h) when the invalid-operation exception (IE) is masked.

**Related Instructions**

CVTDQ2PD, CVTPD2DQ, CVTPD2PI, CVTPI2PD, CVTSD2SI, CVTSI2SD, CVTTPD2DQ, CVTTSD2SI

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
x87 floating-point exception pending, #MF	X	X	X	An exception is pending due to an x87 floating-point instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.

Exception	Real	Virtual 8086	Protected	Cause of Exception
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value, a QNaN value, or $\pm$ infinity.
	X	X	X	A source operand was too large to fit in the destination format.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**CVTTPS2DQ****Convert Packed Single-Precision Floating-Point to Packed Doubleword Integers, Truncated**

Converts four packed single-precision floating-point values in an XMM register or a 128-bit memory location to four packed 32-bit signed integers and writes the converted values in another XMM register.

Mnemonic	Opcode	Description
CVTTPS2DQ <i>xmm1, xmm2/mem128</i>	F3 0F 5B/r	Converts packed single-precision floating-point values in an XMM register or 128-bit memory location to packed doubleword integer values in the destination XMM register. Inexact results are truncated.

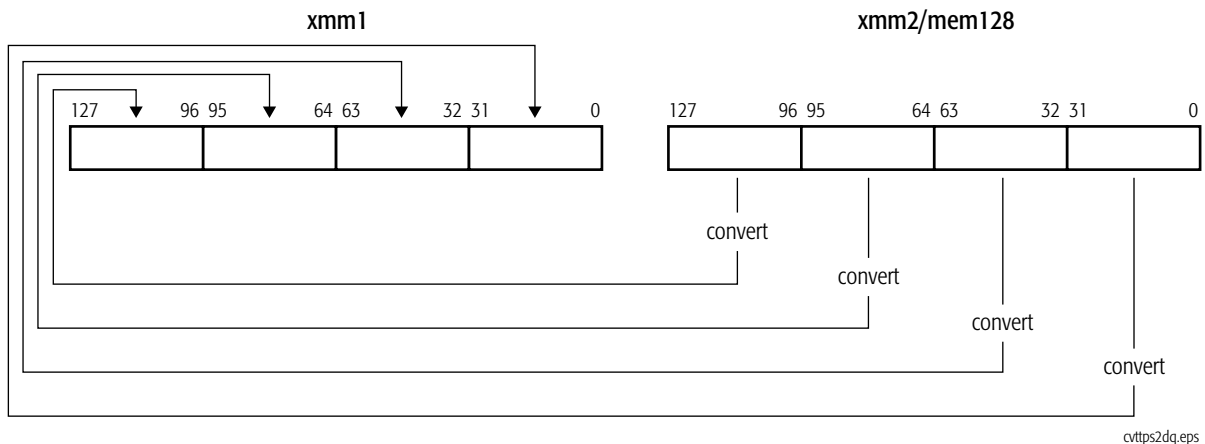

If the result of the conversion is an inexact value, the value is truncated (rounded toward zero). If the floating-point value is a NaN, infinity, or if the result of the conversion is larger than the maximum signed doubleword ( $-2^{31}$  to  $+2^{31} - 1$ ), the instruction returns the 32-bit indefinite integer value (8000\_0000h) when the invalid-operation exception (IE) is masked.

**Related Instructions**

CVTDQ2PS, CVTPI2PS, CVTTPS2DQ, CVTTPS2PI, CVTSS2SI, CVTSS2SI, CVTTPS2PI, CVTTPS2SI

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.


Exception	Real	Virtual 8086	Protected	Cause of Exception
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value, a QNaN value, or $\pm$ infinity.
	X	X	X	A source operand was too large to fit in the destination format.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.



**CVTTPS2PI****Convert Packed Single-Precision Floating-Point to Packed Doubleword Integers, Truncated**

Converts two packed single-precision floating-point values in the low-order 64 bits of an XMM register or a 64-bit memory location to two packed 32-bit signed integer values and writes the converted values in an MMX register.

Mnemonic	Opcode	Description
CVTTPS2PI <i>mmx, xmm/mem64</i>	0F 2C/r	Converts packed single-precision floating-point values in an XMM register or 64-bit memory location to doubleword integer values in the destination MMX™ register. Inexact results are truncated.

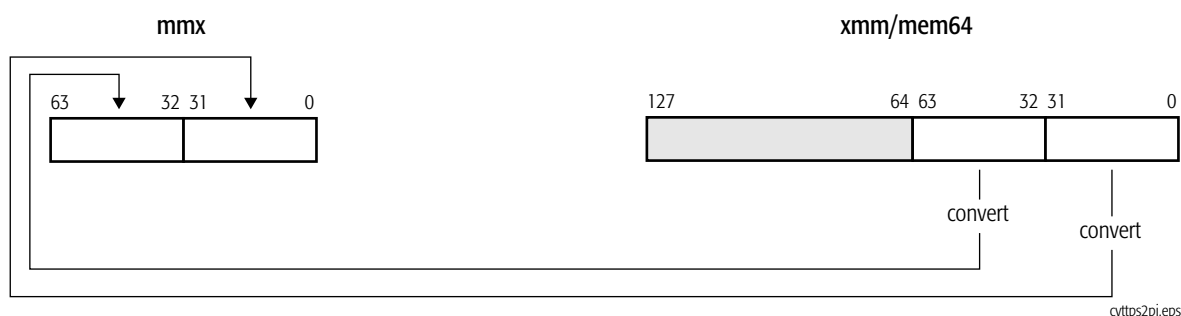

If the result of the conversion is an inexact value, the value is truncated (rounded toward zero). If the floating-point value is a NaN, infinity, or if the result of the conversion is larger than the maximum signed doubleword ( $-2^{31}$  to  $+2^{31} - 1$ ), the instruction returns the 32-bit indefinite integer value (8000\_0000h) when the invalid-operation exception (IE) is masked.

**Related Instructions**

CVTDQ2PS, CVTPI2PS, CVTTPS2DQ, CVTTPS2PI, CVTSS2SI, CVTSS2DQ, CVTSS2SI

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

*Note:*  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
x87 floating-point exception pending, #MF	X	X	X	An exception was pending due to an x87 floating-point instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.

Exception	Real	Virtual 8086	Protected	Cause of Exception
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value, a QNaN value, or $\pm$ infinity.
	X	X	X	A source operand was too large to fit in the destination format.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**CVTTSD2SI****Convert Scalar Double-Precision Floating-Point to Signed Doubleword of Quadword Integer, Truncated**

Converts a double-precision floating-point value in the low-order 64 bits of an XMM register or a 64-bit memory location to a 32-bit or 64-bit signed integer value and writes the converted value in a general-purpose register.

Mnemonic	Opcode	Description
<code>CVTTSD2SI reg32, xmm/mem64</code>	<code>F2 0F 2C/r</code>	Converts scalar double-precision floating-point value in an XMM register or 64-bit memory location to a doubleword signed integer value in a general-purpose register. Inexact results are truncated.
<code>CVTTSD2SI reg64, xmm/mem64</code>	<code>F2 0F 2C/r</code>	Converts scalar double-precision floating-point value in an XMM register or 64-bit memory location to a quadword signed integer value in a general-purpose register. Inexact results are truncated.

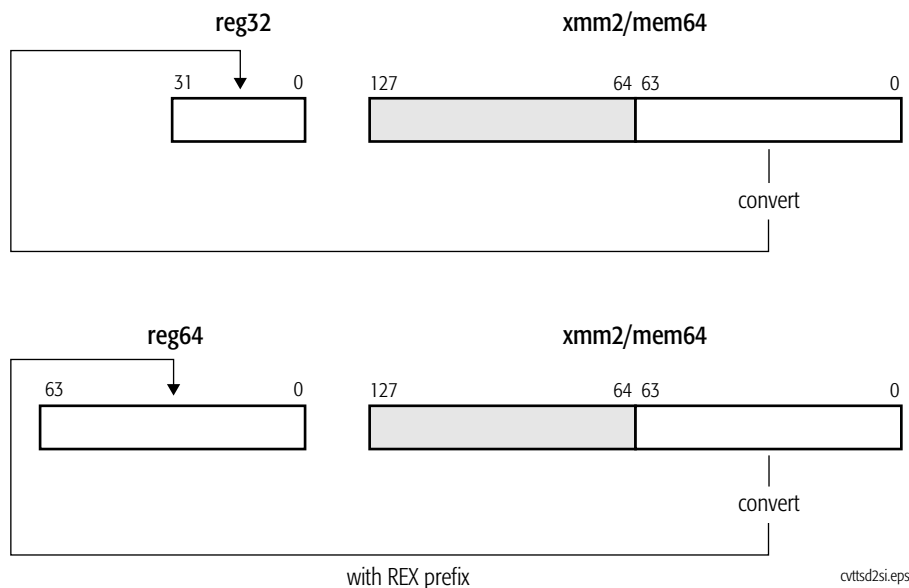

If the result of the conversion is an inexact value, the value is truncated (rounded toward zero). If the floating-point value is a NaN, infinity, or if the result of the conversion is larger than the maximum signed doubleword ( $-2^{31}$  to  $+2^{31} - 1$ ) or quadword value ( $-2^{63}$  to  $+2^{63} - 1$ ), the instruction returns the indefinite integer value

(8000\_0000h for 32-bit integers, 8000\_0000\_0000\_0000h for 64-bit integers) when the invalid-operation exception (IE) is masked.

### Related Instructions

CVTDQ2PD, CVTPD2DQ, CVTPD2PI, CVTPI2PD, CVTSD2SI, CVTSI2SD, CVTTPD2DQ, CVTTPD2PI

### rFLAGS Affected

None

### MXCSR Flags Affected

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

### Exceptions


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

Exception	Real	Virtual 8086	Protected	Cause of Exception
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value, a QNaN value, or $\pm$ infinity.
	X	X	X	A source operand was too large to fit in the destination format.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**CVTTSS2SI****Convert Scalar Single-Precision Floating-Point to Signed Doubleword or Quadword Integer, Truncated**

Converts a single-precision floating-point value in the low-order 32 bits of an XMM register or a 32-bit memory location to a 32-bit or 64-bit signed integer value and writes the converted value in a general-purpose register.

Mnemonic	Opcode	Description
CVTTSS2SI <i>reg32, xmm/mem32</i>	F3 0F 2C /r	Converts scalar single-precision floating-point value in an XMM register or 32-bit memory location to a signed doubleword integer value in a general-purpose register. Inexact results are truncated.
CVTTSS2SI <i>reg64, xmm/mem32</i>	F3 0F 2C /r	Converts scalar single-precision floating-point value in an XMM register or 32-bit memory location to a signed quadword integer value in a general-purpose register. Inexact results are truncated.

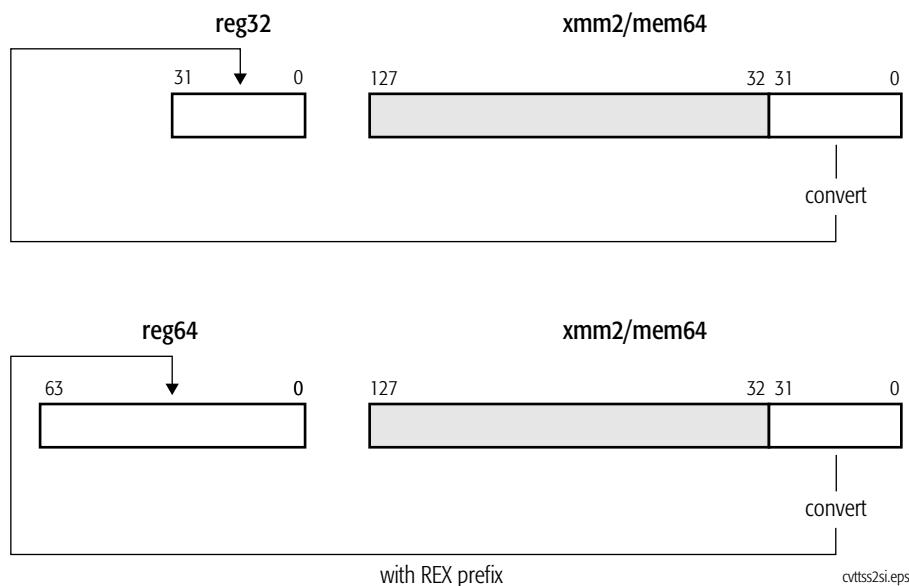

If the result of the conversion is an inexact value, the value is truncated (rounded toward zero). If the floating-point value is a NaN, infinity, or if the result of the conversion is larger than the maximum signed doubleword ( $-2^{31}$  to  $+2^{31} - 1$ ) or quadword value ( $-2^{63}$  to  $+2^{63} - 1$ ), the instruction returns the indefinite integer value

(8000\_0000h for 32-bit integers, 8000\_0000\_0000\_0000h for 64-bit integers) when the invalid-operation exception (IE) is masked.

### Related Instructions

CVTDQ2PS, CVTPI2PS, CVTPS2DQ, CVTPS2PI, CVTSI2SS, CVTSS2SI, CVTTPS2DQ, CVTTPS2PI

### rFLAGS Affected

None

### MXCSR Flags Affected

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M					M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

### Exceptions

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.




Exception	Real	Virtual 8086	Protected	Cause of Exception
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value, a QNaN value, or $\pm$ infinity.
	X	X	X	A source operand was too large to fit in the destination format.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**DIVPD****Divide Packed Double-Precision Floating-Point**

Divides each of the two packed double-precision floating-point values in the first source operand by the corresponding packed double-precision floating-point value in the second source operand and writes the result of each division in the corresponding quadword of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
DIVPD <i>xmm1, xmm2/mem128</i>	66 0F 5E /r	Divides packed double-precision floating-point values in an XMM register by the packed double-precision floating-point values in another XMM register or 128-bit memory location.

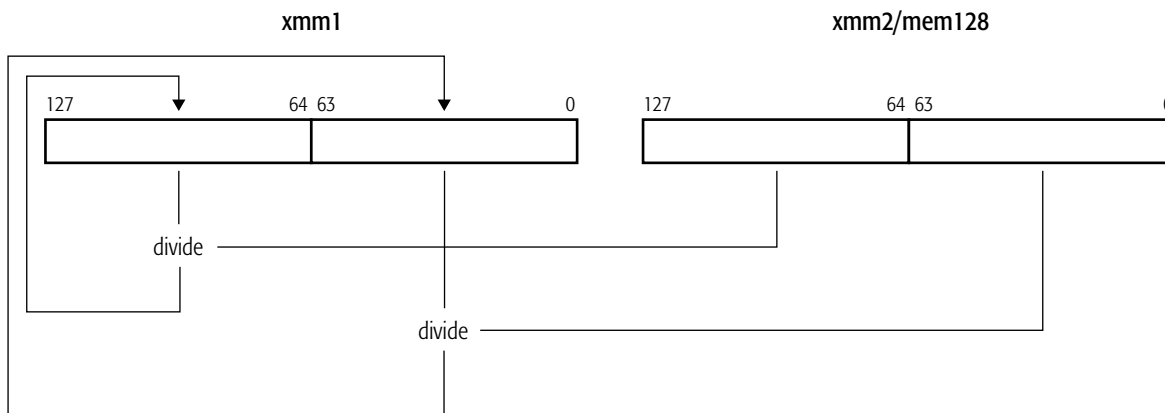

divpd.eps

**Related Instructions**

DIVPS, DIVSD, DIVSS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M	M	M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	Zero was divided by zero.
	X	X	X	±infinity was divided by ±infinity.

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Zero-divide exception (ZE)	X	X	X	A non-zero number was divided by zero.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**DIVPS****Divide Packed Single-Precision Floating-Point**

Divides each of the four packed single-precision floating-point values in the first source operand by the corresponding packed single-precision floating-point value in the second source operand and writes the result of each division in the corresponding quadword of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
DIVPS <i>xmm1, xmm2/mem128</i>	0F 5E/r	Divides packed single-precision floating-point values in an XMM register by the packed single-precision floating-point values in another XMM register or 128-bit memory location.

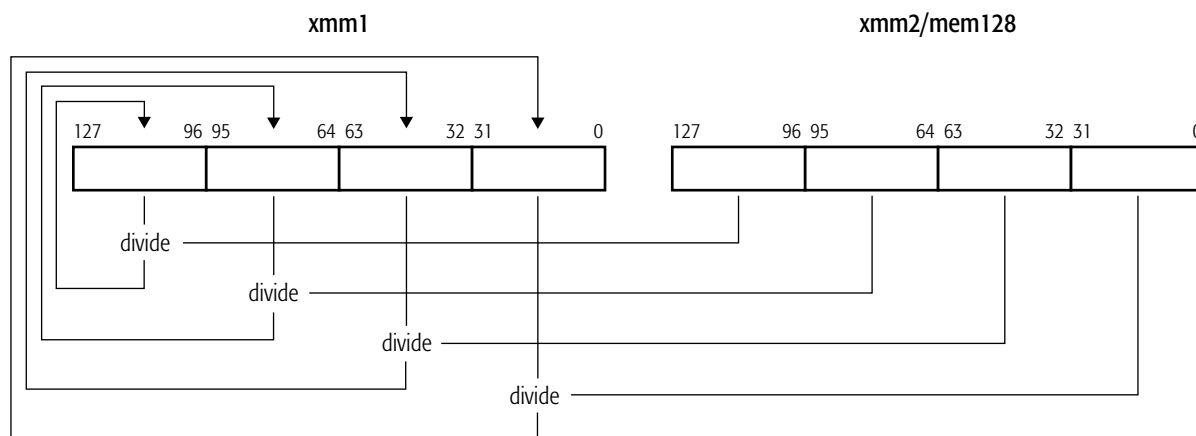

divps.eps

**Related Instructions**

DIVPD, DIVSD, DIVSS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M	M	M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

*Note:*  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	Zero was divided by zero.
	X	X	X	±infinity was divided by ±infinity.


<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Zero-divide exception (ZE)	X	X	X	A non-zero number was divided by zero.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

## DIVSD

## Divide Scalar Double-Precision Floating-Point

Divides the double-precision floating-point value in the low-order quadword of the first source operand by the double-precision floating-point value in the low-order quadword of the second source operand and writes the result in the low-order quadword of the destination (first source). The high-order quadword of the destination is not modified. The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
DIVSD <i>xmm1, xmm2/mem64</i>	F2 0F 5E/r	Divides low-order double-precision floating-point value in an XMM register by the low-order double-precision floating-point value in another XMM register or in a 64- or 128-bit memory location.

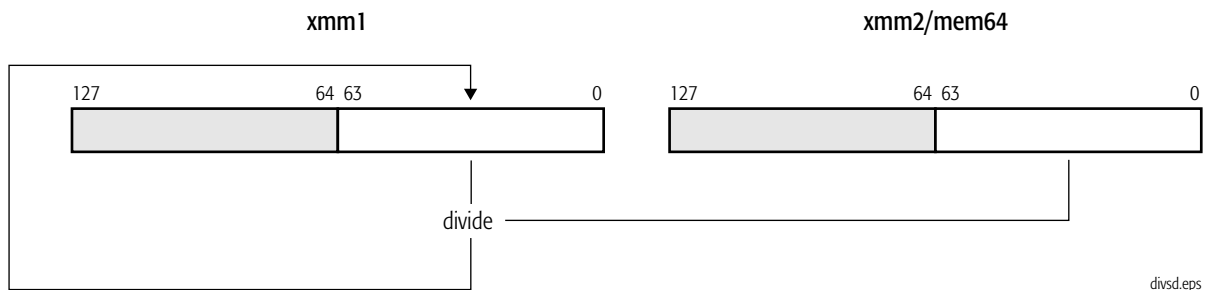

### Related Instructions

DIVPD, DIVPS, DIVSS

### rFLAGS Affected

None

### MXCSR Flags Affected

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M	M	M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**

A flag that can be set to one or zero is M (modified). Unaffected flags are blank.




## Exceptions

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
				Zero was divided by zero.
				$\pm$ infinity was divided by $\pm$ infinity.
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Zero-divide exception (ZE)	X	X	X	A non-zero number was divided by zero.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**DIVSS****Divide Scalar Single-Precision Floating-Point**

Divides the single-precision floating-point value in the low-order doubleword of the first source operand by the single-precision floating-point value in the low-order doubleword of the second source operand and writes the result in the low-order doubleword of the destination (first source). The three high-order doublewords of the destination are not modified. The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
<code>DIVSS xmm1, xmm2/mem32</code>	<code>F3 0F 5E/r</code>	Divides low-order single-precision floating-point value in an XMM register by the low-order single-precision floating-point value in another XMM register or in a 32-bit memory location.

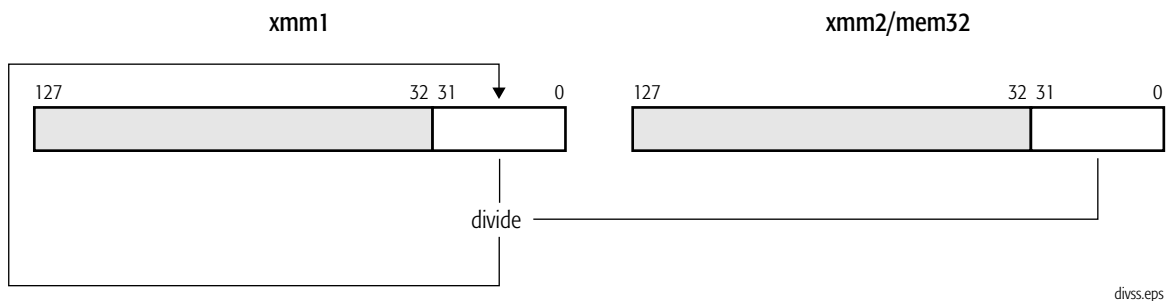

divss.eps

**Related Instructions**

DIVPD, DIVPS, DIVSD

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M	M	M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	Zero was divided by zero.
	X	X	X	$\pm$ infinity was divided by $\pm$ infinity.

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Zero-divide exception (ZE)	X	X	X	A non-zero number was divided by zero.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**FXRSTOR****Restore XMM, MMX™, and x87 State**

Restores the XMM, MMX, and x87 state. The data loaded from memory is the state information previously saved using the FXSAVE instruction. Restoring data with FXRSTOR that had been previously saved with an FSAVE (rather than FXSAVE) instruction results in an incorrect restoration.

If FXRSTOR results in set exception flags in the loaded x87 status word register, and these exceptions are unmasked in the x87 control word register, a floating-point exception occurs when the next floating-point instruction is executed (except for the no-wait floating-point instructions).

If the restored MXCSR register contains a set bit in an exception status flag, and the corresponding exception mask bit is cleared (indicating an unmasked exception), loading the MXCSR register from memory does not cause a SIMD floating-point exception (#XF).

FXRSTOR does not restore the x87 error pointers (last instruction pointer, last data pointer, and last opcode), except in the relatively rare cases in which the exception-summary (ES) bit in the x87 status word is set to 1, indicating that an unmasked x87 exception has occurred.

The architecture supports two memory formats for FXRSTOR, a 512-byte 32-bit legacy format and a 512-byte 64-bit format. Selection of the 32-bit or 64-bit format is accomplished by using the corresponding effective operand size in the FXRSTOR instruction. If software running in 64-bit mode executes an FXRSTOR with a 32-bit operand size (no REX-prefix operand-size override), the 32-bit legacy format is used. If software running in 64-bit mode executes an FXRSTOR with a 64-bit operand size (requires REX-prefix operand-size override), the 64-bit format is used. For details about the memory image restored by FXRSTOR, see “Saving Media and x87 Processor State” in Volume 2.

If the operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0, the saved image of XMM0–XMM7 and MXCSR is not loaded into the processor. A general-protection exception occurs if there is an attempt to load a non-zero value to the bits in MXCSR that are defined as reserved (bits 31–16).

<b>Mnemonic</b>	<b>Opcode</b>	<b>Description</b>
FXRSTOR <i>mem512env</i>	OF AE /1	Restores XMM, MMX™, and x87 state from 512-byte memory location.

**Related Instructions**

FWAIT, FXSAVE

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**

A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The FXSAVE/FSRSTOR instructions are not supported, as indicated by bit 24 of CPUID standard function 1 or extended function 8000_0001.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
	X	X	X	Ones were written to the reserved bits in MXCSR.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## FXSAVE Save XMM, MMX™, and x87 State

Saves the XMM, MMX, and x87 state. A memory location that is not aligned on a 16-byte boundary causes a general-protection exception.

Unlike FSAVE and FNSAVE, FXSAVE does not alter the x87 tag bits. The contents of the saved MMX/x87 data registers are retained, thus indicating that the registers may be valid (or whatever other value the x87 tag bits indicated prior to the save). To invalidate the contents of the MMX/x87 data registers after FXSAVE, software must execute a FINIT instruction. Also, FXSAVE (like FNSAVE) does not check for pending unmasked x87 floating-point exceptions. An FWAIT instruction can be used for this purpose.

FXSAVE does not save the x87 pointer registers (last instruction pointer, last data pointer, and last opcode), except in the relatively rare cases in which the exception-summary (ES) bit in the x87 status word is set to 1, indicating that an unmasked x87 exception has occurred.

The architecture supports two memory formats for FXSAVE, a 512-byte 32-bit legacy format and a 512-byte 64-bit format. Selection of the 32-bit or 64-bit format is accomplished by using the corresponding effective operand size in the FXSAVE instruction. If software running in 64-bit mode executes an FXSAVE with a 32-bit operand size (no REX-prefix operand-size override), the 32-bit legacy format is used. If software running in 64-bit mode executes an FXSAVE with a 64-bit operand size (requires REX-prefix operand-size override), the 64-bit format is used. For details about the memory image restored by FXRSTOR, see “Saving Media and x87 Processor State” in Volume 2.

If the operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0, FXSAVE does not save the image of XMM0–XMM7 or MXCSR. For details about the CR4.OSFXSR bit, see “FXSAVE/FXRSTOR Support (OSFXSR) Bit” in Volume 2.

Mnemonic	Opcode	Description
FXSAVE <i>mem512env</i>	0F AE /0	Saves XMM, MMX™, and x87 state to 512-byte memory location.

### Related Instructions

FINIT, FNSAVE, FRSTOR, FSAVE, FXRSTOR, LDMXCSR, STMXCSR

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The FXSAVE/FSRSTOR instructions are not supported, as indicated by bit 24 of CPUID standard function 1 or extended function 8000_0001.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.



## LDMXCSR Load MXCSR Control/Status Register

Loads the MXCSR register with a 32-bit value from memory. The least-significant bit of the memory location is loaded in bit 0 of MXCSR. Bits 31–16 of the MXCSR are reserved and must be zero. A general-protection exception occurs if the LDMXCSR instruction attempts to load non-zero values into MXCSR bits 31–16.

The MXCSR register is described in “Registers” in Volume 1.

Mnemonic	Opcode	Description
LDMXCSR <i>mem32</i>	OF AE/2	Loads MXCSR register with 32-bit value in memory.

### Related Instructions

STMXCSR

### rFLAGS Affected

None

### MXCSR Flags Affected

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
<b>Note:</b> A flag that can be set to one or zero is <i>M</i> (modified). Unaffected flags are blank.															


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	Ones were written to the reserved bits in MXCSR.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.

## MASKMOVDQU Masked Move Double Quadword Unaligned

Stores bytes from the first source operand as selected by the sign bits in the second source operand (sign-bit is 0 = no write and sign-bit is 1 = write) to a memory location specified in the DS:rDI registers. The first source operand is an XMM register, and the second source operand is another XMM register. The store address may be unaligned.

Mnemonic	Opcode	Description
MASKMOVDQU <i>xmm1, xmm2</i>	66 0F F7 /r	Store bytes from an XMM register selected by a mask value in another XMM register to DS:rDI.

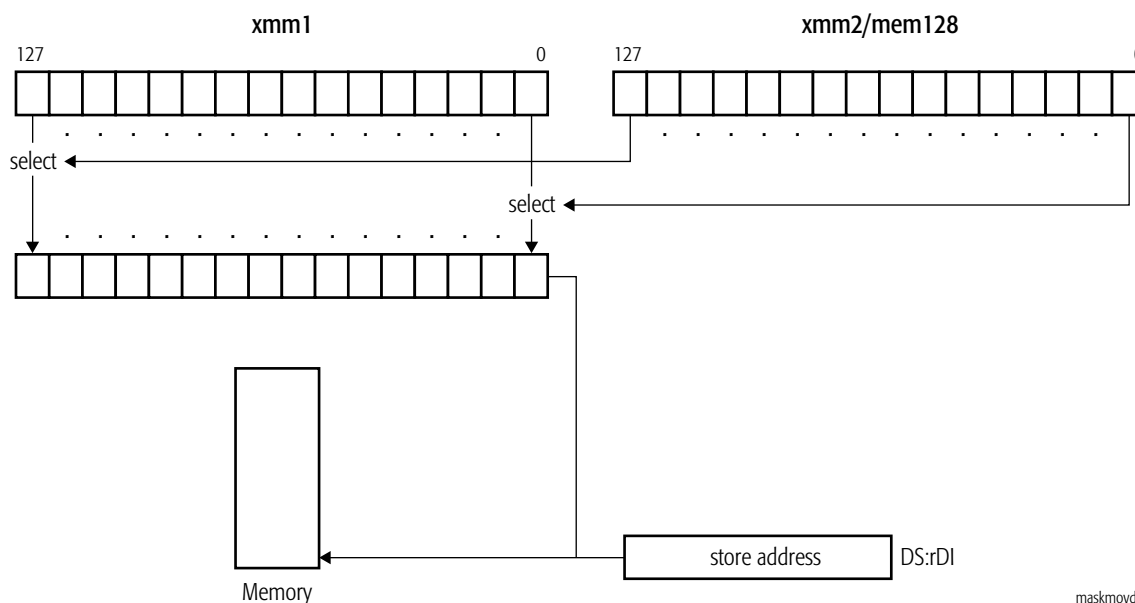

A mask value of all 0s results in the following behavior:

- No data is written to memory.
- Code and data breakpoints are not guaranteed to be signaled in all implementations.
- Exceptions associated with memory addressing and page faults are not guaranteed to be signaled in all implementations.
- The protection features of memory regions mapped as UC or WP are not guaranteed to be enforced in all implementations.

MASKMOVDQU implicitly uses weakly-ordered, write-combining buffering for the data, as described in “Buffering and Combining Memory Writes” in Volume 2. For data that is shared by multiple processors, this instruction should be used together with a fence instruction in order to ensure data coherency (refer to “Cache and TLB Management” in Volume 2).

### Related Instructions

MASKMOVQ

### rFLAGS Affected

None

### MXCSR Flags Affected

None


### Exceptions

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**MAXPD****Maximum Packed Double-Precision Floating-Point**

Compares each of the two packed double-precision floating-point values in the first source operand with the corresponding packed double-precision floating-point value in the second source operand and writes the numerically greater of the two values for each comparison in the corresponding quadword of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
MAXPD <i>xmm1, xmm2/mem128</i>	66 0F 5F /r	Compares two pairs of packed double-precision values in an XMM register and another XMM register or 128-bit memory location and writes the greater value of each comparison in the destination XMM register.

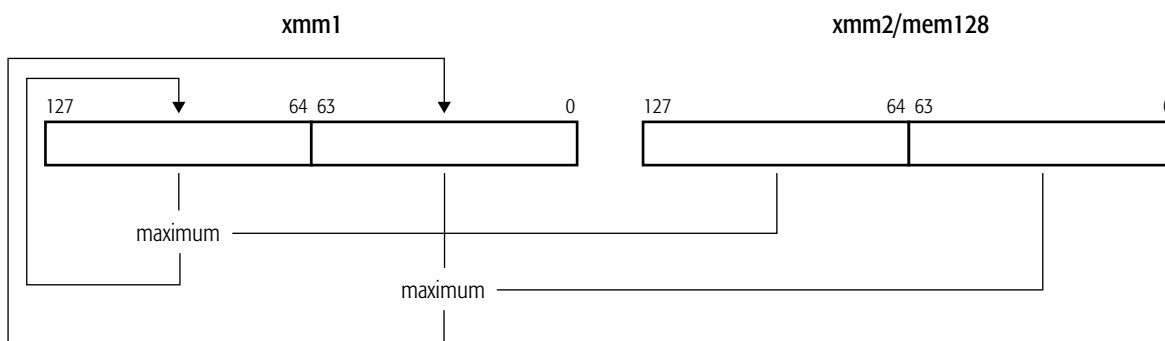

maxpd.eps

If both source operands are equal to zero, the value in the second source operand is returned. If either operand is a NaN (SNaN or QNaN), and invalid-operation exceptions are masked, the second source operand is written to the destination.

**Related Instructions**

MAXPS, MAXSD, MAXSS, MINPD, MINPS, MINSR, MINSS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN or QNaN value.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

**MAXPS****Maximum Packed Single-Precision Floating-Point**

Compares each of the four packed single-precision floating-point values in the first source operand with the corresponding packed single-precision floating-point value in the second source operand and writes the numerically greater of the two values for each comparison in the corresponding doubleword of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
MAXPS <i>xmm1, xmm2/mem128</i>	0F 5F /r	Compares four pairs of packed single-precision values in an XMM register and another XMM register or 128-bit memory location and writes the maximum value of each comparison in the destination XMM register.

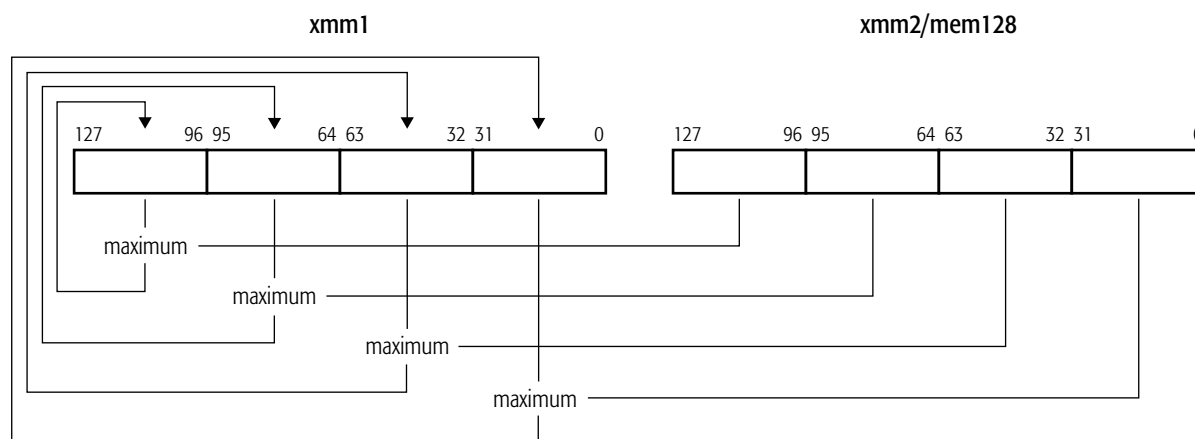

maxps.eps

If both source operands are equal to zero, the value in the second source operand is returned. If either operand is a NaN (SNaN or QNaN), and invalid-operation exceptions are masked, the second source operand is written to the destination.

**Related Instructions**

MAXPD, MAXSD, MAXSS, MINPD, MINPS, MINSR, MINSS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.




Exception	Real	Virtual 8086	Protected	Cause of Exception
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN or QNaN value.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

**MAXSD****Maximum Scalar Double-Precision Floating-Point**

Compares the double-precision floating-point value in the low-order 64 bits of the first source operand with the double-precision floating-point value in the low-order 64 bits of the second source operand and writes the numerically greater of the two values in the low-order quadword of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or a 64-bit memory location. The high-order quadword of the destination XMM register is not modified.

Mnemonic	Opcode	Description
MAXSD <i>xmm1, xmm2/mem64</i>	F2 0F 5F /r	Compares scalar double-precision values in an XMM register and another XMM register or 64-bit memory location and writes the greater of the two values in the destination XMM register.

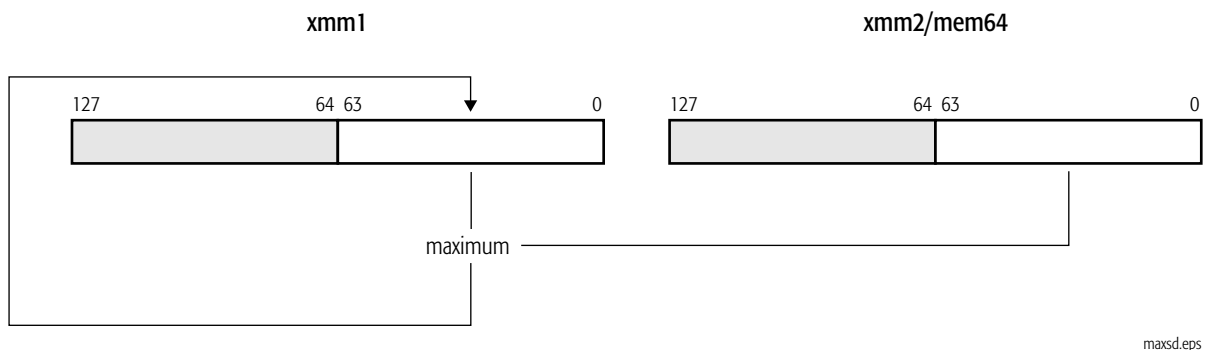

If both source operands are equal to zero, the value in the second source operand is returned. If either operand is a NaN (SNaN or QNaN), and invalid-operation exceptions are masked, the second source operand is written to the destination.

**Related Instructions**

MAXPD, MAXPS, MAXSS, MINPD, MINPS, MINSR, MINSS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN or QNaN value.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

**MAXSS****Maximum Scalar Single-Precision Floating-Point**

Compares the single-precision floating-point value in the low-order 32 bits of the first source operand with the single-precision floating-point value in the low-order 32 bits of the second source operand and writes the numerically greater of the two values in the low-order 32 bits of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or a 32-bit memory location. The three high-order doublewords of the destination XMM register are not modified.

Mnemonic	Opcode	Description
MAXSS <i>xmm1, xmm2/mem32</i>	F3 0F 5F /r	Compares scalar single-precision floating-point values in an XMM register and another XMM register or 32-bit memory location and writes the greater of the two values in the destination XMM register.

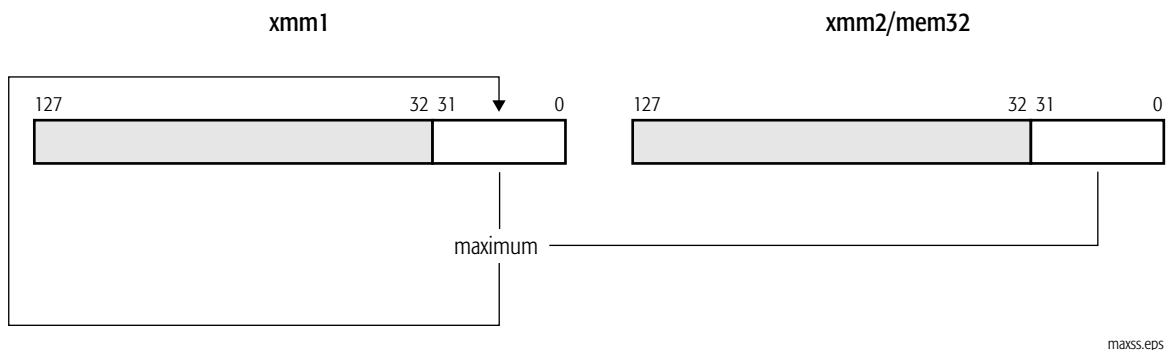

If both source operands are equal to zero, the value in the second source operand is returned. If either operand is a NaN (SNaN or QNaN), and invalid-operation exceptions are masked, the second source operand is written to the destination.

**Related Instructions**

MAXPD, MAXPS, MAXSD, MINPD, MINPS, MINS, MINSD, MINSS, PFMAX

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN or QNaN value.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

**MINPD****Minimum Packed Double-Precision Floating-Point**

Compares each of the two packed double-precision floating-point values in the first source operand with the corresponding packed double-precision floating-point value in the second source operand and writes the numerically lesser of the two values for each comparison in the corresponding quadword of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or a 128-bit memory location.

Mnemonic	Opcode	Description
MINPD <i>xmm1, xmm2/mem128</i>	66 0F 5D /r	Compares two pairs of packed double-precision floating-point values in an XMM register and another XMM register or 128-bit memory location and writes the lesser value of each comparison in the destination XMM register.

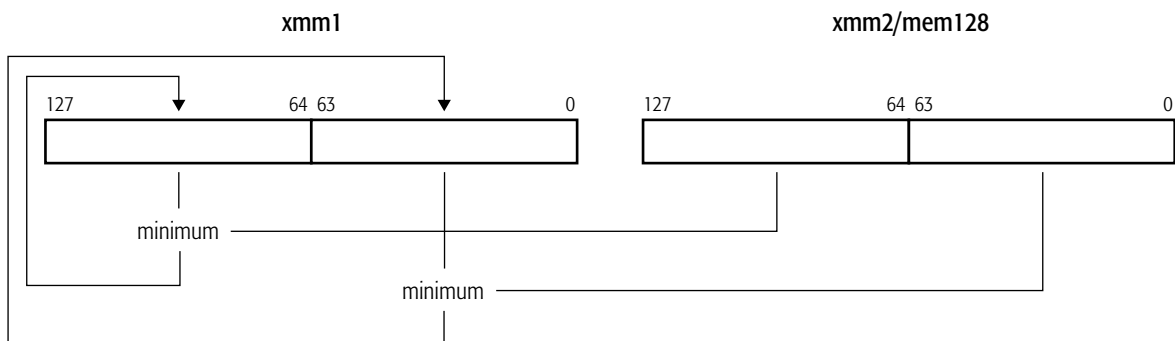

minpd.eps

If both source operands are equal to zero, the value in the second source operand is returned. If either operand is a NaN (SNaN or QNaN), and invalid-operation exceptions are masked, the second source operand is written to the destination.

**Related Instructions**

MAXPD, MAXPS, MAXSD, MAXSS, MINPS, MINSB, MINSD, MINSS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN or QNaN value.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

**MINPS****Minimum Packed Single-Precision Floating-Point**

The MINPS instruction compares each of the four packed single-precision floating-point values in the first source operand with the corresponding packed single-precision floating-point value in the second source operand and writes the numerically lesser of the two values for each comparison in the corresponding doubleword of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or a 128-bit memory location.

Mnemonic	Opcode	Description
MINPS <i>xmm1, xmm2/mem128</i>	OF 5D /r	Compares four pairs of packed single-precision values in an XMM register and another XMM register or 128-bit memory location and writes the numerically lesser value of each comparison in the destination XMM register.

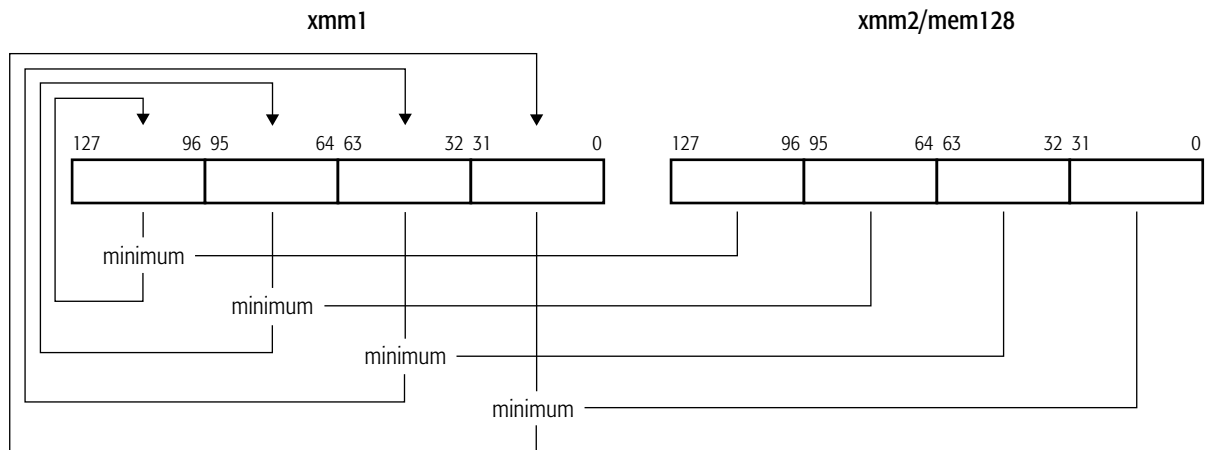

minps.eps

If both source operands are equal to zero, the value in the second source operand is returned. If either operand is a NaN (SNaN or QNaN), and invalid-operation exceptions are masked, the second source operand is written to the destination.

**Related Instructions**

MAXPD, MAXPS, MAXSD, MAXSS, MINPD, MINSD, MINSS, PFMIN



**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.

Exception	Real	Virtual 8086	Protected	Cause of Exception
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN or QNaN value.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

**MINS****Minimum Scalar Double-Precision Floating-Point**

Compares the double-precision floating-point value in the low-order 64 bits of the first source operand with the double-precision floating-point value in the low-order 64 bits of the second source operand and writes the numerically lesser of the two values in the low-order 64 bits of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or a 64-bit memory location. The high-order quadword of the destination XMM register is not modified.

Mnemonic	Opcode	Description
MINS <i>xmm1, xmm2/mem64</i>	F2 0F 5D /r	Compares scalar double-precision floating-point values in an XMM register and another XMM register or 64-bit memory location and writes the lesser of the two values in the destination XMM register.

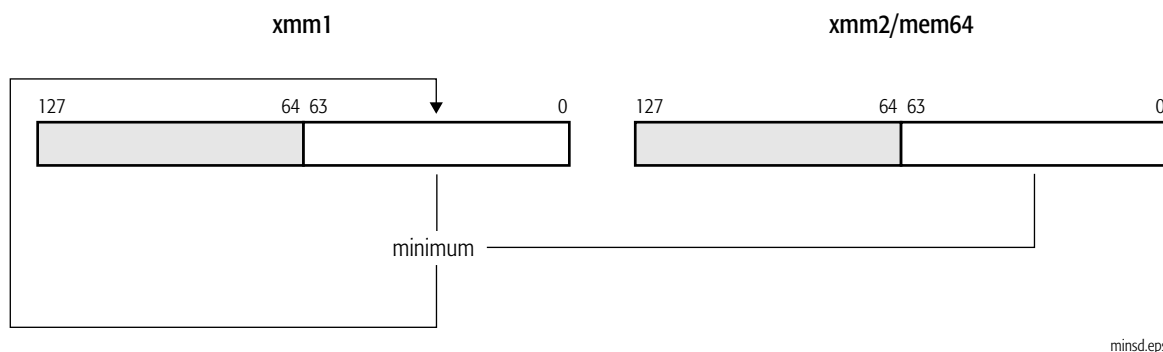

If both source operands are equal to zero, the value in the second source operand is returned. If either operand is a NaN (SNaN or QNaN), and invalid-operation exceptions are masked, the second source operand is written to the destination.

**Related Instructions**

MAXPD, MAXPS, MAXSD, MAXSS, MINPD, MINPS, MINSS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

*Note:*  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN or QNaN value.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

**MINSS****Minimum Scalar Single-Precision Floating-Point**

Compares the single-precision floating-point value in the low-order 32 bits of the first source operand with the single-precision floating-point value in the low-order 32 bits of the second source operand and writes the numerically lesser of the two values in the low-order 32 bits of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or a 32-bit memory location. The three high-order doublewords of the destination XMM register are not modified.

Mnemonic	Opcode	Description
MINSS <i>xmm1, xmm2/mem32</i>	F3 0F 5D /r	Compares scalar single-precision floating-point values in an XMM register and another XMM register or 32-bit memory location and writes the lesser of the two values in the destination XMM register.

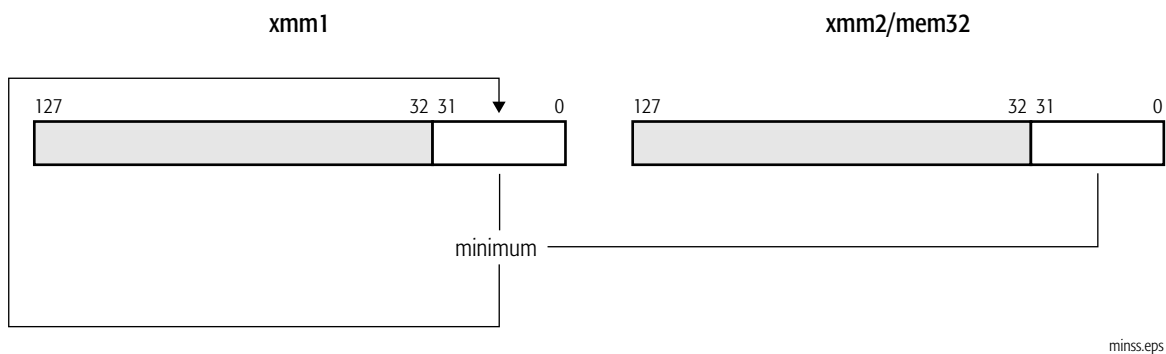

If both source operands are equal to zero, the value in the second source operand is returned. If either operand is a NaN (SNaN or QNaN), and invalid-operation exceptions are masked, the second source operand is written to the destination.

**Related Instructions**

MAXPD, MAXPS, MAXSD, MAXSS, MINPD, MINPS, MINS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

*Note:*  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN or QNaN value.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.


## MOVAPD Move Aligned Packed Double-Precision Floating-Point

### Floating-Point

Moves two packed double-precision floating-point values:

- from an XMM register or 128-bit memory location to another XMM register, or
- from an XMM register to another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
MOVAPD <i>xmm1, xmm2/mem128</i>	66 0F 28 /r	Moves packed double-precision floating-point value from an XMM register or 128-bit memory location to an XMM register.
MOVAPD <i>xmm1/mem128, xmm2</i>	66 0F 29 /r	Moves packed double-precision floating-point value from an XMM register to an XMM register or 128-bit memory location.

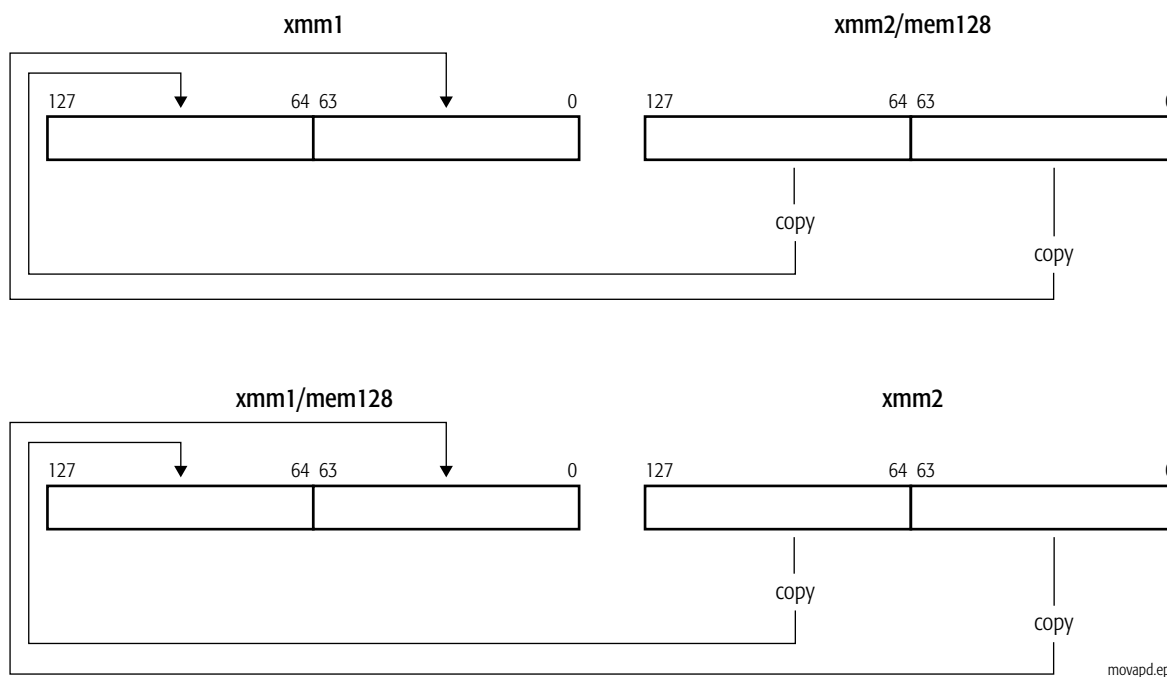

A memory operand that is not aligned on a 16-byte boundary causes a general-protection exception.

**Related Instructions**

MOVHPD, MOVLPD, MOVMSKPD, MOVSD, MOVUPD

**rFLAGS Affected**

None

**MXCSR Flags Affected**


None

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.





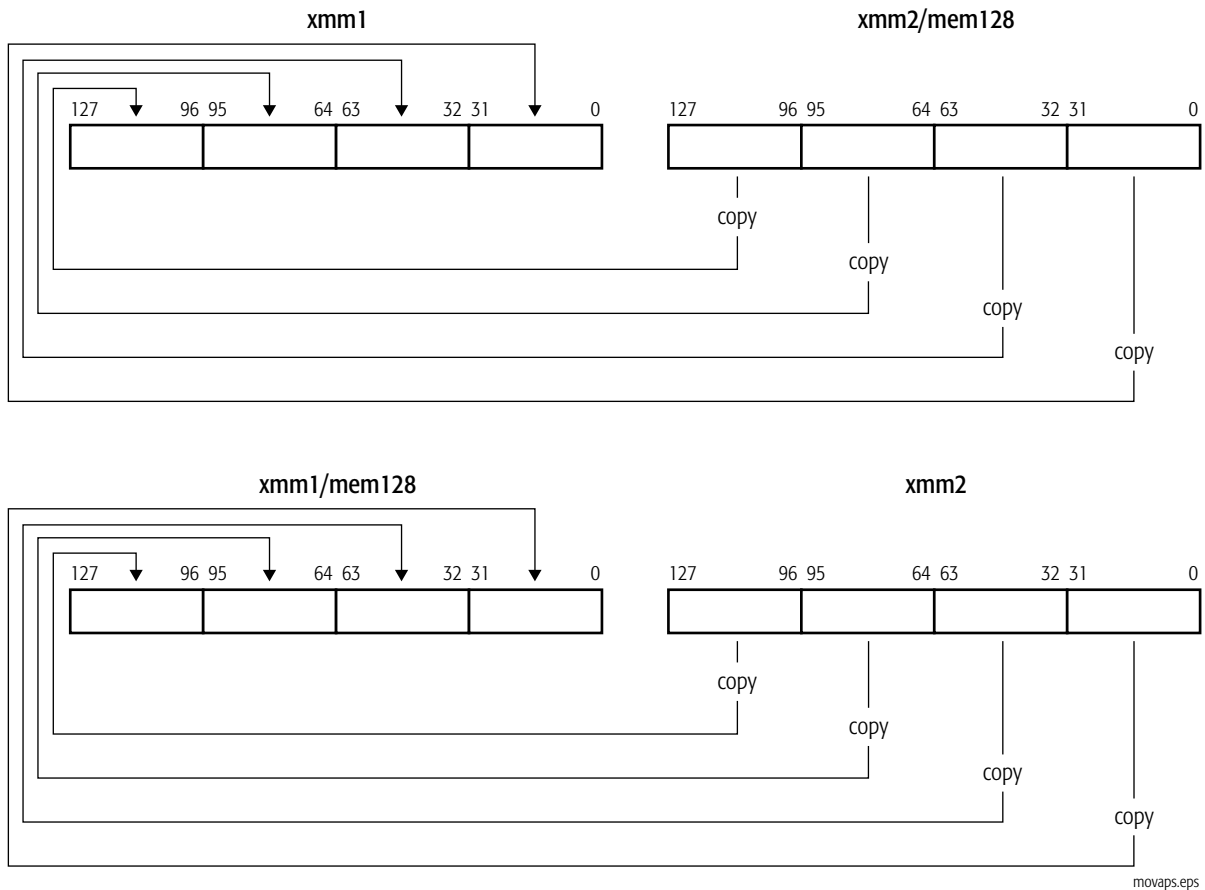

A memory operand that is not aligned on a 16-byte boundary causes a general-protection exception.

### Related Instructions

MOVHLPS, MOVHPS, MOVLHPS, MOVLPS, MOVMSKPS, MOVSS, MOVUPS

### rFLAGS Affected

None

### MXCSR Flags Affected

None

**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.


## MOVD Move Doubleword or Quadword

Moves a 32-bit or 64-bit value in one of the following ways:





- from a 32-bit or 64-bit general-purpose register or memory location to the low-order 32 or 64 bits of an XMM register, with zero-extension to 128 bits
- from the low-order 32 or 64 bits of an XMM to a 32-bit or 64-bit general-purpose register or memory location
- from a 32-bit or 64-bit general-purpose register or memory location to the low-order 32 bits (with zero-extension to 64 bits) or the full 64 bits of an MMX register
- from the low-order 32 or the full 64 bits of an MMX register to a 32-bit or 64-bit general-purpose register or memory location

Mnemonic	Opcode	Description
MOVD <i>xmm, reg/mem32</i>	66 0F 6E/r	Move 32-bit value from a general-purpose register or 32-bit memory location to an XMM register.
MOVD <i>xmm, reg/mem64</i>	66 0F 6E/r	Move 64-bit value from a general-purpose register or 64-bit memory location to an XMM register.
MOVD <i>reg/mem32, xmm</i>	66 0F 7E/r	Move 32-bit value from an XMM register to a 32-bit general-purpose register or memory location.
MOVD <i>reg/mem64, xmm</i>	66 0F 7E/r	Move 64-bit value from an XMM register to a 64-bit general-purpose register or memory location.

The following diagrams illustrate the operation of the MOVD instruction.

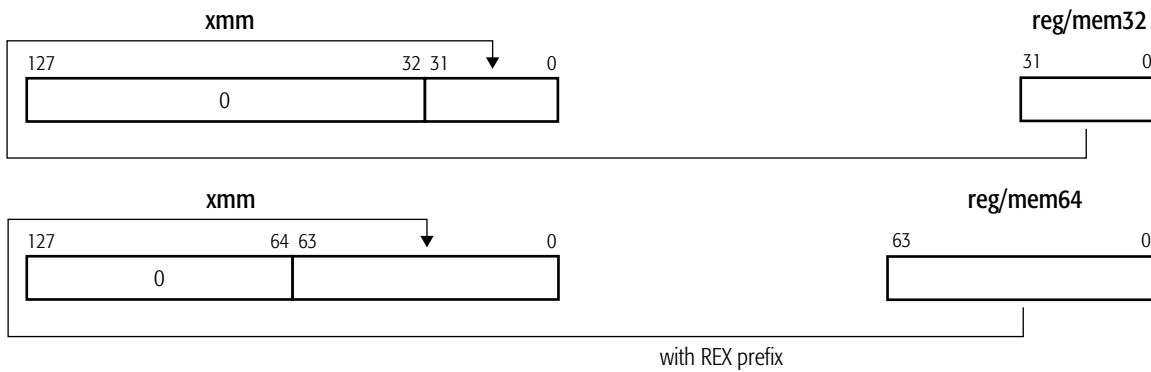

All operations are "copy"

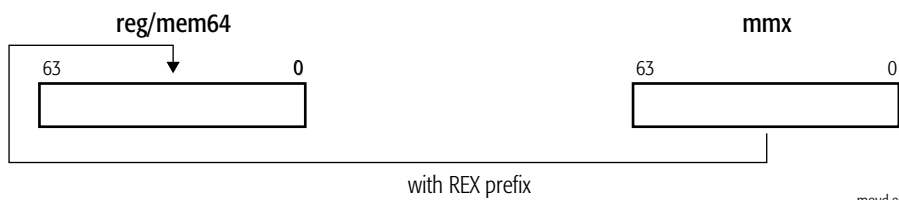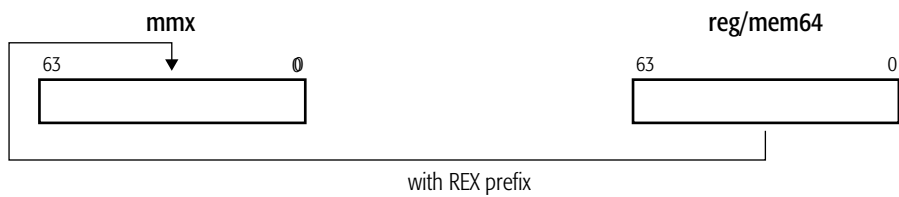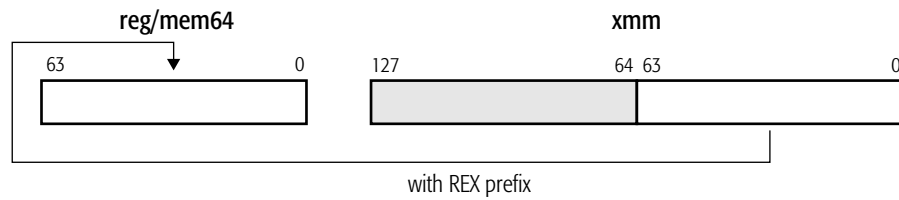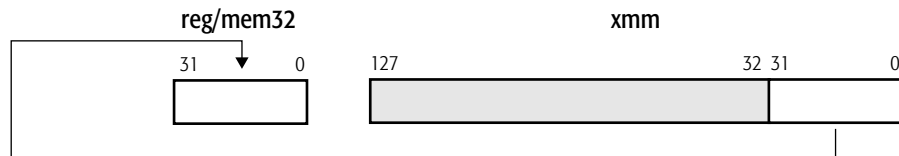

movd.eps

**Related Instructions**

MOVDQA, MOVDQU, MOVDQ2Q, MOVQ, MOVQ2DQ

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions (All Modes)**

Exception	Real	Virtual 8086	Protected	Description
Invalid opcode, #UD	X	X	X	The MMX instructions are not supported, as indicated by bit 23 of CPUID standard function 1.
	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The instruction used XMM registers while CR4.OSFXSR=0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
x87 floating-point exception pending, #MF	X	X	X	An x87 floating-point exception was pending and the instruction referenced an MMX register.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.

## MOVDQ2Q Move Quadword to Quadword

Moves the low-order 64-bit value in an XMM register to a 64-bit MMX register.

Mnemonic	Opcode	Description
MOVDQ2Q <i>mmx, xmm</i>	F2 0F D6 /r	Moves low-order 64-bit value from an XMM register to the destination MMX™ register.

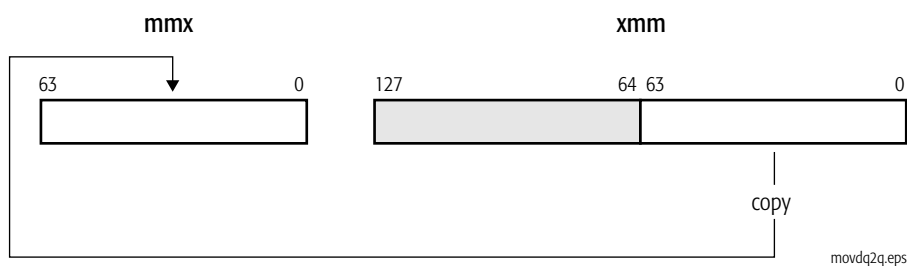

### Related Instructions

MOVD, MOVDQA, MOVDQU, MOVQ, MOVQ2DQ

### rFLAGS Affected

None

### MXCSR Flags Affected

None

**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
General protection			X	The destination operand was in a non-writable segment.
x87 floating-point exception pending, #MF	X	X	X	An exception was pending due to an x87 floating-point instruction.




## MOVDQA Move Aligned Double Quadword

Moves an aligned 128-bit (double quadword) value:

- from an XMM register or 128-bit memory location to another XMM register, or
- from an XMM register to a 128-bit memory location or another XMM register.

Mnemonic	Opcode	Description
MOVDQA <i>xmm1, xmm2/mem128</i>	66 0F 6F /r	Moves 128-bit value from an XMM register or 128-bit memory location to the destination XMM register.
MOVDQA <i>xmm1/mem128, xmm2</i>	66 0F 7F /r	Moves 128-bit value from an XMM register to the destination XMM register or 128-bit memory location.

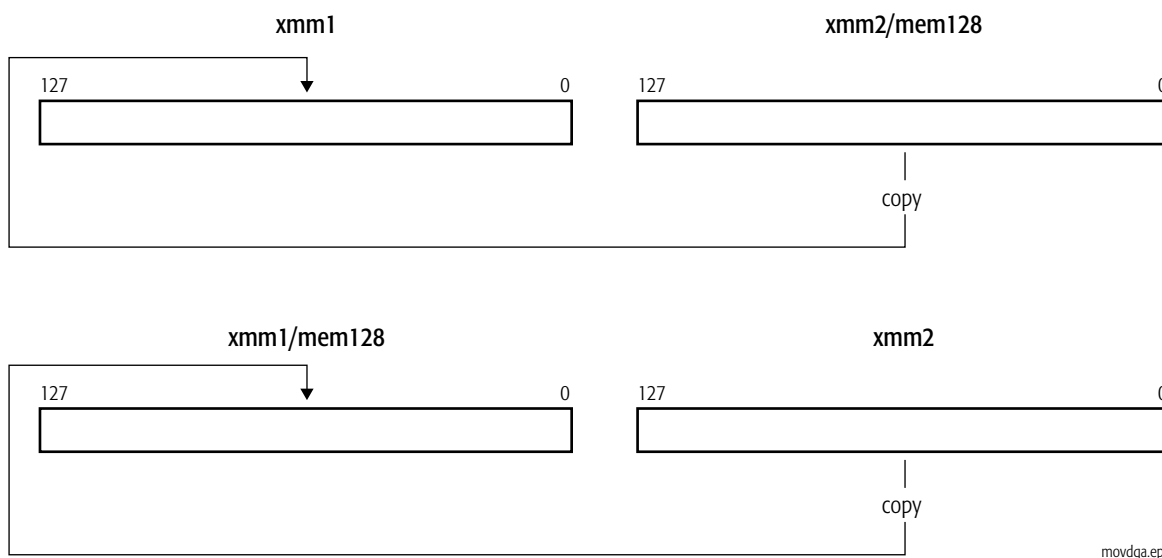

movdqa.eps

A memory operand that is not aligned on a 16-byte boundary causes a general-protection exception.

### Related Instructions

MOVD, MOVDQU, MOVDQ2Q, MOVQ, MOVQ2DQ

### rFLAGS Affected

None

**MXCSR Flags Affected**

None

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## MOVDQU Move Unaligned Double Quadword

Moves an unaligned 128-bit (double quadword) value:

- from an XMM register or 128-bit memory location to another XMM register, or
- from an XMM register to another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
MOVDQU <i>xmm1, xmm2/mem128</i>	F3 0F 6F /r	Moves 128-bit value from an XMM register or unaligned 128-bit memory location to the destination XMM register.
MOVDQU <i>xmm1/mem128, xmm2</i>	F3 0F 7F /r	Moves 128-bit value from an XMM register to the destination XMM register or unaligned 128-bit memory location.

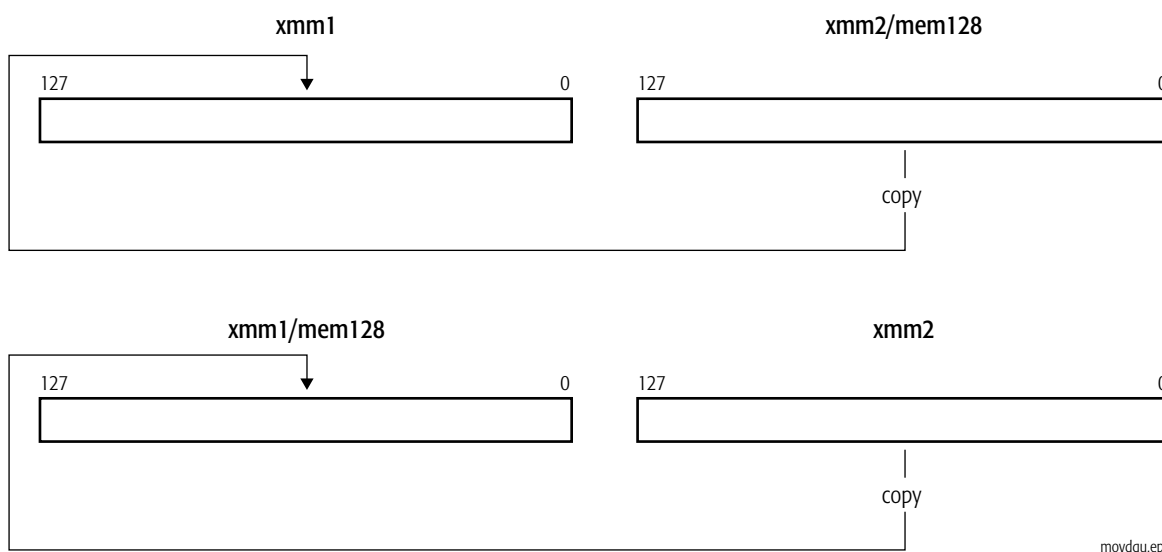

Memory operands that are not aligned on a 16-byte boundary do not cause a general-protection exception.

### Related Instructions

MOVD, MOVDQA, MOVDQ2Q, MOVQ, MOVQ2DQ

### rFLAGS Affected

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned-memory reference was performed while alignment checking was enabled.

## MOVHLPS Move Packed Single-Precision Floating-Point High to Low

Moves two packed single-precision floating-point values from the high-order 64 bits of an XMM register to the low-order 64 bits of another XMM register. The high-order 64 bits of the destination XMM register are not modified.

Mnemonic	Opcode	Description
MOVHLPS <i>xmm1, xmm2</i>	0F 12 /r	Moves two packed single-precision floating-point values from an XMM register to the destination XMM register.

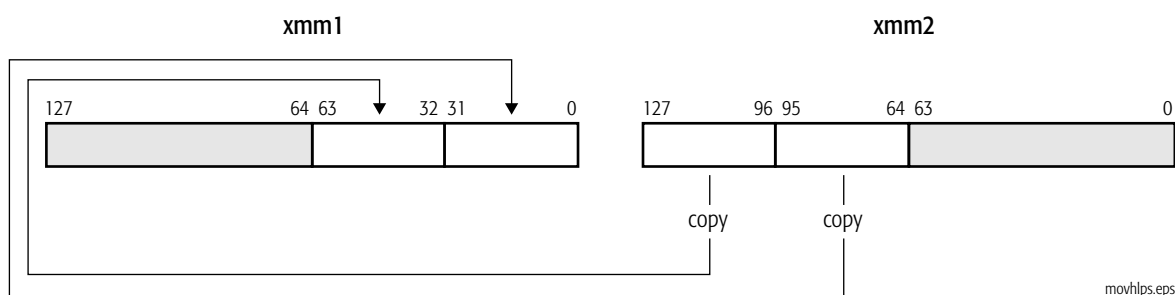

### Related Instructions

MOVAPS, MOVHPS, MOVLHPS, MOVLPS, MOVMSKPS, MOVSS, MOVUPS

### rFLAGS Affected

None

### MXCSR Flags Affected

None

**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.


## MOVHPD                      Move High Packed Double-Precision Floating-Point

Moves a double-precision floating-point value:

- from a 64-bit memory location to the high-order 64 bits of an XMM register, or
- from the high-order 64 bits of an XMM register to a 64-bit memory location.

The low-order 64 bits of the destination XMM register are not modified.

Mnemonic	Opcode	Description
MOVHPD <i>xmm</i> , <i>mem64</i>	66 0F 16 /r	Moves double-precision floating-point value from a 64-bit memory location to an XMM register.
MOVHPD <i>mem64</i> , <i>xmm</i>	66 0F 17 /r	Moves double-precision floating-point value from an XMM register to a 64-bit memory location.

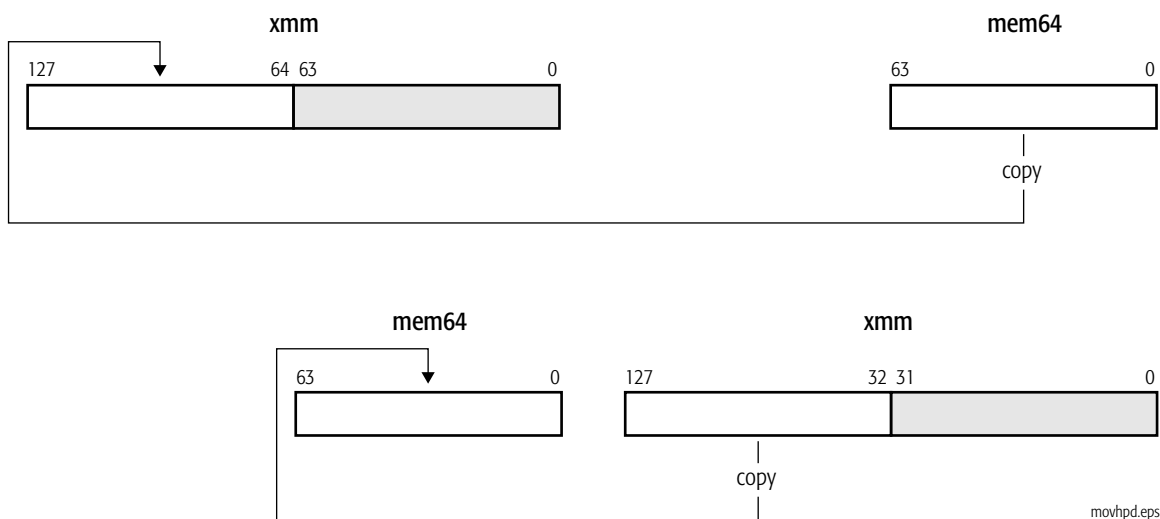

### Related Instructions

MOVAPD, MOVLPD, MOVMSKPD, MOVSD, MOVUPD

### rFLAGS Affected

None

**MXCSR Flags Affected**

None

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.




## MOVHPS Move High Packed Single-Precision Floating-Point

Moves two packed single-precision floating-point values:

- from a 64-bit memory location to the high-order 64 bits of an XMM register, or
- from the high-order 64 bits of an XMM register to a 64-bit memory location.

The low-order 64 bits of the destination XMM register are not modified.

Mnemonic	Opcode	Description
MOVHPS <i>xmm, mem64</i>	0F 16 /r	Moves two packed single-precision floating-point values from a 64-bit memory location to an XMM register.
MOVHPS <i>mem64, xmm</i>	0F 17 /r	Moves two packed single-precision floating-point values from an XMM register to a 64-bit memory location.

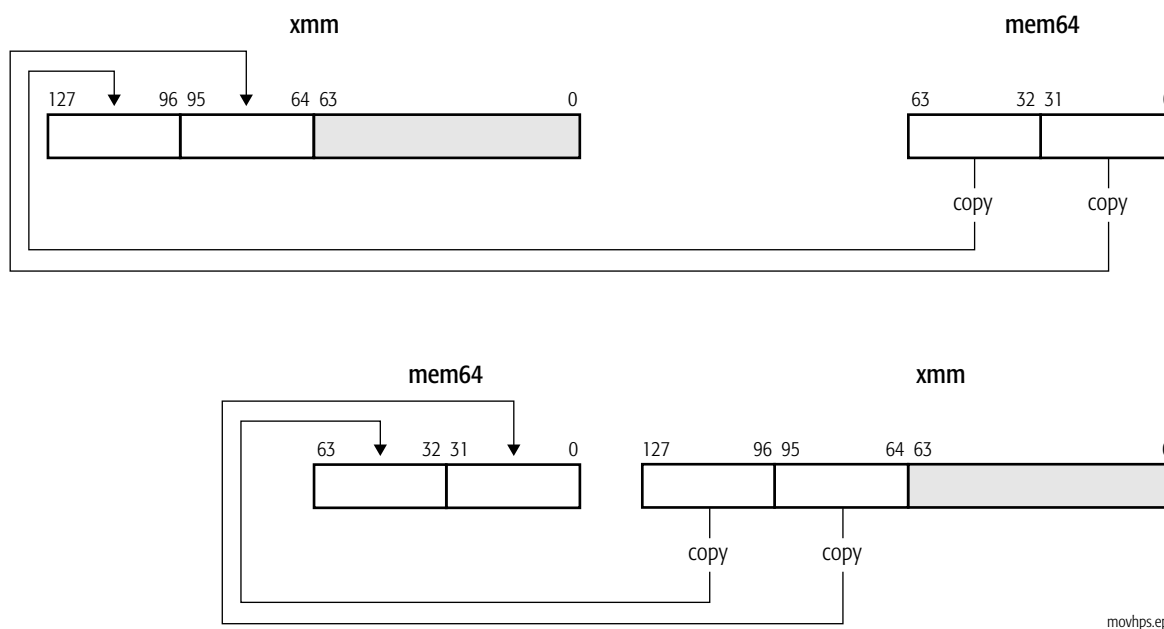

### Related Instructions

MOVAPS, MOVHLPS, MOVLHPS, MOVLPS, MOVMSKPS, MOVSS, MOVUPS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.

## MOVLHPS Move Packed Single-Precision Floating-Point Low to High

Moves two packed single-precision floating-point values from the low-order 64 bits of an XMM register to the high-order 64 bits of another XMM register. The low-order 64 bits of the destination XMM register are not modified.

Mnemonic	Opcode	Description
MOVLHPS <i>xmm1, xmm2</i>	0F 16/r	Moves two packed single-precision floating-point values from an XMM register to another XMM register.

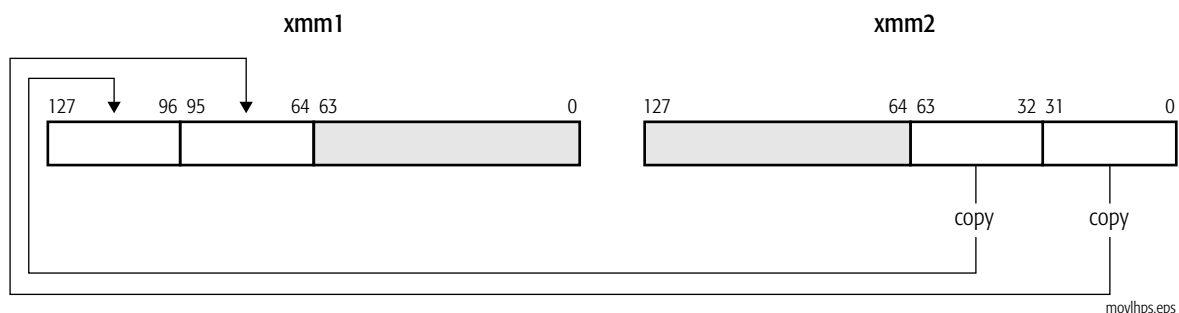

### Related Instructions

MOVAPS, MOVHLPS, MOVHPS, MOVLPS, MOVMSKPS, MOVSS, MOVUPS

### rFLAGS Affected

None

### MXCSR Flags Affected

None

**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.

## MOVLPD Move Low Packed Double-Precision Floating-Point


### Floating-Point

Moves a double-precision floating-point value:

- from a 64-bit memory location to the low-order 64 bits of an XMM register, or
- from the low-order 64 bits of an XMM register to a 64-bit memory location.

The high-order 64 bits of the destination XMM register are not modified.

Mnemonic	Opcode	Description
MOVLPD <i>xmm</i> , <i>mem64</i>	66 0F 12 /r	Moves double-precision floating-point value from a 64-bit memory location to an XMM register.
MOVLPD <i>mem64</i> , <i>xmm</i>	66 0F 13 /r	Moves double-precision floating-point value from an XMM register to a 64-bit memory location.

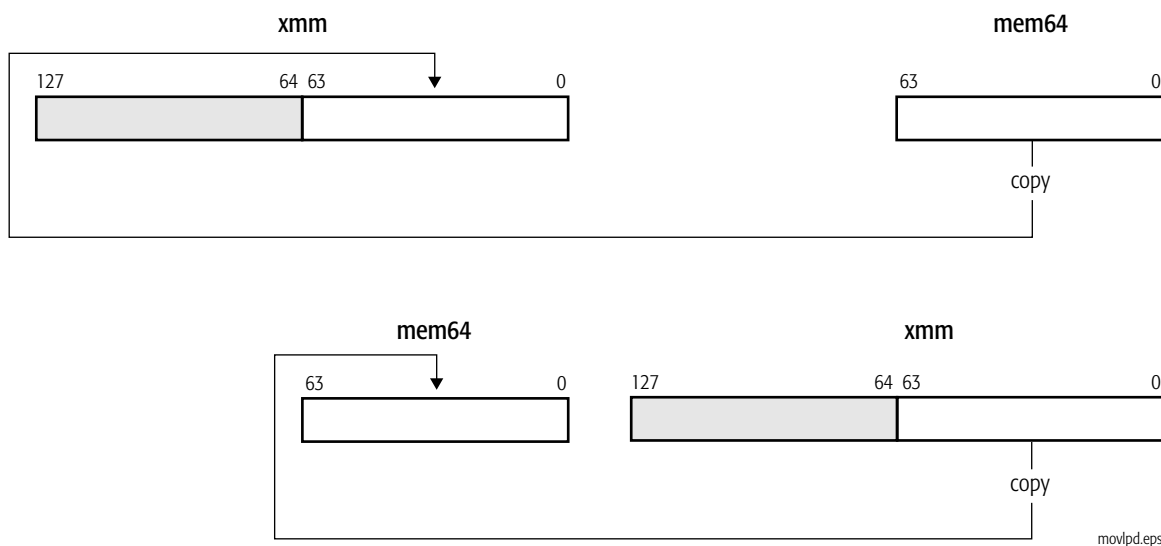

### Related Instructions

MOVAPD, MOVHPD, MOVMSKPD, MOVSD, MOVUPD

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.


## MOVLPS Move Low Packed Single-Precision Floating-Point

Moves two packed single-precision floating-point values:

- from a 64-bit memory location to the low-order 64 bits of an XMM register, or
- from the low-order 64 bits of an XMM register to a 64-bit memory location

The high-order 64 bits of the destination XMM register are not modified.

Mnemonic	Opcode	Description
MOVLPS <i>xmm, mem64</i>	0F 12/r	Moves two packed single-precision floating-point values from a 64-bit memory location to an XMM register.
MOVLPS <i>mem64, xmm</i>	0F 13/r	Moves two packed single-precision floating-point values from an XMM register to a 64-bit memory location.

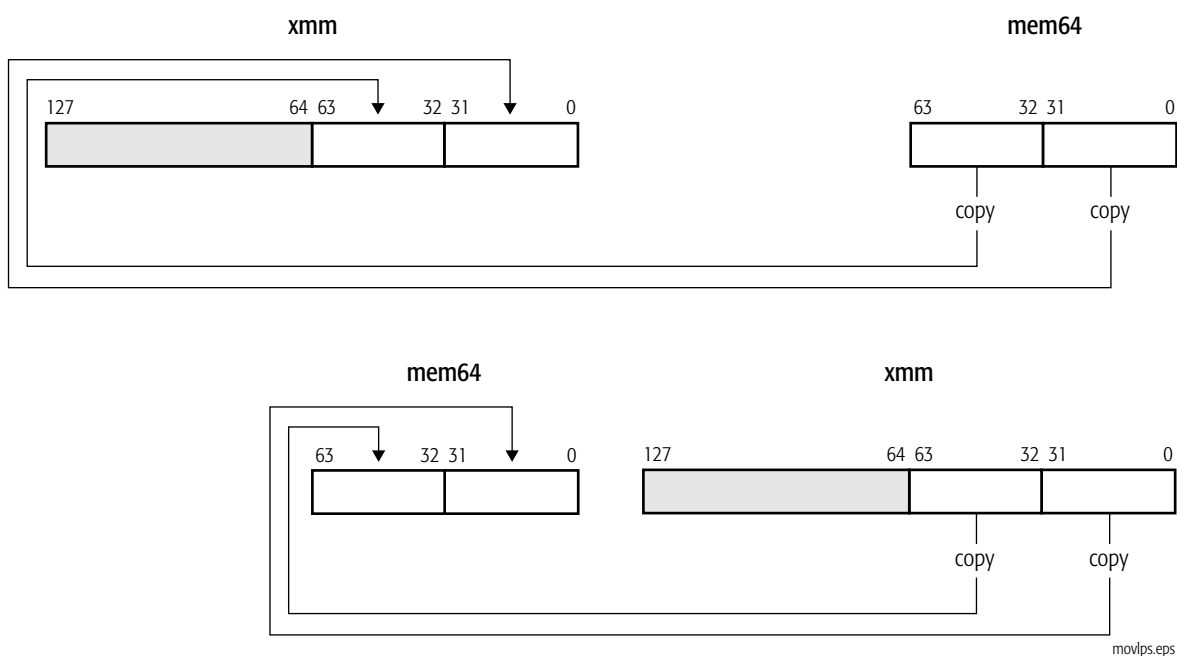

### Related Instructions

MOVAPS, MOVHLPS, MOVHPS, MOVLHPS, MOVMSKPS, MOVSS, MOVUPS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of the control register (CR4) was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.



## MOVMSKPD Extract Packed Double-Precision Floating-Point Sign Mask

Moves the sign bits of two packed double-precision floating-point values in an XMM register to the two low-order bits of a 32-bit general-purpose register, with zero-extension.

Mnemonic	Opcode	Description
MOVMSKPD <i>reg32, xmm</i>	66 0F 50 /r	Move sign bits in an XMM register to a 32-bit general-purpose register.

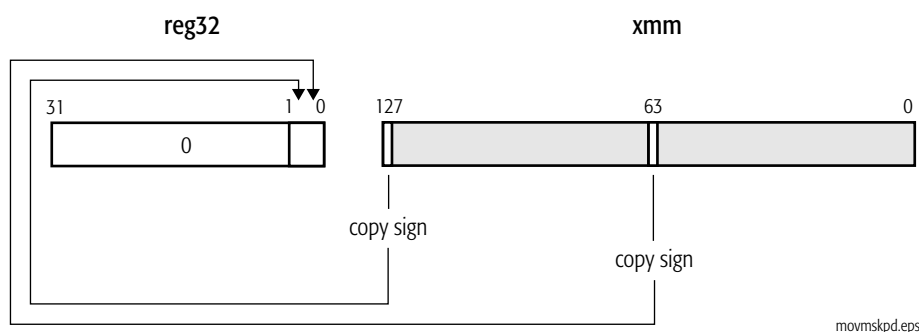

### Related Instructions

MOVMSKPS, PMOVMSKB

### rFLAGS Affected

None

### MXCSR Flags Affected

None


**Exceptions**

<b>Exception (vector)</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.

## MOVMSKPS Extract Packed Single-Precision Floating-Point Sign Mask

Moves the sign bits of four packed single-precision floating-point values in an XMM register to the four low-order bits of a 32-bit general-purpose register, with zero-extension.

Mnemonic	Opcode	Description
MOVMSKPS <i>reg32, xmm</i>	0F 50/r	Move sign bits in an XMM register to a 32-bit general-purpose register.

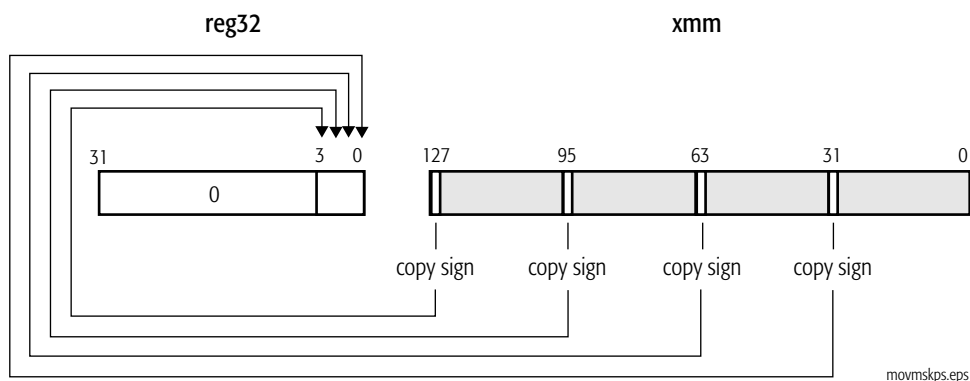

### Related Instructions

MOVMSKPD, PMOVMSKB

### rFLAGS Affected

None

### MXCSR Flags Affected

None

**Exceptions**


<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.

**MOVNTDQ****Move Non-Temporal Double Quadword**

Stores a 128-bit (double quadword) XMM register value into a 128-bit memory location. This instruction indicates to the processor that the data is non-temporal, and is unlikely to be used again soon. The processor treats the store as a write-combining (WC) memory write, which minimizes cache pollution. The exact method by which cache pollution is minimized depends on the hardware implementation of the instruction. For further information, see “Memory Optimization” in Volume 1.

MOVNTDQ is weakly-ordered with respect to other instructions that operate on memory. Software should use an SFENCE instruction to force strong memory ordering of MOVNTDQ with respect to other stores.

Mnemonic	Opcode	Description
MOVNTDQ <i>mem128, xmm</i>	66 0F E7 /r	Stores a 128-bit XMM register value into a 128-bit memory location, minimizing cache pollution.

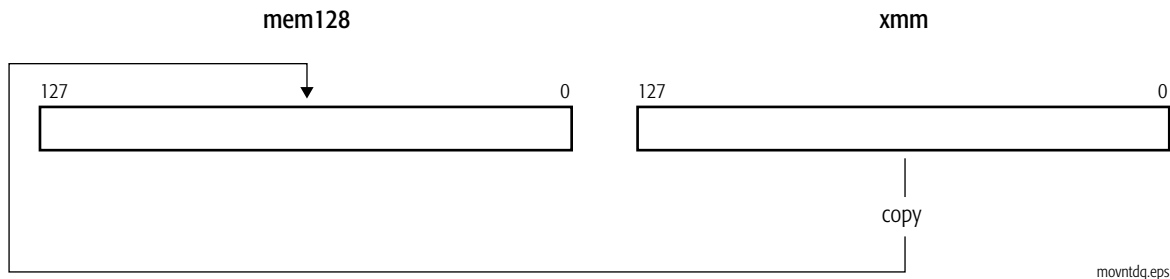

movntdq.eps

**Related Instructions**

MOVNTI, MOVNTPD, MOVNTPS, MOVNTQ

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (CR0.EM) was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (CR4.OSFXSR) was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (CR0.TS) was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from executing the instruction.

**MOVNTPD****Move Non-Temporal Packed Double-Precision Floating-Point**

Stores two double-precision floating-point XMM register values into a 128-bit memory location. This instruction indicates to the processor that the data is non-temporal, and is unlikely to be used again soon. The processor treats the store as a write-combining (WC) memory write, which minimizes cache pollution. The exact method by which cache pollution is minimized depends on the hardware implementation of the instruction. For further information, see “Memory Optimization” in Volume 1.

Mnemonic	Opcode	Description
MOVNTPD <i>mem128, xmm</i>	66 0F 2B /r	Stores two packed double-precision floating-point XMM register values into a 128-bit memory location, minimizing cache pollution.

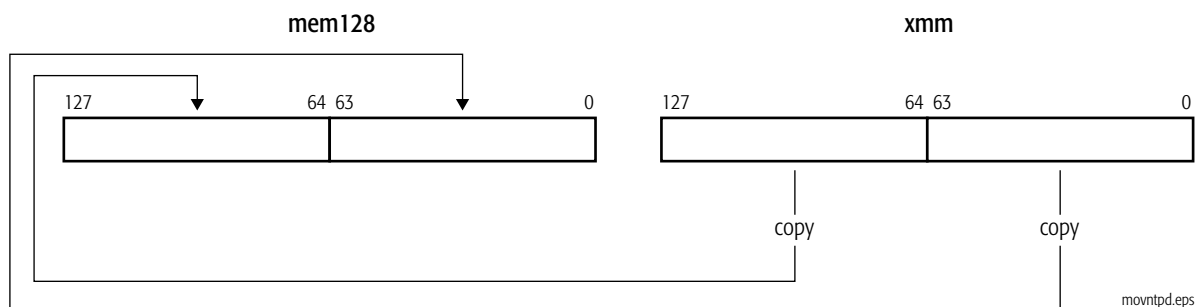

MOVNTPD is weakly-ordered with respect to other instructions that operate on memory. Software should use an SFENCE instruction to force strong memory ordering of MOVNTPD with respect to other stores.

**Related Instructions**

MOVNTDQ, MOVNTI, MOVNTPS, MOVNTQ

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (CR0.EM) was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (CR4.OSFXSR) was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (CR0.TS) was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from executing the instruction.



**MOVNTPS****Move Non-Temporal Packed  
Single-Precision Floating-Point**

Stores four single-precision floating-point XMM register values into a 128-bit memory location. This instruction indicates to the processor that the data is non-temporal, and is unlikely to be used again soon. The processor treats the store as a write-combining (WC) memory write, which minimizes cache pollution. The exact method by which cache pollution is minimized depends on the hardware implementation of the instruction. For further information, see “Memory Optimization” in Volume 1.

Mnemonic	Opcode	Description
MOVNTPS <i>mem128, xmm</i>	0F 2B /r	Stores four packed single-precision floating-point XMM register values into a 128-bit memory location, minimizing cache pollution.

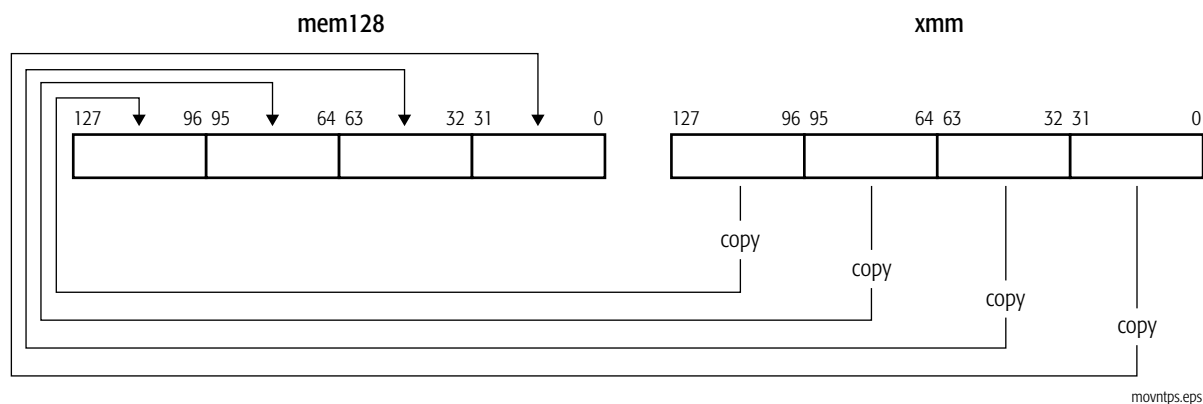

MOVNTPD is weakly-ordered with respect to other instructions that operate on memory. Software should use an SFENCE instruction to force strong memory ordering of MOVNTPD with respect to other stores.

**Related Instructions**

MOVNTDQ, MOVNTI, MOVNTPD, MOVNTQ

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (CR0.EM) was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (CR4.OSFXSR) was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (CR0.TS) was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from executing the instruction.

## MOVQ Move Quadword

Moves a 64-bit value in one of the following ways:

- from the low-order 64 bits of an XMM register or a 64-bit memory location to the low-order 64 bits of another XMM register, with zero-extension to 128 bits
- from the low-order 64 bits of an XMM register to the low-order 64 bits of another XMM register, with zero-extension to 128 bits or to a 64-bit memory location

Mnemonic	Opcode	Description
MOVQ <i>xmm1, xmm2/mem64</i>	F3 0F 7E /r	Moves 64-bit value from an XMM register or memory location to an XMM register.
MOVQ <i>xmm1/mem64, xmm2</i>	66 0F D6 /r	Moves 64-bit value from an XMM register to an XMM register or memory location.

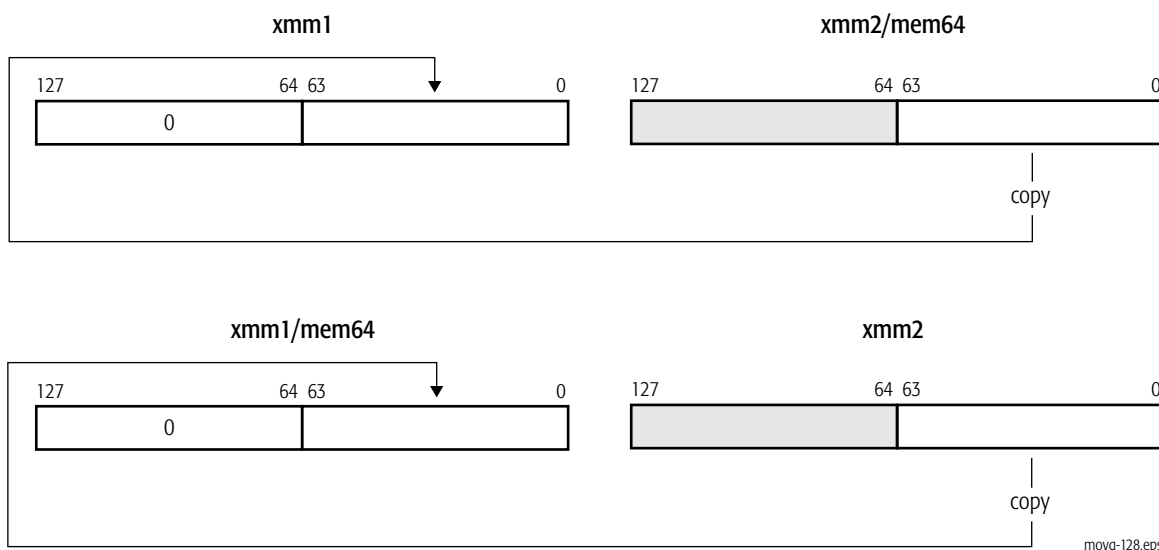

### Related Instructions

MOVD, MOVDQA, MOVDQU, MOVDQ2Q, MOVQ2DQ

### rFLAGS Affected

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.

## MOVQ2DQ Move Quadword to Quadword

Moves a 64-bit value from an MMX register to the low-order 64 bits of an XMM register, with zero-extension to 128 bits.

Mnemonic	Opcode	Description
MOVQ2DQ <i>xmm, mmx</i>	F3 0F D6 /r	Moves 64-bit value from an MMX™ register to an XMM register.

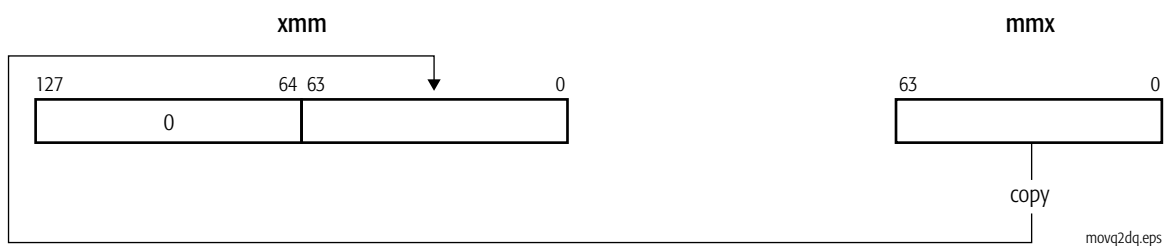

### Related Instructions

MOVD, MOVDQA, MOVDQU, MOVDQ2Q, MOVQ

### rFLAGS Affected

None

### MXCSR Flags Affected

None

**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
x87 floating-point exception pending, #MF	X	X	X	An exception was pending due to an x87 floating-point instruction.


## MOVSD Move Scalar Double-Precision Floating-Point

Moves a scalar double-precision floating-point value:

- from the low-order 64 bits of an XMM register or a 64-bit memory location to the low-order 64 bits of another XMM register, or
- from the low-order 64 bits of an XMM register to the low-order 64 bits of another XMM register or a 64-bit memory location.

If the source operand is an XMM register, the high-order 64 bits of the destination XMM register are not modified. If the source operand is a memory location, the high-order 64 bits of the destination XMM register are cleared to all 0s.

Mnemonic	Opcode	Description
MOVSD <i>xmm1, xmm2/mem64</i>	F2 0F 10 /r	Moves double-precision floating-point value from an XMM register or 64-bit memory location to an XMM register.
MOVSD <i>xmm1/mem64, xmm2</i>	F2 0F 11 /r	Moves double-precision floating-point value from an XMM register to an XMM register or 64-bit memory location.

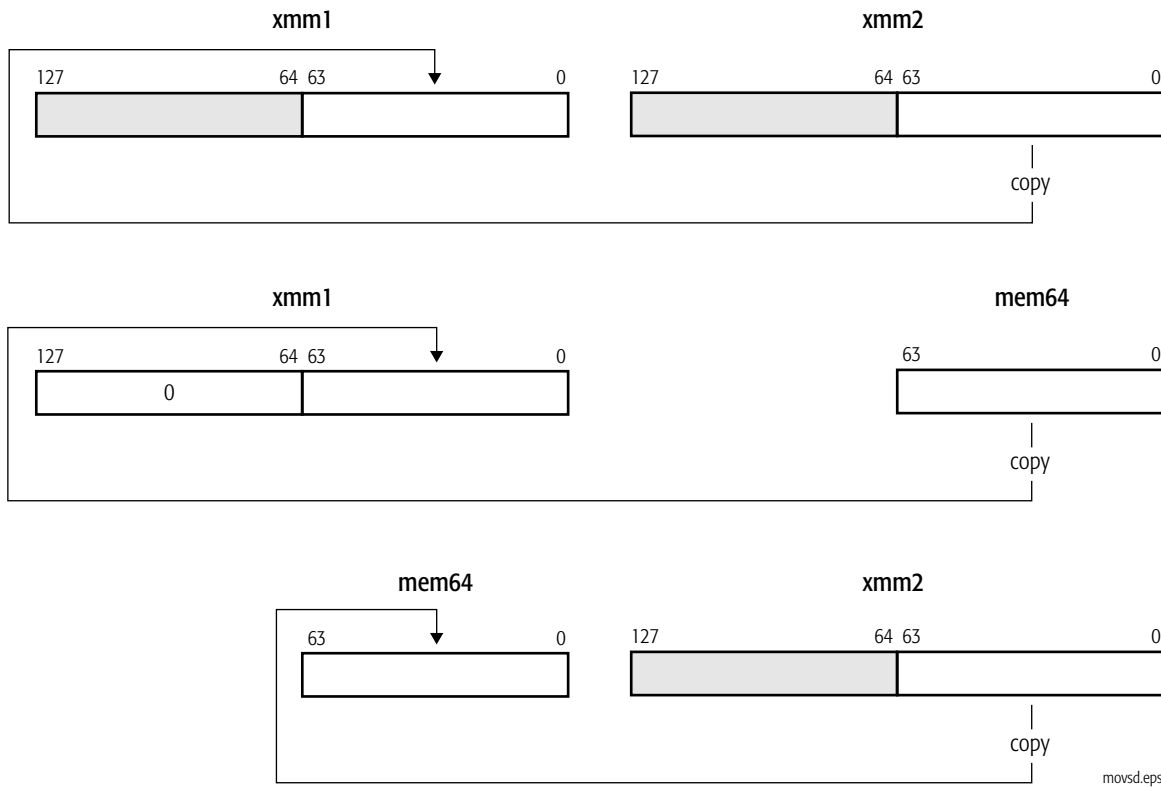

This MOVSD instruction should not be confused with the same-mnemonic MOVSD (move string doubleword) instruction in the general-purpose instruction set. Assemblers can distinguish the instructions by the number and type of operands.

**Related Instructions**

MOVAPD, MOVHPD, MOVLPD, MOVMSKPD, MOVUPD

**rFLAGS Affected**

None.

**MXCSR Flags Affected**

None.



**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.


## MOVSS Move Scalar Single-Precision Floating-Point

Moves a scalar single-precision floating-point value:

- from the low-order 32 bits of an XMM register or a 32-bit memory location to the low-order 32 bits of another XMM register, or
- from a 32-bit memory location to the low-order 32 bits of an XMM register, with zero-extension to 128 bits.

If the source operand is an XMM register, the high-order 96 bits of the destination XMM register are not modified. If the source operand is a memory location, the high-order 96 bits of the destination XMM register are cleared to all 0s.

Mnemonic	Opcode	Description
MOVSS <i>xmm1, xmm2/mem32</i>	F3 0F 10 /r	Moves single-precision floating-point value from an XMM register or 32-bit memory location to an XMM register.
MOVSS <i>xmm1/mem32, xmm2</i>	F3 0F 11 /r	Moves single-precision floating-point value from an XMM register to an XMM register or 32-bit memory location.

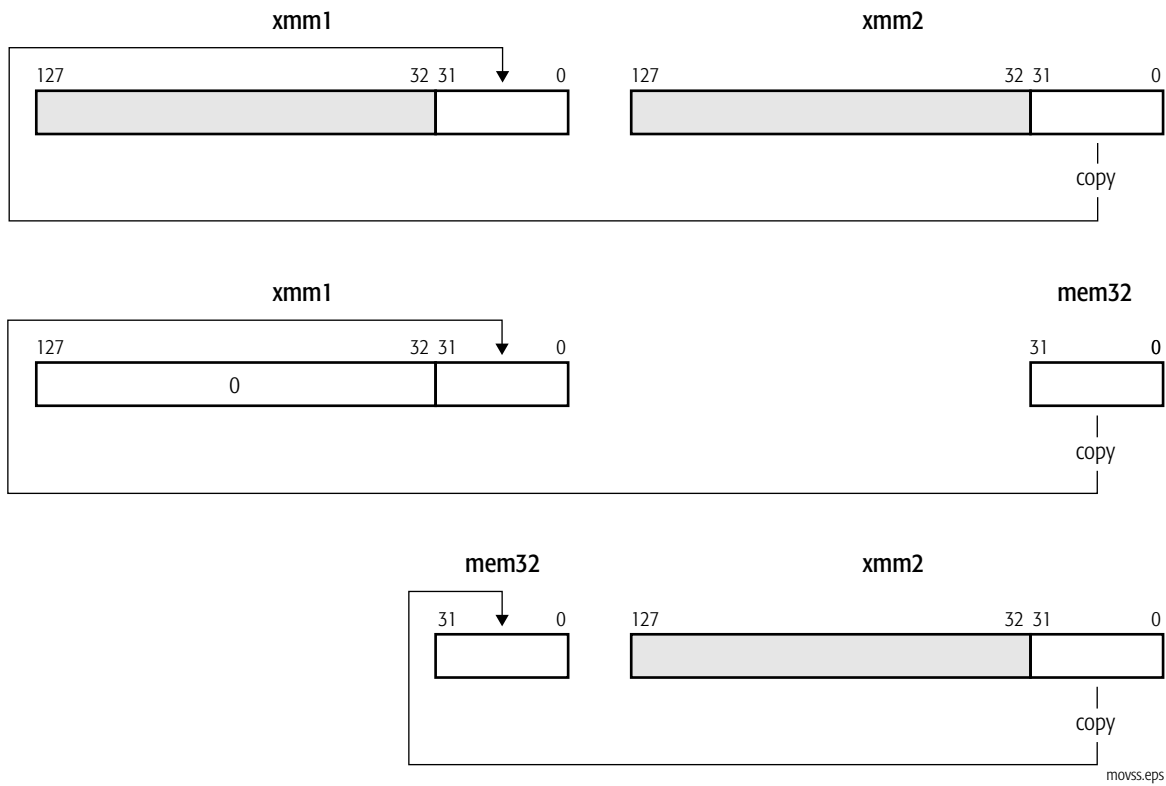

**Related Instructions**

MOVAPS, MOVHLP, MOVHPS, MOVLHP, MOVLPS, MOVMSKPS, MOVUPS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.

## MOVUPD Move Unaligned Packed Double-Precision Floating-Point

Moves two packed double-precision floating-point values:

- from an XMM register or 128-bit memory location to another XMM register, or
- from an XMM register to another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
MOVUPD <i>xmm1</i> , <i>xmm2/mem128</i>	66 0F 10 /r	Moves two packed double-precision floating-point values from an XMM register or unaligned 128-bit memory location to an XMM register.
MOVUPD <i>xmm1/mem128</i> , <i>xmm2</i>	66 0F 11 /r	Moves two packed double-precision floating-point values from an XMM register to an XMM register or unaligned 128-bit memory location.

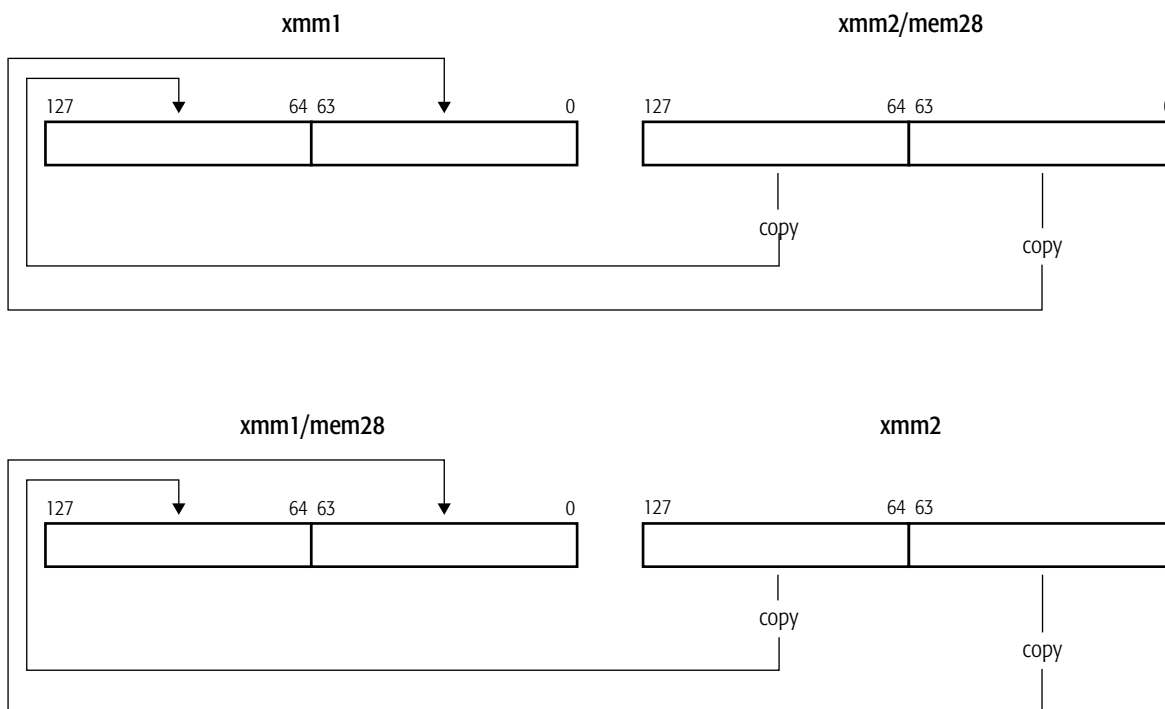

movupd.eps

Memory operands that are not aligned on a 16-byte boundary do not cause a general-protection exception.

**Related Instructions**

MOVAPD, MOVHPD, MOVLPD, MOVMSKPD, MOVSD

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**



Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned-memory reference was performed while alignment checking was enabled.

## MOVUPS Move Unaligned Packed Single-Precision Floating-Point

Moves four packed single-precision floating-point values:

- from an XMM register or 128-bit memory location to another XMM register, or
- from an XMM register to another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
MOVUPS <i>xmm1</i> , <i>xmm2/mem128</i>	0F 10 /r	Moves four packed single-precision floating-point values from an XMM register or unaligned 128-bit memory location to an XMM register.
MOVUPS <i>xmm1/mem128</i> , <i>xmm2</i>	0F 11 /r	Moves four packed single-precision floating-point values from an XMM register to an XMM register or unaligned 128-bit memory location.

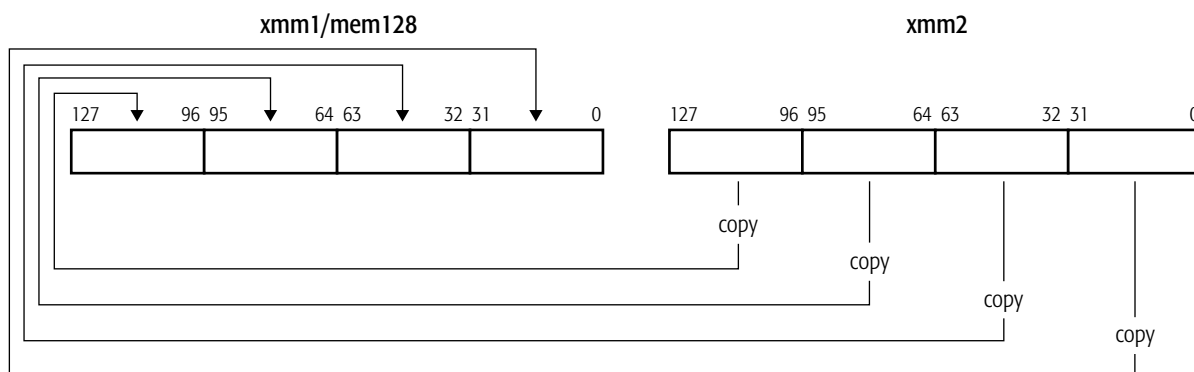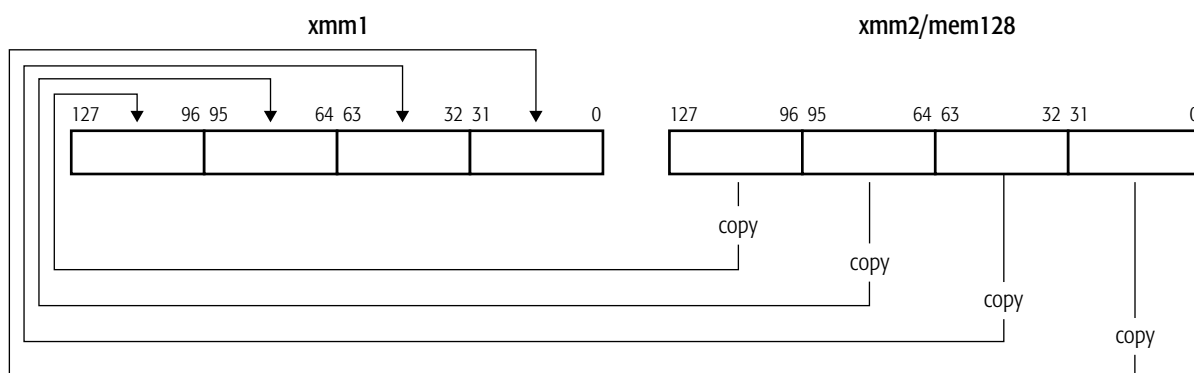

movups.eps

Memory operands that are not aligned on a 16-byte boundary do not cause a general-protection exception.

### Related Instructions

MOVAPS, MOVHLPS, MOVHPS, MOVLHPS, MOVLPS, MOVMSKPS, MOVSS

### rFLAGS Affected

None

### MXCSR Flags Affected

None

### Exceptions


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned-memory reference was performed while alignment checking was enabled.



**MULPD****Multiply Packed Double-Precision Floating-Point**

Multiplies each of the two packed double-precision floating-point values in the first source operand by the corresponding packed double-precision floating-point value in the second source operand and writes the result of each multiplication operation in the corresponding quadword of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
MULPD <i>xmm1, xmm2/mem128</i>	66 0F 59 /r	Multiplies packed double-precision floating-point values in an XMM register and another XMM register or 128-bit memory location and writes the results in the destination XMM register.

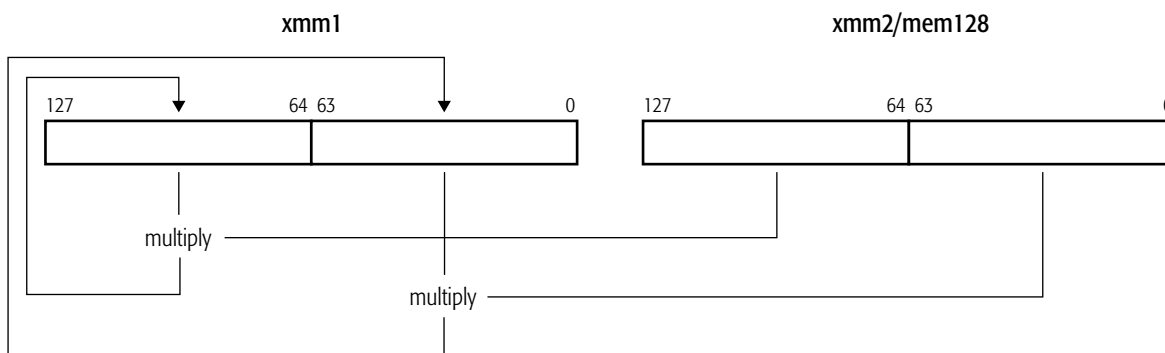

mulpd.eps

**Related Instructions**

MULPS, MULSD, MULSS, PFMUL

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M		M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

*Note:*  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	Zero was multiplied by ±infinity.
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

## MULPS Multiply Packed Single-Precision Floating-Point

Multiplies each of the four packed single-precision floating-point values in first source operand by the corresponding packed single-precision floating-point value in the second source operand and writes the result of each multiplication operation in the corresponding doubleword of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
MULPS <i>xmm1, xmm2/mem128</i>	0F 59/r	Multiplies packed single-precision floating-point values in an XMM register and another XMM register or 128-bit memory location and writes the results in the destination XMM register.

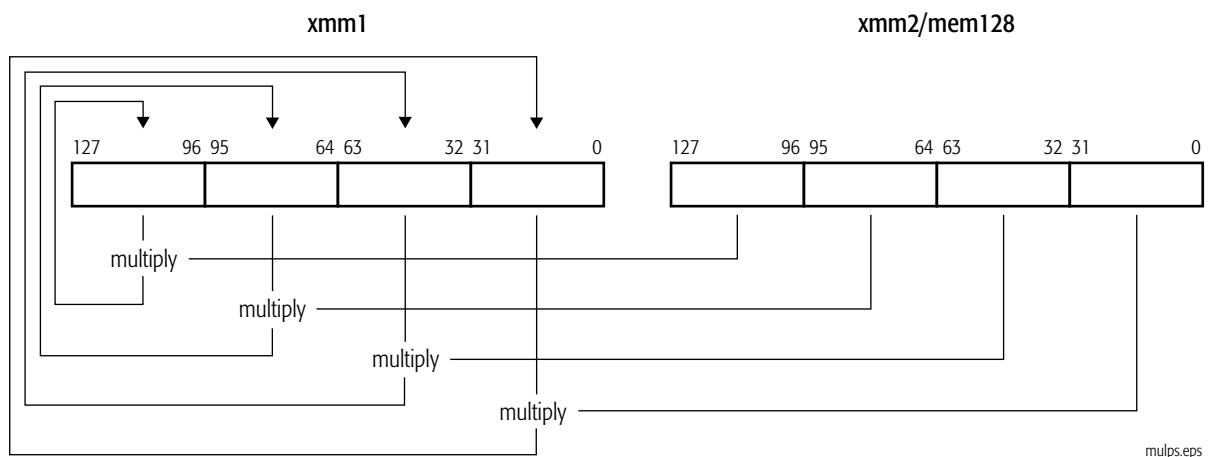

### Related Instructions

MULPD, MULSD, MULSS, PFMUL

### rFLAGS Affected

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M		M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	Zero was multiplied by $\pm$ infinity.
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

## MULSD Multiply Scalar Double-Precision Floating-Point

Multiplies the double-precision floating-point value in the low-order quadword of first source operand by the double-precision floating-point value in the low-order quadword of the second source operand and writes the result in the low-order quadword of the destination (first source). The high-order quadword of the destination is not modified. The first source/destination operand is an XMM register. The second source operand is another XMM register or 64-bit memory location.

Mnemonic	Opcode	Description
MULSD <i>xmm1, xmm2/mem64</i>	F2 0F 59 /r	Multiplies low-order double-precision floating-point values in an XMM register and another XMM register or 64-bit memory location and writes the result in the low-order quadword of the destination XMM register.

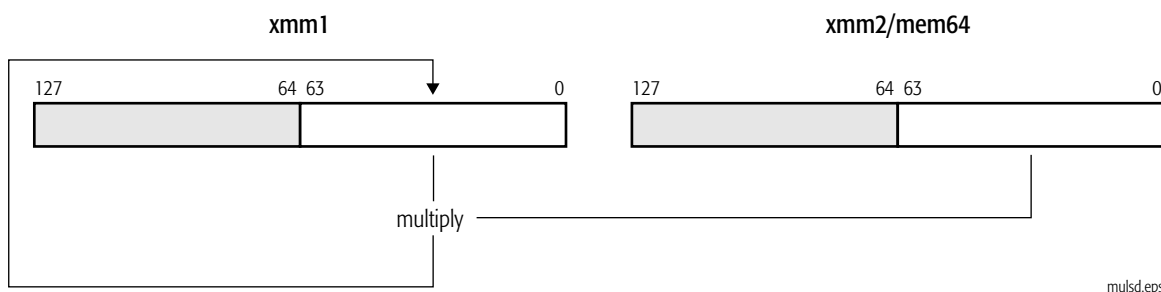

### Related Instructions

MULPD, MULPS, MULSS, PFMUL

### rFLAGS Affected

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M		M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

*Note:*  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	Zero was multiplied by $\pm$ infinity.
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.




<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

## MULSS Multiply Scalar Single-Precision Floating-Point

Multiplies the single-precision floating-point value in the low-order doubleword of first source operand by the single-precision floating-point value in the low-order doubleword of the second source operand and writes the result in the low-order doubleword of the destination (first source). The three high-order doublewords of the destination are not modified. The first source/destination operand is an XMM register. The second source operand is another XMM register or 32-bit memory location.

Mnemonic	Opcode	Description
MULSS <i>xmm1, xmm2/mem32</i>	F3 0F 59 /r	Multiplies low-order single-precision floating-point values in an XMM register and another XMM register or 32-bit memory location and writes the result in the low-order doubleword of the destination XMM register.

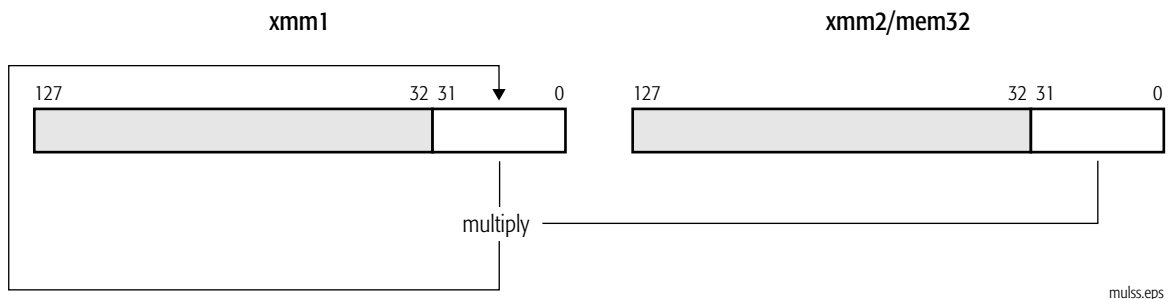

### Related Instructions

MULPD, MULPS, MULSD, PFMUL

### rFLAGS Affected

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M		M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	Zero was multiplied by $\pm$ infinity.
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**ORPD****Logical Bitwise OR  
Packed Double-Precision Floating-Point**

Performs a bitwise logical OR of the two packed double-precision floating-point values in the first source operand and the corresponding two packed double-precision floating-point values in the second source operand and writes the result in the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
ORPD <i>xmm1, xmm2/mem128</i>	66 0F 56/r	Performs bitwise logical OR of two packed double-precision floating-point values in an XMM register and in another XMM register or 128-bit memory location and writes the result in the destination XMM register.

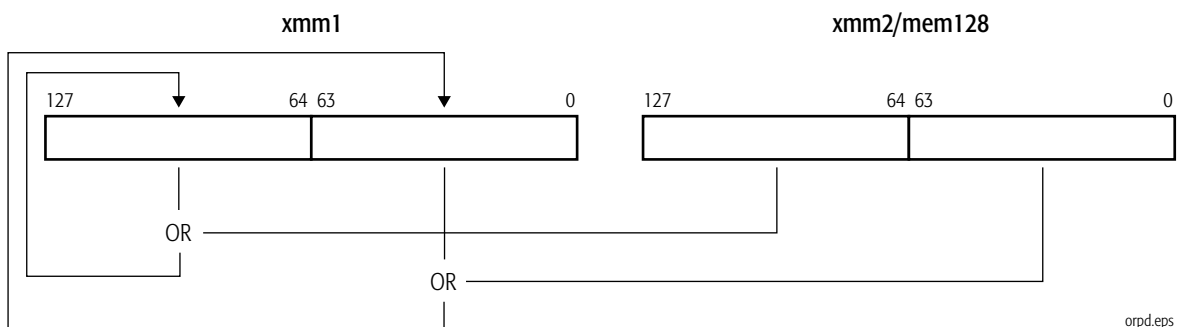**Related Instructions**

ANDNPD, ANDNPS, ANDPD, ANDPS, ORPS, XORPD, XORPS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**ORPS****Logical Bitwise OR  
Packed Single-Precision Floating-Point**

Performs a bitwise logical OR of the four packed single-precision floating-point values in the first source operand and the corresponding four packed single-precision floating-point values in the second source operand and writes the result in the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
ORPS <i>xmm1, xmm2/mem128</i>	OF 56/r	Performs bitwise logical OR of four packed single-precision floating-point values in an XMM register and in another XMM register or 128-bit memory location and writes the result in the destination XMM register.

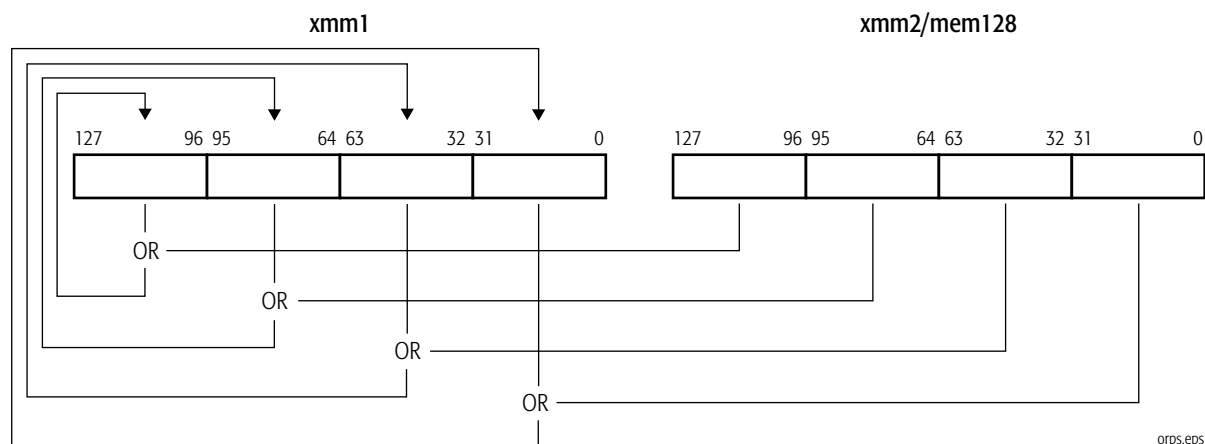**Related Instructions**

ANDNPD, ANDNPS, ANDPD, ANDPS, ORPD, XORPD, XORPS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.




## PACKSSDW Pack with Saturation Signed Doubleword to Word

Converts each 32-bit signed integer in the first and second source operands to a 16-bit signed integer and packs the converted values into words in the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Converted values from the first source operand are packed into the low-order words of the destination, and the converted values from the second source operand are packed into the high-order words of the destination.

Mnemonic	Opcode	Description
PACKSSDW <i>xmm1, xmm2/mem128</i>	66 0F 6B /r	Packs 32-bit signed integers in an XMM register and another XMM register or 128-bit memory location into 16-bit signed integers in an XMM register.

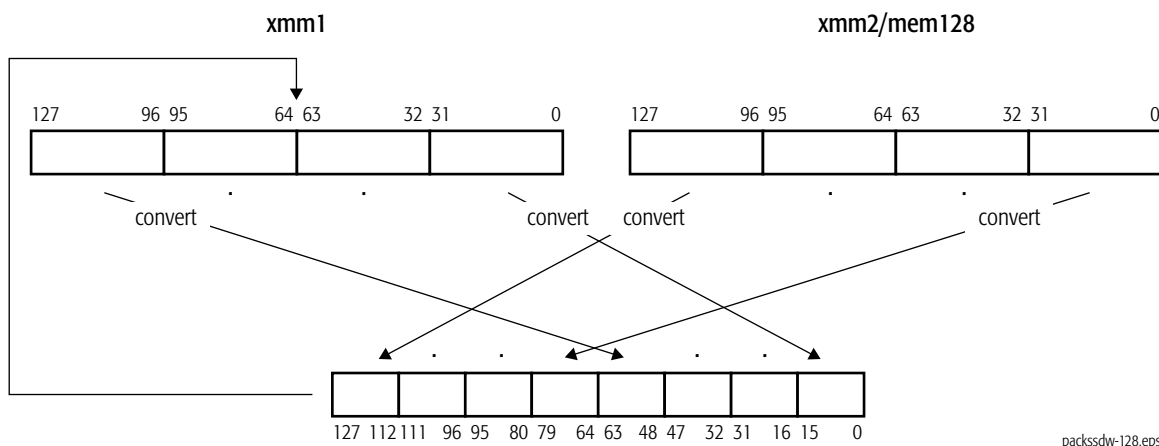

For each packed value in the destination, if the value is larger than the largest signed 16-bit integer, it is saturated to 7FFFh, and if the value is smaller than the smallest signed 16-bit integer, it is saturated to 8000h.

### Related Instructions

PACKSSWB, PACKUSWB

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PACKSSWB Pack with Saturation Signed Word to Byte

Converts each 16-bit signed integer in the first and second source operands to an 8-bit signed integer and packs the converted values into bytes in the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Converted values from the first source operand are packed into the low-order bytes of the destination, and the converted values from the second source operand are packed into the high-order bytes of the destination.

Mnemonic	Opcode	Description
PACKSSWB <i>xmm1, xmm2/mem128</i>	66 0F 63 /r	Packs 16-bit signed integers in an XMM register and another XMM register or 128-bit memory location into 8-bit signed integers in an XMM register.

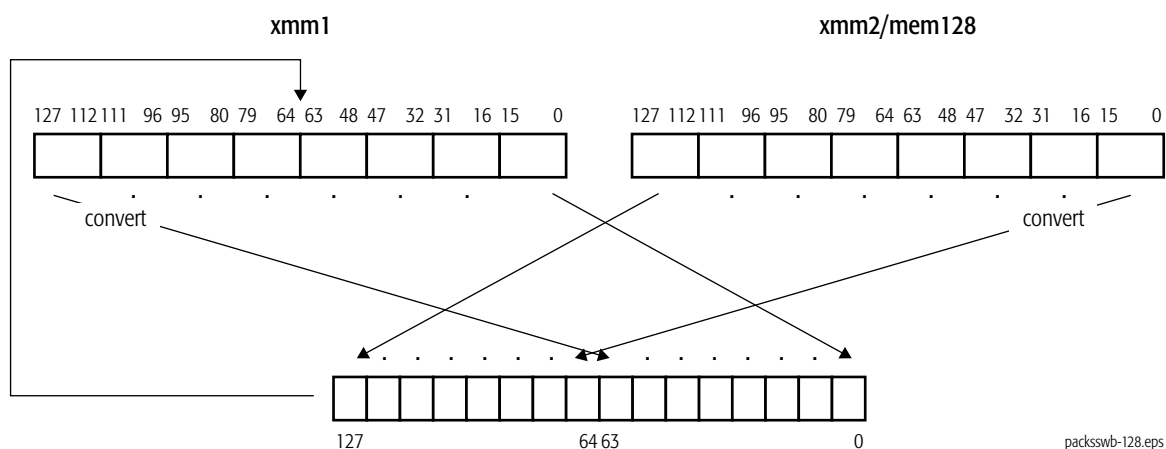

For each packed value in the destination, if the value is larger than the largest signed 8-bit integer, it is saturated to 7Fh, and if the value is smaller than the smallest signed 8-bit integer, it is saturated to 80h.

### Related Instructions

PACKSSDW, PACKUSWB

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PACKUSWB****Pack with Saturation Signed Word to Unsigned Byte**

Converts each 16-bit signed integer in the first and second source operands to an 8-bit unsigned integer and packs the converted values into bytes in the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.


Converted values from the first source operand are packed into the low-order bytes of the destination, and the converted values from the second source operand are packed into the high-order bytes of the destination.

**Mnemonic**PACKUSWB *xmm1, xmm2/mem128***Opcode**

66 0F 67 /r

**Description**

Packs 16-bit signed integers in an XMM register and another XMM register or 128-bit memory location into 8-bit unsigned integers in an XMM register.

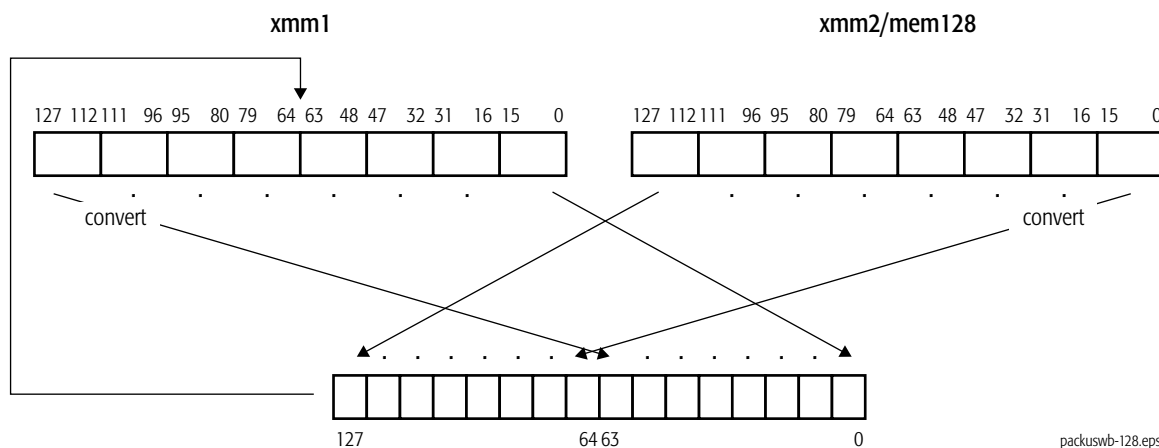

For each packed value in the destination, if the value is larger than the largest unsigned 8-bit integer, it is saturated to FFh, and if the value is smaller than the smallest unsigned 8-bit integer, it is saturated to 00h.

**Related Instructions**

PACKSSDW, PACKSSWB

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PADDB Packed Add Bytes

Adds each packed 8-bit integer value in the first source operand to the corresponding packed 8-bit integer in the second source operand and writes the integer result of each addition in the corresponding byte of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PADDB <i>xmm1, xmm2/mem128</i>	66 0F FC /r	Adds packed byte integer values in an XMM register and another XMM register or 128-bit memory location and writes the result in the destination XMM register.

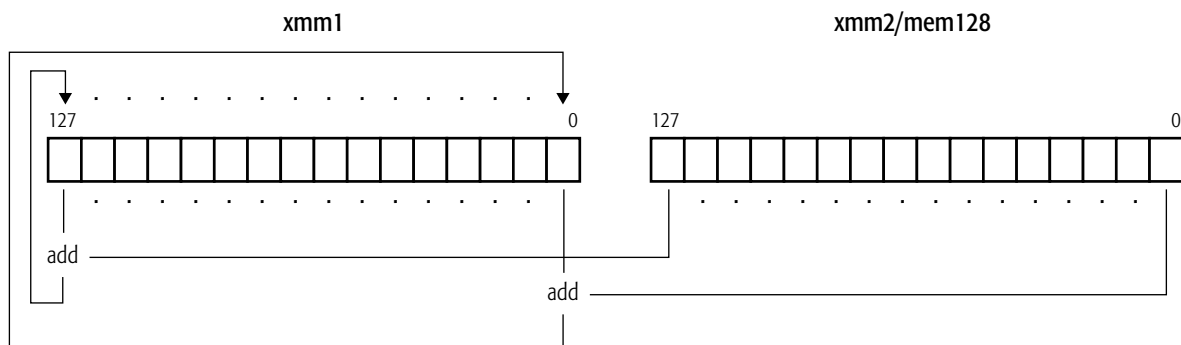

This instruction operates on both signed and unsigned integers. If the result overflows, the carry is ignored (neither the overflow nor carry bit in rFLAGS is set), and only the low-order 8 bits of each result are written in the destination.

### Related Instructions

PADDD, PADDQ, PADDSB, PADDSW, PADDUSB, PADDUSW, PADDW

### rFLAGS Affected

None

### MXCSR Flags Affected

None

**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.






**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PADDQ Packed Add Quadwords

Adds each packed 64-bit integer value in the first source operand to the corresponding packed 64-bit integer in the second source operand and writes the integer result of each addition in the corresponding quadword of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PADDQ <i>xmm1, xmm2/mem128</i>	66 0F D4 /r	Adds packed 64-bit integer values in an XMM register and another XMM register or 128-bit memory location and writes the result in the destination XMM register.

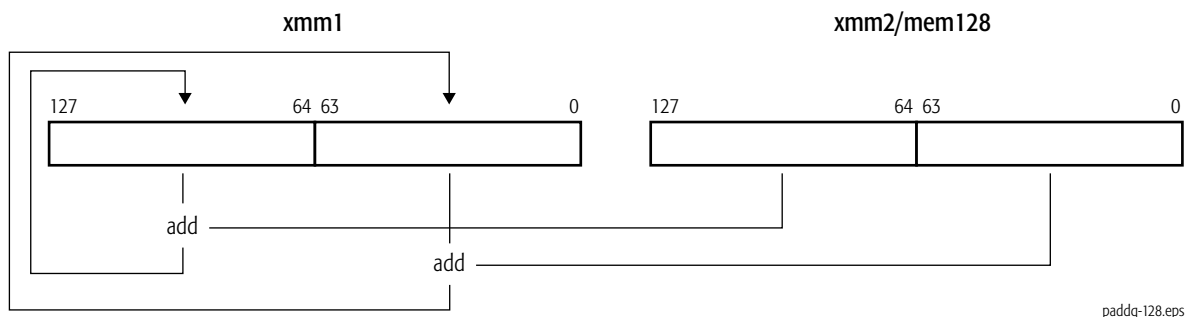

This instruction operates on both signed and unsigned integers. If the result overflows, the carry is ignored (neither the overflow nor carry bit in `rFLAGS` is set), and only the low-order 64 bits of each result are written in the destination.

### Related Instructions

PADDB, PADDD, PADDSB, PADDSW, PADDUSB, PADDUSW, PADDW

### rFLAGS Affected

None

### MXCSR Flags Affected

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PADDSB Packed Add Signed with Saturation Bytes

Adds each packed 8-bit signed integer value in the first source operand to the corresponding packed 8-bit signed integer in the second source operand and writes the signed integer result of each addition in the corresponding byte of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PADDSB <i>xmm1, xmm2/mem128</i>	66 0F EC /r	Adds packed byte signed integer values in an XMM register and another XMM register or 128-bit memory location and writes the result in the destination XMM register.

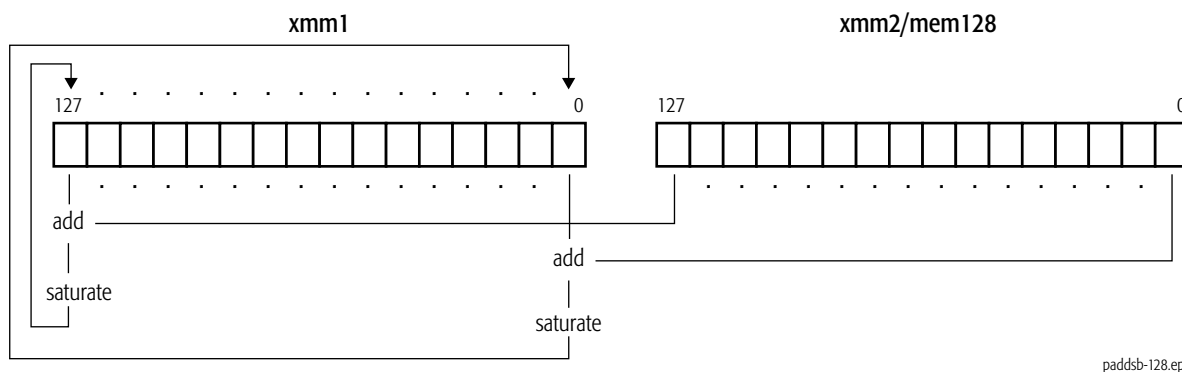

For each packed value in the destination, if the value is larger than the largest representable signed 8-bit integer, it is saturated to 7Fh, and if the value is smaller than the smallest signed 8-bit integer, it is saturated to 80h.

### Related Instructions

PADDB, PADDD, PADDQ, PADDSW, PADDUSB, PADDUSW, PADDW

### rFLAGS Affected

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PADDSW****Packed Add Signed with Saturation Words**

Adds each packed 16-bit signed integer value in the first source operand to the corresponding packed 16-bit signed integer in the second source operand and writes the signed integer result of each addition in the corresponding word of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
<code>PADDSW <i>xmm1</i>, <i>xmm2/mem128</i></code>	<code>66 0F ED /r</code>	Adds packed 16-bit signed integer values in an XMM register and another XMM register or 128-bit memory location and writes the result in the destination XMM register.

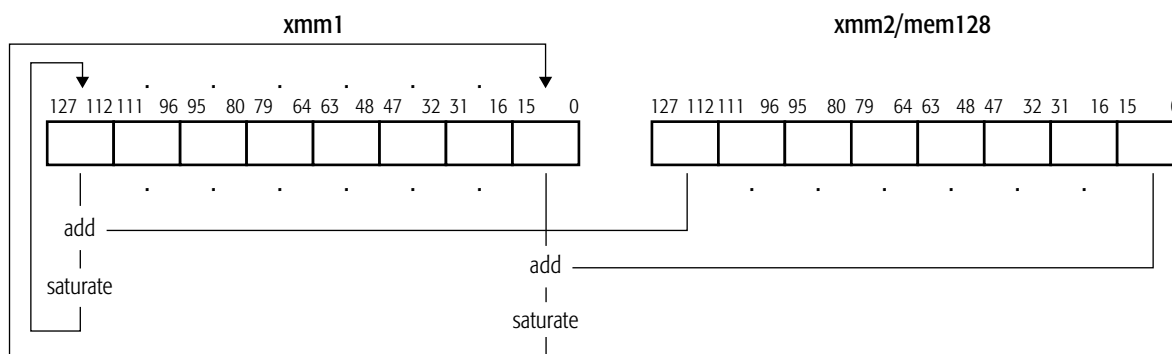

paddsw-128.eps

For each packed value in the destination, if the value is larger than the largest representable signed 16-bit integer, it is saturated to 7FFFh, and if the value is smaller than the smallest signed 16-bit integer, it is saturated to 8000h.

**Related Instructions**

`PADDB`, `PADDD`, `PADDQ`, `PADDSB`, `PADDUSB`, `PADDUSW`, `PADDW`

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.



## PADDUSB Packed Add Unsigned with Saturation Bytes

Adds each packed 8-bit unsigned integer value in the first source operand to the corresponding packed 8-bit unsigned integer in the second source operand and writes the unsigned integer result of each addition in the corresponding byte of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PADDUSB <i>xmm1, xmm2/mem128</i>	66 0F DC /r	Adds packed byte unsigned integer values in an XMM register and another XMM register or 128-bit memory location and writes the result in the destination XMM register.

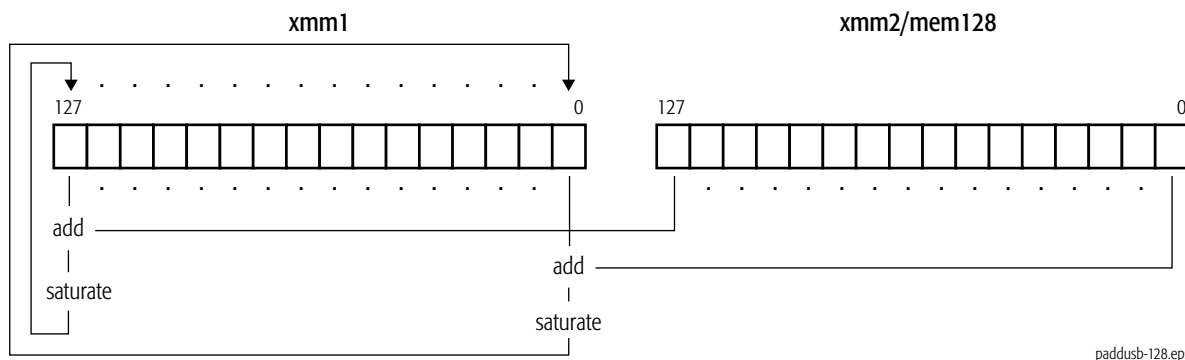

For each packed value in the destination, if the value is larger than the largest unsigned 8-bit integer, it is saturated to FFh, and if the value is smaller than the smallest unsigned 8-bit integer, it is saturated to 00h.

### Related Instructions

PADDB, PADDD, PADDQ, PADDSB, PADDSW, PADDUSW, PADDW

### rFLAGS Affected

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PADDUSW Packed Add Unsigned with Saturation Words

Adds each packed 16-bit unsigned integer value in the first source operand to the corresponding packed 16-bit unsigned integer in the second source operand and writes the unsigned integer result of each addition in the corresponding word of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PADDUSW <i>xmm1, xmm2/mem128</i>	66 0F DD /r	Adds packed 16-bit unsigned integer values in an XMM register and another XMM register or 128-bit memory location and writes result in the destination XMM register.

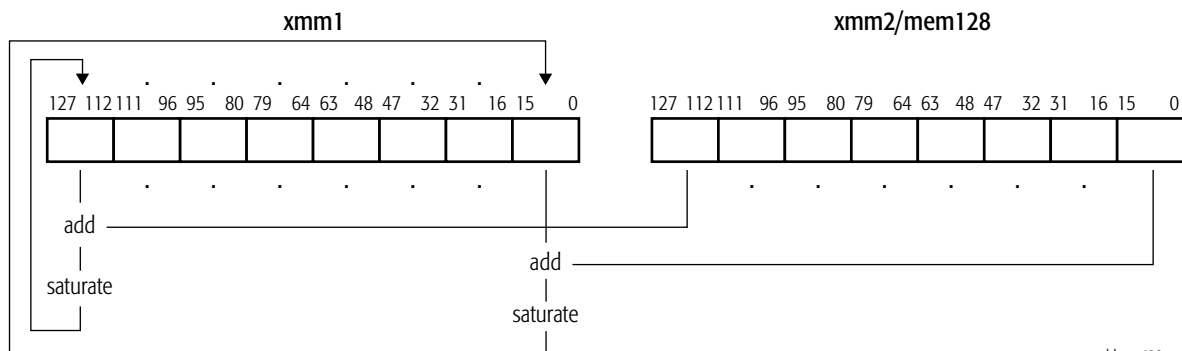

paddusw-128.eps

For each packed value in the destination, if the value is larger than the largest unsigned 16-bit integer, it is saturated to FFFFh, and if the value is smaller than the smallest unsigned 16-bit integer, it is saturated to 0000h.

### Related Instructions

PADDB, PADDD, PADDQ, PADDSB, PADDSW, PADDUSB, PADDW

### rFLAGS Affected

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PADDW Packed Add Words

Adds each packed 16-bit integer value in the first source operand to the corresponding packed 16-bit integer in the second source operand and writes the integer result of each addition in the corresponding word of the destination (second source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PADDW <i>xmm1</i> , <i>xmm2/mem128</i>	66 0F FD /r	Adds packed 16-bit integer values in an XMM register and another XMM register or 128-bit memory location and writes the result in the destination XMM register.

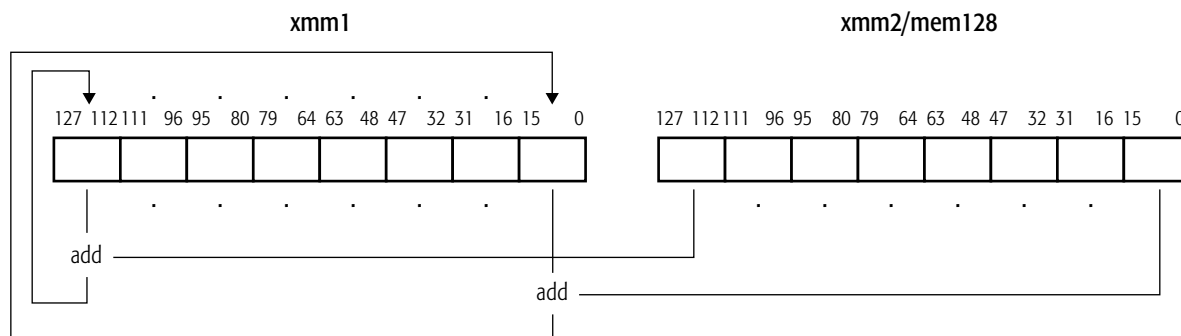

paddw-128.eps

This instruction operates on both signed and unsigned integers. If the result overflows, the carry is ignored (neither the overflow nor carry bit in rFLAGS is set), and only the low-order 16 bits of the result are written in the destination.

### Related Instructions

PADDB, PADDD, PADDQ, PADDSB, PADDSW, PADDUSB, PADDUSW

### rFLAGS Affected

None

### MXCSR Flags Affected

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PAND****Packed Logical Bitwise AND**

Performs a bitwise logical AND of the values in the first and second source operands and writes the result in the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PAND <i>xmm1, xmm2/mem128</i>	66 0F DB /r	Performs bitwise logical AND of values in an XMM register and in another XMM register or 128-bit memory location and writes the result in the destination XMM register.

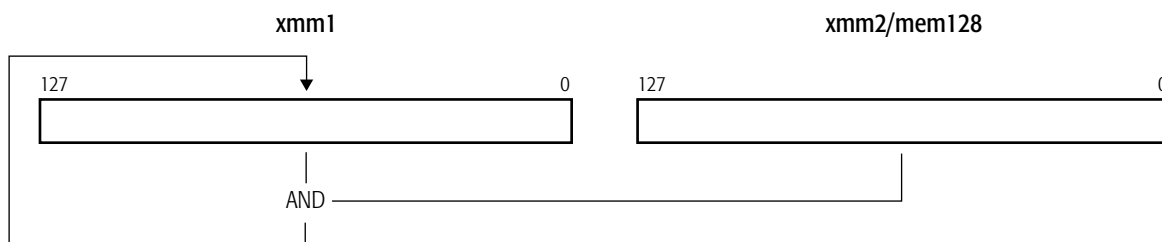

pand-128.eps

**Related Instructions**

PANDN, POR, PXOR

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.



**PANDN****Packed Logical Bitwise AND NOT**

Performs a bitwise logical AND of the value in the second source operand and the one's complement of the value in the first source operand and writes the result in the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PANDN <i>xmm1, xmm2/mem128</i>	66 0F DF /r	Performs bitwise logical AND NOT of values in an XMM register and in another XMM register or 128-bit memory location and writes the result in the destination XMM register.

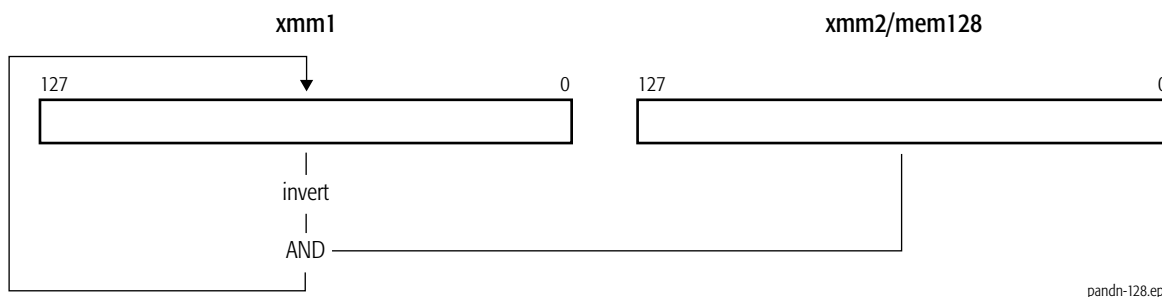**Related Instructions**

PAND, POR, PXOR

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PAVGB****Packed Average Unsigned Bytes**

Computes the rounded average of each packed unsigned 8-bit integer value in the first source operand and the corresponding packed 8-bit unsigned integer in the second source operand and writes each average in the corresponding byte of the destination (first source). The average is computed by adding each pair of operands, adding 1 to the 9-bit temporary sum, and then right-shifting the temporary sum by one bit position. The destination and source operands are an XMM register and another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PAVGB <i>xmm1, xmm2/mem128</i>	66 0F E0 /r	Averages packed 8-bit unsigned integer values in an XMM register and another XMM register or 128-bit memory location and writes the result in the destination XMM register.

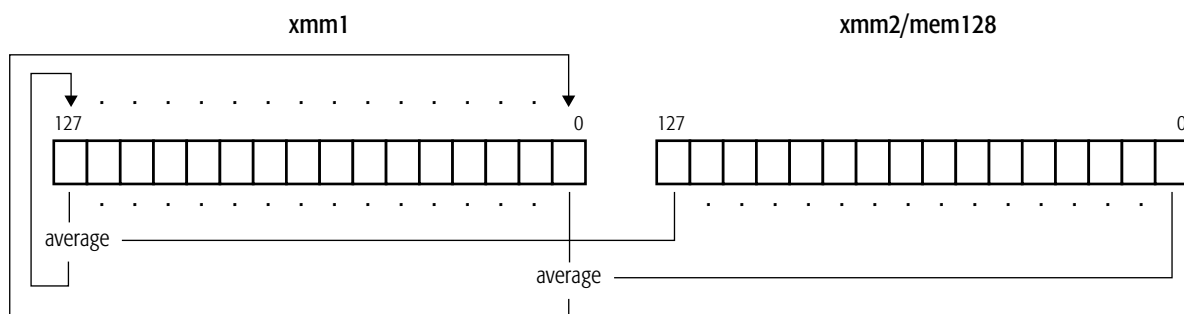

pavgb-128.eps

**Related Instructions**

PAVGW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 in CPUID standard function 1; and the AMD extensions to MMX are not supported, as indicated by bit 22 of CPUID extended function 8000_0001.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PAVGW Packed Average Unsigned Words

Computes the rounded average of each packed unsigned 16-bit integer value in the first source operand and the corresponding packed 16-bit unsigned integer in the second source operand and writes each average in the corresponding word of the destination (first source). The average is computed by adding each pair of operands, adding 1 to the 17-bit temporary sum, and then right-shifting the temporary sum by one bit position. The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PAVGW <i>xmm1, xmm2/mem128</i>	66 0F E3 /r	Averages packed 16-bit unsigned integer values in an XMM register and another XMM register or 128-bit memory location and writes the result in the destination XMM register.

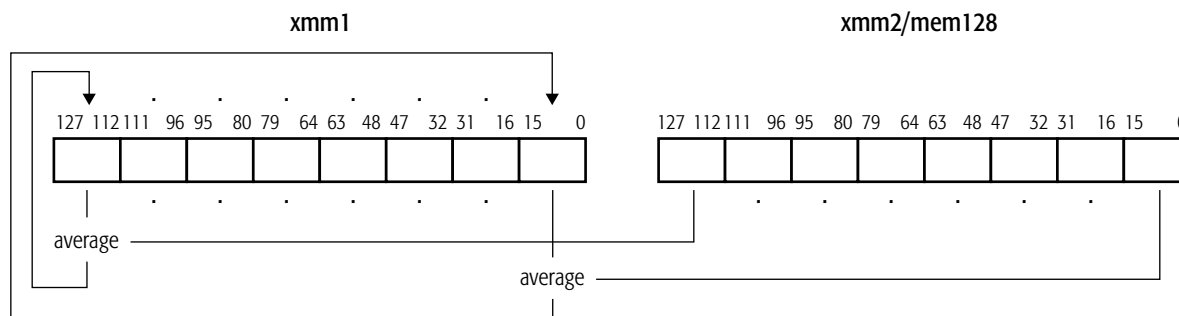

pavgw-128.eps

### Related Instructions

PAVGB

### rFLAGS Affected

None

### MXCSR Flags Affected

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 in CPUID standard function 1; and the AMD extensions to MMX are not supported, as indicated by bit 22 of CPUID extended function 8000_0001.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PCMPEQB Packed Compare Equal Bytes

Compares corresponding packed bytes in the first and second source operands and writes the result of each comparison in the corresponding byte of the destination (first source). For each pair of bytes, if the values are equal, the result is all 1s. If the values are not equal, the result is all 0s. The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PCMPEQB <i>xmm1, xmm2/mem128</i>	66 0F 74 /r	Compares packed bytes in an XMM register and an XMM register or 128-bit memory location.

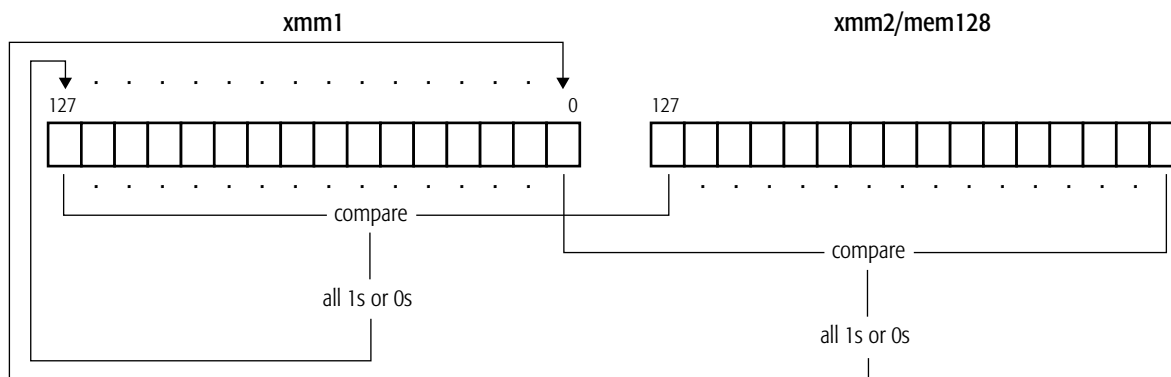

### Related Instructions

PCMPEQD, PCMPEQW, PCMPGTB, PCMPGTD, PCMPGTW

### rFLAGS Affected

None

### MXCSR Flags Affected

None

**Exceptions**


<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.



## PCMPEQD Packed Compare Equal Doublewords

Compares corresponding packed 32-bit values in the first and second source operands and writes the result of each comparison in the corresponding 32 bits of the destination (first source). For each pair of doublewords, if the values are equal, the result is all 1s. If the values are not equal, the result is all 0s. The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PCMPEQD <i>xmm1, xmm2/mem128</i>	66 0F 76 /r	Compares packed doublewords in an XMM register and an XMM register or 128-bit memory location.

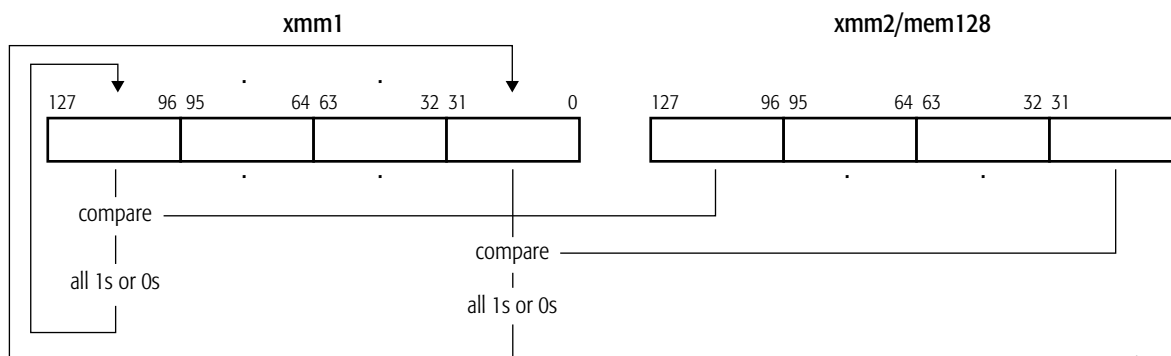

### Related Instructions

PCMPEQB, PCMPEQW, PCMPGTB, PCMPGTD, PCMPGTW

### rFLAGS Affected

None

### MXCSR Flags Affected

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PCMPEQW****Packed Compare Equal Words**

Compares corresponding packed 16-bit values in the first and second source operands and writes the result of each comparison in the corresponding 16 bits of the destination (first source). For each pair of words, if the values are equal, the result is all 1s. If the values are not equal, the result is all 0s. The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PCMPEQW <i>xmm1, xmm2/mem128</i>	66 0F 75 /r	Compares packed 16-bit values in an XMM register and an XMM register or 128-bit memory location.

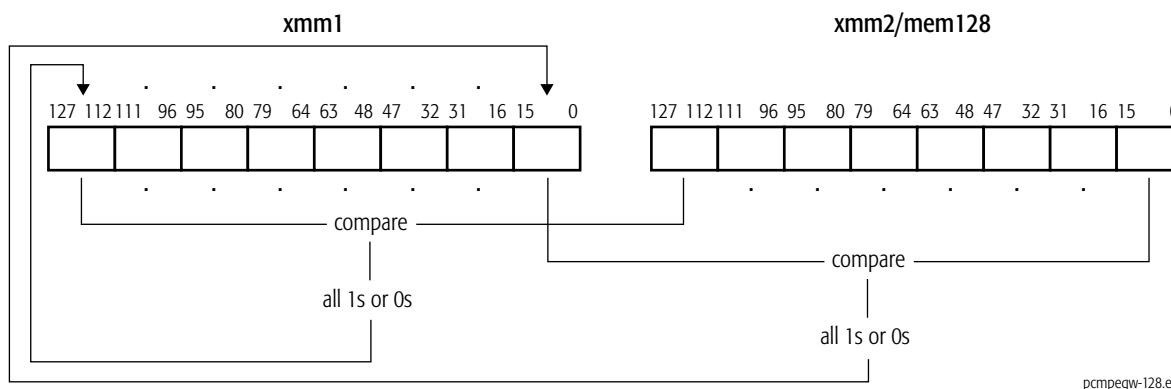**Related Instructions**

PCMPEQB, PCMPEQD, PCMPGTB, PCMPGTD, PCMPGTW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PCMPGTB Packed Compare Greater Than Signed Bytes

Compares corresponding packed signed bytes in the first and second source operands and writes the result of each comparison in the corresponding byte of the destination (first source). For each pair of bytes, if the value in the first source operand is greater than the value in the second source operand, the result is all 1s. If the value in the first source operand is less than or equal to the value in the second source operand, the result is all 0s. The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PCMPGTB <i>xmm1, xmm2/mem128</i>	66 0F 64 /r	Compares packed signed bytes in an XMM register and an XMM register or 128-bit memory location.

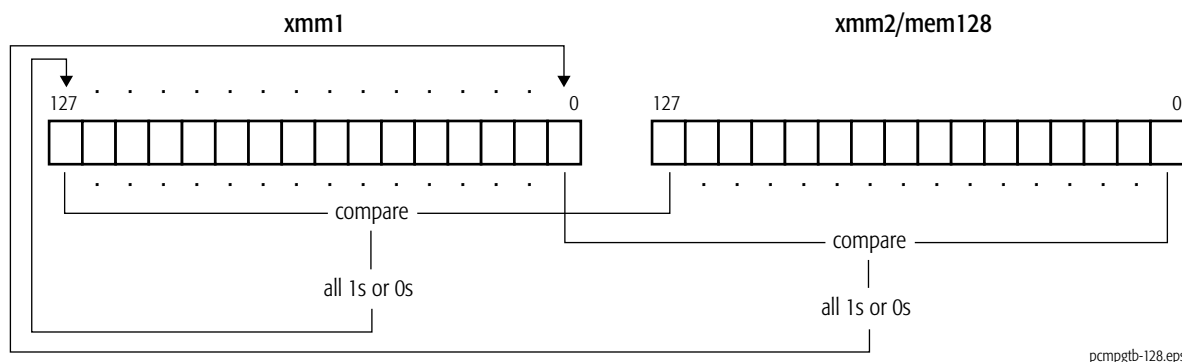

### Related Instructions

PCMPEQB, PCMPEQD, PCMPEQW, PCMPGTD, PCMPGTW

### rFLAGS Affected

None

### MXCSR Flags Affected

None

**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PCMPGTD****Packed Compare Greater Than Signed Doublewords**


Compares corresponding packed signed 32-bit values in the first and second source operands and writes the result of each comparison in the corresponding 32 bits of the destination (first source). For each pair of doublewords, if the value in the first source operand is greater than the value in the second source operand, the result is all 1s. If the value in the first source operand is less than or equal to the value in the second source operand, the result is all 0s. The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

**Mnemonic**PCMPGTD *xmm1, xmm2/mem128***Opcode**

66 0F 66/r

**Description**

Compares packed signed 32-bit values in an XMM register and an XMM register or 128-bit memory location.

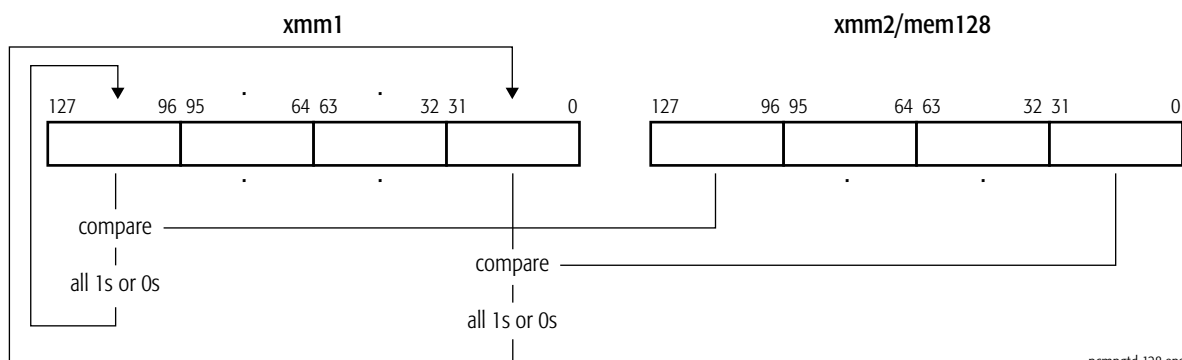

pcmpgtd-128.eps

**Related Instructions**

PCMPEQB, PCMPEQD, PCMPEQW, PCMPGTB, PCMPGTW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.



## PCMPGTW Packed Compare Greater Than Signed Words

Compares corresponding packed signed 16-bit values in the first and second source operands and writes the result of each comparison in the corresponding 16 bits of the destination (first source). For each pair of words, if the value in the first source operand is greater than the value in the second source operand, the result is all 1s. If the value in the first source operand is less than or equal to the value in the second source operand, the result is all 0s. The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PCMPGTW <i>xmm1, xmm2/mem128</i>	66 0F 65 /r	Compares packed signed 16-bit values in an XMM register and an XMM register or 128-bit memory location.

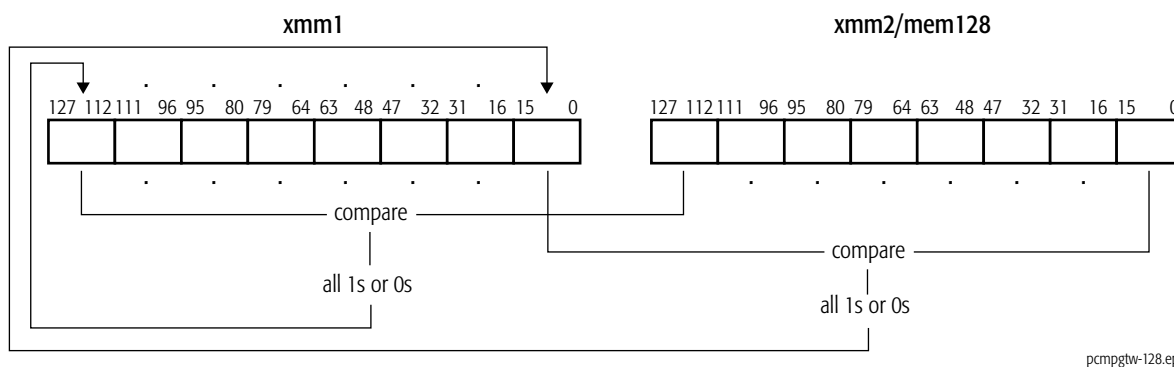

### Related Instructions

PCMPEQB, PCMPEQD, PCMPEQW, PCMPGTB, PCMPGTD

### rFLAGS Affected

None

### MXCSR Flags Affected

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PEXTRW Extract Packed Word

Extracts a 16-bit value from an XMM register, as selected by the immediate byte operand (as shown in Table 1-2) and writes it to the low-order word of a 32-bit general-purpose register, with zero-extension to 32 bits.

Mnemonic	Opcode	Description
PEXTRW <i>reg32, xmm, imm8</i>	66 0F C5 /r <i>ib</i>	Extracts a 16-bit value from an XMM register and writes it to low-order 16 bits of a general-purpose register.

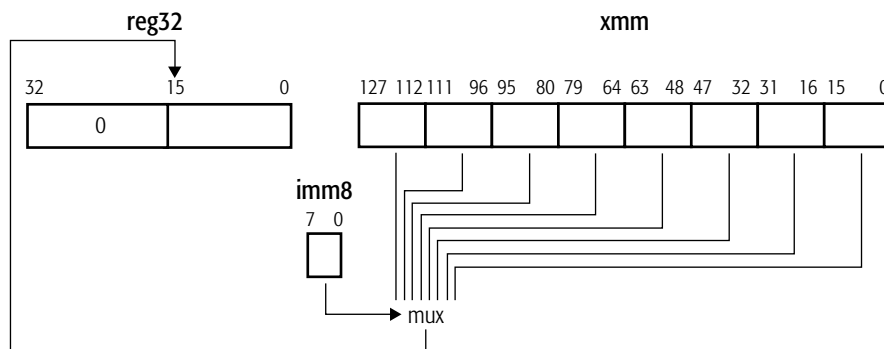

pextrw-128.eps

**Table 1-2. Immediate-Byte Operand Encoding for 128-Bit PEXTRW**

Immediate-Byte Bit Field	Value of Bit Field	Source Bits Extracted
2-0	0	15-0
	1	31-16
	2	47-32
	3	63-48
	4	79-64
	5	95-80
	6	111-96
	7	127-112

**Related Instructions**

PINSRW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 in CPUID standard function 1; and the AMD extensions to MMX are not supported, as indicated by bit 22 of CPUID extended function 8000_0001.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.

## PINSRW Packed Insert Word

Inserts a 16-bit value from the low-order word of a 32-bit general purpose register or a 16-bit memory location into an XMM register. The location in the destination register is selected by the immediate byte operand, as shown in Table 1-3. The other words in the destination register operand are not modified.

Mnemonic	Opcode	Description
PINSRW <i>xmm, reg32/mem16, imm8</i>	66 0F C4 /r ib	Inserts a 16-bit value from a general-purpose register or memory location into an XMM register.

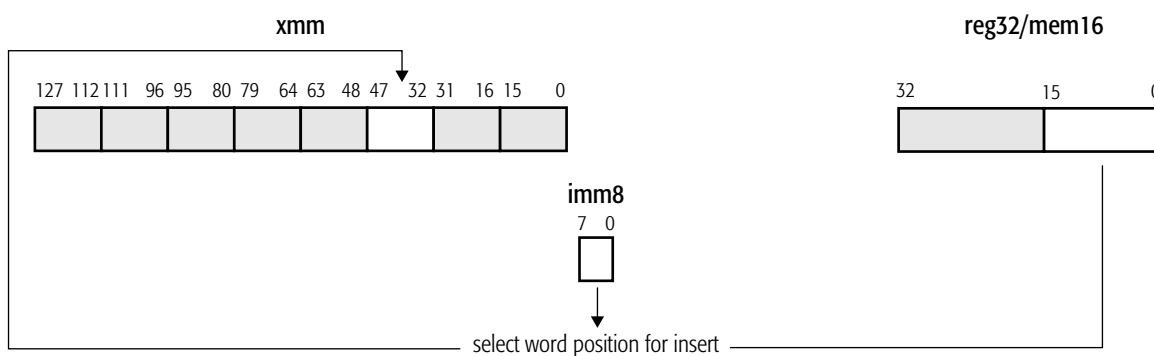

pinsrw-128.eps

**Table 1-3. Immediate-Byte Operand Encoding for 128-Bit PINSRW**

Immediate-Byte Bit Field	Value of Bit Field	Destination Bits Filled
2-0	0	15-0
	1	31-16
	2	47-32
	3	63-48
	4	79-64
	5	95-80
	6	111-96
	7	127-112

**Related Instructions**

PEXTRW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 in CPUID standard function 1; and the AMD extensions to MMX are not supported, as indicated by bit 22 of CPUID extended function 8000_0001.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.

## PMADDWD Packed Multiply Words and Add Doublewords

Multiplies each packed 16-bit signed value in the first source operand by the corresponding packed 16-bit signed value in the second source operand, adds the adjacent intermediate 32-bit results of each multiplication (for example, the multiplication results for the adjacent bit fields 63–48 and 47–32, and 31–16 and 15–0), and writes the 32-bit result of each addition in the corresponding doubleword of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PMADDWD <i>xmm1, xmm2/mem128</i>	66 0F F5 /r	Multiplies eight packed 16-bit signed values in an XMM register and another XMM register or 128-bit memory location, adds intermediate results, and writes the result in the destination XMM register.

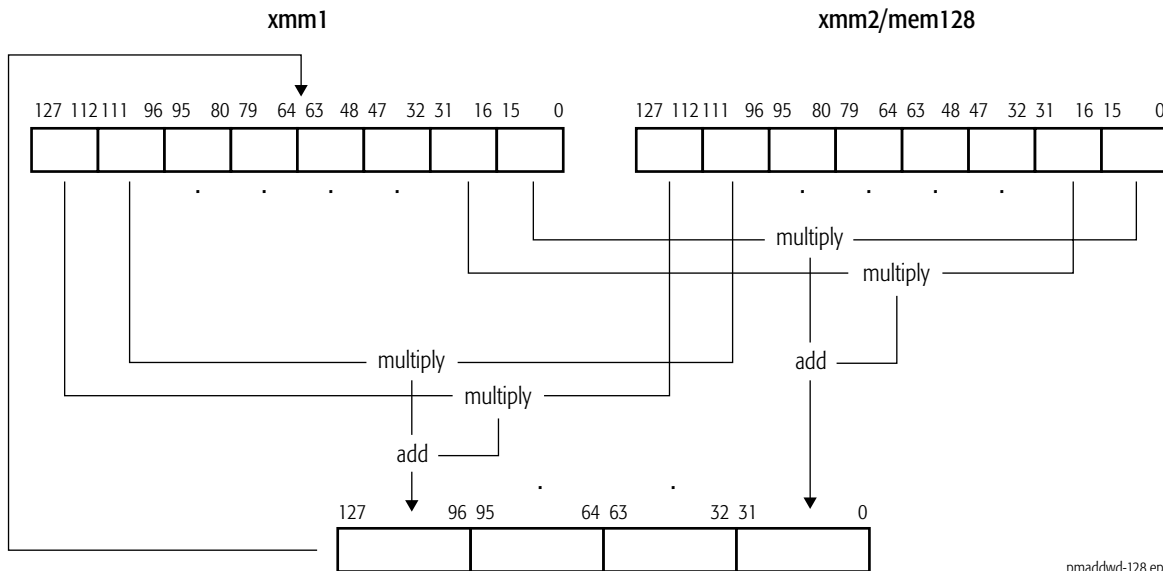

pmaddwd-128.eps

There is only one case in which the result of the multiplication and addition will not fit in a signed 32-bit destination. If all four of the 16-bit source operands used to produce a 32-bit multiply-add result have the value 8000h, the 32-bit result is 8000\_0000h, which is incorrect.



**Related Instructions**

PMULHUW, PMULHW, PMULLW, PMULUDQ

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PMAXSW Packed Maximum Signed Words

Compares each of the packed 16-bit signed integer values in the first source operand with the corresponding packed 16-bit signed integer value in the second source operand and writes the numerically greater of the two values for each comparison in the corresponding word of the destination (first source). The first source/destination and second source operands are an XMM register and an XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PMAXSW <i>xmm1, xmm2/mem128</i>	66 0F EE /r	Compares packed signed 16-bit integer values in an XMM register and another XMM register or 128-bit memory location and writes the greater value of each comparison in destination XMM register.

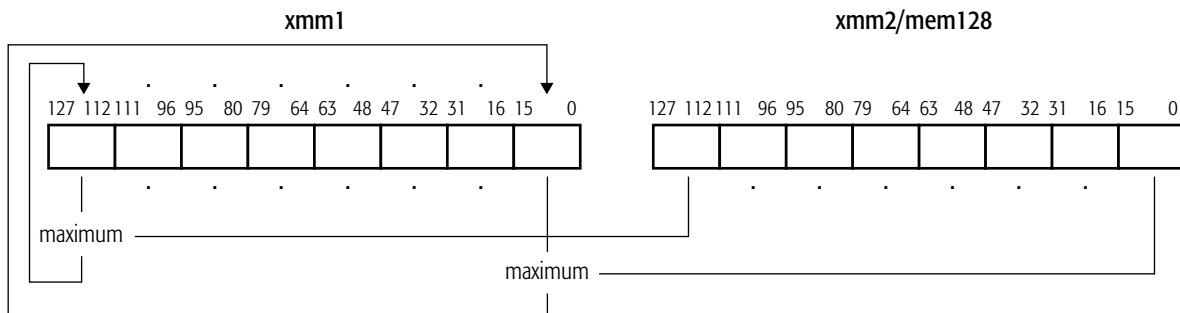

pmaxsw-128.eps

### Related Instructions

PMAXUB, PMINSW, PMINUB

### rFLAGS Affected

None

### MXCSR Flags Affected

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 in CPUID standard function 1; and the AMD extensions to MMX are not supported, as indicated by bit 22 of CPUID extended function 8000_0001.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	A memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PMAXUB Packed Maximum Unsigned Bytes

Compares each of the packed 8-bit unsigned integer values in the first source operand with the corresponding packed 8-bit unsigned integer value in the second source operand and writes the numerically greater of the two values for each comparison in the corresponding byte of the destination (first source). The first source/destination and second source operands are an XMM register and an XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PMAXUB <i>xmm1, xmm2/mem128</i>	66 0F DE/r	Compares packed unsigned 8-bit integer values in an XMM register and another XMM register or 128-bit memory location and writes the greater value of each compare in the destination XMM register.

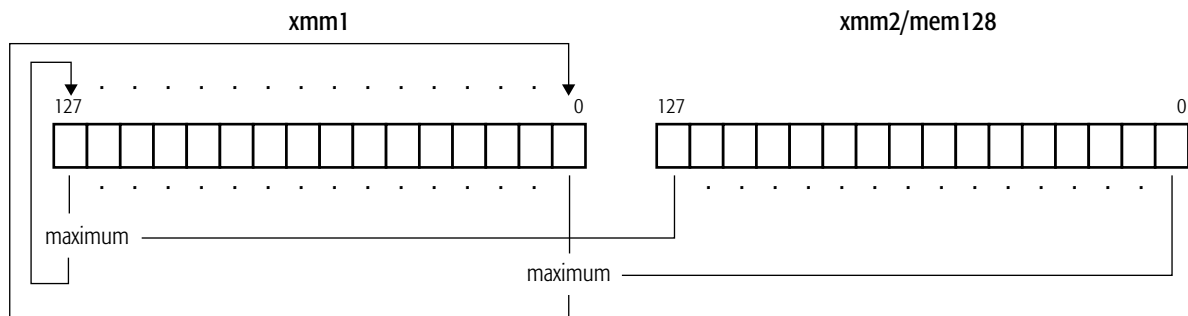

pmaxub-128.eps

### Related Instructions

PMAXSW, PMINSW, PMINUB

### rFLAGS Affected

None

### MXCSR Flags Affected

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 in CPUID standard function 1; and the AMD extensions to MMX are not supported, as indicated by bit 22 of CPUID extended function 8000_0001.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	A memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PMINSW****Packed Minimum Signed Words**

Compares each of the packed 16-bit signed integer values in the first source operand with the corresponding packed 16-bit signed integer value in the second source operand and writes the numerically lesser of the two values for each comparison in the corresponding word of the destination (first source). The first source/destination and second source operands are an XMM register and an XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PMINSW <i>xmm1, xmm2/mem128</i>	66 0F EA/r	Compares packed signed 16-bit integer values in an XMM register and another XMM register or 128-bit memory location and writes the lesser value of each compare in the destination XMM register.

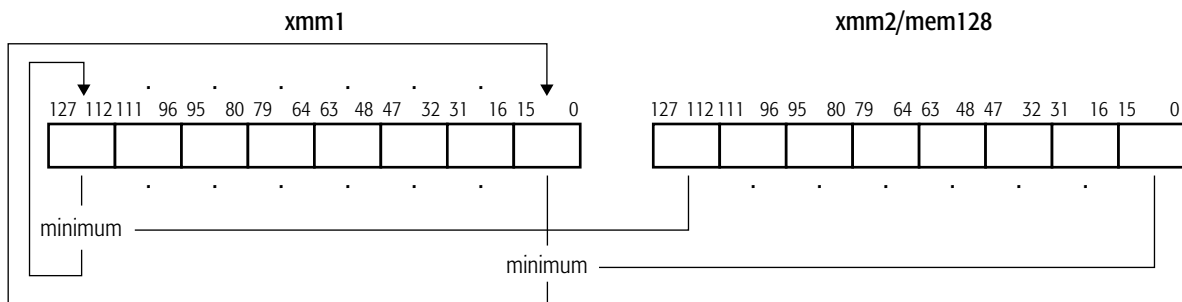

pminsw-128.eps

**Related Instructions**PMA<sub>X</sub>SW, PMA<sub>X</sub>UB, PMINUB**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 in CPUID standard function 1; and the AMD extensions to MMX are not supported, as indicated by bit 22 of CPUID extended function 8000_0001.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	A memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PMINUB****Packed Minimum Unsigned Bytes**

Compares each of the packed 8-bit unsigned integer values in the first source operand with the corresponding packed 8-bit unsigned integer value in the second source operand and writes the numerically lesser of the two values for each comparison in the corresponding byte of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PMINUB <i>xmm1, xmm2/mem128</i>	66 0F DA/r	Compares packed unsigned 8-bit integer values in an XMM register and another XMM register or 128-bit memory location and writes the lesser value of each comparison in the destination XMM register.

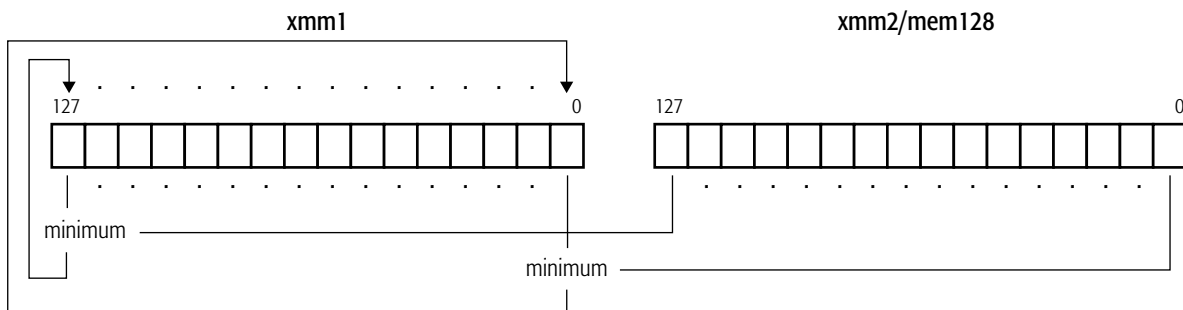

pminub-128.eps

**Related Instructions**

PMAWSW, PMAWSUB, PMINSW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None




**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 in CPUID standard function 1; and the AMD extensions to MMX are not supported, as indicated by bit 22 of CPUID extended function 8000_0001.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	A memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PMOVMSKB Packed Move Mask Byte

Moves the most-significant bit of each byte in the source operand to the destination, with zero-extension to 32 bits. The destination and source operands are a 32-bit general-purpose register and an XMM register. The result is written to the low-order word of the general-purpose register.

Mnemonic	Opcode	Description
PMOVMSKB <i>reg32, xmm</i>	66 0F D7 /r	Moves most-significant bit of each byte in an XMM register to low-order word of a 32-bit general-purpose register.

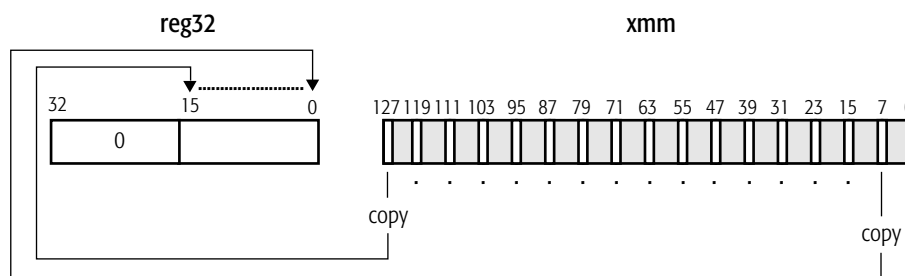

pmovmskb-128.eps

### Related Instructions

MOVMSKPD, MOVMSKPS

### rFLAGS Affected

None

### MXCSR Flags Affected

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.

**PMULHUW****Packed Multiply High Unsigned Word**

Multiplies each packed unsigned 16-bit values in the first source operand by the corresponding packed unsigned word in the second source operand and writes the high-order 16 bits of each intermediate 32-bit result in the corresponding word of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PMULHUW <i>xmm1, xmm2/mem128</i>	66 0F E4 /r	Multiplies packed 16-bit values in an XMM register by the packed 16-bit values in another XMM register or 128-bit memory location and writes the high-order 16 bits of each result in the destination XMM register.

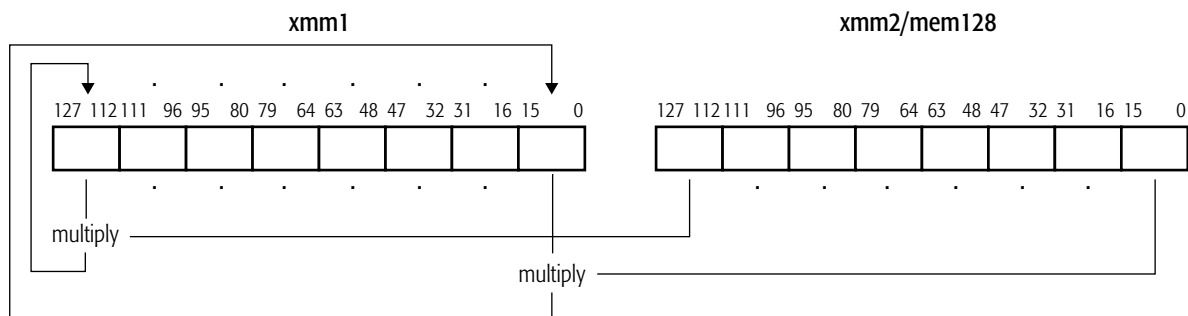

pmulhuw-128.eps

**Related Instructions**

PMADDWD, PMULHW, PMULLW, PMULUDQ

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 in CPUID standard function 1; and the AMD extensions to MMX are not supported, as indicated by bit 22 of CPUID extended function 8000_0001.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PMULHW Packed Multiply High Signed Word

Multiplies each packed 16-bit signed integer value in the first source operand by the corresponding packed 16-bit signed integer in the second source operand and writes the high-order 16 bits of the intermediate 32-bit result of each multiplication in the corresponding word of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PMULHW <i>xmm1, xmm2/mem128</i>	66 0F E5 /r	Multiplies packed 16-bit signed integer values in an XMM register and another XMM register or 128-bit memory location and writes the high-order 16 bits of each result in the destination XMM register.

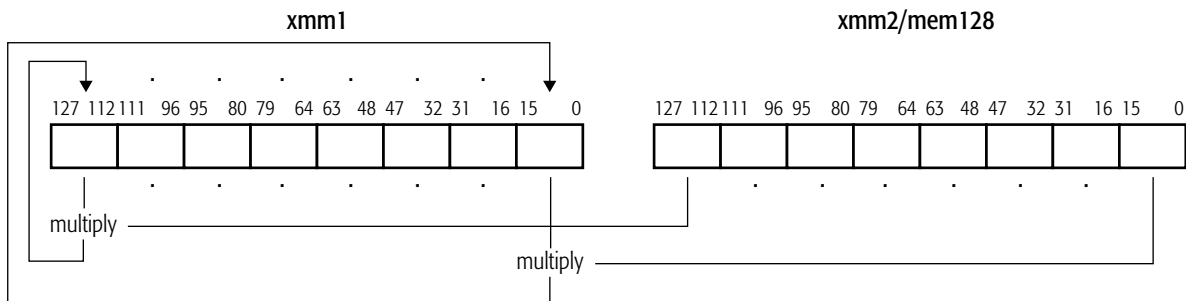

pmulhw-128.eps

### Related Instructions

PMADDWD, PMULHUW, PMULLW, PMULUDQ

### rFLAGS Affected

None

### MXCSR Flags Affected

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PMULLW Packed Multiply Low Signed Word

Multiplies each packed 16-bit signed integer value in the first source operand by the corresponding packed 16-bit signed integer in the second source operand and writes the low-order 16 bits of the intermediate 32-bit result of each multiplication in the corresponding word of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PMULLW <i>xmm1, xmm2/mem128</i>	66 0F D5 /r	Multiplies packed 16-bit signed integer values in an XMM register and another XMM register or 128-bit memory location and writes the low-order 16 bits of each result in the destination XMM register.

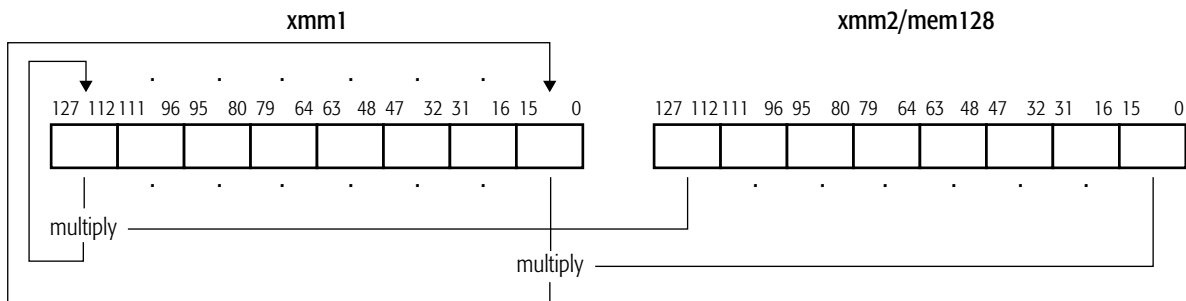

pmullw-128.eps

### Related Instructions

PMADDWD, PMULHUW, PMULHW, PMULUDQ

### rFLAGS Affected

None

### MXCSR Flags Affected

None



**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PMULUDQ****Packed Multiply Unsigned Doubleword and Store Quadword**


Multiplies two pairs of 32-bit unsigned integer values in the first and second source operands and writes the two 64-bit results in the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location. The source operands are in the first (low-order) and third doublewords of the source operands, and the result of each multiply is stored in the first and second quadwords of the destination XMM register.

**Mnemonic**PMULUDQ *xmm1, xmm2/mem128***Opcode**

66 0F F4 /r

**Description**

Multiplies two pairs of 32-bit unsigned integer values in an XMM register and another XMM register or 128-bit memory location and writes the two 64-bit results in the destination XMM register.

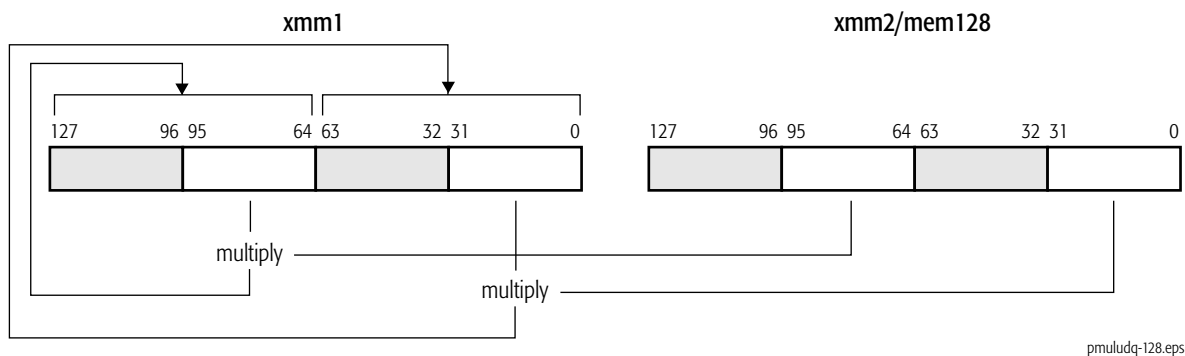**Related Instructions**

PMADDWD, PMULHUW, PMULHW, PMULLW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## POR Packed Logical Bitwise OR

Performs a bitwise logical OR of the values in the first and second source operands and writes the result in the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
POR <i>xmm1, xmm2/mem128</i>	66 0F EB /r	Performs bitwise logical OR of values in an XMM register and in another XMM register or 128-bit memory location and writes the result in the destination XMM register.

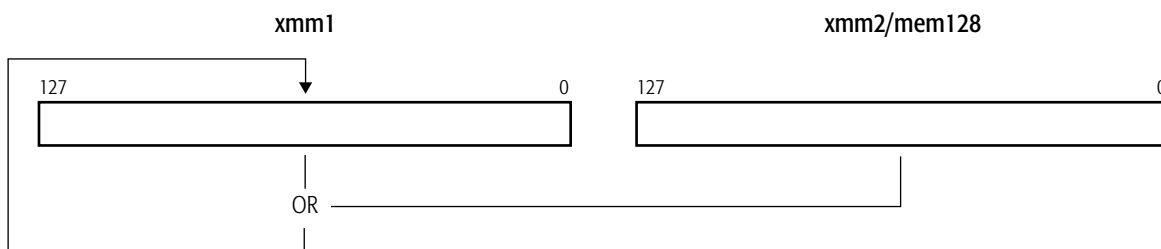

por-128.eps

### Related Instructions

PAND, PANDN, PXOR

### rFLAGS Affected

None

### MXCSR Flags Affected

None

**Exceptions**


<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PSADBW**

**Packed Sum of Absolute Differences of Bytes Into a Word**

Computes the absolute differences of eight corresponding packed 8-bit unsigned integers in the first and second source operands and writes the unsigned 16-bit integer result of the sum of the eight differences in a word in the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PSADBW <i>xmm1, xmm2/mem128</i>	66 0F F6 /r	Compute the sum of the absolute differences of two sets of packed 8-bit unsigned integer values in an XMM register and another XMM register or 128-bit memory location and writes the 16-bit unsigned integer result in the destination XMM register.

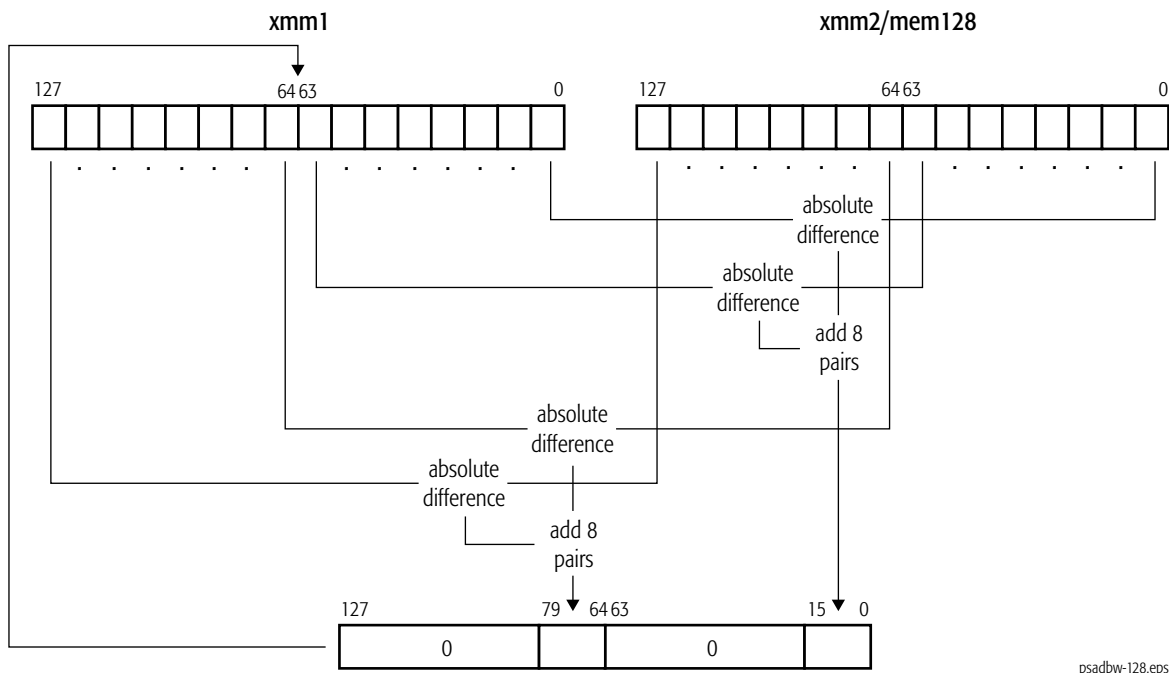

psadbw-128.eps

The sum of the differences of the eight bytes in the high-order quadwords of the source operands are written in the least-significant word of the high-order quadword in the destination XMM register, with the remaining bytes cleared to all 0s. The sum of

the differences of the eight bytes in the low-order quadwords of the source operands are written in the least-significant word of the low-order quadword in the destination XMM register, with the remaining bytes cleared to all 0s.

### rFLAGS Affected

None

### MXCSR Flags Affected

None


### Exceptions

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 in CPUID standard function 1; and the AMD extensions to MMX are not supported, as indicated by bit 22 of CPUID extended function 8000_0001.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PSHUFD Packed Shuffle Doublewords

Moves any one of the four packed doublewords in an XMM register or 128-bit memory location to each doubleword in another XMM register. In each case, the value of the destination doubleword is determined by a two-bit field in the immediate-byte operand, with bits 0 and 1 selecting the contents of the low-order doubleword, bits 2 and 3 selecting the second doubleword, bits 4 and 5 selecting the third doubleword, and bits 6 and 7 selecting the high-order doubleword. Refer to Table 1-4 on page 277. A doubleword in the source operand may be copied to more than one doubleword in the destination.

Mnemonic	Opcode	Description
PSHUFD <i>xmm1, xmm2/mem128, imm8</i>	66 0F 70 /r <i>ib</i>	Moves packed 32-bit values in an XMM register or 128-bit memory location to doubleword locations in another XMM register, as selected by the immediate-byte operand.

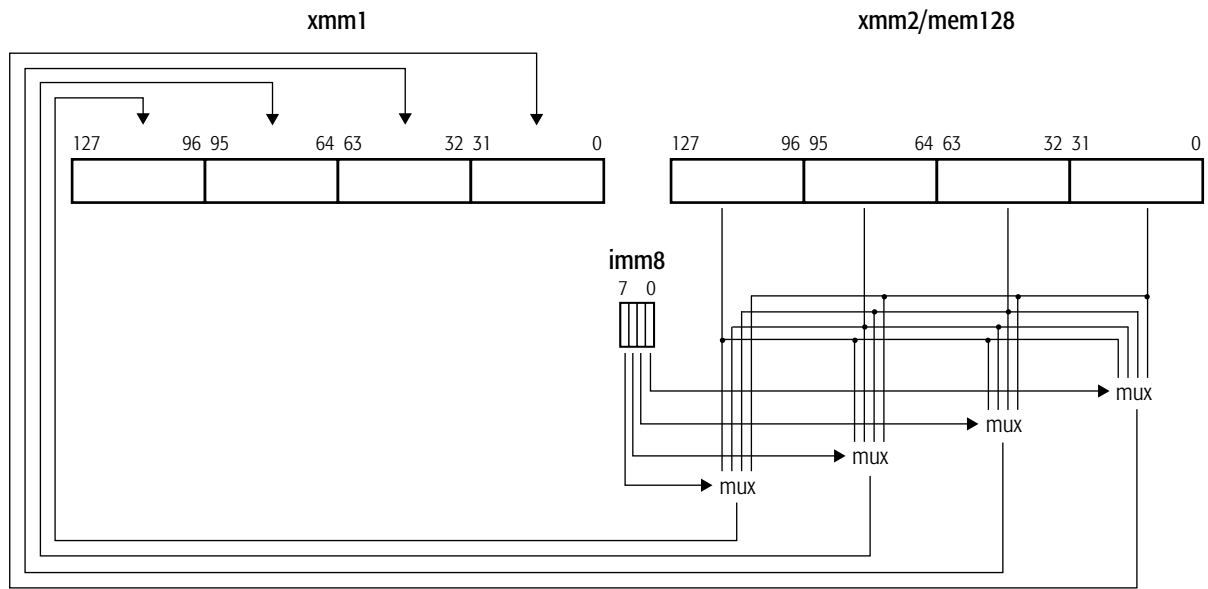

pshufd.eps



**Table 1-4. Immediate-Byte Operand Encoding for PSHUFD**

Destination Bits Filled	Immediate-Byte Bit Field	Value of Bit Field	Source Bits Moved
31–0	1–0	0	31–0
		1	63–32
		2	95–64
		3	127–96
63–32	3–2	0	31–0
		1	63–32
		2	95–64
		3	127–96
95–64	5–4	0	31–0
		1	63–32
		2	95–64
		3	127–96
127–96	7–6	0	31–0
		1	63–32
		2	95–64
		3	127–96

**Related Instructions**

PSHUFHW, PSHUFLW, PSHUFW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PSHUFHW****Packed Shuffle High Words**

Moves any one of the four packed words in the high-order quadword of an XMM register or 128-bit memory location to each word in the high-order quadword of another XMM register. In each case, the value of the destination word is determined by a two-bit field in the immediate-byte operand, with bits 0 and 1 selecting the contents of the low-order word, bits 2 and 3 selecting the second word, bits 4 and 5 selecting the third word, and bits 6 and 7 selecting the high-order word. Refer to Table 1-5 on page 280. A word in the source operand may be copied to more than one word in the destination. The low-order quadword of the source operand is copied to the low-order quadword of the destination register.

**Mnemonic**


`PSHUFHW xmm1, xmm2/mem128, imm8`

**Opcode**

`F3 0F 70 /r ib`

**Description**

Shuffles packed 16-bit values in high-order quadword of an XMM register or 128-bit memory location and puts the result in high-order quadword of another XMM register.

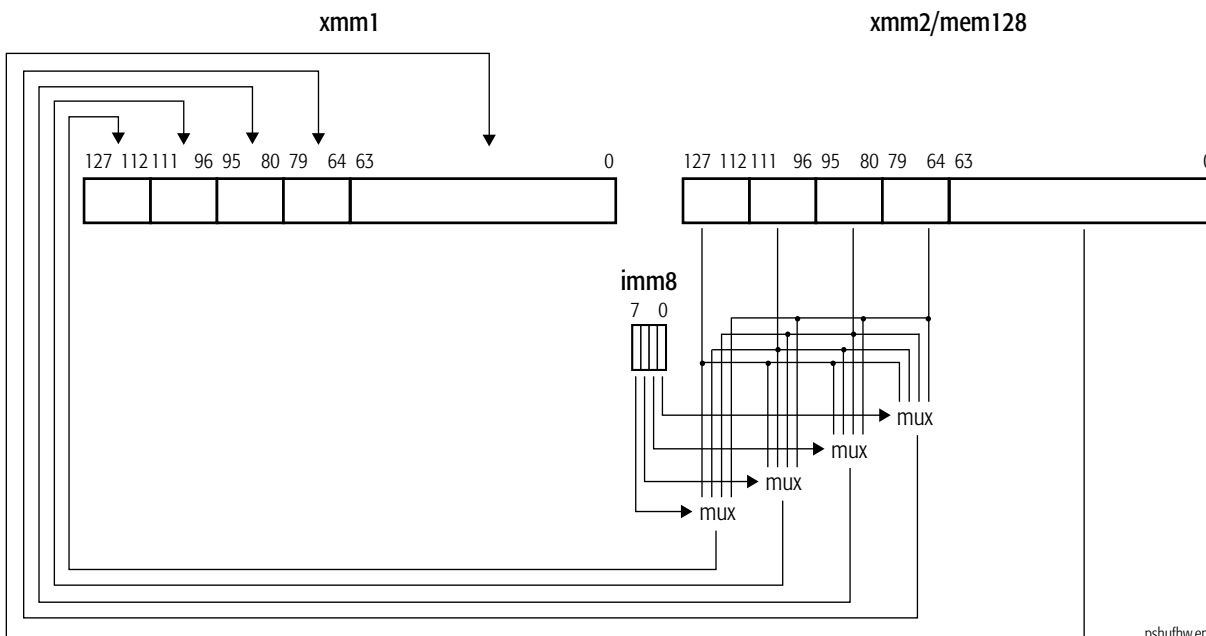

pshufhw.eps

**Table 1-5. Immediate-Byte Operand Encoding for PSHUFW**

Destination Bits Filled	Immediate-Byte Bit Field	Value of Bit Field	Source Bits Moved
79–64	1–0	0	79–64
		1	95–80
		2	111–96
		3	127–112
95–80	3–2	0	79–64
		1	95–80
		2	111–96
		3	127–112
111–96	5–4	0	79–64
		1	95–80
		2	111–96
		3	127–112
127–112	7–6	0	79–64
		1	95–80
		2	111–96
		3	127–112

**Related Instructions**

PSHUFD, PSHUFLW, PSHUFW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PSHUFLW Packed Shuffle Low Words

Moves any one of the four packed words in the low-order quadword of an XMM register or 128-bit memory location to each word in the low-order quadword of another XMM register. In each case, the selection of the value of the destination word is determined by a two-bit field in the immediate-byte operand, with bits 0 and 1 selecting the contents of the low-order word, bits 2 and 3 selecting the second word, bits 4 and 5 selecting the third word, and bits 6 and 7 selecting the high-order word. Refer to Table 1-6 on page 283. A word in the source operand may be copied to more than one word in the destination. The high-order quadword of the source operand is copied to the high-order quadword of the destination register.

Mnemonic	Opcode	Description
PSHUFLW <i>xmm1, xmm2/mem128, imm8</i>	F2 0F 70 /r <i>ib</i>	Shuffles packed 16-bit values in low-order quadword of an XMM register or 128-bit memory location and puts the result in low-order quadword of another XMM register.

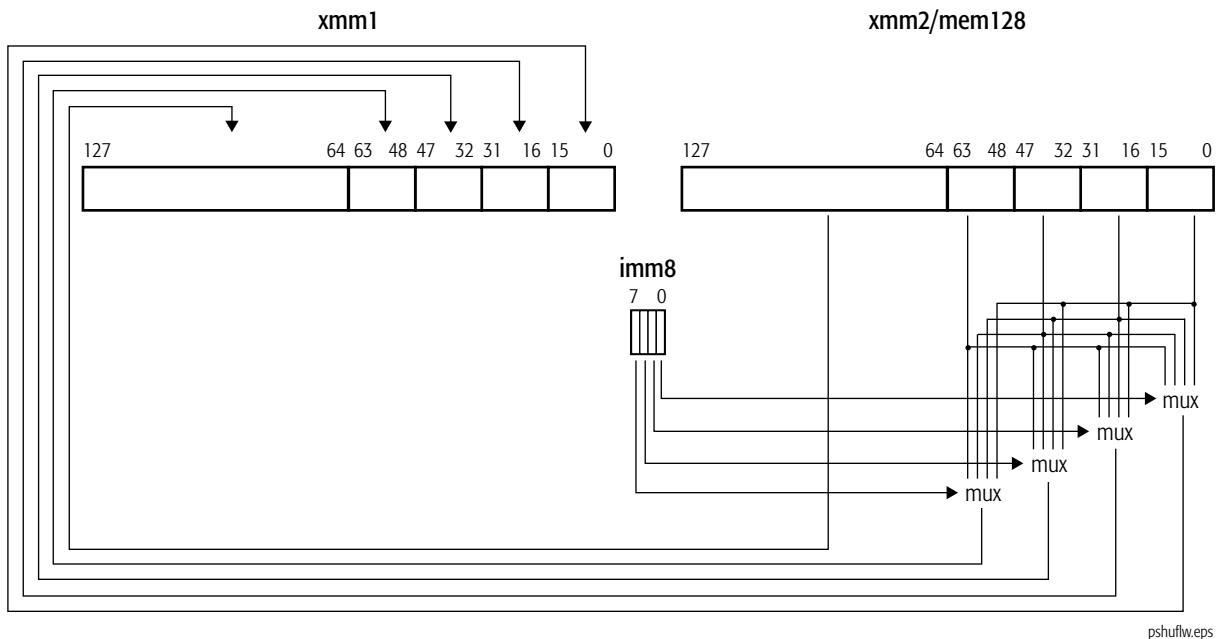

**Table 1-6. Immediate-Byte Operand Encoding for PSHUFLW**

Destination Bits Filled	Immediate-Byte Bit Field	Value of Bit Field	Source Bits Moved
15–0	1–0	0	15–0
		1	31–16
		2	47–32
		3	63–48
31–16	3–2	0	15–0
		1	31–16
		2	47–32
		3	63–48
47–32	5–4	0	15–0
		1	31–16
		2	47–32
		3	63–48
63–48	7–6	0	15–0
		1	31–16
		2	47–32
		3	63–48

**Related Instructions**

PSHUFD, PSHUFHW, PSHUFW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.




**PSLLD****Packed Shift Left Logical Doublewords**

Left-shifts each of the packed 32-bit values in the first source operand by the number of bits specified in the second source operand and writes each shifted value in the corresponding doubleword of the destination (first source). The first source/destination and second source operands are:

- an XMM register and another XMM register or 128-bit memory location, or
- an XMM register and an immediate byte value.

The low-order bits that are emptied by the shift operation are cleared to 0. If the shift value is greater than 31, the destination is cleared to all 0s.

Mnemonic	Opcode	Description
PSLLD <i>xmm1, xmm2/mem128</i>	66 0F F2 /r	Left-shifts packed doublewords in an XMM register by the amount specified in the low 64 bits of an XMM register or 128-bit memory location.
PSLLD <i>xmm, imm8</i>	66 0F 72 /6 <i>ib</i>	Left-shifts packed doublewords in an XMM register by the amount specified in an immediate byte value.

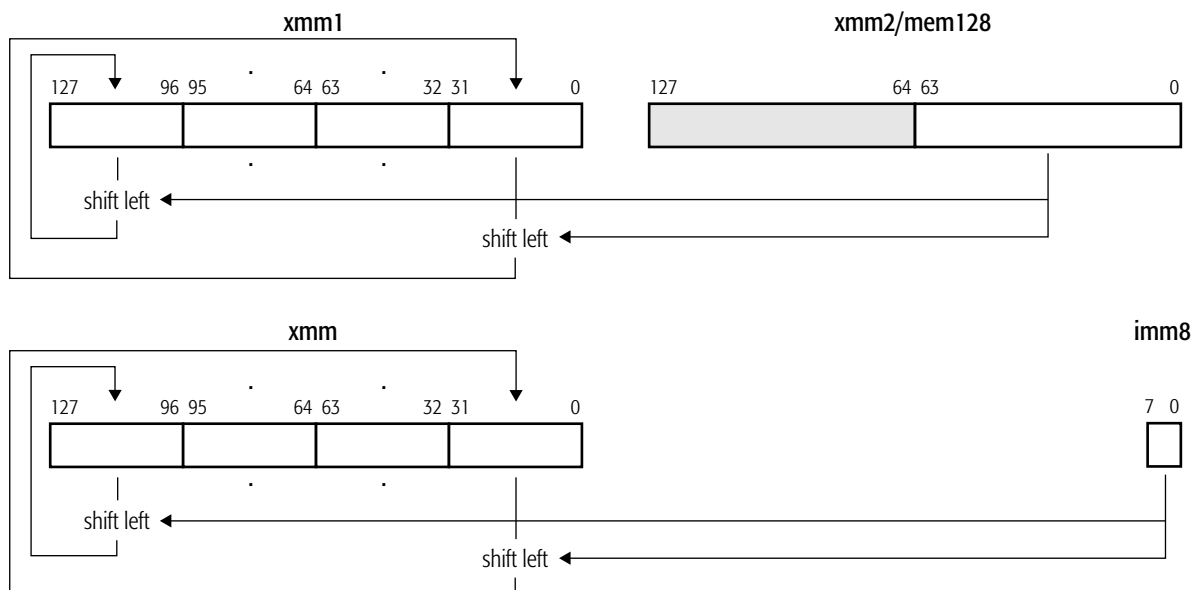

pslld-128.eps

**Related Instructions**

PSLLDQ, PSLQ, PSLW, PSRAD, PSRAW, PSRLD, PSRLDQ, PSRLQ, PSRLW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PSLLDQ Packed Shift Left Logical Double Quadword

Left-shifts the 128-bit (double quadword) value in an XMM register by the number of bytes specified in an immediate byte value. The low-order bytes that are emptied by the shift operation are cleared to 0. If the shift value is greater than 15, the destination XMM register is cleared to all 0s.

Mnemonic	Opcode	Description
PSLLDQ <i>xmm, imm8</i>	66 0F 73 /7 <i>ib</i>	Left-shifts double quadword value in an XMM register by the amount specified in an immediate byte value.

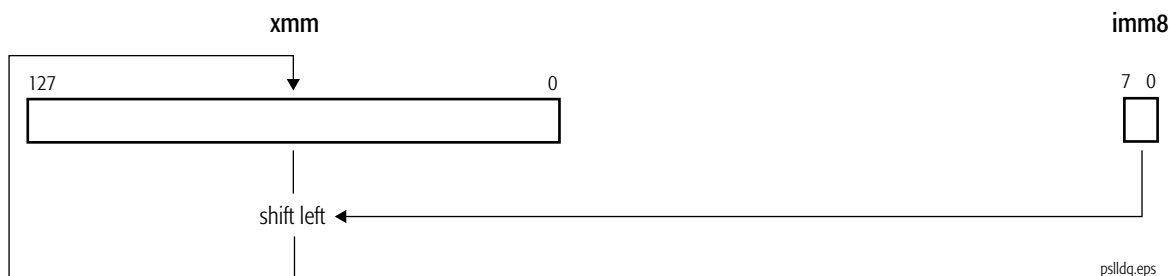

### Related Instructions

PSLLD, PSLLQ, PSLLW, PSRAD, PSRAW, PSRLD, PSRLDQ, PSRLQ, PSRLW

### rFLAGS Affected

None

### MXCSR Flags Affected

None

**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.


**PSLLQ****Packed Shift Left Logical Quadwords**

Left-shifts each 64-bit value in the first source operand by the number of bits specified in the second source operand and writes each shifted value in the corresponding quadword of the destination (first source). The first source/destination and second source operands are:

- an XMM register and another XMM register or 128-bit memory location, or
- an XMM register and an immediate byte value.

The low-order bits that are emptied by the shift operation are cleared to 0. If the shift value is greater than 63, the destination is cleared to all 0s.

Mnemonic	Opcode	Description
PSLLQ <i>xmm1, xmm2/mem128</i>	66 0F F3 /r	Left-shifts packed quadwords in XMM register by the amount specified in the low 64 bits of an XMM register or 128-bit memory location.
PSLLQ <i>xmm, imm8</i>	66 0F 73 /6 ib	Left-shifts packed quadwords in an XMM register by the amount specified in an immediate byte value.

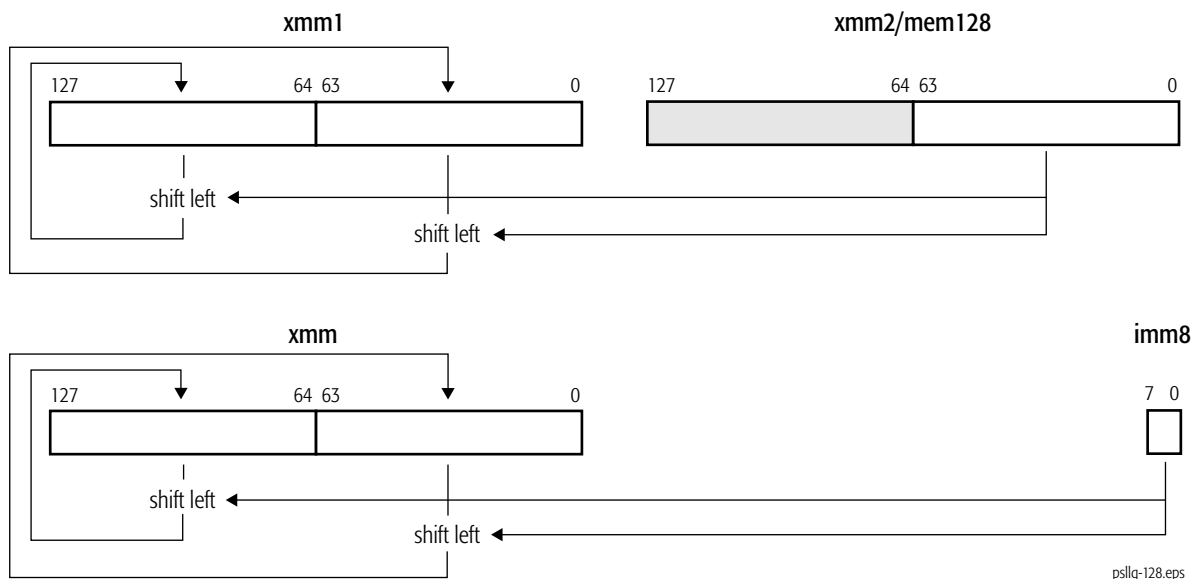

psllq-128.eps

**Related Instructions**

PSLLD, PSLLDQ, PSLLW, PSRAD, PSRAW, PSRLD, PSRLDQ, PSRLQ, PSRLW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.


**PSLLW****Packed Shift Left Logical Words**

Left-shifts each of the packed 16-bit values in the first source operand by the number of bits specified in the second source operand and writes each shifted value in the corresponding word of the destination (first source). The first source/destination and second source operands are:

- an XMM register and another XMM register or 128-bit memory location, or
- an XMM register and an immediate byte value

The low-order bits that are emptied by the shift operation are cleared to 0. If the shift value is greater than 15, the destination is cleared to all 0s.

Mnemonic	Opcode	Description
PSLLW <i>xmm1, xmm2/mem128</i>	66 0F F1 /r	Left-shifts packed words in an XMM register by the amount specified in the low 64 bits of an XMM register or 128-bit memory location.
PSLLW <i>xmm, imm8</i>	66 0F 71 /6 ib	Left-shifts packed words in an XMM register by the amount specified in an immediate byte value.

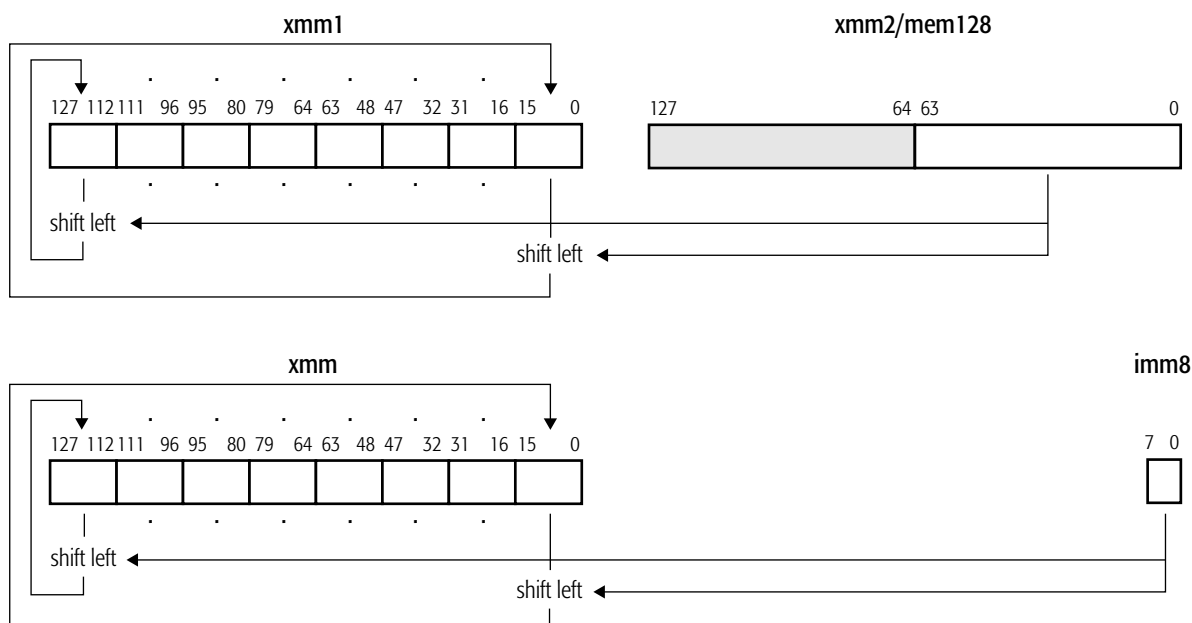

psllw-128.eps

**Related Instructions**

PSLLD, PSLLDQ, PSLQ, PSRAD, PSRAW, PSRLD, PSRLDQ, PSRLQ, PSRLW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.




**PSRAD****Packed Shift Right Arithmetic Doublewords**

Right-shifts each of the packed 32-bit values in the first source operand by the number of bits specified in the second source operand and writes each shifted value in the corresponding doubleword of the destination (first source). The first source/destination and second source operands are:

- an XMM register and another XMM register or 128-bit memory location, or
- an XMM register and an immediate byte value.

The high-order bits that are emptied by the shift operation are filled with the sign bit of the doubleword's initial value. If the shift value is greater than 31, each doubleword in the destination is filled with the sign bit of the doubleword's initial value.

<b>Mnemonic</b>	<b>Opcode</b>	<b>Description</b>
PSRAD <i>xmm1, xmm2/mem128</i>	66 0F E2 /r	Right-shifts packed doublewords in an XMM register by the amount specified in the low 64 bits of an XMM register or 128-bit memory location.
PSRAD <i>xmm, imm8</i>	66 0F 72 /4 <i>ib</i>	Right-shifts packed doublewords in an XMM register by the amount specified in an immediate byte value.

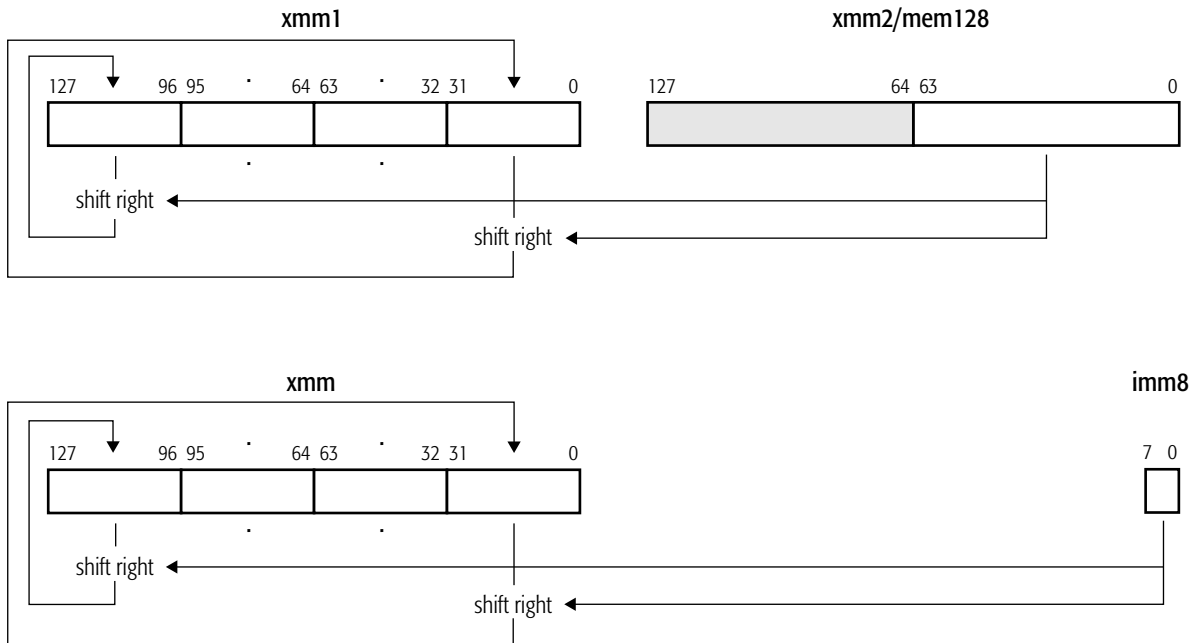

psrad-128.eps

**Related Instructions**

PSLLD, PSLLDQ, PSLLQ, PSLLW, PSRAW, PSRLD, PSRLDQ, PSRLQ, PSRLW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.


**PSRAW****Packed Shift Right Arithmetic Words**

Right-shifts each of the packed 16-bit values in the first source operand by the number of bits specified in the second source operand and writes each shifted value in the corresponding word of the destination (first source). The first source/destination and second source operands are:

- an XMM register and another XMM register or 128-bit memory location, or
- an XMM register and an immediate byte value.

The high-order bits that are emptied by the shift operation are filled with the sign bit of the word's initial value. If the shift value is greater than 15, each word in the destination is filled with the sign bit of the word's initial value.

<b>Mnemonic</b>	<b>Opcode</b>	<b>Description</b>
PSRAW <i>xmm1, xmm2/mem128</i>	66 0F E1 / <i>r</i>	Right-shifts packed words in an XMM register by the amount specified in the low 64 bits of an XMM register or 128-bit memory location.
PSRAW <i>xmm, imm8</i>	66 0F 71 /4 <i>ib</i>	Right-shifts packed words in an XMM register by the amount specified in an immediate byte value.

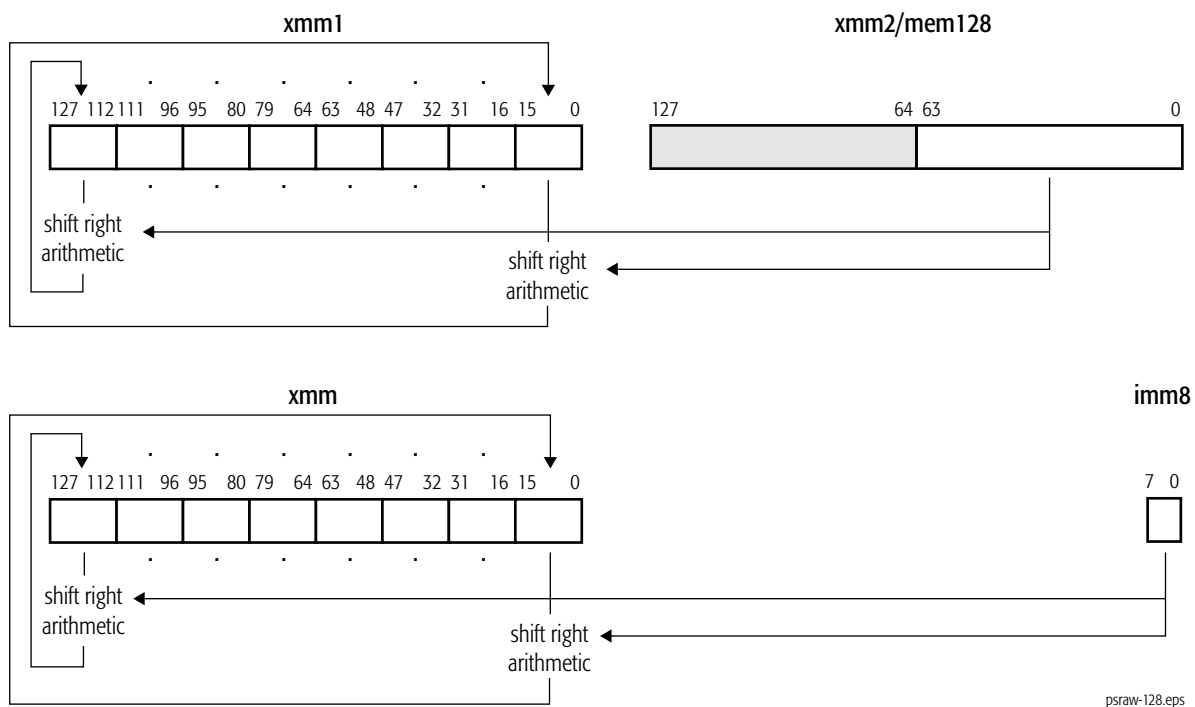**Related Instructions**

PSLLD, PSLLDQ, PSLLQ, PSLW, PSRAD, PSRLD, PSRLDQ, PSRLQ, PSRLW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.


**PSRLD****Packed Shift Right Logical Doublewords**

Right-shifts each of the packed 32-bit values in the first source operand by the number of bits specified in the second source operand and writes each shifted value in the corresponding doubleword of the destination (first source). The first source/destination and second source operands are:

- an XMM register and another XMM register or 128-bit memory location, or
- an XMM register and an immediate byte value.

The high-order bits that are emptied by the shift operation are cleared to 0. If the shift value is greater than 31, the destination is cleared to 0.

Mnemonic	Opcode	Description
PSRLD <i>xmm1, xmm2/mem128</i>	66 0F D2 /r	Right-shifts packed doublewords in an XMM register by the amount specified in the low 64 bits of an XMM register or 128-bit memory location.
PSRLD <i>xmm, imm8</i>	66 0F 72 /2 ib	Right-shifts packed doublewords in an XMM register by the amount specified in an immediate byte value.

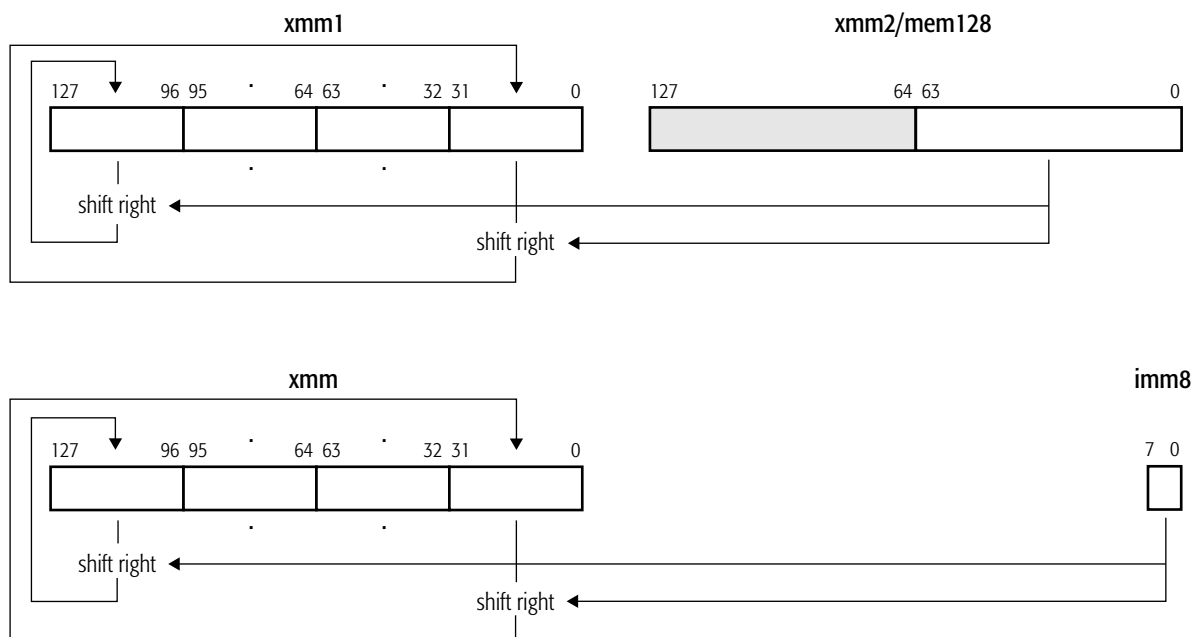

psrld-128.eps

**Related Instructions**

PSLLD, PSLLDQ, PSLLQ, PSLLW, PSRAD, PSRAW, PSRLDQ, PSRLQ, PSRLW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.



## PSRLDQ Packed Shift Right Logical Double Quadword

Right-shifts the 128-bit (double quadword) value in an XMM register by the number of bytes specified in an immediate byte value. The high-order bytes that are emptied by the shift operation are cleared to 0. If the shift value is greater than 15, the destination XMM register is cleared to all 0s.

Mnemonic	Opcode	Description
PSRLDQ <i>xmm, imm8</i>	66 0F 73 /3 <i>ib</i>	Right-shifts double quadword value in an XMM register by the amount specified in an immediate byte value.

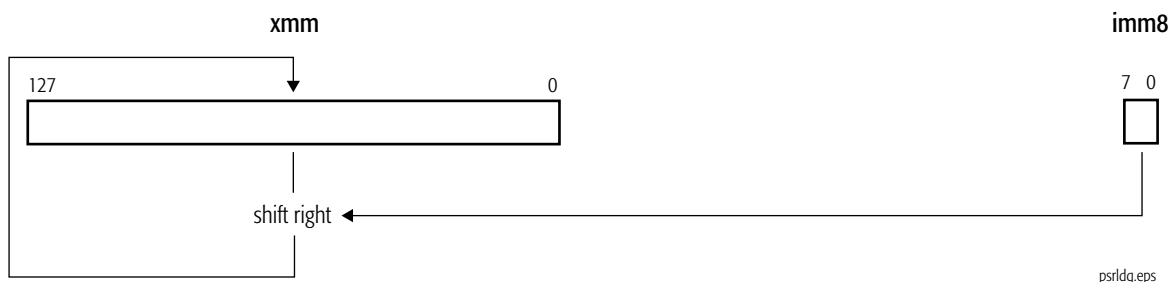

### Related Instructions

PSLLD, PSLLDQ, PSLLQ, PSLLW, PSRAD, PSRAW, PSRLD, PSRLQ, PSRLW

### rFLAGS Affected

None

### MXCSR Flags Affected

None

**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.


**PSRLQ****Packed Shift Right Logical Quadwords**

Right-shifts each 64-bit value in the first source operand by the number of bits specified in the second source operand and writes each shifted value in the corresponding quadword of the destination (first source). The first source/destination and second source operands are:

- an XMM register and another XMM register or 128-bit memory location, or
- an XMM register and an immediate byte value.

The high-order bits that are emptied by the shift operation are cleared to 0. If the shift value is greater than 63, the destination is cleared to 0.

Mnemonic	Opcode	Description
PSRLQ <i>xmm1, xmm2/mem128</i>	66 0F D3 /r	Right-shifts packed quadwords in an XMM register by the amount specified in the low 64 bits of an XMM register or 128-bit memory location.
PSRLQ <i>xmm, imm8</i>	66 0F 73 /2 ib	Right-shifts packed quadwords in an XMM register by the amount specified in an immediate byte value.

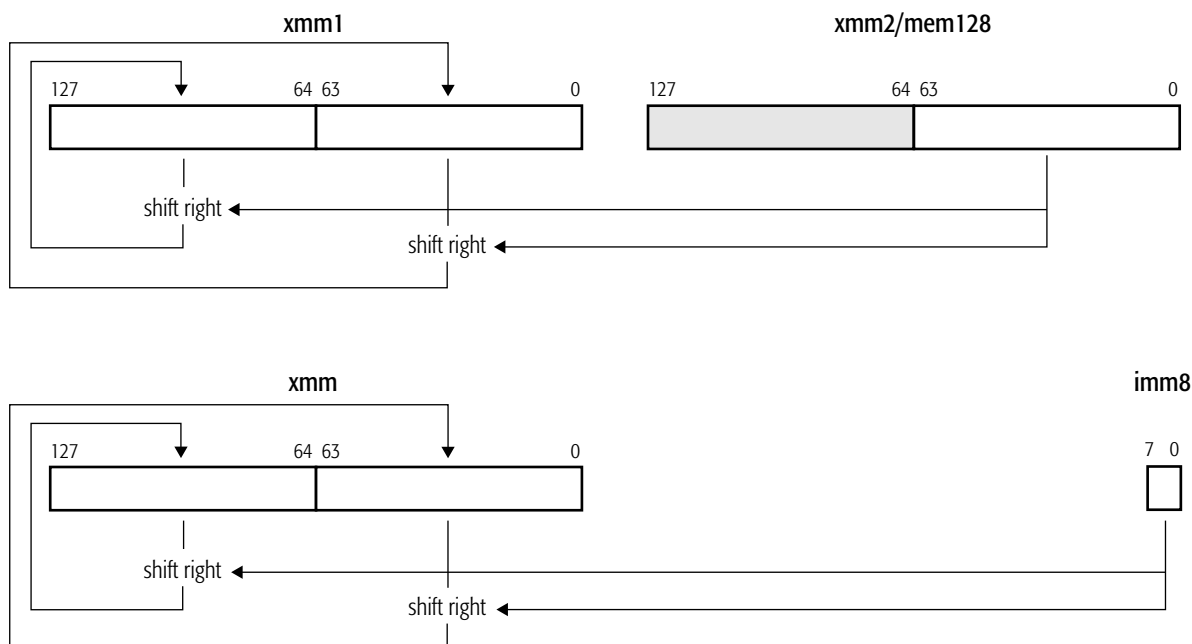

psrlq-128.eps

**Related Instructions**

PSLLD, PSLLDQ, PSLQ, PSLW, PSRAD, PSRAW, PSRLD, PSRLDQ, PSRLW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.


**PSRLW****Packed Shift Right Logical Words**

Right-shifts each of the packed 16-bit values in the first source operand by the number of bits specified in the second operand and writes each shifted value in the corresponding word of the destination (first source). The first source/destination and second source operands are:

- an XMM register and another XMM register or 128-bit memory location, or
- an XMM register and an immediate byte value.

The high-order bits that are emptied by the shift operation are cleared to 0. If the shift value is greater than 15, the destination is cleared to 0.

<b>Mnemonic</b>	<b>Opcode</b>	<b>Description</b>
PSRLW <i>xmm1, xmm2/mem128</i>	66 0F D1 /r	Right-shifts packed words in an XMM register by the amount specified in the low 64 bits of an XMM register or 128-bit memory location.
PSRLW <i>xmm, imm8</i>	66 0F 71 /2 <i>ib</i>	Right-shifts packed words in an XMM register by the amount specified in an immediate byte value.

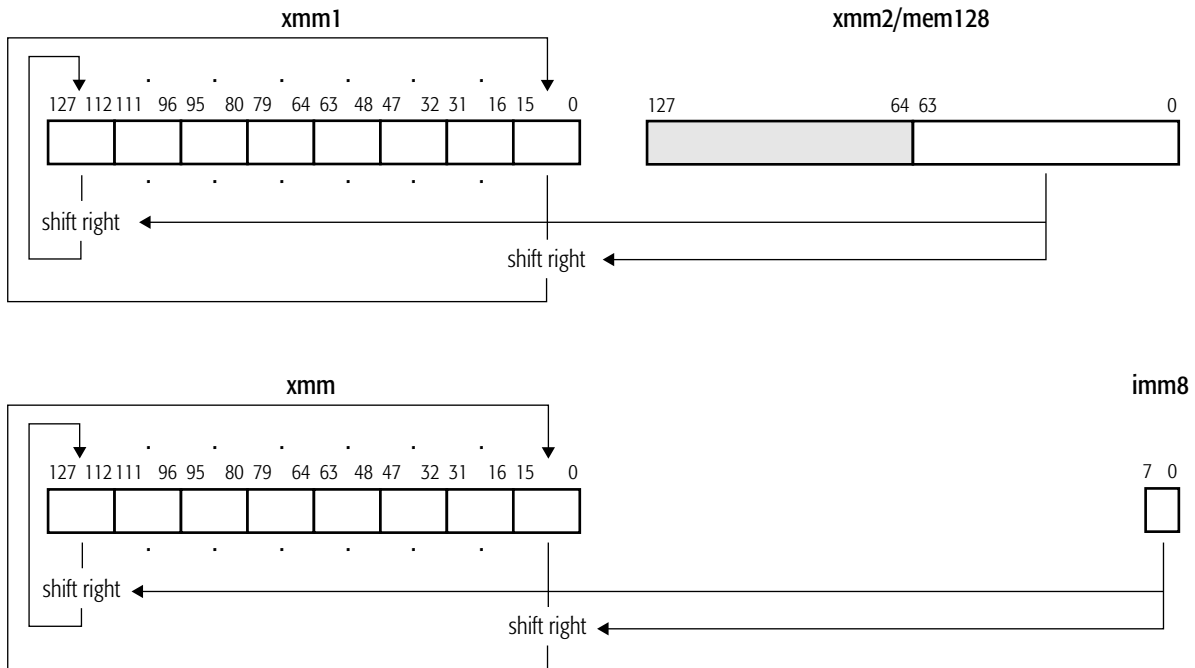

psrlw-128.eps

**Related Instructions**

PSLLD, PSLLDQ, PSLLQ, PSLLW, PSRAD, PSRAW, PSRLD, PSRLDQ, PSRLQ

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PSUBB Packed Subtract Bytes

Subtracts each packed 8-bit integer value in the second source operand from the corresponding packed 8-bit integer in the first source operand and writes the integer result of each subtraction in the corresponding byte of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PSUBB <i>xmm1, xmm2/mem128</i>	66 0F F8 /r	Subtracts packed byte integer values in an XMM register or 128-bit memory location from packed byte integer values in another XMM register and writes the result in the destination XMM register.

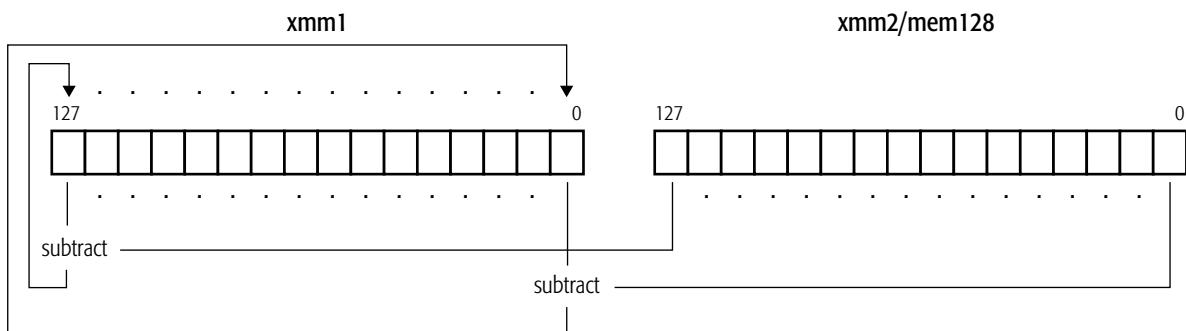

psubb-128.eps

This instruction operates on both signed and unsigned integers. If the result overflows, the carry is ignored (neither the overflow nor carry bit in rFLAGS is set), and only the low-order 8 bits of each result are written in the destination.

### Related Instructions

PSUBD, PSUBQ, PSUBSB, PSUBSW, PSUBUSB, PSUBUSW, PSUBW

### rFLAGS Affected

None



**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PSUBD****Packed Subtract Doublewords**

Subtracts each packed 32-bit integer value in the second source operand from the corresponding packed 32-bit integer in the first source operand and writes the integer result of each subtraction in the corresponding doubleword of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PSUBD <i>xmm1, xmm2/mem128</i>	66 0F FA/r	Subtracts packed 32-bit integer values in an XMM register or 128-bit memory location from packed 32-bit integer values in another XMM register and writes the result in the destination XMM register.

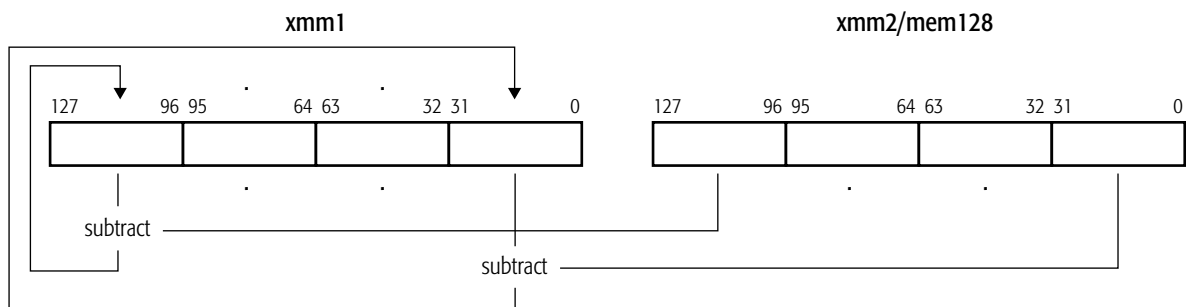

psubd-128.eps

This instruction operates on both signed and unsigned integers. If the result overflows, the carry is ignored (neither the overflow nor carry bit in rFLAGS is set), and only the low-order 32 bits of each result are written in the destination.

**Related Instructions**

PSUBB, PSUBQ, PSUBSB, PSUBSW, PSUBUSB, PSUBUSW, PSUBW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PSUBQ****Packed Subtract Quadword**

Subtracts each packed 64-bit integer value in the second source operand from the corresponding packed 64-bit integer in the first source operand and writes the integer result of each subtraction in the corresponding quadword of the destination (first source). The first source/destination and source operands are an XMM register and another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PSUBQ <i>xmm1, xmm2/mem128</i>	66 0F FB /r	Subtracts packed 64-bit integer values in an XMM register or 128-bit memory location from packed 64-bit integer values in another XMM register and writes the result in the destination XMM register.

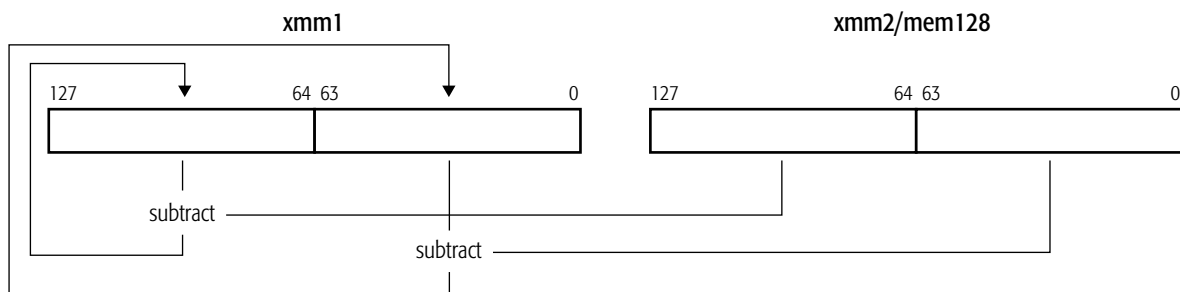

psubq-128.eps

This instruction operates on both signed and unsigned integers. If the result overflows, the carry is ignored (neither the overflow nor carry bit in `rFLAGS` is set), and only the low-order 64 bits of each result are written in the destination.

**Related Instructions**

PSUBB, PSUBD, PSUBSB, PSUBSW, PSUBUSB, PSUBUSW, PSUBW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PSUBSB Packed Subtract Signed With Saturation Bytes

Subtracts each packed 8-bit signed integer value in the second source operand from the corresponding packed 8-bit signed integer in the first source operand and writes the signed integer result of each subtraction in the corresponding byte of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PSUBSB <i>xmm1, xmm2/mem128</i>	66 0F E8 /r	Subtracts packed byte signed integer values in an XMM register or 128-bit memory location from packed byte integer values in another XMM register and writes the result in the destination XMM register.

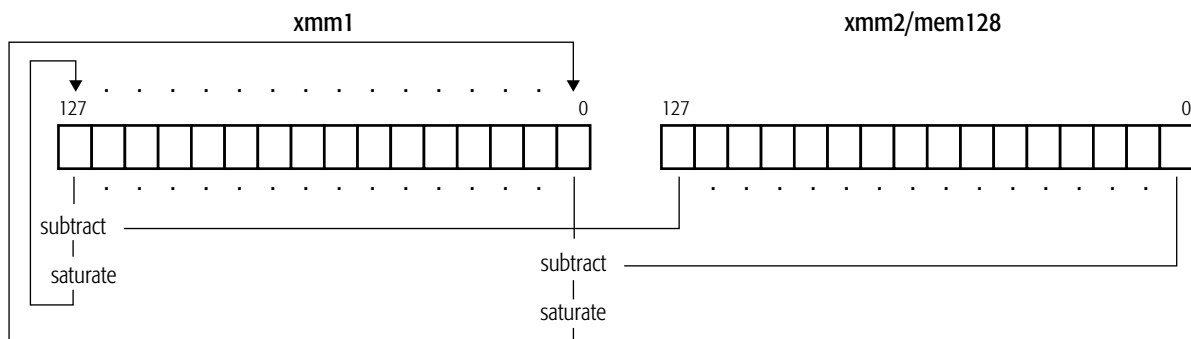

psubsb-128.eps

For each packed value in the destination, if the value is larger than the largest signed 8-bit integer, it is saturated to 7Fh, and if the value is smaller than the smallest signed 8-bit integer, it is saturated to 80h.

### Related Instructions

PSUBB, PSUBD, PSUBQ, PSUBSW, PSUBUSB, PSUBUSW, PSUBW

### rFLAGS Affected

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PSUBSW****Packed Subtract Signed With Saturation Words**

Subtracts each packed 16-bit signed integer value in the second source operand from the corresponding packed 16-bit signed integer in the first source operand and writes the signed integer result of each subtraction in the corresponding word of the destination (first source). The first source/destination and source operands are an XMM register and another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PSUBSW <i>xmm1, xmm2/mem128</i>	66 0F E9 /r	Subtracts packed 16-bit signed integer values in an XMM register or 128-bit memory location from packed 16-bit integer values in another XMM register and writes the result in the destination XMM register.

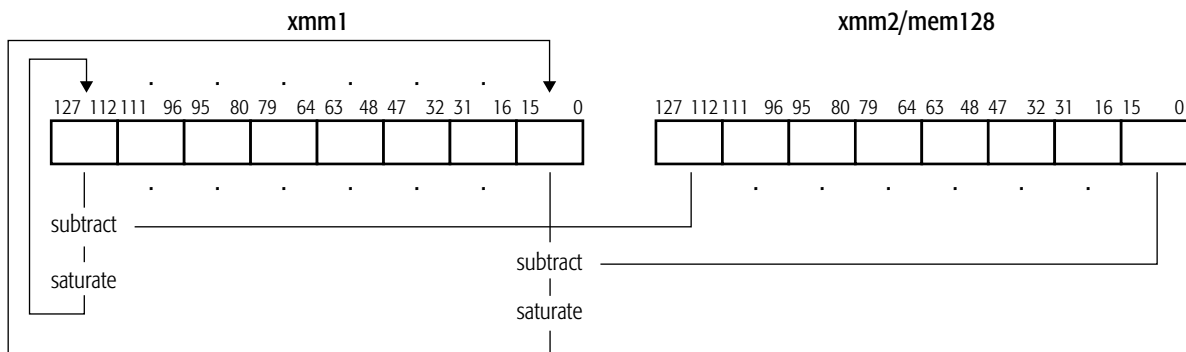

psubsw-128.eps

For each packed value in the destination, if the value is larger than the largest signed 16-bit integer, it is saturated to 7FFFh, and if the value is smaller than the smallest signed 16-bit integer, it is saturated to 8000h.

**Related Instructions**

PSUBB, PSUBD, PSUBQ, PSUBSB, PSUBUSB, PSUBUSW, PSUBW

**rFLAGS Affected**

None



**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PSUBUSB****Packed Subtract Unsigned and Saturate Bytes**

Subtracts each packed 8-bit unsigned integer value in the second source operand from the corresponding packed 8-bit unsigned integer in the first source operand and writes the unsigned integer result of each subtraction in the corresponding byte of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PSUBUSB <i>xmm1, xmm2/mem128</i>	66 0F D8 /r	Subtracts packed byte unsigned integer values in an XMM register or 128-bit memory location from packed byte integer values in another XMM register and writes the result in the destination XMM register.

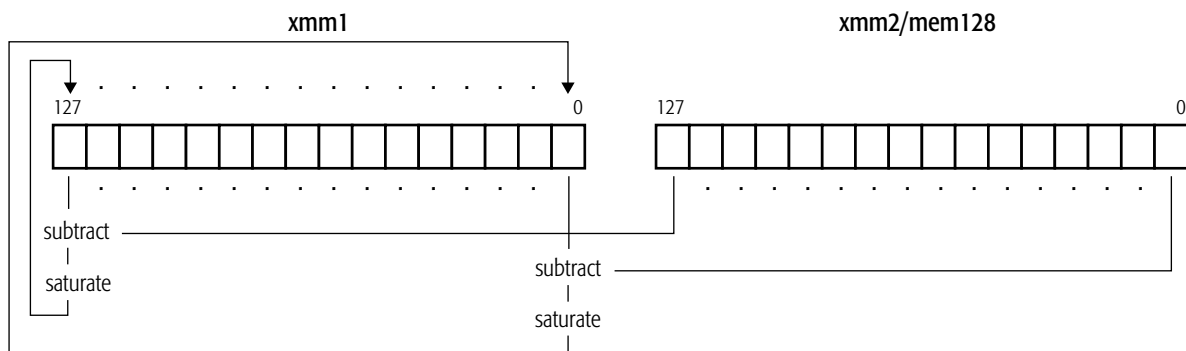

psubusb-128.eps

For each packed value in the destination, if the value is larger than the largest unsigned 8-bit integer, it is saturated to FFh, and if the value is smaller than the smallest unsigned 8-bit integer, it is saturated to 00h.

**Related Instructions**

PSUBB, PSUBD, PSUBQ, PSUBSB, PSUBSW, PSUBUSW, PSUBW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PSUBUSW****Packed Subtract Unsigned and Saturate Words**

Subtracts each packed 16-bit unsigned integer value in the second source operand from the corresponding packed 16-bit unsigned integer in the first source operand and writes the unsigned integer result of each subtraction in the corresponding word of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PSUBUSW <i>xmm1, xmm2/mem128</i>	66 0F D9 /r	Subtracts packed 16-bit unsigned integer values in an XMM register or 128-bit memory location from packed 16-bit integer values in another XMM register and writes the result in the destination XMM register.

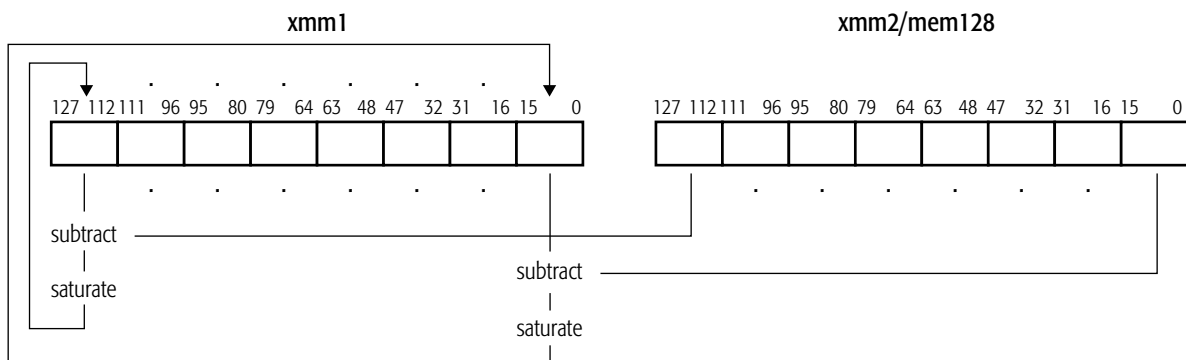

For each packed value in the destination, if the value is larger than the largest unsigned 16-bit integer, it is saturated to FFFFh, and if the value is smaller than the smallest unsigned 16-bit integer, it is saturated to 0000h.

**Related Instructions**

PSUBB, PSUBD, PSUBQ, PSUBSB, PSUBSW, PSUBUSB, PSUBW

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PSUBW Packed Subtract Words

Subtracts each packed 16-bit integer value in the second source operand from the corresponding packed 16-bit integer in the first source operand and writes the integer result of each subtraction in the corresponding word of the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PSUBW <i>xmm1, xmm2/mem128</i>	66 0F F9 /r	Subtracts packed 16-bit integer values in an XMM register or 128-bit memory location from packed 16-bit integer values in another XMM register and writes the result in the destination XMM register.

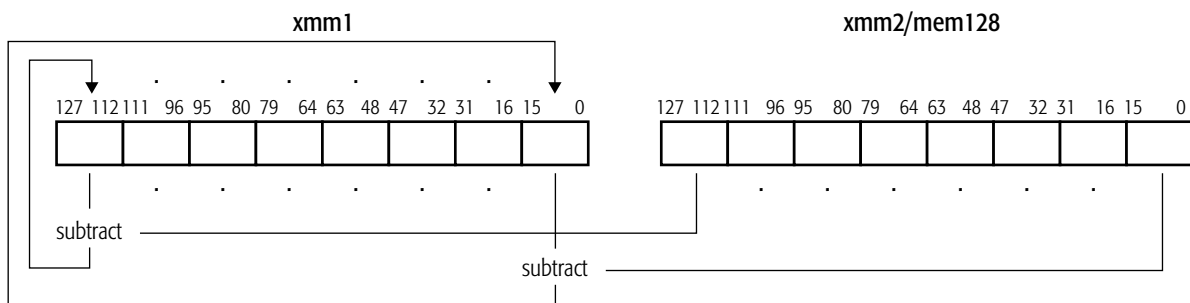

psubw-128.eps

This instruction operates on both signed and unsigned integers. If the result overflows, the carry is ignored (neither the overflow nor carry bit in rFLAGS is set), and only the low-order 16 bits of the result are written in the destination.

### Related Instructions

PSUBB, PSUBD, PSUBQ, PSUBSB, PSUBSW, PSUBUSB, PSUBUSW

### rFLAGS Affected

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PUNPCKHBW****Unpack and Interleave High Bytes**

Unpacks the high-order bytes from the first and second source operands and packs them into interleaved bytes in the destination (first source). The low-order bytes of the source operands are ignored. The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PUNPCKHBW <i>xmm1, xmm2/mem128</i>	66 0F 68 /r	Unpacks the eight high-order bytes in an XMM register and another XMM register or 128-bit memory location and packs them into interleaved bytes in the destination XMM register.

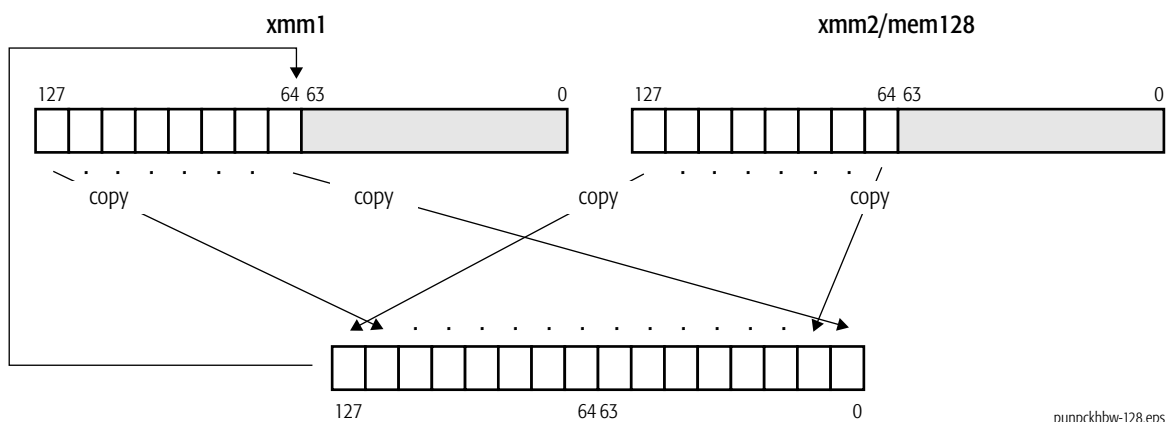

If the second source operand is all 0s, the destination contains the bytes from the first source operand zero-extended to 16 bits. This operation is useful for expanding unsigned 8-bit values to unsigned 16-bit operands for subsequent processing that requires higher precision.

**Related Instructions**

PUNPCKHDQ, PUNPCKHQDQ, PUNPCKHWD, PUNPCKLBW, PUNPCKLDQ, PUNPCKLQDQ, PUNPCKLWD

**rFLAGS Affected**

None



**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PUNPCKHDQ****Unpack and Interleave High Doublewords**

Unpacks the high-order doublewords from the first and second source operands and packs them into interleaved doublewords in the destination (first source). The low-order doublewords of the source operands are ignored. The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PUNPCKHDQ <i>xmm1, xmm2/mem128</i>	66 0F 6A /r	Unpacks two high-order doublewords in an XMM register and another XMM register or 128-bit memory location and packs them into interleaved doublewords in the destination XMM register.

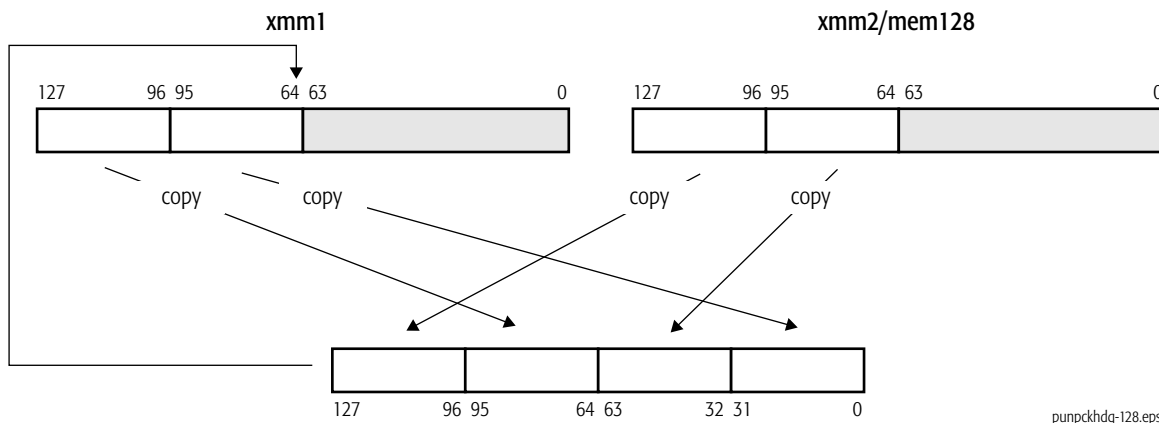

If the second source operand is all 0s, the destination contains the doubleword(s) from the first source operand zero-extended to 64 bits. This operation is useful for expanding unsigned 32-bit values to unsigned 64-bit operands for subsequent processing that requires higher precision.

**Related Instructions**

PUNPCKHBW, PUNPCKHQDQ, PUNPCKHWD, PUNPCKLBW, PUNPCKLDQ, PUNPCKLQDQ, PUNPCKLWD

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PUNPCKHQDQ                      Unpack and Interleave High Quadwords

Unpacks the high-order quadwords from the first and second source operands and packs them into interleaved quadwords in the destination (first source). The first source/destination is an XMM register, and the second source operand is another XMM register or 128-bit memory location. The low-order quadwords of the source operands are ignored.

If the second source operand is all 0s, the destination contains the quadword from the first source operand zero-extended to 128 bits. This operation is useful for expanding unsigned 64-bit values to unsigned 128-bit operands for subsequent processing that requires higher precision.

Mnemonic	Opcode	Description
PUNPCKHQDQ <i>xmm1, xmm2/mem128</i>	66 0F 6D /r	Unpacks high-order quadwords in an XMM register and another XMM register or 128-bit memory location and packs them into interleaved quadwords in the destination XMM register.

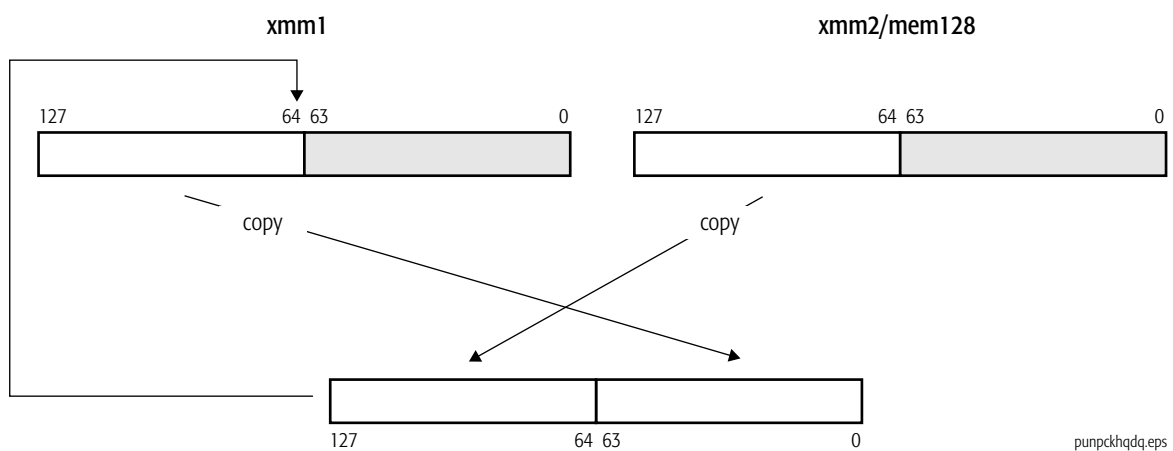

### Related Instructions

PUNPCKHBW, PUNPCKHDQ, PUNPCKHWD, PUNPCKLBW, PUNPCKLDQ, PUNPCKLQDQ, PUNPCKLWD

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PUNPCKHWD                      Unpack and Interleave High Words

Unpacks the high-order words from the first and second source operands and packs them into interleaved words in the destination (first source). The low-order words of the source operands are ignored. The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PUNPCKHWD <i>xmm1, xmm2/mem128</i>	66 0F 69/r	Unpacks four high-order words in an XMM register and another XMM register or 128-bit memory location and packs them into interleaved words in the destination XMM register.

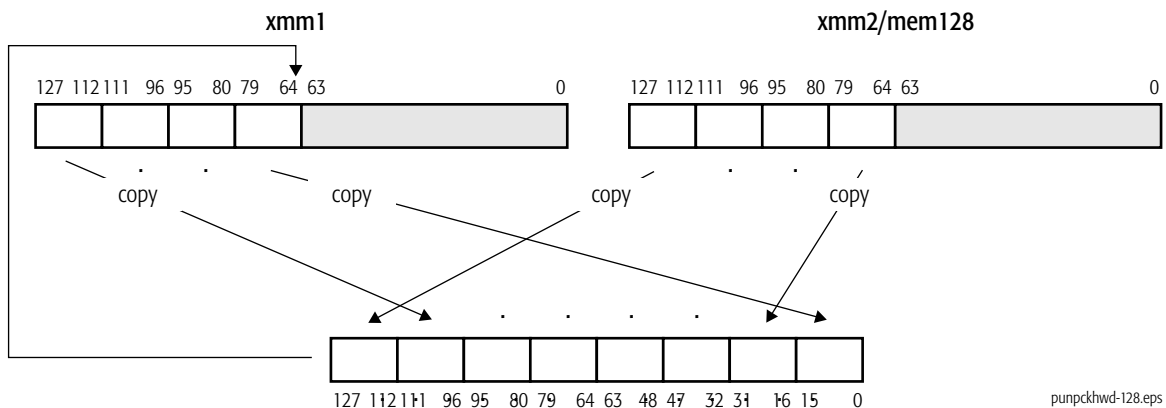

If the second source operand is all 0s, the destination contains the words from the first source operand zero-extended to 32 bits. This operation is useful for expanding unsigned 16-bit values to unsigned 32-bit operands for subsequent processing that requires higher precision.

### Related Instructions

PUNPCKHBW, PUNPCKHDQ, PUNPCKHQDQ, PUNPCKLBW, PUNPCKLDQ, PUNPCKLQDQ, PUNPCKLWD

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PUNPCKLBW                      Unpack and Interleave Low Bytes

Unpacks the low-order bytes from the first and second source operands and packs them into interleaved bytes in the destination (first source). The high-order bytes of the source operands are ignored. The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PUNPCKLBW <i>xmm1, xmm2/mem128</i>	66 0F 60 /r	Unpacks the eight low-order bytes in an XMM register and another XMM register or 128-bit memory location and packs them into interleaved bytes in the destination XMM register.

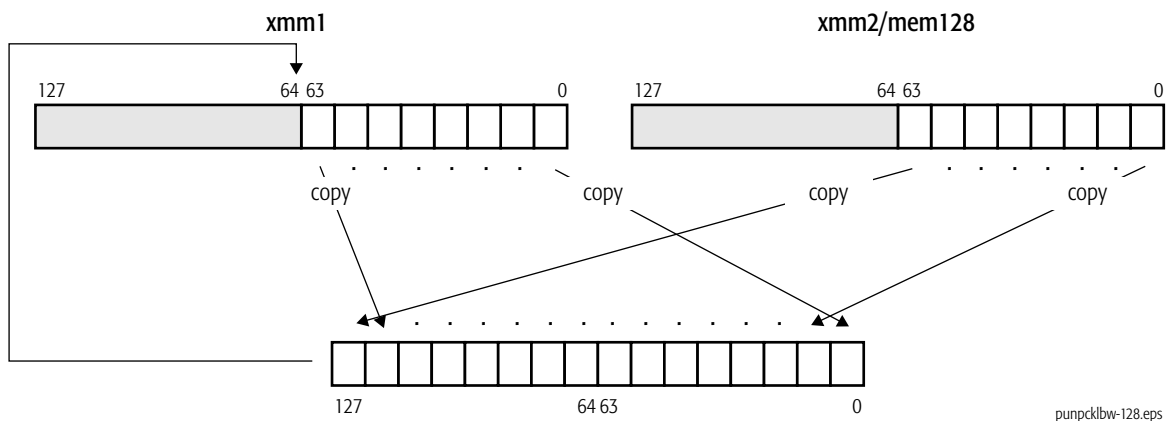

If the second source operand is all 0s, the destination contains the bytes from the first source operand zero-extended to 16 bits. This operation is useful for expanding unsigned 8-bit values to unsigned 16-bit operands for subsequent processing that requires higher precision.

### Related Instructions

PUNPCKHBW, PUNPCKHDQ, PUNPCKHQDQ, PUNPCKHWD, PUNPCKLDQ, PUNPCKLQDQ, PUNPCKLWD



**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PUNPCKLDQ Unpack and Interleave Low Doublewords

Unpacks the low-order doublewords from the first and second source operands and packs them into interleaved doublewords in the destination (first source). The high-order doublewords of the source operands are ignored. The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PUNPCKLDQ <i>xmm1, xmm2/mem128</i>	66 0F 62 /r	Unpacks two low-order doublewords in an XMM register and another XMM register or 128-bit memory location and packs them into interleaved doublewords in the destination XMM register.

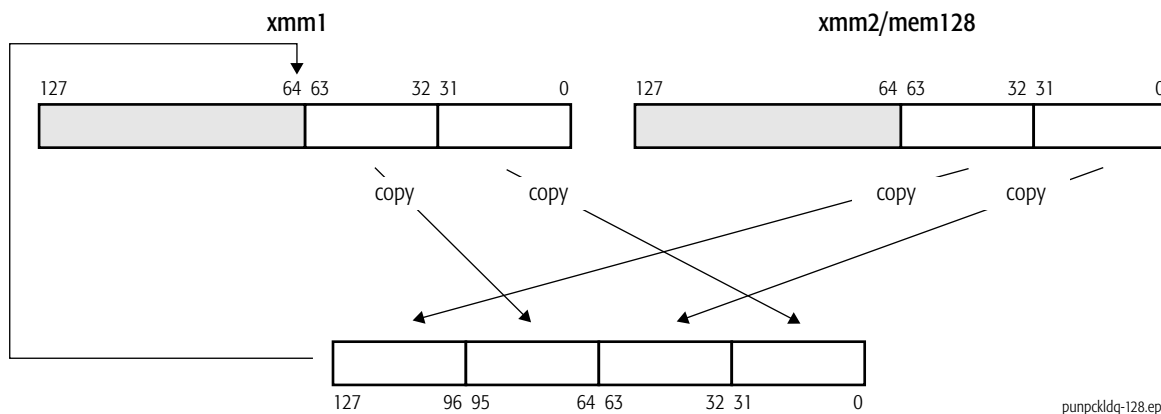

punpckldq-128.eps

If the second source operand is all 0s, the destination contains the doubleword(s) from the first source operand zero-extended to 64 bits. This operation is useful for expanding unsigned 32-bit values to unsigned 64-bit operands for subsequent processing that requires higher precision.

### Related Instructions

PUNPCKHBW, PUNPCKHDQ, PUNPCKHQDQ, PUNPCKHWD, PUNPCKLBW, PUNPCKLQDQ, PUNPCKLWD

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PUNPCKLQDQ****Unpack and Interleave Low Quadwords**

Unpacks the low-order quadwords from the first and second source operands and packs them into interleaved quadwords in the destination (first source). The first source/destination is an XMM register, and the second source operand is another XMM register or 128-bit memory location. The high-order quadwords of the source operands are ignored.

If the second source operand is all 0s, the destination contains the quadword from the first source operand zero-extended to 128 bits. This operation is useful for expanding unsigned 64-bit values to unsigned 128-bit operands for subsequent processing that requires higher precision.

**Mnemonic**


PUNPCKLQDQ *xmm1, xmm2/mem128*

**Opcode**

66 0F 6C /r

**Description**

Unpacks low-order quadwords in an XMM register and another XMM register or 128-bit memory location and packs them into interleaved quadwords in the destination XMM register.

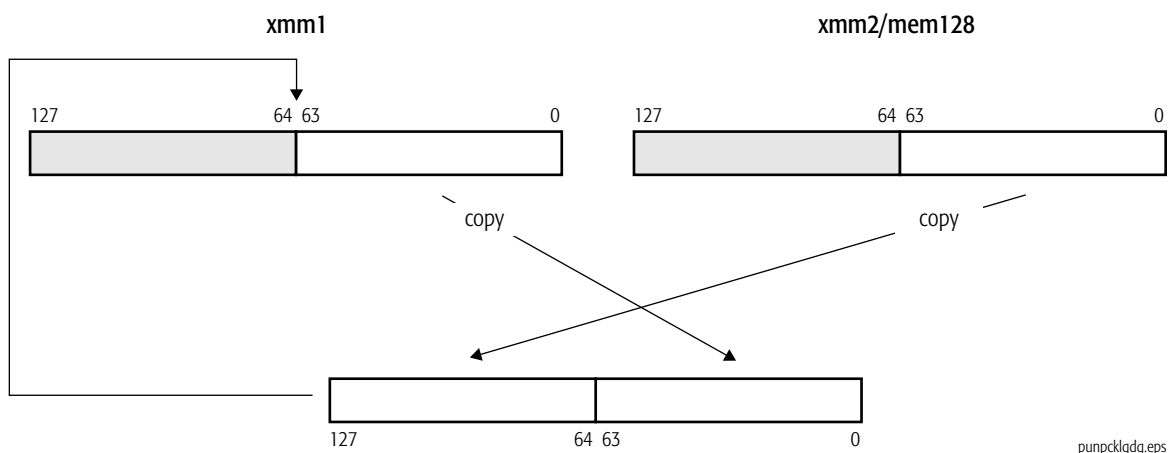

punpcklqdq.eps

**Related Instructions**

PUNPCKHBW, PUNPCKHDQ, PUNPCKHQDQ, PUNPCKHWD, PUNPCKLBW, PUNPCKLDQ, PUNPCKLWD

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

## PUNPCKLWD                      Unpack and Interleave Low Words

Unpacks the low-order words from the first and second source operands and packs them into interleaved words in the destination (first source). The high-order words of the source operands are ignored. The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PUNPCKLWD <i>xmm1, xmm2/mem128</i>	66 0F 61 /r	Unpacks the four low-order words in an XMM register and another XMM register or 128-bit memory location and packs them into interleaved words in the destination XMM register.

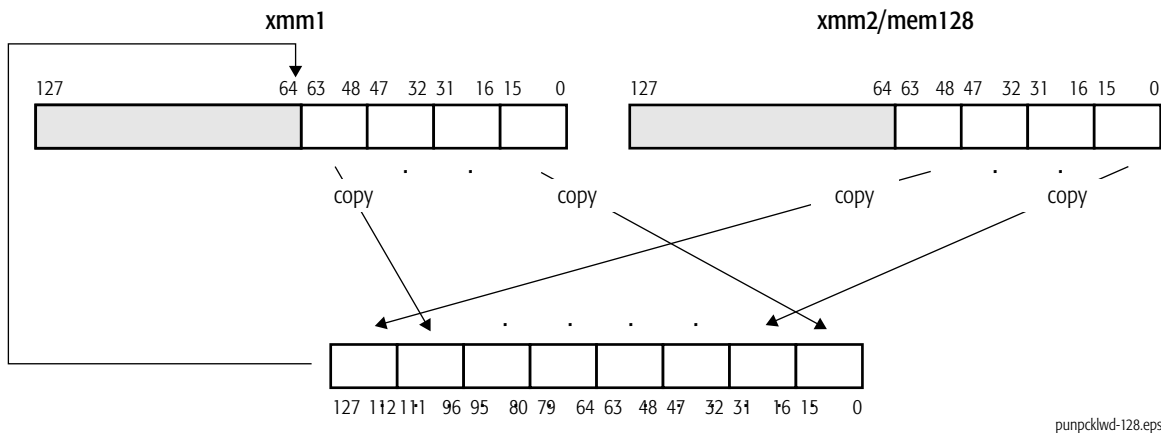

If the second source operand is all 0s, the destination contains the words from the first source operand zero-extended to 32 bits. This operation is useful for expanding unsigned 16-bit values to unsigned 32-bit operands for subsequent processing that requires higher precision.

### Related Instructions

PUNPCKHBW, PUNPCKHDQ, PUNPCKHQDQ, PUNPCKHWD, PUNPCKLBW, PUNPCKLDQ, PUNPCKLQDQ

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**PXOR****Packed Logical Bitwise Exclusive OR**

Performs a bitwise exclusive OR of the values in the first and second source operands and writes the result in the destination (first source). The first source/destination operand is an XMM register and the second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
PXOR <i>xmm1, xmm2/mem128</i>	66 0F EF /r	Performs bitwise logical XOR of values in an XMM register and in another XMM register or 128-bit memory location and writes the result in the destination XMM register.

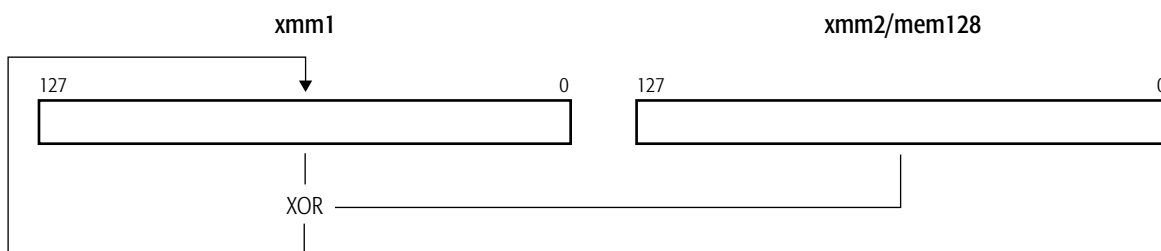

pxor-128.eps

**Related Instructions**

PAND, PANDN, POR

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None



**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.


**RCPPS**

**Reciprocal Packed Single-Precision Floating-Point**

Computes the approximate reciprocal of each of the four packed single-precision floating-point values in an XMM register or 128-bit memory location and writes the result in the corresponding doubleword of another XMM register. The rounding control bits (RC) in the MXCSR register have no effect on the result.

The maximum relative error is less than or equal to  $1.5 * 2^{-12}$ . A source value of 0.0 returns an infinity of the source value’s sign. Denormal source operands are treated as signed 0.0. Results that underflow are changed to signed 0.0. For both SNaN and QNaN source operands, a QNaN is returned.

Mnemonic	Opcode	Description
RCPPS <i>xmm1, xmm2/mem128</i>	OF 53/r	Computes reciprocals of packed single-precision floating-point values in an XMM register or 128-bit memory location and writes result in the destination XMM register.

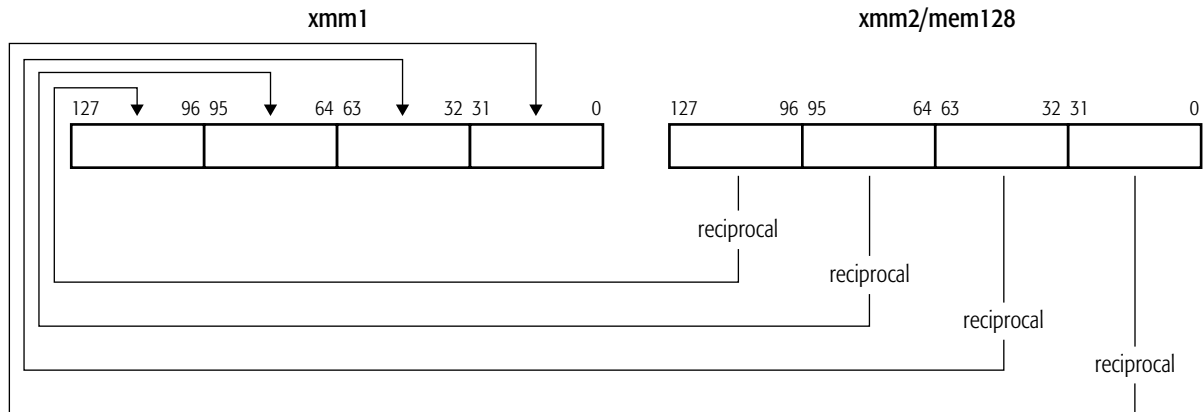

rcpps.eps

**Related Instructions**

RCPSS, RSQRTPS, RSQRTSS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**RCPSS****Reciprocal Scalar Single-Precision Floating-Point**

Computes the approximate reciprocal of the low-order single-precision floating-point value in an XMM register or in a 32-bit memory location and writes the result in the low-order doubleword of another XMM register. The three high-order doublewords in the destination XMM register are not modified. The rounding control bits (RC) in the MXCSR register have no effect on the result.

The maximum relative error is less than or equal to  $1.5 * 2^{-12}$ . A source value of 0.0 returns an infinity of the source value's sign. Denormal source operands are treated as signed 0.0. Results that underflow are changed to signed 0.0. For both SNaN and QNaN source operands, a QNaN is returned.

Mnemonic	Opcode	Description
RCPSS <i>xmm1, xmm2/mem32</i>	F3 0F 53 /r	Computes reciprocal of scalar single-precision floating-point value in an XMM register or 32-bit memory location and writes the result in the destination XMM register.

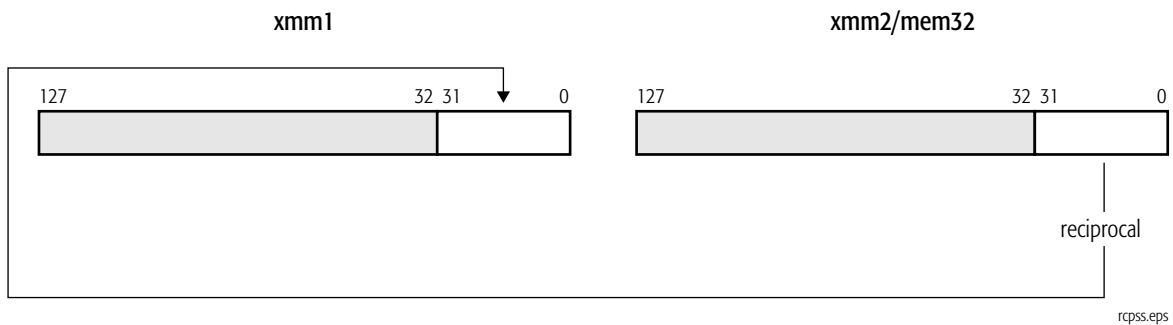**Related Instructions**

RCPSS, RSQRTPS, RSQRTSS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.

**RSQRTPS****Reciprocal Square Root Packed Single-Precision Floating-Point**

Computes the approximate reciprocal of the square root of each of the four packed single-precision floating-point values in an XMM register or 128-bit memory location and writes the result in the corresponding doubleword of another XMM register. The rounding control bits (RC) in the MXCSR register have no effect on the result.

The maximum relative error for the approximate reciprocal square root is less than or equal to  $1.5 * 2^{-12}$ . A source value of 0.0 returns an infinity of the source value's sign. Denormal source operands are treated as signed 0.0. For negative source values other than 0.0, the QNaN floating-point indefinite value (“Indefinite Values” in Volume 1) is returned. For both SNaN and QNaN source operands, a QNaN is returned.

Mnemonic	Opcode	Description
RSQRTPS <i>xmm1, xmm2/mem128</i>	0F 52/r	Computes reciprocals of square roots of packed single-precision floating-point values in an XMM register or 128-bit memory location and writes the result in the destination XMM register.

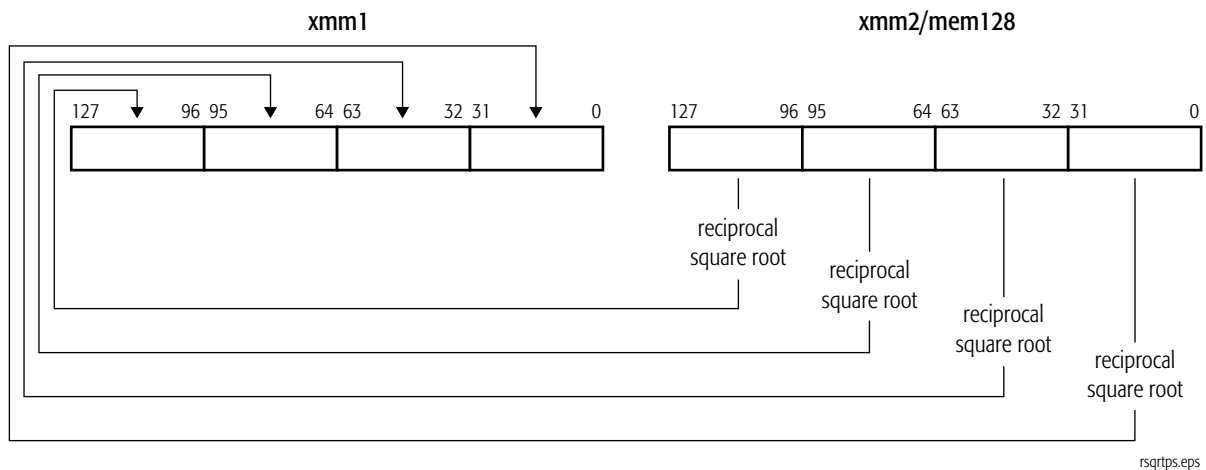**Related Instructions**

RSQRTSS, SQRTPD, SQRTPS, SQRTSD, SQRTSS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**RSQRTSS****Reciprocal Square Root Scalar Single-Precision Floating-Point**

Computes the approximate reciprocal of the square root of the low-order single-precision floating-point value in an XMM register or in a 32-bit memory location and writes the result in the low-order doubleword of another XMM register. The three high-order doublewords in the destination XMM register are not modified. The rounding control bits (RC) in the MXCSR register have no effect on the result.

The maximum relative error for the approximate reciprocal square root is less than or equal to  $1.5 * 2^{-12}$ . A source value of 0.0 returns an infinity of the source value's sign. Denormal source operands are treated as signed 0.0. For negative source values other than 0.0, the QNaN floating-point indefinite value (“Indefinite Values” in Volume 1) is returned. For both SNaN and QNaN source operands, a QNaN is returned.

Mnemonic	Opcode	Description
RSQRTPS <i>xmm1, xmm2/mem32</i>	F3 0F 52/r	Computes reciprocal of square root of single-precision floating-point value in an XMM register or 32-bit memory location and writes the result in the destination XMM register.

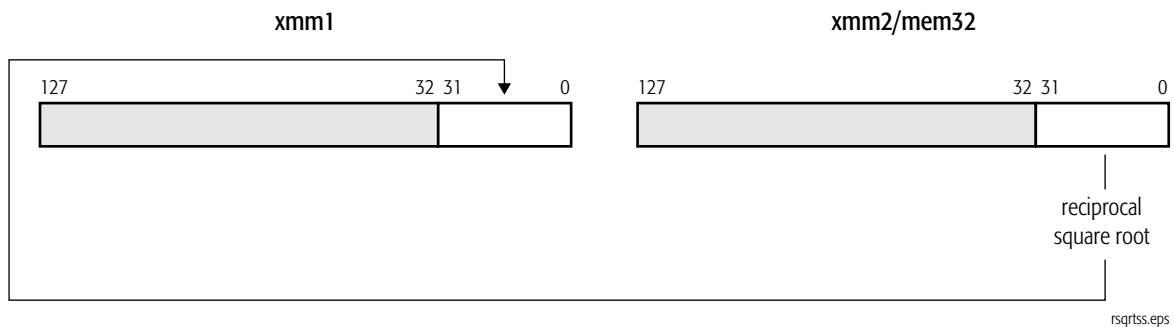**Related Instructions**

RSQRTPS, SQRTPD, SQRTPS, SQRTSD, SQRTSS

**rFLAGS Affected**

None

**MXCSR Flags Affected**



None


**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.

## SHUFPD Shuffle Packed Double-Precision Floating-Point

Moves either of the two packed double-precision floating-point values in the first source operand to the low-order quadword of the destination (first source) and moves either of the two packed double-precision floating-point values in the second source operand to the high-order quadword of the destination. In each case, the value of the destination quadword is determined by the least-significant two bits in the immediate-byte operand, as shown in Table 1-7. The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
SHUFPD <i>xmm1, xmm2/mem128, imm8</i>	66 OF C6 /r ib	Shuffles packed double-precision floating-point values in an XMM register and another XMM register or 128-bit memory location and puts the result in the destination XMM register.

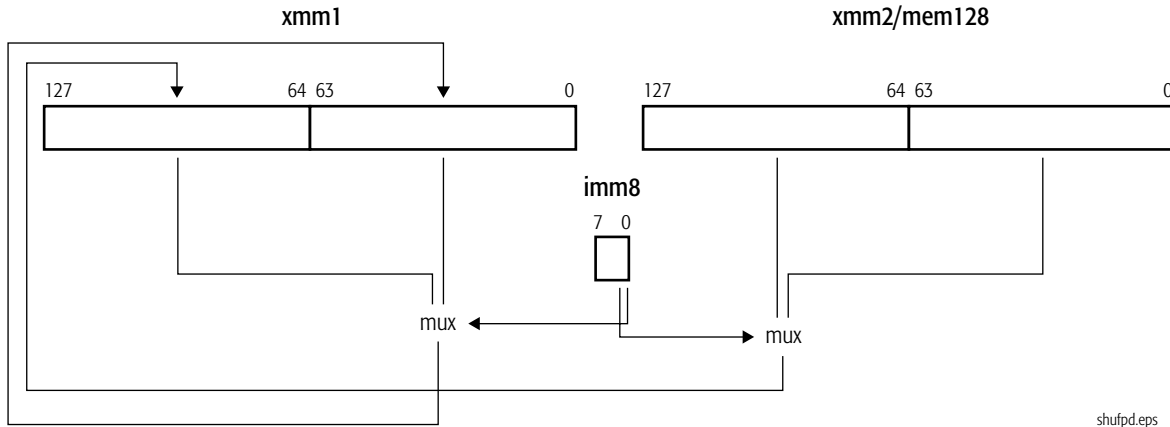

**Table 1-7. Immediate-Byte Operand Encoding for SHUFPD**

Destination Bits Filled	Immediate-Byte Bit Field	Value of Bit Field	Source 1 Bits Moved	Source 2 Bits Moved
63–0	0	0	63–0	–
		1	127–64	–
127–64	1	0	–	63–0
		1	–	127–64

**Related Instructions**

SHUFPS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.


Exception	Real	Virtual 8086	Protected	Cause of Exception
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**SHUFPS****Shuffle Packed Single-Precision Floating-Point**

Moves two of the four packed single-precision floating-point values in the first source operand to the low-order quadword of the destination (first source) and moves two of the four packed single-precision floating-point values in the second source operand to the high-order quadword of the destination. In each case, the value of the destination doubleword is determined by a two-bit field in the immediate-byte operand, as shown in Table 1-8 on page 354. The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

**Mnemonic**SHUFPS *xmm1, xmm2/mem128, imm8***Opcode**0F C6 /r *ib***Description**

Shuffles packed single-precision floating-point values in an XMM register and another XMM register or 128-bit memory location and puts the result in the destination XMM register.

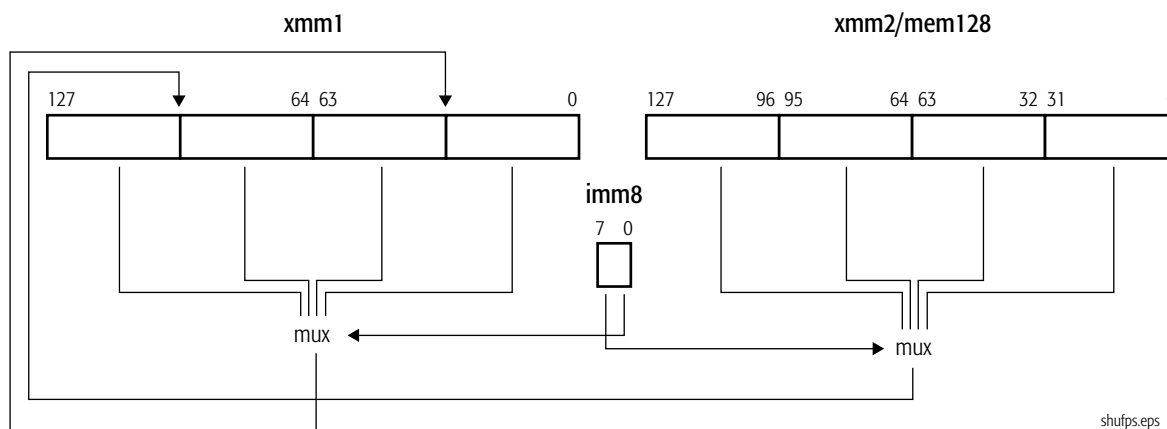

**Table 1-8. Immediate-Byte Operand Encoding for SHUFPS**

Destination Bits Filled	Immediate-Byte Bit Field	Value of Bit Field	Source 1 Bits Moved	Source 2 Bits Moved
31–0	1–0	0	31–0	–
		1	63–32	–
		2	95–64	–
		3	127–96	–
63–32	3–2	0	31–0	–
		1	63–32	–
		2	95–64	–
		3	127–96	–
95–64	5–4	0	–	31–0
		1	–	63–32
		2	–	95–64
		3	–	127–96
127–96	7–6	0	–	31–0
		1	–	63–32
		2	–	95–64
		3	–	127–96

**Related Instructions**

SHUFPS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**SQRTPD****Square Root Packed Double-Precision Floating-Point**

Computes the square root of each of the two packed double-precision floating-point values in an XMM register or 128-bit memory location and writes the result in the corresponding quadword of another XMM register. Taking the square root of +infinity returns +infinity.

Mnemonic	Opcode	Description
SQRTPD <i>xmm1, xmm2/mem128</i>	66 0F 51 /r	Computes square roots of packed double-precision floating-point values in an XMM register or 128-bit memory location and writes the result in the destination XMM register.

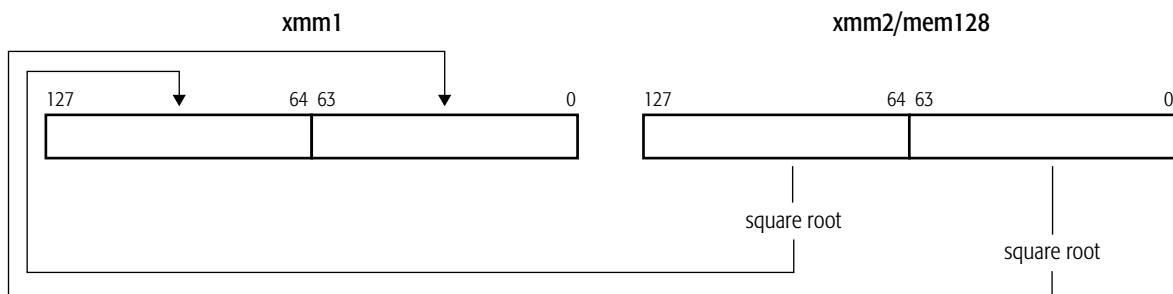

sqrtpd.eps

**Related Instructions**

RSQRTPS, RSQRTSS, SQRTPS, SQRTSD, SQRTSS

**rFLAGS Affected**

None



**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M				M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.

Exception	Real	Virtual 8086	Protected	Cause of Exception
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	A source operand was negative (not including $-0$ ).
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**SQRTPS****Square Root Packed Single-Precision Floating-Point**

Computes the square root of each of the four packed single-precision floating-point values in an XMM register or 128-bit memory location and writes the result in the corresponding doubleword of another XMM register. Taking the square root of +infinity returns +infinity.

Mnemonic	Opcode	Description
SQRTPS <i>xmm1, xmm2/mem128</i>	0F 51 /r	Computes square roots of packed single-precision floating-point values in an XMM register or 128-bit memory location and writes the result in the destination XMM register.

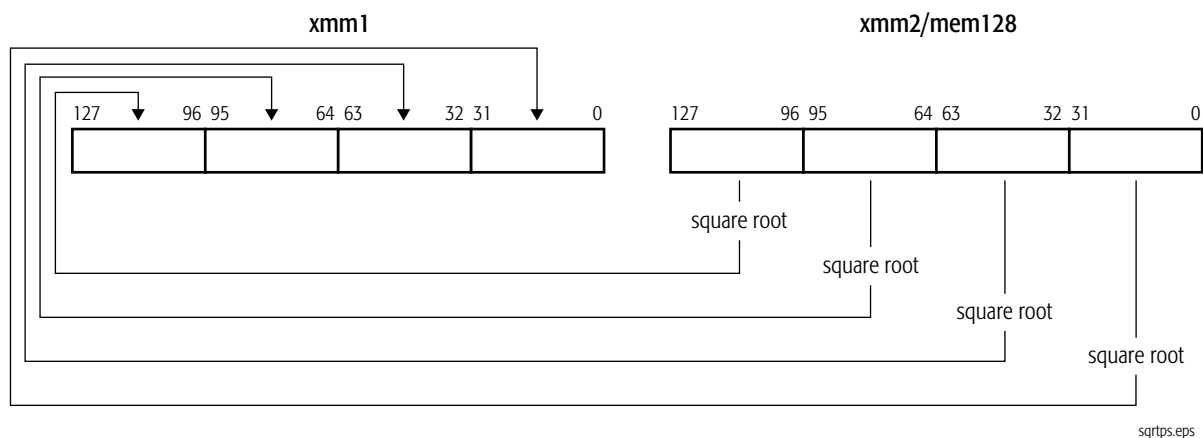**Related Instructions**

RSQRTPS, RSQRTSS, SQRTPD, SQRTSD, SQRTSS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M				M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

*Note:*  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.


Exception	Real	Virtual 8086	Protected	Cause of Exception
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	A source operand was negative (not including $-0$ ).
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**SQRTSD**

**Square Root Scalar Double-Precision Floating-Point**

Computes the square root of the low-order double-precision floating-point value in an XMM register or in a 64-bit memory location and writes the result in the low-order quadword of another XMM register. The high-order quadword of the destination XMM register is not modified. Taking the square root of +infinity returns +infinity.

Mnemonic	Opcode	Description
SQRTSD <i>xmm1, xmm2/mem64</i>	F2 0F 51 /r	Computes square root of double-precision floating-point value in an XMM register or 64-bit memory location and writes the result in the destination XMM register.

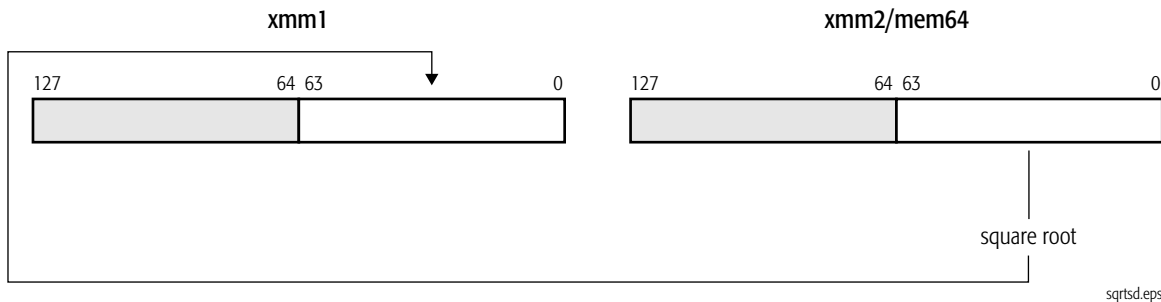

sqrtsd.eps

**Related Instructions**

RSQRTPS, RSQRTSS, SQRTPD, SQRTPS, SQRTSS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M				M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**

A flag that can be set to one or zero is M (modified). Unaffected flags are blank.


**Exceptions.**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	A source operand was negative (not including -0).
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**SQRTSS****Square Root Scalar Single-Precision  
Floating-Point**

Computes the square root of the low-order single-precision floating-point value in an XMM register or 32-bit memory location and writes the result in the low-order doubleword of another XMM register. The three high-order doublewords of the destination XMM register are not modified. Taking the square root of +infinity returns +infinity.

Mnemonic	Opcode	Description
SQRTSS <i>xmm1</i> , <i>xmm2/mem32</i>	F3 0F 51 /r	Computes square root of single-precision floating-point value in an XMM register or 32-bit memory location and writes the result in the destination XMM register.

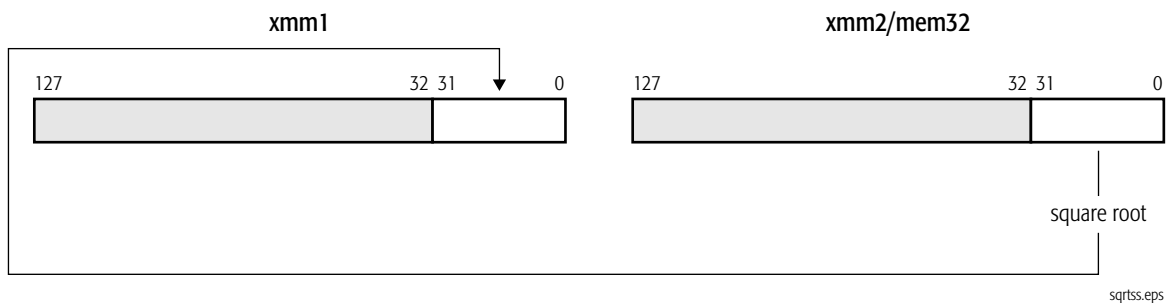**Related Instructions**

RSQRTPS, RSQRTSS, SQRTPD, SQRTPS, SQRTSD

**rFLAGS Affected**

None



**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M				M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.

Exception	Real	Virtual 8086	Protected	Cause of Exception
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	A source operand was negative (not including $-0$ ).
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

## STMXCSR Store MXCSR Control/Status Register

Saves the contents of the MXCSR register in a 32-bit location in memory. The MXCSR register is described in “Registers” in Volume 1.

Mnemonic	Opcode	Description
STMXCSR <i>mem32</i>	OF AE /3	Stores contents of MXCSR in 32-bit memory location.

### Related Instructions

LDMXCSR

### rFLAGS Affected

None

### MXCSR Flags Affected

None

### Exceptions


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
			X	The destination operand was in a non-writable segment.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.

**SUBPD****Subtract Packed Double-Precision Floating-Point**

Subtracts each packed double-precision floating-point value in the second source operand from the corresponding packed double-precision floating-point value in the first source operand and writes the result of each subtraction in the corresponding quadword of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
SUBPD <i>xmm1, xmm2/mem128</i>	66 0F 5C /r	Subtracts packed double-precision floating-point values in an XMM register or 128-bit memory location from packed double-precision floating-point values in another XMM register and writes the result in the destination XMM register.

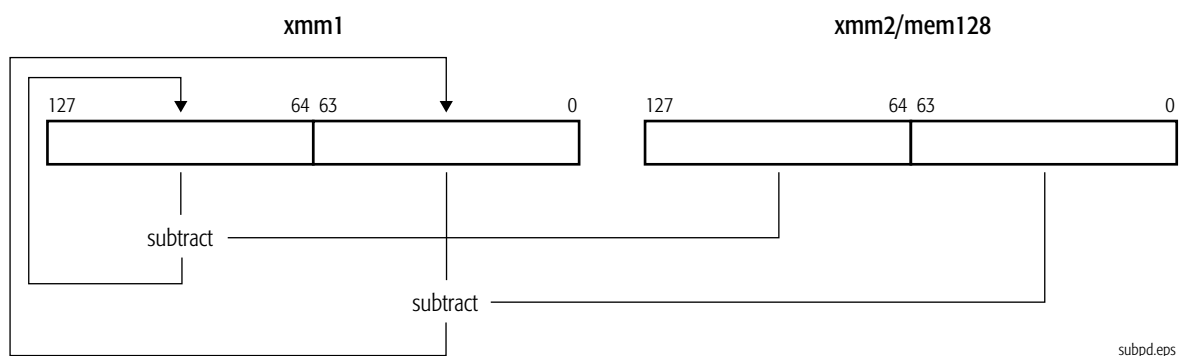**Related Instructions**

SUBPS, SUBSD, SUBSS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M		M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

*Note:*  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	+infinity was subtracted from +infinity.
	X	X	X	-infinity was subtracted from -infinity.

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**SUBPS****Subtract Packed Single-Precision Floating-Point**

Subtracts each packed single-precision floating-point value in the second source operand from the corresponding packed single-precision floating-point value in the first source operand and writes the result of each subtraction in the corresponding doubleword of the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
SUBPS <i>xmm1, xmm2/mem128</i>	0F 5C/r	Subtracts packed single-precision floating-point values in an XMM register or 128-bit memory location from packed single-precision floating-point values in another XMM register and writes the result in the destination XMM register.

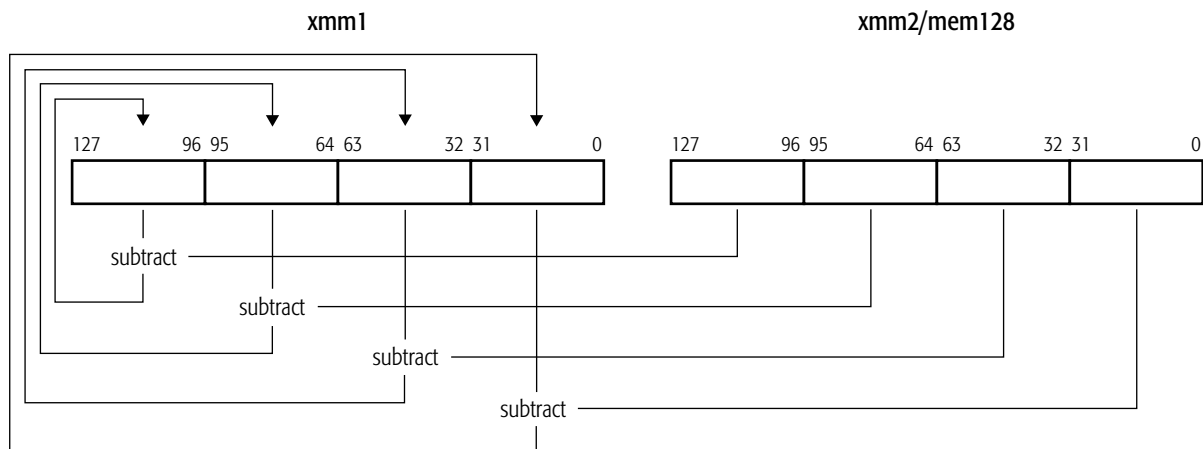

subps.eps

**Related Instructions**

SUBPD, SUBSD, SUBSS

**rFLAGS Affected**

None



**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M		M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	+infinity was subtracted from +infinity.
	X	X	X	-infinity was subtracted from -infinity.

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

## SUBSD Subtract Scalar Double-Precision Floating-Point

Subtracts the double-precision floating-point value in the low-order quadword of the second source operand from the double-precision floating-point value in the low-order quadword of the first source operand and writes the result in the low-order quadword of the destination (first source). The high-order quadword of the destination is not modified. The first source/destination operand is an XMM register. The second source operand is another XMM register or 64-bit memory location.

Mnemonic	Opcode	Description
SUBSD <i>xmm1, xmm2/mem64</i>	F2 0F 5C /r	Subtracts low-order double-precision floating-point value in an XMM register or in a 64-bit memory location from low-order double-precision floating-point value in another XMM register and writes the result in the destination XMM register.

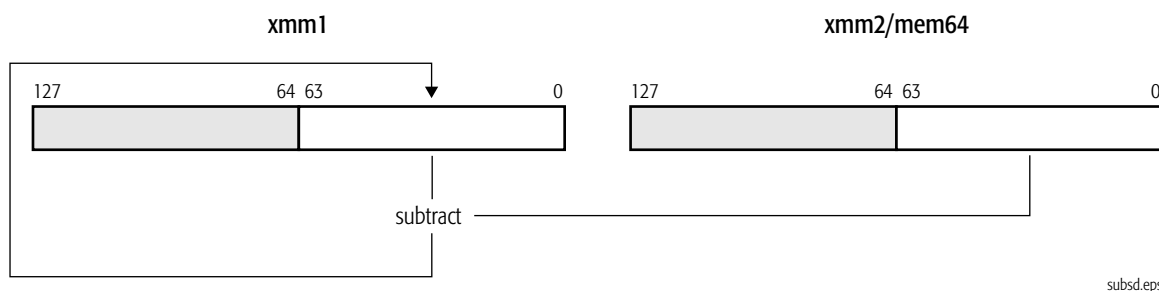

### Related Instructions

SUBPD, SUBPS, SUBSS

### rFLAGS Affected

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M		M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

*Note:*  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	+infinity was subtracted from +infinity.
	X	X	X	-infinity was subtracted from -infinity.

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.

**SUBSS****Subtract Scalar Single-Precision Floating-Point**

Subtracts the single-precision floating-point value in the low-order doubleword of the second source operand from the single-precision floating-point value in the low-order doubleword of the first source operand and writes the result in the low-order doubleword of the destination (first source). The three high-order doublewords of the destination are not modified. The first source/destination operand is an XMM register. The second source operand is another XMM register or 32-bit memory location.

Mnemonic	Opcode	Description
SUBSS <i>xmm1, xmm2/mem32</i>	F3 0F 5C /r	Subtracts low-order single-precision floating-point value in an XMM register or in a 32-bit memory location from low-order single-precision floating-point value in another XMM register and writes the result in the destination XMM register.

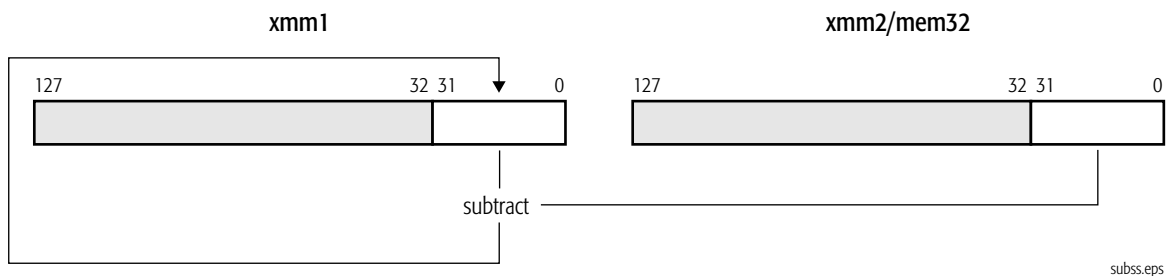**Related Instructions**

SUBPD, SUBPS, SUBSD

**rFLAGS Affected**

None

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
										M	M	M		M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
	X	X	X	+infinity was subtracted from +infinity.
	X	X	X	-infinity was subtracted from -infinity.

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.
Overflow exception (OE)	X	X	X	A rounded result was too large to fit into the format of the destination operand.
Underflow exception (UE)	X	X	X	A rounded result was too small to fit into the format of the destination operand.
Precision exception (PE)	X	X	X	A result could not be represented exactly in the destination format.




**UCOMISD****Unordered Compare Scalar  
Double-Precision Floating-Point**

Performs an unordered compare of the double-precision floating-point value in the low-order 64 bits of an XMM register with the double-precision floating-point value in the low-order 64 bits of another XMM register or a 64-bit memory location and sets the ZF, PF, and CF bits in the rFLAGS register to reflect the result of the compare. The result is unordered if one or both of the operand values is a NaN. The OF, AF, and SF bits in rFLAGS are set to zero.

If the instruction causes an unmasked SIMD floating-point exception (#XF), the rFLAGS bits are not updated.

Mnemonic	Opcode	Description
UCOMISD <i>xmm1, xmm2/mem64</i>	66 0F 2E/r	Compares scalar double-precision floating-point values in an XMM register and an XMM register or 64-bit memory location. Sets rFLAGS.

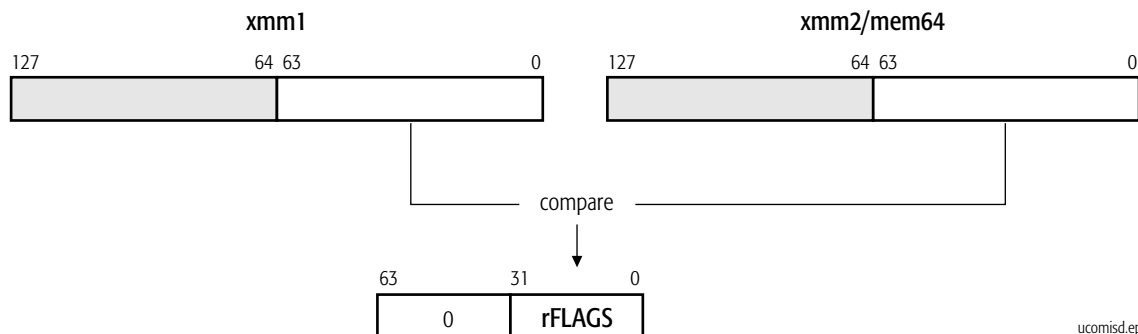

Result of Compare	ZF	PF	CF
Unordered	1	1	1
Greater Than	0	0	0
Less Than	0	0	1
Equal	1	0	0

**Related Instructions**

CMPPD, CMPPS, CMPSD, CMPSS, COMISD, COMISS, UCOMISS

**rFLAGS Affected**

ID	VIP	VIF	AC	VM	RF	NT	IOPL	OF	DF	IF	TF	SF	ZF	AF	PF	CF
								0				0	M	0	M	M
21	20	19	18	17	16	14	13–12	11	10	9	8	7	6	4	2	0

**Note:**  
 Bits 31–22, 15, 5, 3, and 1 are reserved. A flag set to 1 or cleared to 0 is M (modified). Unaffected flags are blank.  
 If the instruction causes an unmasked SIMD floating-point exception (#XF), the rFLAGS bits are not updated.

**MXCSR Flags Affected**

FZ	RC		PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE
														M	M
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**  
 A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.


Exception	Real	Virtual 8086	Protected	Cause of Exception
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

## UCOMISS Unordered Compare Scalar Single-Precision Floating-Point

Performs an unordered compare of the single-precision floating-point value in the low-order 32 bits of an XMM register with the single-precision floating-point value in the low-order 32 bits of another XMM register or a 32-bit memory location and sets the ZF, PF, and CF bits in the rFLAGS register to reflect the result. The result is unordered if one or both of the operand values is a NaN. The OF, AF, and SF bits in rFLAGS are set to zero.

If the instruction causes an unmasked SIMD floating-point exception (#XF), the rFLAGS bits are not updated.

Mnemonic	Opcode	Description
UCOMISS <i>xmm1, xmm2/mem32</i>	OF 2E/r	Compares scalar single-precision floating-point values in an XMM register and an XMM register or 32-bit memory location. Sets rFLAGS.

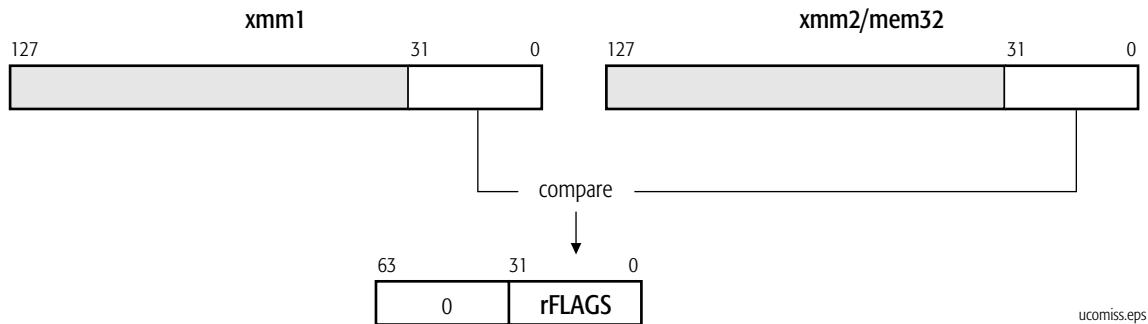

Result of Compare	ZF	PF	CF
Unordered	1	1	1
Greater Than	0	0	0
Less Than	0	0	1
Equal	1	0	0

**Related Instructions**

CMPPD, CMPPS, CMPSD, CMPSS, COMISD, COMISS, UCOMISD

**rFLAGS Affected**

ID	VIP	VIF	AC	VM	RF	NT	IOPL	OF	DF	IF	TF	SF	ZF	AF	PF	CF
								0				0	M	0	M	M
21	20	19	18	17	16	14	13–12	11	10	9	8	7	6	4	2	0

**Note:**

Bits 31–22, 15, 5, 3, and 1 are reserved. A flag set to 1 or cleared to 0 is M (modified). Unaffected flags are blank.  
If the instruction causes an unmasked SIMD floating-point exception (#XF), the rFLAGS bits are not updated.

**MXCSR Flags Affected**

FZ	RC	PM	UM	OM	ZM	DM	IM	DAZ	PE	UE	OE	ZE	DE	IE	
													M	M	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

**Note:**

A flag that can be set to one or zero is M (modified). Unaffected flags are blank.

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 0. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.

Exception	Real	Virtual 8086	Protected	Cause of Exception
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.
Alignment check, #AC		X	X	An unaligned memory reference was performed while alignment checking was enabled.
SIMD Floating-Point Exception, #XF	X	X	X	There was an unmasked SIMD floating-point exception while CR4.OSXMMEXCPT = 1. See <i>SIMD Floating-Point Exceptions</i> , below, for details.
<b>SIMD Floating-Point Exceptions</b>				
Invalid-operation exception (IE)	X	X	X	A source operand was an SNaN value.
Denormalized-operand exception (DE)	X	X	X	A source operand was a denormal value.

**UNPCKHPD****Unpack High Double-Precision Floating-Point**

Unpacks the high-order double-precision floating-point values in the first and second source operands and packs them into quadwords in the destination (first source). The value from the first source operand is packed into the low-order quadword of the destination, and the value from the second source operand is packed into the high-order quadword of the destination. The low-order quadwords of the source operands are ignored. The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
UNPCKHPD <i>xmm1, xmm2/mem128</i>	66 0F 15 /r	Unpacks high-order double-precision floating-point values in an XMM register and another XMM register or 128-bit memory location and packs them into the destination XMM register.

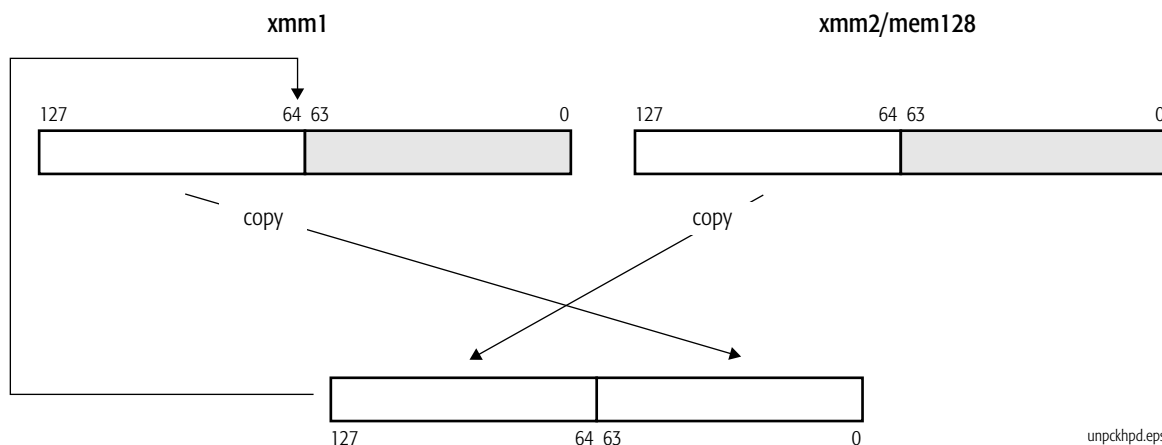

unpckhpd.eps

**Related Instructions**

UNPCKHPS, UNPCKLPD, UNPCKLPS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.



**UNPCKHPS****Unpack High Single-Precision Floating-Point**

Unpacks the high-order single-precision floating-point values in the first and second source operands and packs them into interleaved doublewords in the destination (first source). The low-order quadwords of the source operands are ignored. The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
UNPCKHPS <i>xmm1, xmm2/mem128</i>	OF 15 /r	Unpacks high-order single-precision floating-point values in an XMM register and another XMM register or 128-bit memory location and packs them into the destination XMM register.

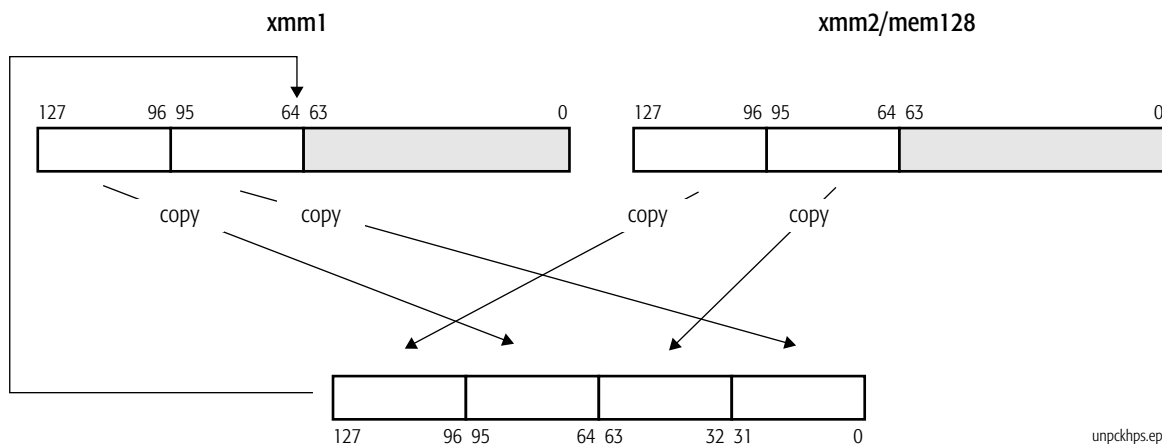

unpckhps.eps

**Related Instructions**

UNPCKHPD, UNPCKLPD, UNPCKLPS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**UNPCKLPD****Unpack Low Double-Precision Floating-Point**

Unpacks the low-order double-precision floating-point values in the first and second source operands and packs them into the destination (first source). The value from the first source operand is packed into the low-order quadword of the destination, and the value from the second source operand is packed into the high-order quadword of the destination. The high-order quadwords of the source operands are ignored. The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
UNPCKLPD <i>xmm1, xmm2/mem128</i>	66 0F 14 /r	Unpacks low-order double-precision floating-point values in an XMM register and another XMM register or 128-bit memory location and packs them into the destination XMM register.

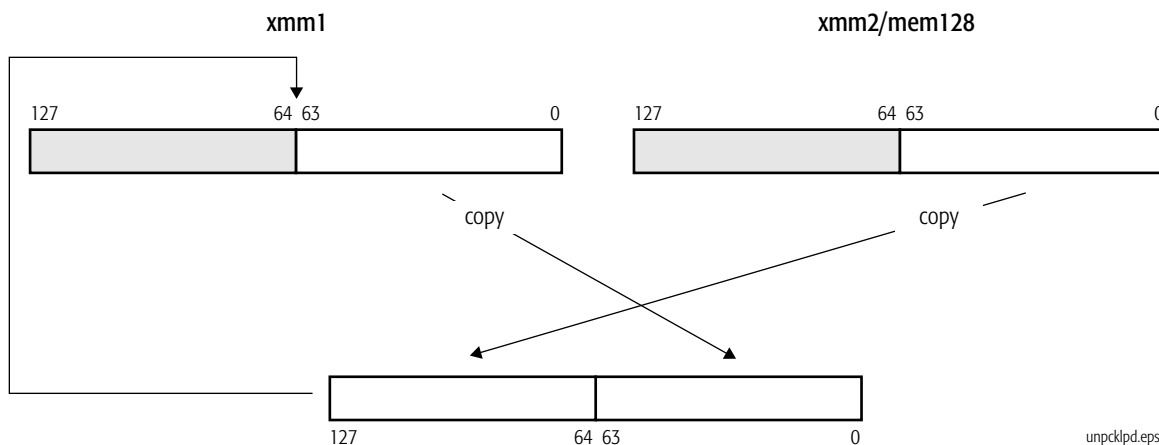

unpcklpd.eps

**Related Instructions**

UNPCKHPD, UNPCKHPS, UNPCKLPS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**UNPCKLPS****Unpack Low Single-Precision Floating-Point**

Unpacks the low-order single-precision floating-point values in the first and second source operands and packs them into interleaved doublewords in the destination (first source). The high-order quadwords of the source operands are ignored. The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location

Mnemonic	Opcode	Description
UNPCKLPS <i>xmm1, xmm2/mem128</i>	OF 14/ <i>r</i>	Unpacks low-order single-precision floating-point values in an XMM register and another XMM register or 128-bit memory location and packs them into the destination XMM register.

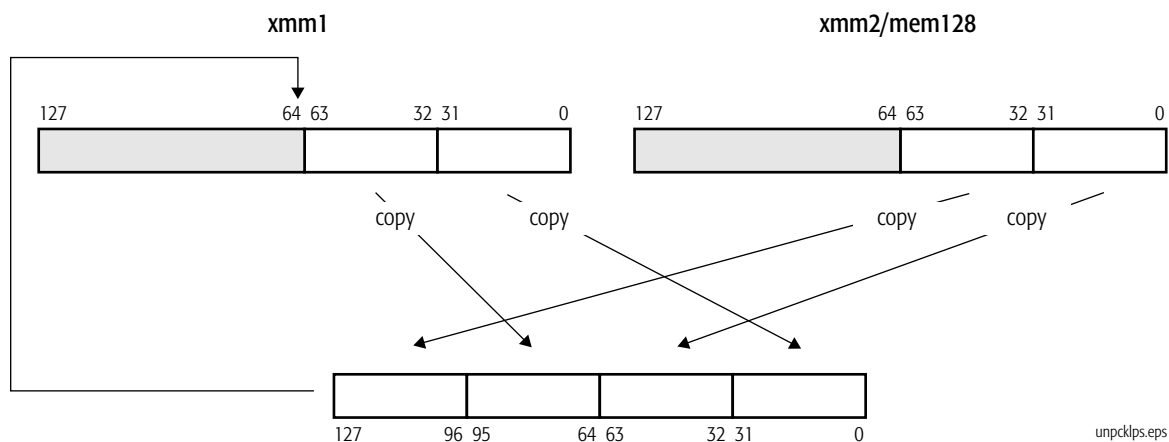**Related Instructions**

UNPCKHPD, UNPCKHPS, UNPCKLPD

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None


**Exceptions**

<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

**XORPD****Logical Bitwise Exclusive OR  
Packed Double-Precision Floating-Point**

Performs a bitwise logical Exclusive OR of the two packed double-precision floating-point values in the first source operand and the corresponding two packed double-precision floating-point values in the second source operand and writes the result in the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
XORPD <i>xmm1, xmm2/mem128</i>	66 0F 57 /r	Performs bitwise logical XOR of two packed double-precision floating-point values in an XMM register and in another XMM register or 128-bit memory location and writes the result in the destination XMM register.

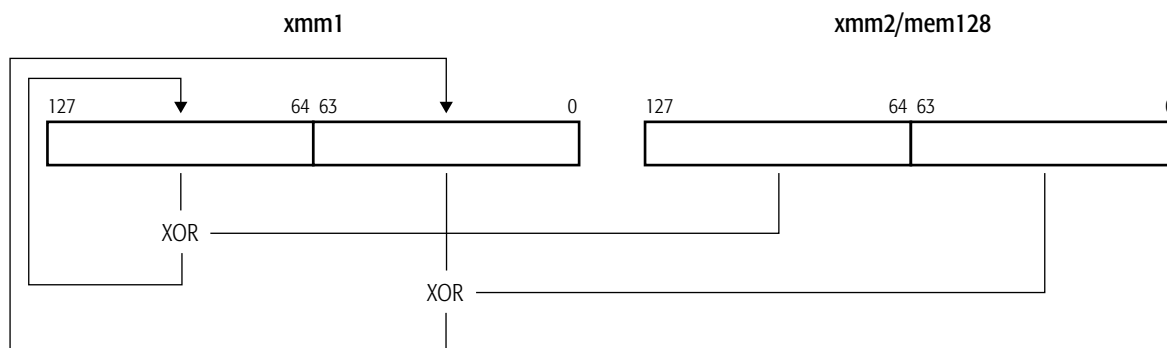

xorpd.eps

**Related Instructions**

ANDNPD, ANDNPS, ANDPD, ANDPS, ORPD, ORPS, XORPS

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**


<b>Exception</b>	<b>Real</b>	<b>Virtual 8086</b>	<b>Protected</b>	<b>Cause of Exception</b>
Invalid opcode, #UD	X	X	X	The SSE2 instructions are not supported, as indicated by bit 26 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 is cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded a data segment limit or was non-canonical.
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.



**XORPS****Logical Bitwise Exclusive OR  
Packed Single-Precision Floating-Point**

Performs a bitwise Exclusive OR of the four packed single-precision floating-point values in the first source operand and the corresponding four packed single-precision floating-point values in the second source operand and writes the result in the destination (first source). The first source/destination operand is an XMM register. The second source operand is another XMM register or 128-bit memory location.

Mnemonic	Opcode	Description
XORPS <i>xmm1, xmm2/mem128</i>	OF 57 /r	Performs bitwise logical XOR of four packed single-precision floating-point values in an XMM register and in another XMM register or 128-bit memory location and writes the result in the destination XMM register.

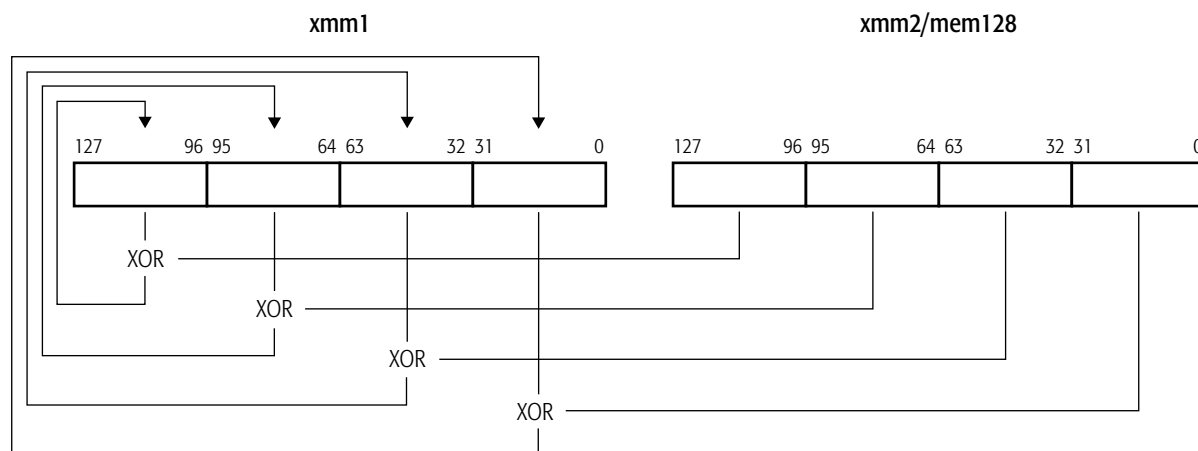

xorps.eps

**Related Instructions**

ANDNPD, ANDNPS, ANDPD, ANDPS, ORPD, ORPS, XORPD

**rFLAGS Affected**

None

**MXCSR Flags Affected**

None

**Exceptions**

Exception	Real	Virtual 8086	Protected	Cause of Exception
Invalid opcode, #UD	X	X	X	The SSE instructions are not supported, as indicated by bit 25 of CPUID standard function 1.
	X	X	X	The emulate bit (EM) of CR0 was set to 1.
	X	X	X	The operating-system FXSAVE/FXRSTOR support bit (OSFXSR) of CR4 was cleared to 0.
Device not available, #NM	X	X	X	The task-switch bit (TS) of CR0 was set to 1.
Stack, #SS	X	X	X	A memory address exceeded the stack segment limit or was non-canonical.
General protection, #GP	X	X	X	A memory address exceeded the data segment limit or was non-canonical
			X	A null data segment was used to reference memory.
	X	X	X	The memory operand was not aligned on a 16-byte boundary.
Page fault, #PF		X	X	A page fault resulted from the execution of the instruction.

# Index

## Numerics

16-bit mode.....	xv
32-bit mode.....	xv
64-bit mode.....	xv

## A

ADDPD .....	4
ADDPS .....	7
addressing, RIP-relative.....	xxi
ADDSI .....	10
ADDSS .....	12
ANDNPD .....	15
ANDNPS .....	17
ANDPD .....	19
ANDPS .....	21

## B

biased exponent.....	xv
----------------------	----

## C

CMPPD .....	23
CMPPS .....	27
CMPSD .....	30
CMPSS .....	33
COMISD.....	36
COMISS .....	39
commit .....	xvi
compatibility mode.....	xv
CVTDQ2PD .....	42
CVTDQ2PS .....	44
CVTPD2DQ .....	46
CVTPD2PI .....	49
CVTPD2PS .....	52
CVTPI2PD .....	55
CVTPI2PS.....	57
CVTPS2DQ.....	59
CVTPS2PD .....	62
CVTPS2PI.....	64
CVTSD2SI .....	67
CVTSD2SS.....	70
CVTSI2SD .....	73
CVTSI2SS .....	76
CVTSS2SD.....	79
CVTSS2SI.....	81
CVTTPD2DQ.....	84
CVTTPD2PI.....	87
CVTTPS2DQ .....	90
CVTTPS2PI .....	93
CVTTSD2SI.....	96

CVTTSS2SI .....	99
-----------------	----

## D

direct referencing.....	xvi
displacements.....	xvi
DIVPD .....	102
DIVPS.....	105
DIVSD .....	108
DIVSS .....	110
double quadword.....	xvi
doubleword .....	xvi

## E

eAX-eSP register .....	xxii
effective address size.....	xvii
effective operand size.....	xvii
eFLAGS register.....	xxiii
eIP register .....	xxiii
element .....	xvii
endian order .....	xxv
exception.....	xvii
exponent .....	xv

## F

flush.....	xvii
FXRSTOR .....	113
FXSAVE .....	115

## I

IGN .....	xviii
indirect.....	xviii
instructions	
128-bit media .....	1
SSE .....	1
SSE-2 .....	1

## L

LDMXCSR .....	117
legacy mode .....	xviii
legacy x86 .....	xviii
long mode.....	xviii
LSB .....	xviii
lsb .....	xviii

## M

mask .....	xix
MASKMOVDQU .....	119
MAXPD .....	121
MAXPS.....	123
MAXSD .....	126
MAXSS .....	128

MBZ.....	xix	overflow.....	xx
MINPD .....	130	<b>P</b>	
MINPS .....	132	packed .....	xx
MINSD .....	135	PACKSSDW .....	205
MINSS .....	137	PACKSSWB .....	207
modes		PACKUSWB .....	209
16-bit .....	xv	PADDB.....	211
32-bit .....	xv	PADDD .....	213
64-bit .....	xv	PADDQ .....	215
compatibility.....	xv	PADDSB .....	217
legacy.....	xviii	PADDSW .....	219
long.....	xviii	PADDUSB .....	221
protected .....	xx	PADDUSW .....	223
real .....	xx	PADDW .....	225
virtual-8086 .....	xxii	PAND .....	227
moffset .....	xix	PANDN .....	229
MOVAPD.....	139	PAVGB .....	231
MOVAPS .....	141	PAVGW .....	233
MOVD .....	144	PCMPEQB .....	235
MOVDQ2Q.....	147	PCMPEQD .....	237
MOVDQA.....	149	PCMPEQW .....	239
MOVDQU.....	151	PCMPGTB .....	241
MOVHLPS .....	153	PCMPGTD .....	243
MOVHPD .....	155	PCMPGTW .....	245
MOVHPS.....	157	PEXTRW .....	247
MOVLHPS .....	159	PINSRW .....	249
MOVLPD.....	161	PMADDWD .....	252
MOVLPS .....	163	PMAXSW .....	254
MOVMSKPD.....	165	PMAXUB.....	256
MOVMSKPS .....	167	PMINSW.....	258
MOVNTDQ .....	169	PMINUB .....	260
MOVNTPD.....	171	PMOVMSKB .....	262
MOVNTPS .....	173	PMULHUW.....	264
MOVQ .....	175	PMULHW.....	266
MOVQ2DQ.....	177	PMULLW.....	268
MOVSD .....	179	PMULUDQ.....	270
MOVSS.....	182	POR .....	272
MOVUPD .....	185	protected mode .....	xx
MOVUPS.....	187	PSADBW .....	274
MSB .....	xix	PSHUFDB.....	276
msb.....	xix	PSHUFHW .....	279
MSR .....	xxiii	PSHUFLW .....	282
MULPD .....	189	PSLLD .....	285
MULPS .....	192	PSLLDQ .....	287
MULSD .....	195	PSLLQ .....	289
MULSS.....	198	PSLLW .....	291
<b>O</b>		PSRAD .....	293
octword .....	xix	PSRAW .....	296
offset .....	xix	PSRLD.....	299
ORPD .....	201	PSRLDQ .....	301
ORPS.....	203	PSRLQ.....	303

PSRLW .....	305	SQRTSS .....	364
PSUBB .....	308	SSE .....	xxi
PSUBD .....	310	SSE-2 .....	xxi
PSUBQ .....	312	sticky bit.....	xxi
PSUBSB .....	314	STMXCSR.....	367
PSUBSW .....	316	SUBPD.....	369
PSUBUSB .....	318	SUBPS .....	372
PSUBUSW .....	320	SUBSD .....	375
PSUBW .....	322	SUBSS .....	378
PUNPCKHBW .....	324	<b>T</b>	
PUNPCKHDQ .....	326	TSS.....	xxi
PUNPCKHQDQ .....	328	<b>U</b>	
PUNPCKHWD .....	330	UCOMISD .....	381
PUNPCKLBW .....	332	UCOMISS.....	384
PUNPCKLDQ .....	334	underflow.....	xxi
PUNPCKLQDQ .....	336	UNPCKHPD.....	387
PUNPCKLWD .....	338	UNPCKHPS .....	389
PXOR .....	340	UNPCKLPD .....	391
<b>Q</b>		UNPCKLPS .....	393
quadword .....	xx	<b>V</b>	
<b>R</b>		vector.....	xxi
r8–r15.....	xxiii	virtual-8086 mode .....	xxii
rAX–rSP.....	xxiv	<b>X</b>	
RAZ.....	xx	XORPD.....	395
RCPPS .....	342	XORPS .....	397
RCPSS.....	344		
real address mode. See real mode			
real mode.....	xx		
registers			
eAX–eSP .....	xxii		
eFLAGS.....	xxiii		
eIP .....	xxiii		
r8–r15.....	xxiii		
rAX–rSP.....	xxiv		
rFLAGS .....	xxiv		
rIP.....	xxiv		
relative.....	xx		
revision history .....	xi		
rFLAGS register.....	xxiv		
rIP register .....	xxiv		
RIP-relative addressing.....	xxi		
RSQRTPS .....	346		
RSQRTSS.....	348		
<b>S</b>			
set.....	xxi		
SHUFPD .....	350		
SHUFPS.....	353		
SQRTPD.....	356		
SQRTPS .....	359		
SQRTPSD.....	362		

